Amendment to the Agreement Between Universal Telecom, Inc. and BellSouth Telecommunications, Inc. Dated May 19, 2004

Pursuant to this Amendment, (the "Amendment"), Universal Telecom, Inc. ("Universal"), and BellSouth Telecommunications, Inc. ("BellSouth"), hereinafter referred to collectively as the "Parties," hereby agree to amend that certain Interconnection Agreement between the Parties dated May 19, 2004 ("Agreement") to be effective March 11, 2005.

WHEREAS, BellSouth and Universal entered into the Agreement on May 19,

2004, and;

WHEREAS, BellSouth and Universal desire to amend the Agreement to modify provisions pursuant to the Federal Communications Commission's (FCC) Order on Remand (Triennial Review Remand Order), WC Docket No. 04-313, released February 4, 2005 and effective March 11, 2005;

WHEREAS, the Parties desire to amend the Agreement to reflect other changes as agreed upon by the parties;

NOW, THEREFORE, in consideration of the mutual provisions contained herein and other good and valuable consideration, the receipt and sufficiency of which are hereby acknowledged, the Parties hereby covenant and agree as follows:

- 1. The Parties agree to delete Attachment 3, Network Elements, in its entirety and replace with Attachment 3 reflected as Exhibit 1, attached hereto and by reference incorporated into this Amendment.
- 2. The Parties agree to delete Section 16 from Attachment 3 and Section 1 from Attachment 9 and add Section 10 to Attachment 4 as follows:

| 10 BASIC 911 AND E911 INTERCONNECTION | |
|---------------------------------------|--|
|---------------------------------------|--|

- 10.1 BASIC 911 AND E911 General Requirements
- 10.1.1 BellSouth shall provide Universal with access to 911 and E911.
- 10.1.2. Basic 911 and E911 provides a caller access to the appropriate emergency service bureau by dialing a 3-digit universal telephone number (911). Basic 911 and E911 access from Local Switching shall be provided to Universal in accordance with the following:
- 10.1.3 E911 shall provide additional routing flexibility for 911 calls. E911 shall use subscriber data, contained in the Automatic

Location Identification/Data Base Management System (ALI/DBMS) and the E911 tandem switch, to determine to which Public Safety Answering Point (PSAP) to route the call.

- 10.1.4If BellSouth develops and makes available to its customers any
other type of 911 service (e.g., advanced intelligent network 911)
BellSouth shall make such service available to Universal at rates
that will be negotiated at the time the service is made available.
- 10.1.5 BellSouth shall provide to Universal, where available, the emergency public agency (e.g. police, fire, rescue, poison, and bomb) telephone numbers linked to all NPA NXXs for the states in which they provide service. Such information shall be used solely for purposes of handling emergency calls.
- 10.1.6 BellSouth shall use its best efforts to provide to Universal all changes, alterations, modifications, and updates to the emergency public agency (e.g., police, fire, rescue, poison, and bomb) telephone numbers linked to all NPA NXX's as soon as such changes occur. BellSouth shall provide such information at Parity.
- 10.1.7 Basic 911 and E911 functions provided to Universal shall be at least at parity with the support and services that BellSouth provides to its subscribers for such similar functionality.
- 10.1.8 Descriptions, signaling, trunking and ordering interfaces for 911/E911 are set forth in this Agreement.
- 10.2 Basic 911 and E911 Access from Local Switching
- 10.2.1 Basic 911 and E911 access from Local Switching shall be provided to Universal in accordance with the following:
- 10.2.1.1 The Parties shall comply with all applicable laws and regulations concerning emergency services.
- 10.2.1.2 For E911, BellSouth shall receive data from Universal electronically. An ALI/DBMS discrepancy report listing errors detected by BellSouth will be faxed to Universal promptly. Universal will transmit daily update files for "batch" processing within twenty-four (24) hours of receipt of a fax transmission of errors.
- 10.2.2 In government jurisdictions where BellSouth has obligations under existing *a*greements as the primary provider of the 911 Service to the county, Universal shall participate in the provision of the 911 Service as follows:

- 10.2.2.1 Each party shall be responsible for those network portions of the 911 Service for which it has control, including any necessary maintenance to each party's portion of the 911 Service.
- 10.2.2.2 Where BellSouth is the host Telco, BellSouth shall be responsible for maintaining the E-911 database including validating Universal updates against the Master Street Address Guide ("MSAG") and posting valid updates to E911 database. Errors will be returned to Universal for correction and transmission of valid updates.
- 10.2.2.3 Universal may verify the accuracy of information regarding Universal Customers in the ALI/DBMS database using methods and procedures mutually agreed to by the Parties.
- 10.2.3 If a third party is the primary service provider to a government agency, Universal shall negotiate separately with such third party with regard to the provision of 911 service to the agency. All relations between such third party and Universal are totally separate from this Agreement and BellSouth makes no representations on behalf of the third party.
- 10.2.4 If Universal or its Affiliate is the primary service provider to a government agency, Universal and BellSouth shall negotiate the specific provisions necessary for providing 911 service to the agency and shall include such provisions in an amendment to this Agreement.
- 10.2.5 BellSouth shall comply with established, competitively neutral intervals for installation of facilities, including any collocation facilities, diversity requirements, etc.
- 10.2.5.1 BellSouth shall update the ALI/DBMS Database with Universal data in an interval no less than is experienced by BellSouth subscribers, or than for other carriers, whichever is faster, at no additional cost.
- 10.2.6 BellSouth shall provide to Universal, at the rates set forth in Attachment 1 of this Agreement, the necessary Network Elements and services in order for Universal to provide E911/911 services to governmental agencies in accordance with the requirements of this Agreement.
- 10.3 Basic 911 and E911 Database Requirements
- 10.3.1 The telephone number ("TN") data is managed in ALI/DBMS by BellSouth, but the responsibility for providing the data resides with each Local Service Provider.

- 10.3.2 Copies of the MSAG shall be provided within ten (10) business days from the time requested and provided on CD-ROM or such other medium as the Parties may agree.
- 10.3.3 Universal shall be solely responsible for providing Universal database records to BellSouth for inclusion in BellSouth's ALI/DBMS database on a timely basis.
- 10.3.4 BellSouth and Universal shall arrange for the automated input and periodic updating of the E911 database information related to Universal End Users as stated in the BellSouth E911 Local Exchange Carrier Guide for Facility Based Providers. BellSouth shall work cooperatively with Universal to ensure the accuracy of the data transfer by verifying it against MSAG.
- 10.3.5 Universal shall assign an E911 database coordinator charged with the responsibility of forwarding Universal end user ALI/DBMS record information to BellSouth or via a third-party entity, charged with the responsibility of ALI/DBMS record transfer. Universal assumes all responsibility for the accuracy of the data that Universal provides to BellSouth.
- 10.3.6 Automatic Location Identification/Data Base Management System (ALI/DBMS). The ALI/DBMS Database contains subscriber information (including name, address, telephone information, and sometimes special information from the local service provider or subscriber) used to determine to which Public Safety Answering Point (PSAP) to route the call. The ALI/DBMS database is used to provide more routing flexibility for E911 calls than Basic 911. This subsection 1.3.6 supplements the requirements for SCPs/Databases set forth in the technical references in Attachment 3, Appendix 1 of this Agreement. BellSouth shall provide the Emergency Services Database in accordance with the following:
- 10.3.6.1 Technical Requirements
- 10.3.6.1.1 BellSouth shall provide error reports from the ALI/DBMS database to Universal after Universal inputs information into the ALI/DBMS database. Where BellSouth provides local switching or resold services to Universal, Universal may utilize BellSouth to enter through the service order process subscriber information into the database on a demand basis, and validate subscriber information on a demand basis. With either ALI/DBMS update method, BellSouth shall provide the ability for Universal to update ALI/DBMS database with End User information for lines that have been ported via INP or LNP.
- 10.3.6.1.2 The ALI/DBMS database shall contain the following subscriber information:

- 10.3.6.1.2.1 Name;
- 10.3.6.1.2.2 Address;
- 10.3.6.1.2.3 Telephone number; and
- 10.3.6.1.2.4 Other information as BellSouth deems appropriate
- 10.3.6.1.3 When BellSouth is responsible for administering the ALI/DBMS database in its entirety, ported number NXXs entries for the ported numbers should be maintained unless Universal requests otherwise and shall be updated if Universal requests.
- 10.3.6.1.4 When Remote Call Forwarding (RCF) is used to provide number portability to the local subscriber and a remark or other appropriate field information is available in the database, the shadow or "forwarded-to" number and an indication that the number is ported shall be added to the ALI/DBMS database by the Party that enters subscriber information into the database for that subscriber.
- 10.3.6.1.5 Universal's End User records will be updated in the ALI/DBMS via the ALI/DBMS electronic interface. The ALI/DBMS and selective router databases will be subsequently updated via the ALI/DBMS once Universal's End User records are updated in the ALI/DBMS. The ALI/DBMS will send completion information back to the electronic interface for retrieval by Universal.
- 10.3.6.2 Interface Requirements
- 10.3.6.2.1 The interface between the E911 Switch or Tandem and the ALI/DBMS database for Universal subscribers shall meet industry standards.
- 10.3.6.2.2 911 Trunking Arrangements
- 10.3.6.2.2.1 The Parties agree to provide access to 911/E911 in a manner that is transparent to the Customer. The Parties will work together to facilitate the prompt, reliable and efficient Interconnection of Universal's systems to BellSouth's 911/E911 platforms, with a level of performance that will provide at least the same grade of service as that which BellSouth provides to itself, its Customers, subsidiaries, Affiliates or any other third parties.
- 10.3.6.2.2.2 Universal shall order, and BellSouth shall provision, a minimum of two dedicated one-way trunks with either MF or SS7 signaling, as available, at the DS-0 level (at a minimum), from Universal's Central Office to each BellSouth 911/E911 selective router (e.g., 911 Tandem Office) that serves the areas in which

Universal provides Exchange Service, for the provision of 911/E911 services and for access to all subtending PSAPs ("911 Interconnection Trunk Groups").

- 10.3.6.2.2.3 All 911 trunks must be capable of transmitting and receiving Baudot code necessary to support the use of Telecommunications Devices for the Deaf (TTY/TDDs).
- 10.3.6.2.2.4 At Universal's request, BellSouth shall receive Universal CAMA-ANI (Centralized Automatic Message Accounting -Automatic Number identification) traffic destined to the 911 PSAPs, or E911 tandems, on trunks from an Universal endoffice.
- 10.3.6.2.2.5 If and when SS7 signaling on 911 trunks is being provided by BellSouth, at Universal's request, BellSouth shall receive Universal SS7 traffic destined to any BellSouth 911 tandem on trunks from an Universal end-office.
- 10.3.6.2.2.6 Diversity between BellSouth's 911 tandem and the PSAP will be maintained or upgraded and provided to Universal to utilize the highest level of diversity available in the network equal to that which BellSouth provides to itself, its Customers, subsidiaries, Affiliates or any other third parties.
- 10.3.6.2.2.7 Where there is an alternate means of transmitting a 911/E911 call to a PSAP in the event of failures, BellSouth shall make that alternate means available to Universal.
- 10.3.6.2.2.8 BellSouth shall route E911 calls received from Universal's switching office to the appropriate PSAP, and forward the subscriber's ANI to the PSAP.
- 10.3.6.2.2.9 BellSouth shall provide for overflow of Universal's 911 traffic at Parity and as directed by the PSAP.
- 10.3.6.2.2.10 BellSouth shall provide E911 Tandem boundary documentation to Universal. Documentation shows the boundary around the outside of the set of exchange areas served by that E911 Tandem. The documentation provides Universal the information necessary to set up its network to route E911 callers to the correct E911 Tandem. BellSouth shall provide Universal updates to the documentation as this information changes.
- 10.3.6.2.2.11 Equipment and circuits used for 911 shall be monitored for Universal in the same manner as BellSouth provides for itself.
- 10.3.6.2.2.12 BellSouth shall provide restoration and repair of E911/911 trunks or network outages on the same terms/conditions it provides itself.

- 10.3.6.2.2.13 Nothing in this Agreement shall prohibit Universal from arranging with the PSAP to have direct trunking between its network and the PSAP.
- 10.3.7 If BellSouth establishes multiple ALI/DBMS databases that cover different geographic areas, BellSouth shall identify which states, counties or parts thereof are covered by which ALI/DBMS databases, and identify and communicate a point of contact for each.
- 10.3.8 Universal shall provide information on new subscribers to BellSouth within one (1) business day of the order completion. BellSouth shall update the database within two (2) business days of receiving the data from Universal. If BellSouth detects an error in the Universal provided data, the data shall be returned to Universal within two (2) business days from when it was provided to BellSouth. Universal shall respond to requests from BellSouth to make corrections to database record errors by uploading corrected records within two (2) business days.
- 10.3.9 BellSouth agrees to treat all data on Universal subscribers provided under this Agreement as strictly confidential and to use data on Universal subscribers only for the purpose of providing E911 services.
- 10.3.10 BellSouth shall adopt use of a NENA ID (NENA standard fivecharacter field) on all ALI records received from Universal at such time as a NENA customer identification is implemented. The NENA ID will be used to identify the carrier of record in INP/LNP configurations.
- 10.3.11 BellSouth shall provide Universal with the following information:
- 10.3.11.1 When requested by Universal, the identification of the correct 911 tandem to which Universal's 911 calls should be routed, based on Universal's NPA-NXX and Universal's identification of the BellSouth NPA-NXX to which it corresponds.
- 10.3.11.2 Technical specifications for network interface (provided via BellSouth's web site) and technical specifications for database loading and maintenance (provided via the E911 Local Exchange Carrier Guide for Facility Based Carriers).
- 10.3.12 Where BellSouth is the host Telco, BellSouth shall provide Universal with notification when Universal's ALI records have been received. BellSouth shall ensure that the ALI records are delivered to the appropriate ALI/DBMS and selective router databases and are correctly entered.

- 10.3.13 Where BellSouth is the host telco, each ALI/DBMS discrepancy report shall be researched by Universal, and BellSouth shall assist Universal if necessary. The responsible Party shall take immediate corrective action.
- 10.3.14 Where BellSouth is responsible for maintenance of the ALI/DBMS database, BellSouth shall provide database maintenance at no charge to Universal.
- 10.3.15 All Universal lines that have been ported via INP shall reach the correct PSAP when 911 is dialed, provided Universal has appropriate trunking in place. BellSouth shall send both the ported number and the Universal number (if both are received from Universal) to the PSAP.
- 10.3.15.1BellSouth shall cooperate with Universal to ensure that
911/E911 service is fully available to all Universal End Users
whose telephone numbers have been ported from BellSouth.
- 10.3.16 BellSouth shall notify Universal forty-eight (48) hours in advance of any scheduled testing or maintenance affecting Universal 911 service, and provide notification as soon as possible of any unscheduled outage affecting Universal 911 service.
- 10.3.17 BellSouth, where available, shall cooperate with Universal and the appropriate government agency to provide Universal with the ten-digit POTS number of each PSAP that sub-tends each BellSouth 911 tandem to which Universal is interconnected.
- 10.3.18 Universal shall be responsible for reporting all errors, defects and malfunctions to BellSouth. BellSouth shall use its best efforts to provide Universal with the point of contact for reporting errors, defects, and malfunctions in the service and shall also provide escalation contacts within thirty (30) days of the Effective Date.
- 10.3.19 Universal may enter into subcontracts with third parties, including Universal Affiliates, for the performance of any of Universal's duties and obligations stated herein.
- 10.3.20 Within ninety (90) days of a BellSouth decision to implement SS7 signaling, BellSouth shall notify Universal of such decision.
- 10.3.21 BellSouth shall provide notification to Universal of any pending tandem / selective router moves, NPA splits, or scheduled maintenance outages, with enough time to react.

- 10.3.22 BellSouth shall notify Universal within thirty (30) days of BellSouth's decision to implement "reverse ALI" inquiries by public safety entities.
- 10.3.23 BellSouth shall continue its existing process for the management of NPA splits by populating the ALI/DBMS database with the appropriate new NPA codes.
- 10.3.24 Universal may, at its discretion, further request additional and/or modified reporting as business needs demand.
- 3. The Parties agree to delete Sections 11, 12 and 13 from Attachment 3 and add Sections 11, 12 and 13 to Attachment 4 as follows:
 - 11. Signaling Link Transport
 - 11.1 Definition: Signaling Link Transport is a set of two or four dedicated 56 Kbps (or higher when available) transmission paths between Universal-designated Signaling Points of Interconnection (SPOI) that provides appropriate physical diversity and a cross connect at a BellSouth STP site.
 - 11.2 Technical Requirements Signaling Link Transport
 - 11.2.1 Signaling Link Transport shall consist of full duplex mode 56 Kbps (or higher when available) transmission paths.
 - 11.2.2 Of the various options available, Signaling Link Transport shall perform in the following two ways:
 - 11.2.2.1 As an "A-link" which is a connection between a signaling end point and a home Signaling Transfer Point Switch (STPs) pair; and
 - 11.2.2.2 As a "D-link" which is a connection between two STPs pairs in different company networks (e.g., between two STPs pairs for two Competitive Local Exchange Carriers (CLECs)).
 - 11.2.3 Signaling Link Transport shall consist of two or more signaling link layers as follows:
 - 11.2.3.1 An A-link layer shall consist of two links.
 - 11.2.3.2 A D-link layer shall consist of four links.
 - 11.2.4 A signaling link layer shall satisfy a performance objective such that:
 - 11.2.4.1 There shall be no more than two minutes down time per year for an A-link layer; and

- 11.2.4.2 There shall be negligible (less than 2 seconds) down time per year for a D-link layer.
- 11.2.5 A signaling link layer shall satisfy interoffice and intraoffice diversity of facilities and equipment, such that:
- 11.2.5.1 No single failure of facilities or equipment causes the failure of both links in an A-link layer (i.e., the links should be provided on a minimum of two separate physical paths end-to-end); and
- 11.2.5.2 No two concurrent failures of facilities or equipment shall cause the failure of all four links in a D-link layer (i.e., the links should be provided on a minimum of three separate physical paths endto-end).
- 11.3 Interface Requirements Signaling Link Transport
- 11.3.1 There will be a DS1 (1.544 Mbps) interface at the Universaldesignated SPOIs. Each 56 Kbps transmission path will appear as a DS0 channel within the DS1 interface.
- 12. Signaling Transfer Points (STPs)
- 12.1 Definition. Signaling Transfer Points (STPs) provide functionality that enable the exchange of SS7 messages among and between switching elements, database elements and signaling transfer points. Figure 4 depicts a typical SS7 interconnection arrangement.

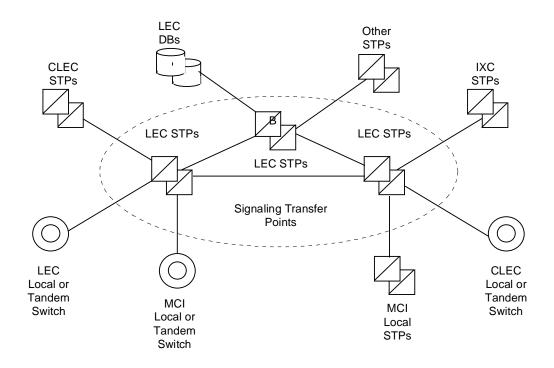


Figure 4

| 12.2 | Technical Red | quirements - | Signaling | Transfer | Points |
|------|---------------|--------------|-----------|----------|--------|
| | | | | | |

- 12.2.1 STPs shall provide access to all other Network Elements connected to the BellSouth SS7 network. These include:
- 12.2.1.1 BellSouth Local Switching or Tandem Switching;
- 12.2.1.2 BellSouth Service Control Points/Data-Bases;
- 12.2.1.3 Third-party local or tandem switching systems; and
- 12.2.1.4 Third-party-provided STPs.
- 12.2.2 The connectivity provided by STPs shall fully support the functions of all other Network Elements connected to BellSouth's SS7 network. This explicitly includes the use of BellSouth's SS7 network to convey messages which neither originate nor terminate at a signaling end point directly connected to the BellSouth SS7 network (i.e., transit messages). When the BellSouth SS7 network is used to convey transit messages, there shall be no alteration of the Integrated Services Digital Network User Part (ISDNUP) or Transaction Capabilities Application Part (TCAP) user data that constitutes the content of


the message. BellSouth shall charge Universal to transit these messages at the rates set forth in Attachment 1 of this Agreement.


- 12.2.2.1 Transit Signaling. Universal may choose to route SS7 signaling information (e.g., ISUP, TCAP) from Universal's signaling network to another LEC's or CMRS provider's signaling network via BellSouth's signaling network for the purpose of exchanging call processing/network information between Universal and the other LEC's or CMRS provider's network, whether or not BellSouth has a trunk to the terminating switch, provided that, where BellSouth does not have such a trunk, Universal furnishes BellSouth with:
- 12.2.2.1.1 the destination point codes ("DPCs") of all the LEC or CMRS provider switches to which it wishes to send transit signaling;
- 12.2.2.1.2 the identity of the STPs in BellSouth's network in which each DPC will be translated; and
- 12.2.2.1.3 the identity of the STPs in the other signaling network to which such transit signaling will be sent.
- 12.2.3 Before BellSouth transits TCAP messages to third parties, Universal shall provide BellSouth with a letter of authorization from third party carriers to and from which BellSouth will transit TCAP messages. Such letter of authorization must state that the third party carrier will accept TCAP messages from BellSouth that originated on Universal's network.
- 12.2.4 STPs shall provide all functions of the Message Transfer Part ("MTP") as specified in Appendix 1 of this Attachment.
- 12.2.5 STPs shall provide all functions of the SCP necessary for Class 0 (basic connectionless) service, as specified in Appendix 1. In particular, this includes Global Title Translation (GTT) and SCP Management procedures as specified in Appendix 1.
- 12.2.6 In cases where the destination signaling point is a BellSouth local or tandem switching system or data base, or is an Universal or third party local or tandem switching system directly connected to BellSouth's SS7 network, BellSouth STPs shall perform final GTT of messages to the destination and SCP Subsystem Management of the destination. In all other cases, STPs shall perform intermediate GTT of messages to a gateway pair of STPs in an SS7 network connected with the BellSouth SS7 network, and shall not perform SCP Subsystem Management of the destination.
- 12.2.7 BellSouth's STPs shall provide all functions of the OMAP commonly provided by STPs, as specified in Appendix 1 of this


Attachment. When available and upon request, BellSouth shall identify the switches in which the following functionalities are available: MTP Routing Verification Test (MRVT) and, SCP Routing Verification Test (SRVT).

- 12.2.8 In cases where the destination signaling point is a BellSouth local or tandem switching system or DB, or is an Universal or third party local or tandem switching system directly connected to the BellSouth SS7 network, STPs shall perform MRVT and SRVT to the destination signaling point. In all other cases, STPs shall perform MRVT and SRVT to a gateway pair of STPs in an SS7 network connected with the BellSouth SS7 network. This requirement shall be superseded by the specifications for Internetwork MRVT and SRVT if and when these become approved ANSI standards and available capabilities of BellSouth STPs, and when mutually agreed upon by Universal and BellSouth.
- 12.2.9 STPs shall, at a minimum, comply with the performance requirements set forth in Appendix 1 of this Attachment.
- 12.2.10 BellSouth shall comply with BST Guidelines to Technical Publication GR-905-CORE (TR 73554).
- 12.3 Interface Requirements Signaling Transport Points
- 12.3.1 BellSouth shall provide the following STPs options to connect Universal or Universal-designated local switching systems or STPs to the BellSouth SS7 network:
- 12.3.1.1 An A-link interface from Universal local switching systems; and,
- 12.3.1.2 A D-link interface from Universal's STPs.
- 12.3.2 Each type of interface shall be provided by one or more sets (layers) of signaling links, as follows:

12.3.2.1 An A-link layer shall consist of two links, as depicted in Figure 6.

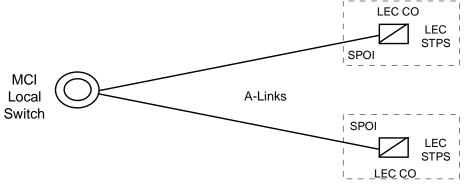



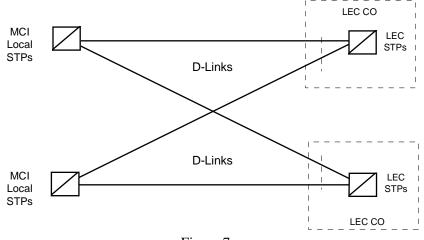

12.3.2.2 A D-link layer shall consist of four links, as depicted in Figure 7.

- 12.3.3 The Signaling point of Interconnection (SPOI) for each link shall be located at a cross-connect element, such as a DSX-1, in the Central Office (CO) where the BellSouth STPs are located. There shall be a DS1 or higher rate transport interface at each of the SPOIs. Each signaling link shall appear as a DS0 channel within the DS1 or higher rate interface. BellSouth shall offer higher rate DS1 signaling for interconnecting Universal local switching systems or STPs with BellSouth STPs as soon as these become approved ANSI standards and available capabilities of BellSouth STPs. Universal and BellSouth shall cooperate to establish mutually agreed upon SPOI's.
- 13. Service Control Points/Databases
- 13.1 Definition:
- 13.1.1 Databases are the Network Elements that provide the functionality for storage of, access to, and manipulation of information required to offer a particular service and/or capability. Databases include, but are not limited to: the Calling Name Database, 911 Database, E911 Database, Line Information Database, Toll Free Calling Database, Advanced Intelligent Network Database, and downstream number portability databases.
- 13.1.2A Service Control Point (SCP) is a specific type of database
Network Element functionality deployed in a Signaling System 7
(SS7) based on Intelligent Network ("IN") that executes service

Figure 7

application logic in response to SS7 queries sent to it by a switching system also connected to the SS7 network. SCPs also provide operational interfaces to allow for provisioning, administration and maintenance of subscriber data and service application data. (e.g., an 800 database stores subscriber record data that provides information necessary to route 800 calls).

- 13.2 Technical Requirements SCPs/Databases
- 13.2.1 Requirements for SCPs/Databases within this Section address storage of information, access to information (e.g., signaling protocols and response times), and administration of information (e.g., provisioning, administration, and maintenance).
- 13.2.2 BellSouth shall provide physical interconnection to databases via industry standard interfaces and protocols (e.g., SS7 and X.25).
- 13.2.3 The reliability of interconnection options shall be consistent with requirements for diversity and survivability as required herein or otherwise set forth in Appendix 1.
- 13.2.4Database functionality shall be unavailable no more that thirty
(30) minutes per year.
- 13.2.5 BellSouth shall provide Database provisioning consistent with the provisioning requirements of this Agreement (e.g., data required, edits, acknowledgments, data format and transmission medium and notification of order completion).
- 13.2.6 The operational interface provided by BellSouth shall complete Database transactions (i.e., add, modify, delete) for Universal subscriber records stored in BellSouth databases within an interval at parity with BellSouth's own provisioning schedule.
- 13.2.7 BellSouth shall provide Database maintenance consistent with the maintenance requirements as specified in this Agreement (e.g., notification of BellSouth Network Affecting Events, testing, dispatch schedule and measurement and exception reports).
- 13.2.8 BellSouth shall provide billing and recording information to track database usage consistent with connectivity billing and recording requirements as specified in this Agreement (e.g., recorded message format and content, timeliness of feed, data format and transmission medium).
- 13.2.9 BellSouth shall provide SCPs/Databases in accordance with the physical security requirements specified in this Agreement.
- 13.2.10 BellSouth shall provide SCPs/Databases in accordance with the logical security requirements specified in this Agreement.

- 4. The Parties agree to add the rates for SS7 Interconnection to Exhibit A of Attachment 4, attached hereto as Exhibit 2 and by reference incorporated into this Amendment.
- 5. The Parties agree to add Section 3.7 to Attachment 8 as follows:
 - 3.7 If Universal modifies an order (Order Modification Charge (OMC)) after being sent a Firm Order Confirmation (FOC) from BellSouth, any costs incurred by BellSouth to accommodate the modification will be paid by Universal in accordance with FCC No. 1 Tariff, Section 5.
- 6. The Parties agree to add the rates for Line Sharing in Exhibit C to Attachment 3, attached hereto as Exhibit 3 and by reference incorporated into this Amendment and terms conditions as follows:
 - 4.24 Line Sharing
 - 4.24.1 <u>General.</u> Line Sharing is defined as the process by which Universal provides digital subscriber line service ("xDSL") over the same copper Loop that BellSouth uses to provide retail voice service, with BellSouth using the low frequency portion of the Loop and Universal using the high frequency spectrum (as defined below) of the Loop.
 - 4.24.1.1 Line Sharing arrangements in service as of October 1, 2003 under a prior Interconnection Agreement between Bellsouth and Universal, will remain in effect until the End User discontinues or moves xDSL service with Universal. Arrangements pursuant to this Section will be billed at the rates set forth in Exhibit C.
 - 4.24.1.2 No new line sharing arrangements may be ordered. For Line Sharing arrangements placed in service between October 2, 2003, and October 1, 2004 (whether under this Agreement only, or under this Agreement and a prior Agreement), the rates will be as set forth in Exhibit C.
 - 4.24.1.3 Any Line Sharing arrangements placed in service between October 2, 2003 and October 1, 2004, and not otherwise terminated, shall terminate on October 2, 2006.
 - 4.24.1.4 The High Frequency Spectrum is defined as the frequency range above the voiceband on a copper Loop facility carrying analog circuit-switched voiceband transmissions. Access to the High Frequency Spectrum is intended to allow Universal the ability to provide xDSL data services to the End User for which BellSouth provides voice services. The High Frequency Spectrum shall be available for any version of xDSL complying with Spectrum Management Class 5 of ANSI T1.417, American National Standard for Telecommunications, Spectrum Management for Loop Transmission Systems. BellSouth will continue to have

access to the low frequency portion of the Loop spectrum (from 300 Hertz to at least 3000 Hertz, and potentially up to 3400 Hertz, depending on equipment and facilities) for the purposes of providing voice service. Universal shall only use xDSL technology that is within the PSD mask for Spectrum Management Class 5 as found in the above-mentioned document.

- 4.24.1.5 Access to the High Frequency Spectrum requires an unloaded, 2-wire copper Loop. An unloaded Loop is a copper Loop with no load coils, low-pass filters, range extenders, DAMLs, or similar devices and minimal bridged taps consistent with ANSI T1.413 and T1.601.
- 4.24.1.6 BellSouth will provide Loop Modification to Universal on an existing Loop for Line Sharing in accordance with procedures as specified in Section 2 of this Attachment. BellSouth is not required to modify a Loop for access to the High Frequency spectrum if modification of that Loop significantly degrades BellSouth's voice service. If Universal requests that BellSouth modify a Loop and such modification significantly degrades the voice services on the Loop, Universal shall pay for the Loop to be restored to its original state.
- 4.24.1.7 Line Sharing shall only be available on loops on which BellSouth is also providing, and continues to provide, analog voice service directly to the End User. In the event the End User terminates its BellSouth provided voice service for any reason, or in the event BellSouth disconnects the End User's voice service pursuant to its tariffs or applicable law, and Universal desires to continue providing xDSL service on such Loop, Universal or the new voice provider, or both, shall be required to purchase a full stand-alone Loop. In those cases in which BellSouth no longer provides voice service to the End User and Universal purchases the full stand-alone Loop, Universal may elect the type of Loop it will purchase. Universal will pay the appropriate recurring and nonrecurring rates for such Loop as set forth in Exhibit C to this Attachment. In the event Universal purchases a voice grade Loop, Universal acknowledges that such Loop may not remain xDSL compatible.
- 4.24.1.8 In the event the End User terminates its BellSouth provided voice service, and Universal requests BellSouth to convert the Line Sharing arrangement to a Line Splitting arrangement (see below), BellSouth will discontinue billing Universal for the High Frequency Spectrum and begin billing the voice CLEC. BellSouth will continue to bill the Data LEC for all associated splitter charges if the Data LEC continues to use a BellSouth splitter.

- 4.24.1.9 Only one CLEC shall be permitted access to the High Frequency Spectrum of any particular Loop.
- 4.24.2 Once BellSouth has placed cross-connects on behalf of Universal to provide Universal access to the High Frequency Spectrum and chooses to rearrange its splitter or CLEC pairs, Universal may order the rearrangement of its splitter or cable pairs via "Subsequent Activity". Subsequent Activity is any rearrangement of Universal's cable pairs or splitter ports after BellSouth has placed cross-connection to provide Universal access to the High Frequency Spectrum. BellSouth shall bill and Universal shall pay the Subsequent Activity charges as set forth in Exhibit C of this Attachment.
- 4.24.3 BellSouth's Local Ordering Handbook (LOH) will provide Universal the LSR format to be used when ordering disconnections of the High Frequency Spectrum or Subsequent Activity.
- 4.24.4 <u>Maintenance and Repair Line Sharing.</u> Universal shall have access for repair and maintenance purposes to any Loop for which it has access to the High Frequency Spectrum. Universal may test from the collocation space, the Termination Point, or the NID.
- 4.24.4.1 BellSouth will be responsible for repairing voice services and the physical line between the NID at the End User's premises and the Termination Point. Universal will be responsible for repairing its data services. Each Party will be responsible for maintaining its own equipment.
- 4.24.4.2 Universal shall inform its End Users to direct data problems to Universal, unless both voice and data services are impaired, in which event Universal should direct the End Users to contact BellSouth.
- 4.24.4.3 Once a Party has isolated a trouble to the other Party's portion of the Loop, the Party isolating the trouble shall notify the End User that the trouble is on the other Party's portion of the Loop.
- 7. All of the other provisions of the Agreement dated May 19, 2004 shall remain unchanged and in full force and effect.
- 8. Either or both of the Parties are authorized to submit this Amendment to the respective state regulatory authorities for approval subject to Section 252(e) of the Federal Telecommunications Act of 1996.

IN WITNESS WHEREOF, the Parties have executed this Agreement the day and year written below.

BellSouth Telecommunications, Inc.

Universal Telecom, Inc.

By:

Name: Kristen E. Rowe

Title: Director

26/05 Date:

By:

Name: aainton Title: ۵5 Date:

Universal Telecom, Inc. TRRO Amendment

Exhibit 1 Attachment 3 Page 1

Attachment 3

Network Elements and Other Services

TABLE OF CONTENTS

| 1 | INTRODUCTION |
|------|---|
| 2 | LOOPS7 |
| 3 | LINE SPLITTING |
| 4 | LOCAL SWITCHING |
| 5 | UNBUNDLED NETWORK ELEMENT COMBINATIONS |
| 6 | DEDICATED TRANSPORT AND DARK FIBER TRANSPORT |
| 8 | AUTOMATIC LOCATION IDENTIFICATION/DATA MANAGEMENT SYSTEM (ALI/DMS) 57 |
| 9 | OSS |
| Rate | esExhibit A |
| Rate | esExhibit B |

ACCESS TO NETWORK ELEMENTS AND OTHER SERVICES

1 Introduction

- 1.1 This Attachment sets forth rates, terms and conditions for unbundled network elements (Network Elements) and combinations of Network Elements (Combinations) that BellSouth offers to UTI for UTI's provision of Telecommunications Services in accordance with its obligations under Section 251(c)(3) of the Act. Additionally, this Attachment sets forth the rates, terms and conditions for other facilities and services BellSouth makes available to UTI (Other Services). Additionally, the provision of a particular Network Element or Other Service may require UTI to purchase other Network Elements or services. In the event of a conflict between this Attachment and any other section or provision of this Agreement, the provisions of this Attachment shall control.
- 1.2 The rates for each Network Element, Combinations and Other Services are set forth in Exhibits A and B. If no rate is identified in this Agreement, the rate will be as set forth in the applicable BellSouth tariff or as negotiated by the Parties upon request by either Party. If UTI purchases service(s) from a tariff, all terms and conditions and rates as set forth in such tariff shall apply. A one-month minimum billing period shall apply to all Network Elements, Combinations and Other Services.
- 1.3 UTI may purchase and use Network Elements and Other Services from BellSouth in accordance with 47 C.F.R § 51.309.
- 1.4 The Parties shall comply with the requirements as set forth in the technical references within this Attachment 2.
- 1.5 UTI shall not obtain a Network Element for the exclusive provision of mobile wireless services or interexchange services.
- 1.6 Conversion of Wholesale Services to Network Elements or Network Elements to Wholesale Services. Upon request, BellSouth shall convert a wholesale service, or group of wholesale services, to the equivalent Network Element or Combination that is available to UTI pursuant to Section 251 of the Act and under this Agreement or convert a Network Element or Combination that is available to UTI pursuant to Section 251 of the Act and under this Agreement to an equivalent wholesale service or group of wholesale services offered by BellSouth (collectively "Conversion"). BellSouth shall charge the applicable nonrecurring switch-as-is rates for Conversions to specific Network Elements or Combinations found in Exhibit A. BellSouth shall also charge the same nonrecurring switch-as-is rates when converting from Network Elements or Combinations. Any rate change resulting from the Conversion will be effective as of the next billing cycle following BellSouth's receipt of a complete and accurate Conversion request from UTI. A

Conversion shall be considered termination for purposes of any volume and/or term commitments and/or grandfathered status between UTI and BellSouth. Any change from a wholesale service/group of wholesale services to a Network Element/Combination, or from a Network Element/Combination to a wholesale service/group of wholesale services, that requires a physical rearrangement will not be considered to be a Conversion for purposes of this Agreement. BellSouth will not require physical rearrangements if the Conversion can be completed through record changes only. Orders for Conversions will be handled in accordance with the guidelines set forth in the Ordering Guidelines and Processes and CLEC Information Packages as referenced in Sections 1.13.1 and 1.13.2 below.

- 1.7 Except to the extent expressly provided otherwise in this Attachment, UTI may not maintain unbundled network elements or combinations of unbundled network elements, that are no longer offered pursuant to this Agreement (collectively "Arrangements"). In the event BellSouth determines that UTI has in place any Arrangements after the Effective Date of this Agreement, BellSouth may disconnect such Arrangements without notice under this Agreement to UTI.
- 1.8 Prior to submitting an order pursuant to this Agreement for high capacity (DS1 or above) Dedicated Transport or high capacity Loops, UTI shall undertake a reasonably diligent inquiry to determine whether UTI is entitled to unbundled access to such Network Elements in accordance with the terms of this Agreement. By submitting any such order, UTI self-certifies that to the best of UTI's knowledge, the high capacity Dedicated Transport or high capacity Loop requested is available as a Network Element pursuant to this Agreement. Upon receiving such order, BellSouth shall process the request in reliance upon UTI's self-certification. To the extent BellSouth believes that such request does not comply with the terms of this Agreement, BellSouth shall seek dispute resolution in accordance with the General Terms and Conditions of this Agreement.
- 1.9 UTI may utilize Network Elements and Other Services to provide services in accordance with this Agreement, as long as such services are consistent with industry standards and applicable BellSouth Technical References.
- 1.10 BellSouth will perform Routine Network Modifications (RNM) in accordance with FCC 47 C.F.R. § 51.319 (a)(7) and (e)(4) for Loops and Dedicated Transport provided under this Attachment. If BellSouth has anticipated such RNM and performs them during normal operations and has recovered the costs for performing such modifications through the rates set forth in Exhibit A, then BellSouth shall perform such RNM at no additional charge. RNM shall be performed within the intervals established for the Network Element and subject to the performance measurements and associated remedies set forth in Attachment 9 of this Agreement to the extent such RNM were anticipated in the setting of such intervals. If BellSouth has not anticipated a requested network modification as being a RNM and has not recovered the costs of such RNM in the rates set forth in

Exhibit A, then such request will be handled as a project on an individual case basis. BellSouth will provide a price quote for the request and, upon receipt of payment from UTI, BellSouth shall perform the RNM.

1.11 <u>Commingling of Services</u>

- 1.11.1 Commingling means the connecting, attaching, or otherwise linking of a Network Element, or a Combination, to one or more Telecommunications Services or facilities that UTI has obtained at wholesale from BellSouth, or the combining of a Network Element or Combination with one or more such wholesale Telecommunications Services or facilities. UTI must comply with all rates, terms or conditions applicable to such wholesale Telecommunications Services or facilities.
- 1.11.2 Subject to the limitations set forth elsewhere in this Attachment, BellSouth shall not deny access to a Network Element or a Combination on the grounds that one or more of the elements: 1) is connected to, attached to, linked to, or combined with such a facility or service obtained from BellSouth; or 2) shares part of BellSouth's network with access services or inputs for mobile wireless services and/or interexchange services.
- 1.11.3 Unless otherwise agreed to by the Parties, the Network Element portion of a commingled circuit will be billed at the rates set forth in this Agreement and the remainder of the circuit or service will be billed in accordance with BellSouth's tariffed rates or rates set forth in a separate agreement between the Parties.
- 1.11.4 When multiplexing equipment is attached to a commingled circuit, the multiplexing equipment will be billed from the same agreement or tariff as the higher bandwidth circuit. Central Office Channel Interfaces (COCI) will be billed from the same agreement or tariff as the lower bandwidth circuit.
- 1.11.5 Notwithstanding any other provision of this Agreement, BellSouth shall not be obligated to commingle or combine Network Elements or Combinations with any service, network element or other offering that it is obligated to make available only pursuant to Section 271 of the Act.
- 1.12 Terms and conditions for order cancellation charges and Service Date Advancement Charges will apply in accordance with Attachment 6 and are incorporated herein by this reference. The charges shall be as set forth in Exhibit A.
- 1.13 Ordering Guidelines and Processes
- 1.13.1 For information regarding Ordering Guidelines and Processes for various Network Elements, Combinations and Other Services, UTI should refer to the "Guides"

section of the BellSouth Interconnection Web site, which is incorporated herein by reference, as amended from time to time. The Web site address is: http://www.interconnection.bellsouth.com/.

- 1.13.2 Additional information may also be found in the individual CLEC Information Packages, which are incorporated herein by reference, as amended from time to time, located at the "CLEC UNE Products" Web site address: <u>http://www.interconnection.bellsouth.com/guides/html/unes.html</u>.
- 1.13.3 The provisioning of Network Elements, Combinations and Other Services to UTI's Collocation Space will require cross-connections within the central office to connect the Network Element, Combinations or Other Services to the demarcation point associated with UTI's Collocation Space. These cross-connects are separate components that are not considered a part of the Network Element, Combinations or Other Services and, thus, have a separate charge pursuant to this Agreement.
- 1.13.4 <u>Testing/Trouble Reporting.</u>
- 1.13.4.1 UTI will be responsible for testing and isolating troubles on Network Elements. UTI must test and isolate trouble to the BellSouth network before reporting the trouble to the UNE Customer Wholesale Interconnection Network Services (CWINS) Center. Upon request from BellSouth at the time of the trouble report, UTI will be required to provide the results of the UTI test which indicate a problem on the BellSouth network.
- 1.13.4.2 Once UTI has isolated a trouble to the BellSouth network, and has issued a trouble report to BellSouth, BellSouth will take the actions necessary to repair the Network Element when trouble is found. BellSouth will repair its network facilities to its wholesale customers in the same time frames that BellSouth repairs similar services to its retail End Users.
- 1.13.4.3 If UTI reports a trouble on a BellSouth Network Element and no trouble is found in BellSouth's network, BellSouth will charge UTI a Maintenance of Service Charge for any dispatching and testing (both inside and outside the CO) required by BellSouth in order to confirm the Network Element's working status. BellSouth will assess the applicable Maintenance of Service rates from BellSouth's FCC No.1 Tariff, Section 13.3.1.
- 1.13.4.4 In the event BellSouth must dispatch to the End User's location more than once due to incorrect or incomplete information provided by UTI (e.g., incomplete address, incorrect contact name/number, etc.), BellSouth will bill UTI for each additional dispatch required to repair the Network Element due to the incorrect/incomplete information provided. BellSouth will assess the applicable Maintenance of Service rates from BellSouth's FCC No.1 Tariff, Section 13.3.1.

2 Loops

- 2.1 General. The local loop Network Element is defined as a transmission facility that BellSouth provides pursuant to this Attachment between a distribution frame (or its equivalent) in BellSouth's central office and the loop demarcation point at an End User premises (Loop). Facilities that do not terminate at a demarcation point at an End User premises, including, by way of example, but not limited to, facilities that terminate to another carrier's switch or premises, a cell site, Mobile Switching Center or base station, do not constitute local Loops. The Loop Network Element includes all features, functions, and capabilities of the transmission facilities, including the network interface device, and attached electronics (except those used for the provision of advanced services, such as Digital Subscriber Line Access Multiplexers (DSLAMs)), optronics and intermediate devices (including repeaters and load coils) used to establish the transmission path to the End User's premises, including inside wire owned or controlled by BellSouth. UTI shall purchase the entire bandwidth of the Loop and, except as required herein or as otherwise agreed to by the Parties, BellSouth shall not subdivide the frequency of the Loop.
- 2.1.1 The Loop does not include any packet switched features, functions or capabilities.
- 2.1.2 Fiber to the Home (FTTH) loops are local loops consisting entirely of fiber optic cable, whether dark or lit, serving an End User's premises or, in the case of predominantly residential multiple dwelling units (MDUs), a fiber optic cable, whether dark or lit, that extends to the MDU minimum point of entry (MPOE). Fiber to the Curb (FTTC) loops are local loops consisting of fiber optic cable connecting to a copper distribution plant that is not more than five hundred (500) feet from the End User's premises or, in the case of predominantly residential MDUs, not more than five hundred (500) feet from the MDU's MPOE. The fiber optic cable in a FTTC loop must connect to a copper distribution plant at a serving area interface from which every other copper distribution subloop also is not more than five hundred (500) feet from the respective End User's premises.
- 2.1.2.1 In new build (Greenfield) areas, where BellSouth has only deployed FTTH/FTTC facilities, BellSouth is under no obligation to provide Loops. FTTH facilities include fiber loops deployed to the MPOE of a MDU that is predominantly residential regardless of the ownership of the inside wiring from the MPOE to each End User in the MDU.
- 2.1.2.2 In FTTH/FTTC overbuild situations where BellSouth also has copper Loops, BellSouth will make those copper Loops available to UTI on an unbundled basis, until such time as BellSouth chooses to retire those copper Loops using the FCC's network disclosure requirements. In these cases, BellSouth will offer a 64 kilobits per second (kbps) second voice grade channel over its FTTH/FTTC facilities.

- 2.1.2.3 Furthermore, in FTTH/FTTC overbuild areas where BellSouth has not yet retired copper facilities, BellSouth is not obligated to ensure that such copper Loops in that area are capable of transmitting signals prior to receiving a request for access to such Loops by UTI. If a request is received by BellSouth for a copper Loop, and the copper facilities have not yet been retired, BellSouth will restore the copper Loop to serviceable condition if technically feasible. In these instances of Loop orders in an FTTH/FTTC overbuild area, BellSouth's standard Loop provisioning interval will not apply, and the order will be handled on a project basis by which the Parties will negotiate the applicable provisioning interval
- 2.1.3 A hybrid Loop is a local Loop, composed of both fiber optic cable, usually in the feeder plant, and copper twisted wire or cable, usually in the distribution plant. BellSouth shall provide UTI with nondiscriminatory access to the time division multiplexing features, functions and capabilities of such hybrid Loop, on an unbundled basis to establish a complete transmission path between BellSouth's central office and an End User's premises.
- 2.1.4 Transition for DS1 and DS3 Loops
- 2.1.4.1 For purposes of this Section 2, the Transition Period for DS1 and DS3 Loops is the twelve (12) month period beginning March 11, 2005 and ending March 10, 2006.
- 2.1.4.2 For purposes of this Section 2, Embedded Base means DS1 and DS3 Loops that were in service for UTI as of March 10, 2005. Subsequent disconnects or loss of End Users shall be removed from the Embedded Base.
- 2.1.4.3 For purposes of this Section 2, a Business Line is defined in 47 C.F.R. § 51.5.
- 2.1.4.4 BellSouth shall make available DS1 and DS3 Loops as defined in this Section 2. Notwithstanding anything to the contrary in this Agreement, BellSouth shall make available DS1 and DS3 Loops as described in this Section 2.1.4 only for UTI's Embedded Base during the Transition Period:
- 2.1.4.4.1 DS1 Loops at any location within the service area of a wire center containing 60,000 or more Business Lines and four (4) or more fiber-based collocators.
- 2.1.4.4.2 DS3 Loops at any location within the service area of a wire center containing 38,000 or more Business Lines and four (4) or more fiber-based collocators.
- 2.1.4.5 During the Transition Period, the rates for UTI's Embedded Base of DS1 and DS3 Loops described in this Section 2.1.4 shall be as set forth in Exhibit B.
- 2.1.4.6 The Transition Period shall apply only to UTI's Embedded Base and UTI shall not add new DS1 or DS3 loops as described in this Section 2.1.4 pursuant to this Agreement.

- 2.1.4.7 Once a wire center exceeds both of the thresholds set forth in Section 2.1.4.4.1, no future DS1 Loop unbundling will be required in that wire center.
- 2.1.4.8 Once a wire center exceeds both of the thresholds set forth in Section 2.1.4.4.2, no future DS3 Loop unbundling will be required in that wire center.
- 2.1.4.9 At the end of the Transition Period any remaining Embedded Base will be disconnected.
- 2.1.5 Where facilities are available, BellSouth will install Loops in compliance with BellSouth's Products and Services Interval Guide available at BellSouth's Web site: <u>http://www.interconnection.bellsouth.com</u>. For orders of fifteen (15) or more Loops, the installation and any applicable OC as described below will be handled on a project basis, and the intervals will be set by the BellSouth project manager for that order. When Loops require a Service Inquiry (SI) prior to issuing the order to determine if facilities are available, the interval for the SI process is separate from the installation interval.
- 2.1.6 The Loop shall be provided to UTI in accordance with BellSouth's TR73600 Unbundled Local Loop Technical Specification and applicable industry standard technical references.
- 2.1.7 BellSouth will only provision, maintain and repair the Loops to the standards that are consistent with the type of Loop ordered.
- 2.1.7.1 When a BellSouth technician is required to be dispatched to provision the Loop, BellSouth will tag the Loop with the Circuit ID number and the name of the ordering CLEC. When a dispatch is not required to provision the Loop, BellSouth will tag the Loop on the next required visit to the End User's location. If UTI wants to ensure the Loop is tagged during the provisioning process for Loops that may not require a dispatch (e.g., UVL-SL1, UVL-SL2, and UCL-ND), UTI may order Loop Tagging. Rates for Loop Tagging are as set forth in Exhibit A.
- 2.1.7.2 For voice grade Loop orders (or orders for Loops intended to provide voice grade services), UTI shall have dial-tone available for that Loop forty-eight (48) hours prior to the Loop order completion due date.
- 2.1.8 Order Coordination (OC) and Order Coordination-Time Specific (OC-TS)
- 2.1.8.1 OC allows BellSouth and UTI to coordinate the installation of the SL2 Loops, Unbundled Digital Loops (UDL) and other Loops where OC may be purchased as an option, to UTI's facilities to limit End User service outage. OC is available when the Loop is provisioned over an existing circuit that is currently providing service to the End User. OC for physical conversions will be scheduled at

BellSouth's discretion during normal working hours on the committed due date. OC shall be provided in accordance with the chart set forth below.

2.1.8.2 OC-TS allows UTI to order a specific time for OC to take place. BellSouth will make commercially reasonable efforts to accommodate UTI's specific conversion time request. However, BellSouth reserves the right to negotiate with UTI a conversion time based on load and appointment control when necessary. This OC-TS is a chargeable option for all Loops except Unbundled Copper Loops (UCL) and is billed in addition to the OC charge. UTI may specify a time between 9:00 a.m. and 4:00 p.m. (location time) Monday through Friday (excluding holidays). If UTI specifies a time outside this window, or selects a time or quantity of Loops that requires BellSouth technicians to work outside normal work hours, overtime charges will apply in addition to the OC and OC-TS charges. Overtime charges will be applied based on the amount of overtime worked and in accordance with the rates established in BellSouth's Access Services Tariff, Section E13.2, for each state. The OC-TS charges for an order due on the same day at the same location will be applied on a per Local Service Request (LSR) basis.

| | Order Coordination (OC) | Order Coordination – Time Specific (OC-TS) | Test Points | DLR | Charge for Dispatch and Testing if No Trouble Found |
|---|---|--|------------------------------------|--|--|
| SL-1 (Non- Designed) | Chargeable Option | Chargeable Option | Not available | Chargeable Option – ordered as Engineering Information Document | Charged for Dispatch inside and outside Central Office |
| UCL-ND (Non- Designed) | Chargeable Option | Not Available | Not Available | Chargeable Option – ordered as Engineering Information Document | Charged for Dispatch inside and outside Central Office |
| Unbundled Voice Loops - SL-2 (including 2- and 4-wire UVL) (Designed) | Included | Chargeable Option | Included | Included | Charged for Dispatch outside Central Office |
| Unbundled Digital Loop (Designed) | Included | Chargeable Option | Included (where appropriate) | Included | Charged for Dispatch outside Central Office |
| Unbundled Copper Loop (Designed) | Chargeable in accordance with Section 2 | Not available | Included | Included | Charged for Dispatch outside Central Office |

For UVL-SL1 and UCLs, UTI must order and will be billed for both OC and OC-TS if requesting OC-TS.

2.1.9 <u>CLEC to CLEC Conversions for Unbundled Loops</u>

- 2.1.9.1 The CLEC to CLEC conversion process for Loops may be used by UTI when converting an existing Loop from another CLEC for the same End User. The Loop type being converted must be included in UTI's Interconnection Agreement before requesting a conversion.
- 2.1.9.2 To utilize the CLEC to CLEC conversion process, the Loop being converted must be the same Loop type with no requested changes to the Loop, must serve the

same End User location from the same serving wire center, and must not require an outside dispatch to provision.

2.1.9.3 The Loops converted to UTI pursuant to the CLEC to CLEC conversion process shall be provisioned in the same manner and with the same functionality and options as described in this Agreement for the specific Loop type.

2.1.10 Bulk Migration

2.1.10.1 BellSouth will make available to UTI a Bulk Migration process pursuant to which UTI may request to migrate port/loop combinations, provisioned pursuant to a separate agreement between the parties, to Loops (UNE-L). The Bulk Migration process may be used if such loop/port combinations are (1) associated with two (2) or more Existing Account Telephone Numbers (EATNs); and (2) located in the same Central Office. The terms and conditions for use of the Bulk Migration process are described in the BellSouth CLEC Information Package, incorporated herein by reference as it may be amended from time to time. The CLEC Information Package is located at www.interconnection.bellsouth.com/guides/html/unes.html. The rates for the Bulk

<u>www.interconnection.bellsouth.com/guides/html/unes.html</u>. The rates for the Bulk Migration process shall be the nonrecurring rates associated with the Loop type being requested on the Bulk Migration, as set forth in Exhibit A. Additionally, Operations Support Systems (OSS) charges will also apply. Loops connected to Integrated Digital Loop Carrier (IDLC) systems will be migrated pursuant to Section 2.6 below.

- 2.1.10.2 Should UTI request migration for two (2) or more EATNs containing fifteen (15) or more circuits, UTI must use the Bulk Migration process referenced in 2.1.11.1 above.
- 2.2 <u>Unbundled Voice Loops (UVLs)</u>
- 2.2.1 BellSouth shall make available the following UVLs:
- 2.2.1.1 2-wire Analog Voice Grade Loop SL1 (Non-Designed)
- 2.2.1.2 2-wire Analog Voice Grade Loop SL2 (Designed)
- 2.2.1.3 4-wire Analog Voice Grade Loop (Designed)
- 2.2.2 UVL may be provisioned using any type of facility that will support voice grade services. This may include loaded copper, non-loaded copper, digital loop carrier systems, fiber/copper combination (hybrid loop) or a combination of any of these facilities. BellSouth, in the normal course of maintaining, repairing, and configuring its network, may also change the facilities that are used to provide any given voice grade circuit. This change may occur at any time. In these situations, BellSouth will only ensure that the newly provided facility will support voice grade

services. BellSouth will not guarantee that UTI will be able to continue to provide any advanced services over the new facility. BellSouth will offer UVL in two different service levels - Service Level One (SL1) and Service Level Two (SL2).

- 2.2.3 <u>Unbundled Voice Loop SL1 (UVL-SL1).</u> Loops are 2-wire Loop start circuits, will be non-designed, and will not have remote access test points. OC will be offered as a chargeable option on SL1 Loops when reuse of existing facilities has been requested by UTI, however, OC is always required on UCLs that involve the reuse of facilities that are currently providing service. UTI may also order OC-TS when a specified conversion time is requested. OC-TS is a chargeable option for any coordinated order and is billed in addition to the OC charge. An Engineering Information (EI) document can be ordered as a chargeable option. The EI document provides Loop Make-Up information which is similar to the information normally provided in a Design Layout Record (DLR). Upon issuance of a non-coordinated order in the service order system, SL1 Loops will be activated on the due date in the same manner and time frames that BellSouth normally activates POTS-type Loops for its End Users.
- 2.2.4 For an additional charge BellSouth will make available Loop Testing so that UTI may request further testing on new UVL-SL1 Loops. Rates for Loop Testing are as set forth in Exhibit A.
- 2.2.5 <u>Unbundled Voice Loop SL2 (UVL-SL2).</u> Loops may be 2-wire or 4-wire circuits, shall have remote access test points, and will be designed with a DLR provided to UTI. SL2 circuits can be provisioned with loop start, ground start or reverse battery signaling. OC is provided as a standard feature on SL2 Loops. The OC feature will allow UTI to coordinate the installation of the Loop with the disconnect of an existing customer's service and/or number portability service. In these cases, BellSouth will perform the order conversion with standard order coordination at its discretion during normal work hours.
- 2.3 <u>Unbundled Digital Loops</u>
- 2.3.1 BellSouth will offer UDLs. UDLs are service specific, will be designed, will be provisioned with test points (where appropriate), and will come standard with OC and a DLR. The various UDLs are intended to support a specific digital transmission scheme or service.
- 2.3.2 BellSouth shall make available the following UDLs, subject to restrictions set forth herein:
- 2.3.2.1 2-wire Unbundled ISDN Digital Loop
- 2.3.2.2 2-wire Unbundled ADSL Compatible Loop

- 2.3.2.3 2-wire Unbundled HDSL Compatible Loop
- 2.3.2.4 4-wire Unbundled HDSL Compatible Loop
- 2.3.2.5 4-wire Unbundled DS1 Digital Loop
- 2.3.2.6 4-wire Unbundled Digital Loop/DS0 64 kbps, 56 kbps and below
- 2.3.2.7 DS3 Loop
- 2.3.2.8 STS-1 Loop
- 2.3.3 <u>2-wire Unbundled ISDN Digital Loops.</u> These will be provisioned according to industry standards for 2-Wire Basic Rate ISDN services and will come standard with a test point, OC, and a DLR. UTI will be responsible for providing BellSouth with a Service Profile Identifier (SPID) associated with a particular ISDN-capable Loop and End User. With the SPID, BellSouth will be able to adequately test the circuit and ensure that it properly supports ISDN service.
- 2.3.4 <u>2-wire ADSL-Compatible Loop.</u> This is a designed Loop that is provisioned according to Revised Resistance Design (RRD) criteria and may be up to 18,000 feet long and may have up to 6,000 feet of bridged tap (inclusive of Loop length). The Loop is a 2-wire circuit and will come standard with a test point, OC, and a DLR.
- 2.3.5 <u>2-wire or 4-wire HDSL-Compatible Loop.</u> This is a designed Loop that meets Carrier Serving Area (CSA) specifications, may be up to 12,000 feet long and may have up to 2,500 feet of bridged tap (inclusive of Loop length). It may be a 2-wire or 4-wire circuit and will come standard with a test point, OC, and a DLR.
- 2.3.6 <u>4-wire Unbundled DS1 Digital Loop.</u>
- 2.3.6.1 This is a designed 4-wire Loop that is provisioned according to industry standards for DS1 or Primary Rate ISDN services and will come standard with a test point, OC, and a DLR. A DS1 Loop may be provisioned over a variety of loop transmission technologies including copper, HDSL-based technology or fiber optic transport systems. It will include a 4-wire DS1 Network Interface at the End User's location. For purposes of this Agreement, including the transition of DS1 and DS3 Loops described in Section 2.1.4 above, DS1 Loops include 2-wire and 4-wire copper Loops capable of providing high-bit rate digital subscriber line services, such as 2-wire and 4-wire HDSL Compatible Loops.
- 2.3.6.2 BellSouth shall not provide more than ten (10) unbundled DS1 Loops to UTI at any single building in which DS1 Loops are available as unbundled Loops.

- 2.3.7 <u>4-wire Unbundled Digital/DS0 Loop.</u> These are designed 4-wire Loops that may be configured as 64kbps, 56kbps, 19kbps, and other sub-rate speeds associated with digital data services and will come standard with a test point, OC, and a DLR.
- 2.3.8 <u>DS3 Loop.</u> DS3 Loop is a two-point digital transmission path which provides for simultaneous two-way transmission of serial, bipolar, return-to-zero isochronous digital electrical signals at a transmission rate of 44.736 megabits per second (Mbps) that is dedicated to the use of the ordering CLEC in its provisioning of local exchange and associated exchange access services. It may provide transport for twenty-eight (28) DS1 channels, each of which provides the digital equivalent of twenty-four (24) analog voice grade channels. The interface to unbundled dedicated DS3 transport is a metallic-based electrical interface.
- 2.3.9 <u>STS-1 Loop.</u> STS-1 Loop is a high-capacity digital transmission path with SONET VT1.5 mapping that is dedicated for the use of the ordering customer for the purpose of provisioning local exchange and associated exchange access services. It is a two-point digital transmission path which provides for simultaneous two-way transmission of serial bipolar return-to-zero synchronous digital electrical signals at a transmission rate of 51.84 Mbps. It may provide transport for twenty-eight (28) DS1 channels, each of which provides the digital equivalent of twenty-four (24) analog voice grade channels. The interface to unbundled dedicated STS-1 transport is a metallic-based electrical interface.
- 2.3.10 Both DS3 Loop and STS-1 Loop require a SI in order to ascertain availability.
- 2.3.11 DS3 services come with a test point and a DLR. Mileage is airline miles, rounded up and a minimum of one mile applies. BellSouth's TR73501 LightGate[®]Service Interface and Performance Specifications, Issue D, June 1995 applies to DS3 services.
- 2.3.12 UTI may obtain a maximum of a single Unbundled DS3 Loop to any single building in which DS3 Loops are available as Unbundled Loops.
- 2.4 <u>Unbundled Copper Loops (UCL).</u>
- 2.4.1 BellSouth shall make available UCLs. The UCL is a copper twisted pair Loop that is unencumbered by any intervening equipment (e.g., filters, load coils, range extenders, digital loop carrier, or repeaters) and is not intended to support any particular telecommunications service. The UCL will be offered in two types – Designed and Non-Designed.
- 2.4.2 <u>Unbundled Copper Loop Designed (UCL-D)</u>

- 2.4.2.1 The UCL-D will be provisioned as a dry copper twisted pair (2-wire or 4-wire) Loop that is unencumbered by any intervening equipment (e.g., filters, load coils, range extenders, digital loop carrier, or repeaters).
- 2.4.2.2 A UCL-D will be 18,000 feet or less in length and is provisioned according to Resistance Design parameters, may have up to 6,000 feet of bridged tap and will have up to 1300 Ohms of resistance.
- 2.4.2.3 The UCL-D is a designed circuit, is provisioned with a test point, and comes standard with a DLR. OC is a chargeable option for a UCL-D; however, OC is always required on UCLs where a reuse of existing facilities has been requested by UTI.
- 2.4.2.4 These Loops are not intended to support any particular services and may be utilized by UTI to provide a wide-range of telecommunications services as long as those services do not adversely affect BellSouth's network. This facility will include a Network Interface Device (NID) at the customer's location for the purpose of connecting the Loop to the customer's inside wire.
- 2.4.3 <u>Unbundled Copper Loop Non-Designed (UCL-ND)</u>
- 2.4.3.1 The UCL–ND is provisioned as a dedicated 2-wire metallic transmission facility from BellSouth's Main Distribution Frame (MDF) to a customer's premises (including the NID). The UCL-ND will be a "dry copper" facility in that it will not have any intervening equipment such as load coils, repeaters, or digital access main lines (DAMLs), and may have up to 6,000 feet of bridged tap between the End User's premises and the serving wire center. The UCL-ND typically will be 1300 Ohms resistance and in most cases will not exceed 18,000 feet in length, although the UCL-ND will not have a specific length limitation. For Loops less than 18,000 feet and with less than 1300 Ohms resistance, the Loop will provide a voice grade transmission channel suitable for loop start signaling and the transport of analog voice grade signals. The UCL-ND will not be designed and will not be provisioned with either a DLR or a test point.
- 2.4.3.2 The UCL-ND facilities may be mechanically assigned using BellSouth's assignment systems. Therefore, the Loop Makeup (LMU) process is not required to order and provision the UCL-ND. However, UTI can request LMU for which additional charges would apply.
- 2.4.3.3 For an additional charge, BellSouth also will make available Loop Testing so that UTI may request further testing on the UCL-ND. Rates for Loop Testing are as set forth in Exhibit A.
- 2.4.3.4 UCL-ND Loops are not intended to support any particular service and may be utilized by UTI to provide a wide-range of telecommunications services as long as

those services do not adversely affect BellSouth's network. The UCL-ND will include a NID at the customer's location for the purpose of connecting the Loop to the customer's inside wire.

- 2.4.3.5 OC will be provided as a chargeable option and may be utilized when the UCL-ND provisioning is associated with the reuse of BellSouth facilities. OC-TS does not apply to this product.
- 2.4.3.6 UTI may use BellSouth's Unbundled Loop Modification (ULM) offering to remove excessive bridged taps and/or load coils from any copper Loop within the BellSouth network. Therefore, some Loops that would not qualify as UCL-ND could be transformed into Loops that do qualify, using the ULM process.

2.5 <u>Unbundled Loop Modifications (Line Conditioning)</u>

- 2.5.1 Line Conditioning is defined as routine network modification that BellSouth regularly undertakes to provide xDSL services to its own customers. This may include the removal of any device, from a copper Loop or copper Subloop that may diminish the capability of the Loop or Subloop to deliver high-speed switched wireline telecommunications capability, including xDSL service. Such devices include, load coils, excessive bridged taps, low pass filters, and range extenders. Excessive bridged taps are bridged taps that serves no network design purpose and that are beyond the limits set according to industry standards and/or the BellSouth's TR73600 Unbundled Local Loop Technical Specification.
- 2.5.2 BellSouth will remove load coils only on copper Loops and Subloops that are less than 18,000 feet in length.
- 2.5.3 For any copper loop being ordered by UTI which has over six thousand (6,000) feet of combined bridged tap will be modified, upon request from UTI, so that the loop will have a maximum of six thousand (6,000) feet of bridged tap. This modification will be performed at no additional charge to UTI. Loop conditioning orders that require the removal of bridged tap that serves no network design purpose on a copper Loop that will result in a combined total of bridged tap between two thousand five hundred (2,500) and six thousand (6,000) feet will be performed at the rates set forth in Exhibit A.
- 2.5.4 UTI may request removal of any unnecessary and non-excessive bridged tap (bridged tap between zero (0) and two thousand five hundred (2,500) feet which serves no network design purpose), at rates pursuant to BellSouth's SC Process as mutually agreed to by the Parties.
- 2.5.5 Rates for ULM are as set forth in Exhibit A.

- 2.5.6 BellSouth will not modify a Loop in such a way that it no longer meets the technical parameters of the original Loop type (e.g., voice grade, ADSL, etc.) being ordered.
- 2.5.7 If UTI requests ULM on a reserved facility for a new Loop order, BellSouth may perform a pair change and provision a different Loop facility in lieu of the reserved facility with ULM if feasible. The Loop provisioned will meet or exceed specifications of the requested Loop facility as modified. UTI will not be charged for ULM if a different Loop is provisioned. For Loops that require a DLR or its equivalent, BellSouth will provide LMU detail of the Loop provisioned.
- 2.5.8 UTI shall request Loop make up information pursuant to this Attachment prior to submitting a service inquiry and/or a LSR for the Loop type that UTI desires BellSouth to condition.
- 2.5.9 When requesting ULM for a Loop that BellSouth has previously provisioned for UTI, UTI will submit a SI to BellSouth. If a spare Loop facility that meets the Loop modification specifications requested by UTI is available at the location for which the ULM was requested, UTI will have the option to change the Loop facility to the qualifying spare facility rather than to provide ULM. In the event that BellSouth changes the Loop facility in lieu of providing ULM, UTI will not be charged for ULM but will only be charged the service order charges for submitting an order.
- 2.6 <u>Loop Provisioning Involving IDLC</u>
- 2.6.1 Where UTI has requested an Unbundled Loop and BellSouth uses IDLC systems to provide the local service to the End User and BellSouth has a suitable alternate facility available, BellSouth will make such alternative facilities available to UTI. If a suitable alternative facility is not available, then to the extent it is technically feasible, BellSouth will implement one of the following alternative arrangements for UTI (e.g., hairpinning):
 - 1. Roll the circuit(s) from the IDLC to any spare copper that exists to the customer premises.
 - 2. Roll the circuit(s) from the IDLC to an existing DLC that is not integrated.
 - 3. If capacity exists, provide "side-door" porting through the switch.
 - 4. If capacity exists, provide "Digital Access Cross-Connect System (DACS)-door" porting (if the IDLC routes through a DACS prior to integration into the switch).
- 2.6.2 Arrangements 3 and 4 above require the use of a designed circuit. Therefore, non-designed Loops such as the SL1 voice grade and UCL-ND may not be ordered in these cases.

- 2.6.3 If no alternate facility is available, and upon request from UTI, and if agreed to by both Parties, BellSouth may utilize its SC process to determine the additional costs required to provision facilities. UTI will then have the option of paying the one-time SC rates to place the Loop.
- 2.7 <u>Network Interface Device</u>
- 2.7.1 The NID is defined as any means of interconnection of the End User's customer premises wiring to BellSouth's distribution plant, such as a cross-connect device used for that purpose. The NID is a single line termination device or that portion of a multiple line termination device required to terminate a single line or circuit at the premises. The NID features two independent chambers or divisions that separate the service provider's network from the End User's premises wiring. Each chamber or division contains the appropriate connection points or posts to which the service provider and the End User each make their connections. The NID provides a protective ground connection and is capable of terminating cables such as twisted pair cable.
- 2.7.2 BellSouth shall permit UTI to connect UTI's Loop facilities to the End User's customer premises wiring through the BellSouth NID or at any other technically feasible point.
- 2.7.3 <u>Access to NID</u>
- 2.7.3.1 UTI may access the End User's premises wiring by any of the following means and UTI shall not disturb the existing form of electrical protection and shall maintain the physical integrity of the NID:
- 2.7.3.1.1 BellSouth shall allow UTI to connect its Loops directly to BellSouth's multi-line residential NID enclosures that have additional space and are not used by BellSouth or any other telecommunications carriers to provide service to the premises;
- 2.7.3.1.2 Where an adequate length of the End User's customer premises wiring is present and environmental conditions permit, either Party may remove the End User premises wiring from the other Party's NID and connect such wiring to that Party's own NID;
- 2.7.3.1.3 Either Party may enter the subscriber access chamber or dual chamber NID enclosures for the purpose of extending a cross-connect or spliced jumper wire from the customer premises wiring through a suitable "punch-out" hole of such NID enclosures; or

- 2.7.3.1.4 UTI may request BellSouth to make other rearrangements to the End User premises wiring terminations or terminal enclosure on a time and materials cost basis.
- 2.7.3.2 In no case shall either Party remove or disconnect the other Party's loop facilities from either Party's NIDs, enclosures, or protectors unless the applicable Commission has expressly permitted the same and the disconnecting Party provides prior notice to the other Party. In such cases, it shall be the responsibility of the Party disconnecting loop facilities to leave undisturbed the existing form of electrical protection and to maintain the physical integrity of the NID. It will be UTI's responsibility to ensure there is no safety hazard, and UTI will hold BellSouth harmless for any liability associated with the removal of the BellSouth Loop from the BellSouth NID. Furthermore, it shall be the responsibility of the MID, to reconnect the disconnected loop to a nationally recognized testing laboratory listed station protector, which has been grounded as per Article 800 of the National Electrical Code. If no spare station protector exists in the NID, the disconnected loop must be appropriately cleared, capped and stored.
- 2.7.3.3 UTI shall not remove or disconnect ground wires from BellSouth's NIDs, enclosures, or protectors.
- 2.7.3.4 UTI shall not remove or disconnect NID modules, protectors, or terminals from BellSouth's NID enclosures.
- 2.7.3.5 Due to the wide variety of NID enclosures and outside plant environments, BellSouth will work with UTI to develop specific procedures to establish the most effective means of implementing this section if the procedures set forth herein do not apply to the NID in question.
- 2.7.4 <u>Technical Requirements</u>
- 2.7.4.1 The NID shall provide an accessible point of interconnection and shall maintain a connection to ground.
- 2.7.4.2 If an existing NID is accessed, it shall be capable of transferring electrical analog or digital signals between the End User's customer premises and the distribution media and/or cross-connect to UTI's NID.
- 2.7.4.3 Existing BellSouth NIDs will be operational and provided in "as is" condition. UTI may request BellSouth to do additional work to the NID on a time and material basis. When UTI deploys its own local loops in a multiple-line termination device, UTI shall specify the quantity of NID connections that it requires within such device.

2.8 <u>Subloop Elements.</u>

- 2.8.1 Where facilities permit, BellSouth shall offer access to its Unbundled Subloop (USL) elements as specified herein.
- 2.8.2 <u>Unbundled Subloop Distribution (USLD)</u>
- 2.8.2.1 The USLD facility is a dedicated transmission facility that BellSouth provides from an End User's point of demarcation to a BellSouth cross-connect device. The BellSouth cross-connect device may be located within a remote terminal (RT) or a stand-alone cross-box in the field or in the equipment room of a building. The USLD media is a copper twisted pair that can be provisioned as a 2-wire or 4-wire facility. BellSouth will make available the following subloop distribution offerings where facilities exist:

USLD – Voice Grade (USLD-VG) Unbundled Copper Subloop (UCSL) USLD – Intrabuilding Network Cable (USLD-INC (aka riser cable))

- 2.8.2.2 USLD-VG is a copper subloop facility from the cross-box in the field up to and including the point of demarcation at the End User's premises and may have load coils.
- 2.8.2.3 UCSL is a copper facility eighteen thousand (18,000) feet or less in length provided from the cross-box in the field up to and including the End User's point of demarcation. If available, this facility will not have any intervening equipment such as load coils between the End User and the cross-box.
- 2.8.2.3.1 If UTI requests a UCSL and it is not available, UTI may request the copper Subloop facility be modified pursuant to the ULM process to remove load coils and/or excessive bridged taps. If load coils and/or excessive bridged taps are removed, the facility will be classified as a UCSL.
- 2.8.2.4 USLD-INC is the distribution facility owned or controlled by BellSouth inside a building or between buildings on the same property that is not separated by a public street or road. USLD-INC includes the facility from the cross-connect device in the building equipment room up to and including the point of demarcation at the End User's premises.
- 2.8.2.4.1 Upon request for USLD-INC from UTI, BellSouth will install a cross-connect panel in the building equipment room for the purpose of accessing USLD-INC pairs from a building equipment room. The cross-connect panel will function as a single point of interconnection (SPOI) for USLD-INC and will be accessible by multiple carriers as space permits. BellSouth will place cross-connect blocks in twenty five (25) pair increments for UTI's use on this cross-connect panel. UTI

will be responsible for connecting its facilities to the twenty five (25) pair crossconnect block(s).

- 2.8.2.5 For access to Voice Grade USLD and UCSL, UTI shall install a cable to the BellSouth cross-box pursuant to the terms and conditions for physical collocation for remote sites set forth in Attachment 4. This cable would be connected by a BellSouth technician within the BellSouth cross-box during the set-up process. UTI's cable pairs can then be connected to BellSouth's USL within the BellSouth cross-box by the BellSouth technician.
- 2.8.2.6 Through the SI process, BellSouth will determine whether access to USLs at the location requested by UTI is technically feasible and whether sufficient capacity exists in the cross-box. If existing capacity is sufficient to meet UTI's request, then BellSouth will perform the site set-up as described in the CLEC Information Package, located at BellSouth's Interconnection Web site address: http://www.interconnection.bellsouth.com/products/html/unes.html.
- 2.8.2.7 The site set-up must be completed before UTI can order Subloop pairs. For the site set-up in a BellSouth cross-connect box in the field, BellSouth will perform the necessary work to splice UTI's cable into the cross-connect box. For the site set-up inside a building equipment room, BellSouth will perform the necessary work to install the cross-connect panel and the connecting block(s) that will be used to provide access to the requested USLs.
- 2.8.2.8 Once the site set-up is complete, UTI will request Subloop pairs through submission of a LSR form to the Local Carrier Service Center (LCSC). OC is required with USL pair provisioning when UTI requests reuse of an existing facility, and the OC charge shall be billed in addition to the USL pair rate. For expedite requests by UTI for Subloop pairs, expedite charges will apply for intervals less than five (5) days.
- 2.8.2.9 USLs will be provided in accordance with BellSouth's TR73600 Unbundled Local Loop Technical Specifications.
- 2.8.3 <u>Unbundled Network Terminating Wire (UNTW)</u>
- 2.8.3.1 UNTW is unshielded twisted copper wiring that is used to extend circuits from an intra-building network cable terminal or from a building entrance terminal to an individual End User's point of demarcation. It is the final portion of the Loop that in multi-subscriber configurations represents the point at which the network branches out to serve individual subscribers.
- 2.8.3.2 This element will be provided in MDUs and/or Multi-Tenants Units (MTUs) where either Party owns wiring all the way to the End User's premises. Neither Party will provide this element in locations where the property owner provides its own

wiring to the End User's premises, where a third party owns the wiring to the End User's premises.

2.8.3.3 <u>Requirements</u>

- 2.8.3.3.1 On a multi-unit premises, upon request of the other Party (Requesting Party), the Party owning the network terminating wire (Provisioning Party) will provide access to UNTW pairs on an Access Terminal that is suitable for use by multiple carriers at each Garden Terminal or Wiring Closet.
- 2.8.3.3.2 The Provisioning Party shall not be required to install new or additional NTW beyond existing NTW to provision the services of the Requesting Party.
- 2.8.3.3.3 In existing MDUs and/or MTUs in which BellSouth does not own or control wiring (INC/NTW) to the End Users premises, and UTI does own or control such wiring, UTI will install UNTW Access Terminals for BellSouth under the same terms and conditions as BellSouth provides UNTW Access Terminals to UTI.
- 2.8.3.3.4 In situations in which BellSouth activates a UNTW pair, BellSouth will compensate UTI for each pair activated commensurate to the price specified in UTI's Agreement.
- 2.8.3.3.5 Upon receipt of the UNTW SI requesting access to the Provisioning Party's UNTW pairs at a multi-unit premises, representatives of both Parties will participate in a meeting at the site of the requested access. The purpose of the site visit will include discussion of the procedures for installation and location of the Access Terminals. By request of the Requesting Party, an Access Terminal will be installed either adjacent to each of the Provisioning Party's Garden Terminal or inside each Wiring Closet. The Requesting Party will deliver and connect its central office facilities to the UNTW pairs within the Access Terminal. The Requesting Party may access any available pair on an Access Terminal. A pair is available when a pair is not being utilized to provide service or where the End User has requested a change in its local service provider to the Requesting Party. Prior to connecting the Requesting Party's service on a pair previously used by the Provisioning Party, the Requesting Party is responsible for ensuring the End User is no longer using the Provisioning Party's service or another CLEC's service before accessing UNTW pairs.
- 2.8.3.3.6 Access Terminal installation intervals will be established on an individual case basis.
- 2.8.3.3.7 The Requesting Party is responsible for obtaining the property owner's permission for the Provisioning Party to install an Access Terminal(s) on behalf of the Requesting Party. The submission of the SI by the Requesting Party will serve as certification by the Requesting Party that such permission has been obtained. If

the property owner objects to Access Terminal installations that are in progress or within thirty (30) days after completion and demands removal of Access Terminals, the Requesting Party will be responsible for costs associated with removing Access Terminals and restoring the property to its original state prior to Access Terminals being installed.

- 2.8.3.3.8 The Requesting Party shall indemnify and hold harmless the Provisioning Party against any claims of any kind that may arise out of the Requesting Party's failure to obtain the property owner's permission. The Requesting Party will be billed for nonrecurring and recurring charges for accessing UNTW pairs at the time the Requesting Party activates the pair(s). The Requesting Party will notify the Provisioning Party within five (5) business days of activating UNTW pairs using the LSR form.
- 2.8.3.3.9 If a trouble exists on a UNTW pair, the Requesting Party may use an alternate spare pair that serves that End User if a spare pair is available. In such cases, the Requesting Party will re-terminate its existing jumper from the defective pair to the spare pair. Alternatively, the Requesting Party will isolate and report troubles in the manner specified by the Provisioning Party. The Requesting Party must tag the UNTW pair that requires repair. If the Provisioning Party dispatches a technician on a reported trouble call and no UNTW trouble is found, the Provisioning Party will charge Requesting Party for time spent on the dispatch and testing the UNTW pair(s).
- 2.8.3.3.10 If the Requesting Party initiates the Access Terminal installation and the Requesting Party has not activated at least ten percent (10%) of the capacity of the Access Terminal installed pursuant to the Requesting Party's request for an Access Terminal within six (6) months of installation of the Access Terminal, the Provisioning Party will bill the Requesting Party a nonrecurring charge (NRC) equal to the actual cost of provisioning the Access Terminal.
- 2.8.3.3.11 If the Provisioning Party determines that the Requesting Party is using the UNTW pairs without reporting the activation of the pairs, the Requesting Party will be billed for the use of that pair back to the date the End User began receiving service from the Requesting Party at that location. Upon request, the Requesting Party will provide copies of its billing record to substantiate such date. If the Requesting Party fails to provide such records, then the Provisioning Party will bill the Requesting Party back to the date of the Access Terminal installation.
- 2.8.4 Dark Fiber Loop.
- 2.8.4.1 Dark Fiber Loop is an unused optical transmission facility, without attached signal regeneration, multiplexing, aggregation or other electronics, from the demarcation point at an End User's premises to the End User's serving wire center. Dark Fiber Loops may be strands of optical fiber existing in aerial or underground structure.

BellSouth will not provide line terminating elements, regeneration or other electronics necessary for UTI to utilize Dark Fiber Loops.

- 2.8.4.2 <u>Transition for Dark Fiber Loop</u>
- 2.8.4.2.1 For purposes of this Section 2.8.4, the Transition Period for Dark Fiber Loops is the eighteen (18) month period beginning March 11, 2005 and ending September 10, 2006.
- 2.8.4.2.2 For purposes of this Section 2.8.4, Embedded Base means Dark Fiber Loops that were in service for UTI as of March 10, 2005. Subsequent disconnects or loss of End Users shall be removed from the Embedded Base.
- 2.8.4.3 During the Transition Period only, BellSouth shall make available for the Embedded Base Dark Fiber Loops for UTI at the terms and conditions set forth in this Attachment.
- 2.8.4.4 The rates for UTI's Embedded Base of Dark Fiber Loops during the Transition Period shall be as set forth in Exhibit A.
- 2.8.4.5 The Transition Period shall apply only to UTI's Embedded Base and UTI shall not add new Dark Fiber Loops pursuant to this Agreement.
- 2.8.4.6 Effective September 11, 2006, Dark Fiber Loops will no longer be made available pursuant to this Agreement and any remaining Embedded Base will be disconnected.
- 2.9 <u>Loop Makeup</u>
- 2.9.1 <u>Description of Service</u>
- 2.9.1.1 BellSouth shall make available to UTI LMU information with respect to Loops that are required to be unbundled under this Agreement so that UTI can make an independent judgment about whether the Loop is capable of supporting the advanced services equipment UTI intends to install and the services UTI wishes to provide. LMU is a preordering transaction, distinct from UTI ordering any other service(s). Loop Makeup Service Inquiries (LMUSI) and mechanized LMU queries for preordering LMU are likewise unique from other preordering functions with associated SIs as described in this Agreement.
- 2.9.1.2 BellSouth will provide UTI LMU information consisting of the composition of the Loop material (copper/fiber); the existence, location and type of equipment on the Loop, including but not limited to digital loop carrier or other remote concentration devices, feeder/distribution interfaces, bridged taps, load coils, pair-gain devices; the Loop length; the wire gauge and electrical parameters.

- 2.9.1.3 BellSouth's LMU information is provided to UTI as it exists either in BellSouth's databases or in its hard copy facility records. BellSouth does not guarantee accuracy or reliability of the LMU information provided.
- 2.9.1.4 BellSouth's provisioning of LMU information to the requesting CLEC for facilities is contingent upon either BellSouth or the requesting CLEC controlling the Loop(s) that serve the service location for which LMU information has been requested by the CLEC. The requesting CLEC is not authorized to receive LMU information on a facility used or controlled by another CLEC unless BellSouth receives a LOA from the voice CLEC (owner) or its authorized agent on the LMUSI submitted by the requesting CLEC.
- 2.9.1.5 UTI may choose to use equipment that it deems will enable it to provide a certain type and level of service over a particular BellSouth Loop as long as that equipment does not disrupt other services on the BellSouth network. The determination shall be made solely by UTI and BellSouth shall not be liable in any way for the performance of the advanced data services provisioned over said Loop. The specific Loop type (e.g., ADSL, HDSL, or otherwise) ordered on the LSR must match the LMU of the Loop reserved taking into consideration any requisite line conditioning. The LMU data is provided for informational purposes only and does not guarantee UTI's ability to provide advanced data services over the ordered Loop type. Furthermore, the LMU information for Loops other than copper-only Loops (e.g., ADSL, UCL-ND, etc.) that support xDSL services, is subject to change at any time due to modifications and/or upgrades to BellSouth's network. Except as set forth in Section 2.9.1.6, copper-only Loops will not be subject to change due to modification and/or upgrades to BellSouth's network and will remain on copper facilities until the Loop is disconnected by UTI or the End User, or until BellSouth retires the copper facilities via the FCC's and any applicable Commission's requirements. UTI is fully responsible for any of its service configurations that may differ from BellSouth's technical standard for the Loop type ordered.
- 2.9.1.6 If BellSouth retires its copper facilities using 47 C.F.R § 52.325(a) requirements; or is required by a governmental agency or regulatory body to move or replace copper facilities as a maintenance procedure, BellSouth will notify UTI, according to the applicable network disclosure requirements. It will be UTI's responsibility to move any service it may provide over such facilities to alternative facilities. If UTI fails to move the service to alternative facilities by the date in the network disclosure notice, BellSouth may terminate the service to complete the network change.
- 2.9.2 <u>Submitting LMUSI</u>
- 2.9.2.1 UTI may obtain LMU information and reserve facilities by submitting a mechanized LMU query or a manual LMUSI according to the terms and

conditions as described in the LMU CLEC Information Package, incorporated herein by reference as it may be amended from time to time. The CLEC Information Package is located at the "CLEC UNE Product" Web site address: www.interconnection.bellsouth.com/guides/html/unes.html. After obtaining the Loop information from the mechanized LMU process, if UTI needs further Loop information in order to determine Loop service capability, UTI may initiate a separate Manual SI for a separate NRC as set forth in Exhibit A.

- 2.9.2.2 All LSRs issued for reserved facilities shall reference the facility reservation number as provided by BellSouth. UTI will not be billed any additional LMU charges for the Loop ordered on such LSR. If, however, UTI does not reserve facilities upon an initial LMUSI, UTI's placement of an order for an advanced data service type facility will incur the appropriate billing charges to include SI and reservation per Exhibit A.
- 2.9.2.3 Where UTI has reserved multiple Loop facilities on a single reservation, UTI may not specify which facility shall be provisioned when submitting the LSR. For those occasions, BellSouth will assign to UTI, subject to availability, a facility that meets the BellSouth technical standards of the BellSouth type Loop as ordered by UTI.
- 2.9.2.4 Charges for preordering manual LMUSI or mechanized LMU are separate from any charges associated with ordering other services from BellSouth.

3 Line Splitting

- 3.1 Line splitting shall mean that a provider of data services (a Data LEC) and a provider of voice services (a Voice CLEC) to deliver voice and data service to End Users over the same Loop. The Voice CLEC and Data LEC may be the same or different carriers.
- 3.2 <u>Line Splitting UNE-L.</u> In the event UTI provides its own switching or obtains switching from a third party, UTI may engage in line splitting arrangements with another CLEC using a splitter, provided by UTI, in a Collocation Space at the central office where the loop terminates into a distribution frame or its equivalent.
- 3.3 <u>Line Splitting –Loop and UNE Port (UNE-P).</u>
- 3.3.1 To the extent UTI is purchasing UNE-P pursuant to this Agreement, BellSouth will permit UTI to replace UNE-P with Line Splitting. The UNE-P arrangement will be converted to a stand-alone Loop, a Network Element switch port, two collocation cross-connects and the high frequency spectrum line activation. The resulting arrangement shall continue to be included in UTI's Embedded Base as described in Section 5.4.3.2.

- 3.3.2 UTI shall provide BellSouth with a signed LOA between it and the Data LEC or Voice CLEC with which it desires to provision Line Splitting services, if UTI will not provide voice and data services.
- 3.3.3 Line Splitting arrangements in service pursuant to this Section 3.3 must be disconnected or provisioned pursuant to Section 3.2 on or before March 10, 2006.
- 3.4 <u>Provisioning Line Splitting and Splitter Space</u>
- 3.4.1 The Data LEC, Voice CLEC or BellSouth may provide the splitter. When UTI or its authorized agent owns the splitter, Line Splitting requires the following: a non-designed analog Loop from the serving wire center to the NID at the End User's location; a collocation cross-connection connecting the Loop to the collocation space; a second collocation cross-connection from the collocation space connected to a voice port; the high frequency spectrum line activation, and a splitter. When BellSouth owns the splitter, Line Splitting requires the following: a non-designed analog Loop from the serving wire center to the NID at the End User's location with CFA and splitter port assignments, and a collocation cross-connection from the collocation from the collocation space connected to a voice port.
- 3.4.2 An unloaded 2-wire copper Loop must serve the End User. The meet point for the Voice CLEC and the Data LEC is the point of termination on the MDF for the Data LEC's cable and pairs.
- 3.4.3 The foregoing procedures are applicable to migration from a UNE-P arrangement to Line Splitting Service.
- 3.5 <u>CLEC Provided Splitter Line Splitting</u>
- 3.5.1 To order High Frequency Spectrum on a particular Loop, UTI must have a DSLAM collocated in the central office that serves the End User of such Loop.
- 3.5.2 UTI must provide its own splitters in a central office and have installed its DSLAM in that central office.
- 3.5.3 UTI may purchase, install and maintain central office POTS splitters in its collocation arrangements. UTI may use such splitters for access to its customers and to provide digital line subscriber services to its customers using the High Frequency Spectrum. Existing Collocation rules and procedures and the terms and conditions relating to Collocation set forth in Attachment 4-Central Office shall apply.
- 3.5.4 Any splitters installed by UTI in its collocation arrangement shall comply with ANSI T1.413, Annex E, or any future ANSI splitter Standards. UTI may install any splitters that BellSouth deploys or permits to be deployed for itself or any BellSouth affiliate.

3.6 <u>Maintenance – Line Splitting.</u>

- 3.6.1 BellSouth will be responsible for repairing voice troubles and the troubles with the physical loop between the NID at the End User's premises and the termination point.
- 3.6.2 UTI shall indemnify, defend and hold harmless BellSouth from and against any claims, losses, actions, causes of action, suits, demands, damages, injury, and costs including reasonable attorney fees, which arise out of actions related to the other service provider, except to the extent caused by BellSouth's gross negligence or willful misconduct.

4 Local Switching

4.1 Notwithstanding anything to the contrary in this Agreement, the services offered pursuant to this Section 4 are limited to DS0 level Local Switching and BellSouth is not required to provide Local Switching pursuant to this Agreement except as set forth in Section 4.2.

4.2 <u>Transition for Local Switching</u>

- 4.2.1 For purposes of this Section 4, the Transition Period for Local Switching is the twelve (12) month period beginning March 11, 2005 and ending March 10, 2006.
- 4.2.2 For the purposes of this Section 4, Embedded Base shall mean Local Switching and any additional elements that are required to be provided in conjunction therewith that were in service for UTI as of March 10, 2005. Subsequent disconnects or loss of End Users shall be removed from the Embedded Base.
- 4.2.3 During the Transition Period only, BellSouth shall make Local Switching available for the Embedded Base, in addition to all elements that are required to be provided in conjunction with Local Switching, at the rates, terms and conditions set forth in this Attachment. The Transition Period shall apply only to UTI's Embedded Base and UTI shall not place new orders for Local Switching pursuant to this Agreement.
- 4.2.4 The rates for UTI's Embedded Base of Local Switching during the Transition Period shall be as set forth in Exhibit A.
- 4.2.5 Effective March 11, 2006, Local Switching will no longer be made available pursuant to this Agreement and any remaining Embedded Base will be disconnected.
- 4.3 Local Switching Capability, including Tandem Switching Capability

- 4.3.1 Local Switching capability is defined as all line-side and trunk-side facilities, plus the features, functions, and capabilities of the switch. The features, functions, and capabilities of the switch shall include the basic switching function of connecting lines to lines, lines to trunks, trunks to lines, and trunks to trunks. Local Switching includes all vertical features that the switch is capable of providing, including custom calling, custom local area signaling service features, and Centrex, as well as any technically feasible customized routing functions.
- 4.3.2 Unbundled local switching consists of three separate components: Unbundled Ports, End Office Switching Functionality, and End Office Interoffice Trunk Ports.
- 4.3.3 Unbundled Local Switching combined with Common Transport and, if necessary, Tandem Switching provides to UTI's End User local calling and the ability to presubscribe to a primary carrier for intraLATA and/or to presubscribe to a primary carrier for interLATA toll service.
- 4.3.4 Provided that UTI has unbundled Local Switching from BellSouth and uses the BellSouth Carrier Identification Code (CIC) for its End Users' Local Preferred Interexchange Carrier (LPIC) or if a BellSouth local End User selects BellSouth as its LPIC, then the Parties will consider as local any calls originated by a UTI local End User, or originated by a BellSouth local End User and terminated to a UTI local End User, where such calls originate and terminate in the same LATA, except for those calls originated and terminated through switched access arrangements (i.e., calls that are transported by a Party other than BellSouth). For such calls, BellSouth will charge UTI the Network Elements for the BellSouth facilities utilized. Neither Party shall bill the other originating or terminating switched access charges for such calls. Intercarrier compensation for local calls between BellSouth and UTI shall be as described in BellSouth's UNE Local Call Flows set forth on BellSouth's Web site: http://interconnection.bellsouth.com/products/docs/FLOWSPPT.pdf.
- 4.3.5 Where UTI has unbundled Local Switching from BellSouth but does not use the BellSouth CIC for its End Users' LPIC, BellSouth will consider as local those direct dialed telephone calls that originate from a UTI End User and terminate within the basic local calling area or within the extended local calling areas and that are dialed using seven (7) or ten (10) digits as defined and specified in Section A3 of BellSouth's General Subscriber Services Tariffs (GSST). For such local calls, BellSouth will charge UTI the Network Elements for the BellSouth facilities utilized. Intercarrier compensation for local calls between BellSouth and UTI shall be as described in BellSouth's UNE Local Call Flows set forth on BellSouth's website.
- 4.3.6 For any calls that originate and terminate through switched access arrangements (i.e., calls that are transported by a party other than BellSouth), BellSouth shall bill

| | UTI the Network Elements for the BellSouth facilities utilized. Each Party may bill the toll provider originating or terminating switched access charges as appropriate. |
|----------|--|
| 4.3.7 | Unbundled Ports may or may not include individual features. Where applicable and available, non-switch-based services may be ordered with the Unbundled Port at BellSouth's retail rates. |
| 4.3.8 | Any features that are not currently available but are technically feasible through the switch can be requested through the BFR/NBR Process as set forth in Attachment 11. |
| 4.3.9 | BellSouth will provide to UTI selective routing of calls to a requested Operator System platform pursuant to this Agreement. Any other routing requests by UTI will be made pursuant to the BFR/NBR Process as set forth in Attachment 11. |
| 4.3.10 | BellSouth shall perform routine testing (e.g., Mechanized Loop Tests (MLT) and test calls such as 105, 107 and 108 type calls) and fault isolation on a mutually agreed upon schedule. |
| 4.3.11 | BellSouth shall control congestion points such as those caused by radio station call-ins and network routing abnormalities. All traffic shall be restricted in a non-discriminatory manner. |
| 4.3.12 | BellSouth shall perform manual call trace and permit customer originated call trace. BellSouth shall provide Switching Service Point (SSP) capabilities and signaling software to interconnect the signaling links destined to the Signaling Transfer Point Switch (STPS). These capabilities shall adhere to the technical specifications set forth in the applicable industry standard technical references. |
| 4.3.13 | BellSouth shall provide interfaces to adjuncts through Telcordia standard interfaces. These adjuncts can include, but are not limited to, the Service Circuit Node and Automatic Call Distributors. BellSouth shall offer to UTI all Advanced Intelligent Network (AIN) triggers in connection with its Service Creation Environment and Service Management System (SCE/SMS) offering. |
| 4.3.14 | BellSouth shall provide access to SS7 Signaling Network or Multi-Frequency trunking if requested by UTI. |
| 4.3.15 | BellSouth shall provide the following Local Switching interfaces: |
| 4.3.15.1 | Standard Tip/Ring interface including loopstart or groundstart, on-hook signaling (e.g., for calling number, calling name and message waiting lamp); |
| 4.3.15.2 | Coin phone signaling; |
| | |

- 4.3.15.3 Basic Rate Interface ISDN adhering to appropriate Telcordia Technical Requirements;
- 4.3.15.4 2-wire analog interface to PBX;
- 4.3.15.5 4-wire analog interface to PBX; and
- 4.3.15.6 Loops adhering to Telcordia TR-NWT-08 and TR-NWT-303 specifications to interconnect Digital Loop Carriers.
- 4.3.16 UTI shall maintain the individual telephone number and the correct corresponding address/location data, including maintaining the End User listed address as the actual physical End User location in the E911 ALI Database.
- 4.3.17 UTI will be responsible and liable for any errors resulting from the submission of invalid telephone number and address/location data for the UTI's End Users.
- 4.4 <u>Common (Shared) Transport.</u>
- 4.4.1 Common (Shared) Transport, defined as transmission facilities shared by more than one carrier, including BellSouth, between end office switches, between end office switches and tandem switches, and between tandem switches, in BellSouth's network. Where BellSouth Network Elements are connected by intraoffice wiring, such wiring is provided as part of the Network Element and is not Common (Shared) Transport.
- 4.4.2 Notwithstanding any other provision of this Agreement, BellSouth will only provide unbundled access to Common (Shared) Transport to the extent BellSouth is required to provide and is providing Local Switching to UTI.
- 4.4.3 Technical Requirements of Common (Shared) Transport
- 4.4.3.1 Common (Shared) Transport provided on DS1, DS3, and STS-1 circuits shall at a minimum meet the performance, availability, jitter, and delay requirements specified for Central Office to Central Office (CO to CO) connections in the applicable industry standards.
- 4.4.3.2 BellSouth shall be responsible for the engineering, provisioning, and maintenance of the underlying equipment and facilities that are used to provide Common (Shared) Transport.
- 4.4.3.3 At a minimum, Common (Shared) Transport shall meet all of the requirements set forth in the applicable industry standards.
- 4.5 <u>Tandem Switching</u>

- 4.5.1 The Tandem Switching capability Network Element is defined as:
 (i) trunk-connect facilities, which include, but are not limited to, the connection between trunk termination at a cross-connect panel and switch trunk card; (ii) the basic switch trunk function of connecting trunks to trunks; and (iii) the functions that are centralized in the Tandem Switches (as distinguished from separate end office switches), including but not limited to call recording, the routing of calls to operator services and signaling conversion features.
- 4.5.2 Where UTI utilizes portions of the BellSouth network in originating or terminating traffic, the Tandem Switching rates are applied in call scenarios where the Tandem Switching Network Element has been utilized. Because switch recordings cannot accurately indicate on a per call basis when the Tandem Switching Network Element has been utilized for an interoffice call originating from a UNE port and terminating to a BellSouth, Independent Company or Facility-Based CLEC office, BellSouth has developed, based upon call studies, a melded rate that takes into account the average percentage of calls that utilize Tandem Switching in these scenarios. BellSouth shall apply the melded Tandem Switching rate for every call in these scenarios. BellSouth shall utilize the melded Tandem Switching Rate until BellSouth has the capability to measure actual Tandem Switch usage in each call scenario specifically mentioned above, at which point the rate for the actual Tandem Switch usage shall apply. The UNE Local Call Flows set forth on BellSouth's website, as amended from time to time and incorporated herein by this reference, illustrate when the full or melded Tandem Switching rates apply for specific scenarios.
- 4.5.3 <u>Technical Requirements</u>
- 4.5.3.1 Tandem Switching shall have the same capabilities or equivalent capabilities as those described in Telcordia TR-TSY-000540 Issue 2R2, Tandem Supplement, June 1, 1990. The requirements for Tandem Switching include but are not limited to the following:
- 4.5.3.1.1 Tandem Switching shall provide signaling to establish a tandem connection;
- 4.5.3.1.2 Tandem Switching will provide screening as jointly agreed to by UTI and BellSouth;
- 4.5.3.1.3 Where applicable, Tandem Switching shall provide AIN triggers supporting AIN features where such routing is not available from the originating end office switch, to the extent such Tandem switch has such capability;
- 4.5.3.1.4 Where applicable, Tandem Switching shall provide access to Toll Free number database;

- 4.5.3.1.5 Tandem Switching shall provide connectivity to Public Safety Answering Point (PSAP)s where 911 solutions are deployed and the tandem is used for 911; and
- 4.5.3.1.6 Where appropriate, Tandem Switching shall provide connectivity for the purpose of routing transit traffic to and from other carriers.
- 4.5.3.2 BellSouth may perform testing and fault isolation on the underlying switch that is providing Tandem Switching. Such testing shall be testing routinely performed by BellSouth. The results and reports of the testing shall be made available to UTI.
- 4.5.3.3 BellSouth shall control congestion points and network abnormalities. All traffic will be restricted in a non-discriminatory manner.
- 4.5.3.4 Tandem Switching shall process originating toll free traffic received from UTI's local switch.
- 4.5.3.5 In support of AIN triggers and features, Tandem Switching shall provide SSP capabilities when these capabilities are not available from the Local Switching Network Element to the extent such Tandem Switch has such capability.
- 4.5.4 Upon UTI's purchase of overflow trunk groups, Tandem Switching shall provide an alternate routing pattern for UTI's traffic overflowing from direct end office high usage trunk groups.
- 4.6 <u>Remote Call Forwarding (URCF)</u>
- 4.6.1 As an option, BellSouth shall make available to UTI an unbundled port with Remote Call Forwarding capability. URCF service combines the functionality of unbundled Local Switching, Tandem Switching and common transport to forward calls from the URCF service telephone number (the number dialed by the calling party) to another telephone number selected by the URCF service subscriber. UTI must ensure that the following conditions are satisfied:
- 4.6.1.1 the End User of the forward-to number (service) agrees to receive calls forwarded using the URCF service (if such End User is different from the URCF service End User);
- 4.6.1.2 the forward-to number (service) is equipped with sufficient capacity to receive the volume of calls that will be generated from the URCF service;
- 4.6.1.3 the URCF service will not be utilized to forward calls to another URCF or similar service; and
- 4.6.1.4 the forward-to number (service) is not a public safety number (e.g., 911, fire or police number).

- 4.6.2 In addition to the charge for the URCF service port, BellSouth shall charge UTI the rates set forth in Exhibit A for unbundled Local Switching, Tandem Switching, and Common Transport, including all associated usage incurred for calls from the URCF service telephone number (the number dialed by the calling party) to the forward-to number (service).
- 4.7 <u>AIN Selective Carrier Routing for Operator Services, Directory Assistance and Repair Centers</u>
- 4.7.1 Where BellSouth provides Local Switching to UTI, BellSouth will provide AIN Selective Carrier Routing (AIN SCR) at the request of UTI. AIN SCR will provide UTI with the capability of routing operator calls, 0+ and 0- and 0+ NPA Local Numbering Plan Area (LNPA), 555-1212 directory assistance, 1+411 directory assistance and 611 repair center calls to pre-selected destinations.
- 4.7.2 UTI shall order AIN SCR through its Account Team and/or Local Contract Manager. AIN SCR must first be established regionally and then on a per central office per state basis.
- 4.7.3 AIN SCR is not available in DMS 10 switches.
- 4.7.4 Where AIN SCR is utilized by UTI, the routing of UTI's End User calls shall be pursuant to information provided by UTI and stored in BellSouth's AIN SCR Service Control Point database. AIN SCR shall utilize a set of Line Class Codes (LCCs) unique to a basic class of service assigned on an "as needed" basis. The same LCCs will be assigned in each central office where AIN SCR is established.
- 4.7.5 Upon ordering AIN SCR Regional Service, UTI shall remit to BellSouth the nonrecurring Regional Service Order charge set forth in Exhibit A. There shall be a nonrecurring End Office Establishment Charge as set forth in Exhibit A, per office, due at the addition of each central office where AIN SCR will be utilized. For each UTI End User activated, there shall be a nonrecurring End User Establishment charge as set forth in Exhibit A. UTI shall pay the AIN SCR Per Query Charge set forth in Exhibit A.
- 4.7.6 This nonrecurring Regional Service Order charge will be non-refundable and will be paid with one half due up-front with the submission of all fully completed required forms including: Regional SCR Order Request-Form A, Central Office AIN SCR Order Request - Form B, AIN SCR Central Office Identification Form -Form C, AIN SCR Routing Options Selection Form - Form D, and Routing Combinations Table - Form E. BellSouth has thirty (30) days to respond to UTI's fully completed firm order as a Regional Service Order. With the delivery of this firm order response to UTI, BellSouth considers that the delivery schedule of this service commences. The remaining half of the nonrecurring Regional Service

Order payment must be paid when at least ninety percent (90%) of the Central Offices listed on the original order have been turned up for the service.

- 4.7.7 The nonrecurring End Office Establishment charge will be billed to UTI following BellSouth's normal monthly billing cycle for this type of order.
- 4.7.8 End-User Establishment Orders will not be turned-up until the second payment is received for the Regional Service Order. The nonrecurring End Office Establishment charges will be billed to UTI following BellSouth's normal monthly billing cycle for this type of order.
- 4.7.9 Additionally, the AIN SCR Per Query Charge will be billed to UTI following the normal billing cycle for per query charges.
- 4.7.10 All other network components needed, (i.e., unbundled switching, unbundled local transport, etc.) will be billed per contracted rates.
- 4.8 <u>Selective Call Routing Using Line Class Codes (SCR-LCC)</u>
- 4.8.1 Where UTI has purchased unbundled Local Switching from BellSouth and utilizes an operator services provider other than BellSouth, BellSouth will route UTI's End User calls to that provider through Selective Call Routing.
- 4.8.2 SCR-LCC provides the capability for UTI to have its Operator Call Processing/Directory Assistance (OCP/DA) calls routed to BellSouth's OCP/DA platform for BellSouth provided Custom Branded or Unbranded OCP/DA or to its own or an alternate OCP/DA platform for Self-Branded OCP/DA. SCR-LCC is only available if capacity is available in the requested BellSouth end office switches.
- 4.8.3 Custom Branding for Directory Assistance (DA) is not available for certain classes of service, including but not limited to Hotel/Motel services, WATS service, and certain PBX services.
- 4.8.4 Where available, UTI specific and unique LCCs are programmed in each BellSouth end office switch where UTI intends to serve End Users with customized OCP/DA branding. The LCCs specifically identify UTI's End Users so OCP/DA calls can be routed over the appropriate trunk group to the requested OCP/DA platform. Additional LCCs are required in each end office if the end office serves multiple NPAs (i.e., a unique LCC is required per NPA), and/or if the end office switch serves multiple rate areas and UTI intends to provide UTI -branded OCP/DA to its End Users in these multiple rate areas.
- 4.8.5 SCR-LCC supporting Custom Branding and Self Branding require UTI to order dedicated trunking from each BellSouth end office identified by UTI, either to the BellSouth Traffic Operator Position System (TOPS) for Custom Branding or to

the UTI Operator Service Provider for Self Branding. Separate trunk groups are required for Operator Services and for DA. Rates for trunks are set forth in applicable BellSouth's FCC No. 1 Tariff.

- 4.8.6 Unbranding Unbranded DA and/or OCP calls ride common trunk groups provisioned by BellSouth from those end offices identified by UTI to the BellSouth TOPS.
- 4.8.7 The Rates for SCR-LCC are as set forth in Exhibit A. There is a NRC for the establishment of each LCC in each BellSouth central office. Furthermore, for Unbranded and Custom Branded OCP/DA provided by BellSouth Operator Services with unbundled ports and unbundled port/loop switch combinations, monthly recurring usage charges shall apply for the UNEs necessary to provide the service, such as end office and tandem switching and common transport. A flat rated end office switching charge shall apply to Self-Branded OCP/DA when used in conjunction with unbundled ports and unbundled port/loop switch combinations.

5 Unbundled Network Element Combinations

- 5.1 For purposes of this Section, references to "Currently Combined" Network Elements shall mean that the particular Network Elements requested by UTI are in fact already combined by BellSouth in the BellSouth network. References to "Ordinarily Combined" Network Elements shall mean that the particular Network Elements requested by UTI are not already combined by BellSouth in the location requested by UTI but are elements that are typically combined in BellSouth's network. References to "Not Typically Combined" Network Elements shall mean that the particular Network Elements requested by UTI are not elements that BellSouth combines for its use in its network.
- 5.1.1 Except as otherwise set forth in this Agreement, upon request, BellSouth shall perform the functions necessary to combine Network Elements that BellSouth is required to provide under this Agreement in any manner, even if those elements are not ordinarily combined in BellSouth's network, provided that such Combination is technically feasible and will not undermine the ability of other carriers to obtain access to Network Elements or to interconnect with BellSouth's network.
- 5.1.2 To the extent UTI requests a Combination for which BellSouth does not have methods and procedures in place to provide such Combination, rates and/or methods or procedures for such Combination will be developed pursuant to the BFR process.
- 5.2 <u>Rates</u>

- 5.2.1 The rates for the Currently Combined Network Elements specifically set forth in Exhibit A shall be the rates associated with such Combinations. Where a Currently Combined Combination is not specifically set forth in Exhibit A, the rate for such Currently Combined Combination shall be the sum of the recurring rates for those individual Network Elements as set forth in Exhibit A and/or Exhibit B in addition to the applicable nonrecurring switch-as-is charge set forth in Exhibit A.
- 5.2.2 The rates for the Ordinarily Combined Network Elements specifically set forth in Exhibit A shall be the nonrecurring and recurring charges for those Combinations. Where an Ordinarily Combined Combination is not specifically set forth in Exhibit A, the rate for such Ordinarily Combined Combination shall be the sum of the recurring rates for those individual Network Elements as set forth in Exhibit A and/or Exhibit B and nonrecurring rates for those individual Network Elements as set forth in Exhibit A.
- 5.2.3 The rates for Not Typically Combined Combinations shall be developed pursuant to the BFR process upon request of UTI.
- 5.3 Enhanced Extended Links (EELs)
- 5.3.1 EELs are combinations of Loops and Dedicated Transport as defined in this Attachment, together with any facilities, equipment, or functions necessary to combine those Network Elements. BellSouth shall provide UTI with EELs where the underlying Network Element are available and are required to be provided pursuant to this Agreement and in all instances where the requesting carrier meets the eligibility requirements, if applicable.
- 5.3.2 High-capacity EELs are (1) combinations of Loop and Dedicated Transport, (2) Dedicated Transport commingled with a wholesale loop, or (3) a loop commingled with wholesale transport at the DS1 and/or DS3 level as described in 47 C.F.R. § 51.318(b).
- 5.3.3 By placing an order for a high-capacity EEL, UTI thereby certifies that the service eligibility criteria set forth herein are met for access to a converted high-capacity EEL, a new high-capacity EEL, or part of a high-capacity commingled EEL as a UNE. BellSouth shall have the right to audit UTI's high-capacity EELs as specified below.
- 5.3.4 <u>Service Eligibility Criteria</u>
- 5.3.4.1 High capacity EELs must comply with the following service eligibility requirements. UTI must certify for each high-capacity EEL that all of the following service eligibility criteria are met:

- 5.3.4.1.1 UTI has received state certification to provide local voice service in the area being served;
- 5.3.4.2 For each combined circuit, including each DS1 circuit, each DS1 EEL, and each DS1-equivalent circuit on a DS3 EEL:
- 5.3.4.2.1 1) Each circuit to be provided to each End User will be assigned a local number prior to the provision of service over that circuit;
- 5.3.4.2.2 2) Each DS1-equivalent circuit on a DS3 EEL must have its own local number assignment so that each DS3 must have at least twenty-eight (28) local voice numbers assigned to it;
- 5.3.4.2.3 3) Each circuit to be provided to each End User will have 911 or E911 capability prior to provision of service over that circuit;
- 5.3.4.2.4 4) Each circuit to be provided to each End User will terminate in a collocation arrangement that meets the requirements of 47 C.F.R. § 51.318(c);
- 5.3.4.2.5 5) Each circuit to be provided to each End User will be served by an interconnection trunk over which UTI will transmit the calling party's number in connection with calls exchanged over the trunk;
- 5.3.4.2.66) For each twenty-four (24) DS1 EELs or other facilities having equivalent capacity, UTI will have at least one (1) active DS1 local service interconnection trunk over which UTI will transmit the calling party's number in connection with calls exchanged over the trunk; and
- 5.3.4.2.7 7) Each circuit to be provided to each End User will be served by a switch capable of switching local voice traffic.
- 5.3.4.3 BellSouth may, on an annual basis, audit UTI's records in order to verify compliance with the qualifying service eligibility criteria. The audit shall be conducted by a third party independent auditor, and the audit must be performed in accordance with the standards established by the American Institute for Certified Public Accountants (AICPA). To the extent the independent auditor's report concludes that UTI failed to comply with the service eligibility criteria, UTI must true-up any difference in payments, convert all noncompliant circuits to the appropriate service, and make the correct payments on a going-forward basis. In the event the auditor's report concludes that UTI did not comply in any material respect with the service eligibility criteria, UTI shall reimburse BellSouth for the cost of the independent auditor. To the extent the auditor's report concludes that UTI did comply in all material respects with the service eligibility criteria, BellSouth will reimburse UTI for its reasonable and demonstrable costs associated

with the audit. UTI will maintain appropriate documentation to support its certifications.

- 5.3.4.4 In the event UTI converts special access services to UNEs, UTI shall be subject to the termination liability provisions in the applicable special access tariffs, if any.
- 5.4 <u>UNE-P</u>
- 5.4.1 DS0 Local Switching, as defined in Section 4, in combination with a Loop and Common (Shared) Transport as defined in Section 4.3.9 (UNE-P) provides local exchange service for the origination or termination of calls. UNE-P supports the same local calling and feature requirements as described in the Local Switching section of this Attachment and the ability to presubscribe to a primary carrier for intraLATA toll service and/or to presubscribe to a primary carrier for interLATA toll service.
- 5.4.2 Notwithstanding anything to the contrary in this Agreement, BellSouth is not required to provide UNE-P pursuant to this Agreement except as set forth in this Section 5.4.
- 5.4.3 <u>Transition Period for UNE-P</u>
- 5.4.3.1 For purposes of this Section 5.4, the Transition Period for UNE-P is the twelve (12) month period beginning March 11, 2005 and ending March 10, 2006.
- 5.4.3.2 For the purposes of this Section 5.4, Embedded Base shall mean UNE-P and any additional elements that are required to be provided in conjunction therewith that were in service for UTI as of March 10, 2005. Subsequent disconnects or loss of End Users shall be removed from the Embedded Base.
- 5.4.3.3 During the Transition Period only, BellSouth shall make UNE-P available for the Embedded Base, in addition to all elements that are required to be provided in conjunction with UNE-P, at the rates, terms and conditions set forth in this Attachment. The Transition Period shall apply only to UTI's Embedded Base and UTI shall not place new orders for UNE-P pursuant to this Agreement.
- 5.4.3.4 The rates for UTI's Embedded Base of UNE-P during the Transition Period shall be as set forth in Exhibit A.
- 5.4.3.5 Effective March 11, 2006, UNE-P will no longer be made available pursuant to this Agreement and any remaining Embedded Base will be disconnected.
- 5.4.4 BellSouth shall make 911 updates in the BellSouth 911 database for UTI's UNE-P. BellSouth will not bill UTI for 911 surcharges. UTI is responsible for paying all 911 surcharges to the applicable governmental agency.
- 5.5 Intercarrier Compensation

- 5.5.1 Intercarrier compensation for seven (7) or ten (10) digit dialed calls originated by UTI utilizing Local Switching shall apply as follows:
- 5.5.2 For calls terminating to a BellSouth End User or to an End User served by BellSouth resold services, BellSouth shall charge UTI for End Office Switching as set forth in Exhibit A at the terminating end office.
- 5.5.3 For calls terminating to a CLEC where such CLEC is utilizing a BellSouth switch port or port/loop combination to provide service to its End User, BellSouth shall charge UTI for End Office Switching as set forth in Exhibit A at the terminating end office. BellSouth will not charge the terminating CLEC for End Office Switching as set forth in Exhibit A at the terminating end office.
- 5.5.3.1 For calls terminating to third party carriers, such as CLECs, wireless carriers and independent companies, utilizing their own switches to serve their End Users, UTI is required to enter into interconnection or traffic exchange agreements with such third parties for the exchange of traffic through BellSouth's network. If UTI does not have such an agreement with a third party carrier and BellSouth is charged termination charges by a third party terminating a call originated by UTI, or if such third party carrier bills BellSouth for terminating such calls, despite the existence of such an agreement, then BellSouth may, at its option:
- 5.5.3.1.1 pay such charges as billed by the third party carrier and charge End Office Switching as set forth in Exhibit A to UTI for each such call; or
- 5.5.3.1.2 pay such charges as billed by the third party carrier and UTI will reimburse the full amount of such charges within thirty (30) days of BellSouth's request for reimbursement.
- 5.5.3.2 Intercarrier compensation for seven (7) or ten (10) digit dialed calls terminating to UTI utilizing Local Switching shall apply as follows:
- 5.5.3.2.1 For calls originated by a BellSouth End User or by an End User served by resold BellSouth services, BellSouth shall not charge UTI for End Office Switching at the terminating end office for use of the network component; therefore, UTI shall not charge BellSouth intercarrier compensation or any other charges for termination of such calls.
- 5.5.3.2.2 For calls originated by a CLEC where such CLEC is utilizing a BellSouth switch port or port/loop combination to provide service to its End User, BellSouth shall not charge UTI for End Office Switching at the terminating end office for use of the network component; therefore, UTI shall not charge the originating CLEC or BellSouth intercarrier compensation or any other charges for termination of such calls.

- 5.5.3.2.3 For calls originated by third party carriers, such as CLECs, wireless carriers and independent companies, utilizing their own switches to serve their End Users, UTI is required to enter into interconnection or traffic exchange agreements with such third parties for the exchange of traffic through BellSouth's network. UTI may bill the third parties according to such agreements and shall not bill BellSouth for the exchange of traffic through BellSouth's network.
- 5.5.3.3 Intercarrier compensation shall apply as follows for intralata 1+ dialed calls originated by UTI utilizing Local Switching where UTI uses BellSouth's CIC for its End User's LPIC:
- 5.5.3.3.1 For calls terminating to a BellSouth End User or to an End User served by BellSouth resold services, BellSouth shall charge UTI for End Office Switching as set forth in Exhibit A at the terminating end office.
- 5.5.3.3.2 For calls terminating to a CLEC where such CLEC is utilizing a BellSouth switch port or port/loop combination to provide service to its End User, BellSouth shall charge UTI for End Office Switching as set forth in Exhibit A at the terminating end office. BellSouth will not charge the terminating CLEC for End Office Switching at the terminating end office. In the event that BellSouth is charged termination charges by the CLEC, BellSouth may pay such charges and UTI will reimburse BellSouth the full amount of such charges within thirty (30) days following BellSouth's request for reimbursement.
- 5.5.3.3.3 For calls terminating to third party carriers, such as CLECs, wireless carriers and independent companies, utilizing their own switches to serve their End Users, UTI is required to enter into interconnection or traffic exchange agreements with such third parties for the exchange of traffic through BellSouth's network. If UTI does not have such an agreement with a third party carrier and BellSouth is charged termination charges by a third party terminating a call originated by UTI, or if such third party carrier bills BellSouth for terminating such calls, despite the existence of such an agreement, then BellSouth may, at its option:
- 5.5.3.3.3.1 pay such charges as billed by the third party carrier and charge End Office Switching as set forth in Exhibit A to UTI for each such call; or
- 5.5.3.3.2 pay such charges as billed by the third party carrier and UTI will reimburse BellSouth the full amount of such charges within thirty (30) days following BellSouth's request for reimbursement.
- 5.5.3.4 Intercarrier compensation shall apply as follows for intralata 1+ dialed calls terminating to UTI utilizing Local Switching where the originating carrier uses BellSouth's CIC for its End User's LPIC:

- 5.5.3.4.1 For calls originated by a BellSouth End User or by an End User served by BellSouth resold service, BellSouth shall charge UTI for End Office Switching as set forth in Exhibit A at the terminating end office for use of the End Office Switching network component in terminating such calls. UTI may charge BellSouth for intercarrier compensation at the End Office Switching as set forth in Exhibit A in this Agreement for such calls. UTI shall not charge originating or terminating switched access rates to BellSouth for termination of such calls.
- 5.5.3.5 For calls originated by or terminating to interexchange carriers through a switched access arrangement, UTI may bill the interexchange carrier in accordance with UTI's tariff and will not bill BellSouth any charges for such call. UTI shall pay BellSouth applicable charges for the use of BellSouth's network in accordance with the rates set forth in Exhibit A for originating and terminating such calls.

6 Dedicated Transport and Dark Fiber Transport

- 6.1 <u>Dedicated Transport.</u> Dedicated Transport is defined as BellSouth's transmission facilities between wire centers or switches owned by BellSouth, or between wire centers or switches owned by BellSouth and switches owned by UTI. Including but not limited to DS1, DS3 and OCn level services, as well as dark fiber, dedicated to UTI. BellSouth shall not be required to provide access to OCn level Dedicated Transport under any circumstances pursuant to this Agreement. In addition, except as set forth in Section 6.2 below, BellSouth shall not be required to provide to UTI unbundled access to Dedicated Transport that does not connect a pair of wire centers or switches owned by BellSouth ("Entrance Facilities").
- 6.2 <u>Transition for DS1 and DS3 Dedicated Transport Including DS1 and DS3</u> Entrance Facilities
- 6.2.1 For purposes of this Section 6.2, the Transition Period for DS1 and DS3 Dedicated Transport including all DS1 and DS3 Entrance Facilities is the twelve (12) month period beginning March 11, 2005 and ending March 10, 2006.
- 6.2.2 For purposes of this Section 6.2, Embedded Base means DS1 and DS3 Dedicated Transport including DS1 and DS3 Entrance Facilities that were in service for UTI as of March 10, 2005. Subsequent disconnects or loss of End Users shall be removed from the Embedded Base.
- 6.2.3 For purposes of this Section 6.2, a Business Line is as defined in 47 C.F.R. § 51.5.
- 6.2.4 BellSouth shall make available Dedicated Transport as defined in this Section 6. Notwithstanding anything to the contrary in this Agreement, BellSouth shall make available Dedicated Transport as described in this Section 6.2 only for UTI's Embedded Base during the Transition Period:

| 6.2.4.1 | DS1 Dedicated Transport where both wire centers at the end points of the route |
|---------|--|
| | contain 38,000 Business Lines or four (4) or more fiber-based collocators. |

- 6.2.4.2 DS3 Dedicated Transport where both wire centers at the end points of the route contain 24,000 or more Business Lines or three (3) or more fiber-based collocators.
- 6.2.4.3 During the Transition Period, the rates for UTI's Embedded Base of DS1 and DS3 Dedicated Transport as described in this Section 6.2 shall be as set forth in Exhibit B and the rates for UTI's Embedded Base of DS1 and DS3 Entrance Facilities as described in this Section 6.2 shall be as set forth in Exhibit A.
- 6.2.4.4 The Transition Period shall apply only to UTI's Embedded Base and UTI shall not add new DS1 or DS3 Dedicated Transport as described in this Section 6.2, or DS1 or DS3 Entrance Facilities, pursuant to this Agreement.
- 6.2.4.5 Once a wire center exceeds either of the thresholds set forth in this Section 6.2.4.1, no future DS1 Dedicated Transport unbundling will be required in that wire center.
- 6.2.4.6 Once a wire center exceeds either of the thresholds set forth in Section 6.2.4.2, no future DS3 Dedicated Transport will be required in that wire center.
- 6.2.4.7 At the end of the Transition Period any remaining Embedded Base will be disconnected.
- 6.3 BellSouth shall:
- 6.3.1 Provide UTI exclusive use of Dedicated Transport to a particular customer or carrier;
- 6.3.2 Provide all technically feasible features, functions, and capabilities of Dedicated Transport as outlined within the technical requirements of this section;
- 6.3.3 Permit, to the extent technically feasible, UTI to connect Dedicated Transport to equipment designated by UTI, including but not limited to, UTI's collocated facilities; and
- 6.3.4 Permit, to the extent technically feasible, UTI to obtain the functionality provided by BellSouth's digital cross-connect systems.
- 6.4 BellSouth shall offer Dedicated Transport:
- 6.4.1 As capacity on a shared facility; and
- 6.4.2 As a circuit (i.e., DS0, DS1, DS3, STS-1) dedicated to UTI.

- 6.5 Dedicated Transport may be provided over facilities such as optical fiber, copper twisted pair, and coaxial cable, and shall include transmission equipment such as line terminating equipment, amplifiers, and regenerators.
- 6.6 UTI may obtain a maximum of ten (10) unbundled DS1 Dedicated Transport circuits or twelve (12) unbundled DS3 Dedicated Transport circuits, or their equivalent, on each route where the respective Dedicated Transport is available as a Network Element. A route is defined as a transmission path between one of BellSouth's wire centers or switches and another of BellSouth's wire centers or switches. A route between two (2) points may pass through one or more intermediate wire centers or switches. Transmission paths between identical end points are the same "route", irrespective of whether they pass through the same intermediate wire centers or switches, if any.
- 6.7 <u>Technical Requirements</u>
- 6.7.1 BellSouth shall offer DS0 equivalent interface transmission rates for DS0 or voice grade Dedicated Transport. For DS1 or DS3 circuits, Dedicated Transport shall at a minimum meet the performance, availability, jitter, and delay requirements specified for Customer Interface to Central Office (CI to CO) connections in the applicable industry standards.
- 6.7.2 BellSouth shall offer the following interface transmission rates for Dedicated Transport:
- 6.7.2.1 DS0 Equivalent;
- 6.7.2.2 DS1;
- 6.7.2.3 DS3; and
- 6.7.2.4 SDH (Synchronous Digital Hierarchy) Standard interface rates are in accordance with International Telecommunications Union (ITU) Recommendation G.707 and Plesiochronous Digital Hierarchy (PDH) rates per ITU Recommendation G.704.
- 6.7.3 BellSouth shall design Dedicated Transport according to its network infrastructure. UTI shall specify the termination points for Dedicated Transport.
- 6.7.4 At a minimum, Dedicated Transport shall meet each of the requirements set forth in the applicable industry technical references and BellSouth Technical References;
- 6.7.4.1 Telcordia TR-TSY-000191 Alarm Indication Signals Requirements and Objectives, Issue 1, May 1986.

- 6.7.4.2 BellSouth's TR73501 LightGate®Service Interface and Performance Specifications, Issue D, June 1995.
- 6.7.4.3 BellSouth's TR73525 MegaLink®Service, MegaLink Channel Service and MegaLink Plus Service Interface and Performance Specifications, Issue C, May 1996.
- 6.8 <u>Unbundled Channelization (Multiplexing)</u>
- 6.8.1 To the extent UTI is purchasing DS1 or DS3 or STS-1 Dedicated Transport pursuant to this Agreement, Unbundled Channelization (UC) provides the optional multiplexing capability that will allow a DS1 (1.544 Mbps) or DS3 (44.736 Mbps) or STS-1 (51.84 Mbps) Network Elements to be multiplexed or channelized at a BellSouth central office. Channelization can be accomplished through the use of a multiplexer or a digital cross-connect system at the discretion of BellSouth. Once UC has been installed, UTI may request channel activation on a channelized facility and BellSouth shall connect the requested facilities via COCIs. The COCI must be compatible with the lower capacity facility and ordered with the lower capacity facility. This service is available as defined in NECA 4.
- 6.8.2 BellSouth shall make available the following channelization systems and interfaces:
- 6.8.2.1 DS1 Channelization System: channelizes a DS1 signal into a maximum of twentyfour (24) DS0s. The following COCI are available: Voice Grade, Digital Data and ISDN.
- 6.8.2.2 DS3 Channelization System: channelizes a DS3 signal into a maximum of twentyeight (28) DS1s. A DS1 COCI is available with this system.
- 6.8.2.3 STS-1 Channelization System: channelizes a STS-1 signal into a maximum of twenty-eight (28) DS1s. A DS1 COCI is available with this system.
- 6.8.3 <u>Technical Requirements.</u> In order to assure proper operation with BellSouth provided central office multiplexing functionality, UTI's channelization equipment must adhere strictly to form and protocol standards. UTI must also adhere to such applicable industry standards for the multiplex channel bank, for voice frequency encoding, for various signaling schemes, and for sub rate digital access.
- 6.9 <u>Dark Fiber Transport.</u> Dark Fiber Transport is defined as Dedicated Transport that consists of unactivated optical interoffice transmission facilities without attached signal regeneration, multiplexing, aggregation or other electronics. Except as set forth in Section 6.9.1 below, BellSouth shall not be required to provide access to Dark Fiber Transport Entrance Facilities pursuant to this Agreement.

| 6.9.1 | Transition for Dark Fiber Transport and Dark Fiber Transport Entrance Facilities |
|-----------|---|
| 6.9.1.1 | For purposes of this Section 6.9, the Transition Period for Dark Fiber Transport is the eighteen (18) month period beginning March 11, 2005 and ending September 10, 2006. |
| 6.9.1.2 | For purposes of this Section 6.9, Embedded Base means Dark Fiber Transport that was in service for UTI as of March 10, 2005. Subsequent disconnects or loss of End Users shall be removed from the Embedded Base. |
| 6.9.1.3 | For purposes of this Section 6.9, a Business Line is as defined in 47 C.F.R. § 51.5. |
| 6.9.1.4 | BellSouth shall make available Dark Fiber Transport as defined in this Section 6.9.1. Notwithstanding anything to the contrary in this Agreement, BellSouth shall make available Dark Fiber Transport as described in this Section 6.9 only for UTI's Embedded Base during the Transition Period: |
| 6.9.1.4.1 | Dark Fiber Transport where both wire centers at the end points of the route contain 24,000 or more Business Lines or three (3) or more fiber-based collocators. |
| 6.9.1.5 | During the Transition Period, the rates for UTI's Embedded Base of Dark Fiber Transport as described in Section 6.9.1.1 shall be as set forth in Exhibit B and the rates for UTI's Embedded Base of Dark Fiber Transport Entrance Facilities as described in Section 6.9.1 shall be as set forth in Exhibit A. |
| 6.9.1.6 | The Transition Period shall apply only to UTI's Embedded Base and UTI shall not add new Dark Fiber Transport as described in this Section 6.9 pursuant to this Agreement. |
| 6.9.1.7 | Once a wire center exceeds either of the thresholds set forth in this Section 6.9.1.4.1, no future Dark Fiber Transport unbundling will be required in that wire center. |
| 6.9.1.8 | At the end of the Transition Period any remaining Embedded Base will be disconnected. |
| 6.10 | Rearrangements |
| 6.10.1 | A request to move a working UTI CFA to another UTI CFA, where both CFAs terminate in the same BellSouth Central Office ("Change in CFA"), shall not constitute the establishment of new service. The applicable rates set forth in Exhibit A. |

- 6.10.2 Requests to re-terminate one end of a facility that is not a Change in CFA constitute the establishment of new service and require disconnection of existing service and the applicable rates set forth in Exhibit A shall apply.
- 6.10.3 Upon request of UTI, BellSouth shall project manage the Change in CFA or retermination of a facility as described in Sections 6.10.1 and 6.10.2 above and UTI may request OC-TS for such orders.
- 6.10.4 BellSouth shall accept a Letter of Authorization (LOA) between UTI and another carrier that will allow UTI to connect a facility, or Combination that includes Dedicated Transport to the other carrier's collocation space or to another carrier's CFA associated with higher bandwidth transport.

7 Call Related Databases and Signaling

- 7.1 Call Related Databases are the databases other than OSS, that are used in signaling networks, for billing and collection, or the transmission, routing or other provision of a Telecommunications Service. Notwithstanding anything to the contrary herein, BellSouth shall only provide unbundled access to call related databases and signaling including but not limited to, BellSouth Switched Access (SWA) 8XX Toll Free Dialing Ten Digit Screening Service, Line Information Database (LIDB), Signaling, Signaling Link Transport, STP, SS7 AIN Access, Service Control Point(SCP\Databases, Local Number Portability (LNP) Databases and Calling Name (CNAM) Database Service pursuant to this Agreement where BellSouth is required to provide and is providing Local Switching or UNE-P to UTI pursuant to this Agreement.
- 7.2 <u>BellSouth Switched Access (SWA) 8XX Toll Free Dialing Ten Digit Screening</u> <u>Service</u>
- 7.2.1 The BellSouth SWA 8XX Toll Free Dialing Ten Digit Screening Service database (8XX SCP Database) is a SCP that contains customer record information and the functionality to provide call-handling instructions for 8XX calls. The 8XX SCP IN software stores data downloaded from the national SMS/8XX database and provides the routing instructions in response to queries from the SSP or tandem. The BellSouth SWA 8XX Toll Free Dialing Ten Digit Screening Service (8XX TFD Service) utilizes the 8XX SCP Database to provide identification and routing of the 8XX calls, based on the ten digits dialed. At UTI's option, 8XX TFD Service is provided with or without POTS number delivery, dialing number delivery, and other optional complex features as selected by UTI.
- 7.2.2 The 8XX SCP Database is designated to receive and respond to queries using the ANSI Specification of Signaling System Seven (SS7) protocol.
- 7.3 <u>LIDB</u>

- 7.3.1 LIDB is a transaction-oriented database accessible through Common Channel Signaling (CCS) networks. For access to LIDB, UTI must purchase appropriate signaling links pursuant to Section 7.3 of this Attachment. LIDB contains records associated with End User Line Numbers and Special Billing Numbers. LIDB accepts queries from other Network Elements and provides appropriate responses. The query originator need not be the owner of LIDB data. LIDB queries include functions such as screening billed numbers that provides the ability to accept Collect or Third Number Billing calls and validation of Telephone Line Number based non-proprietary calling cards. The interface for the LIDB functionality is the interface between BellSouth's CCS network and other CCS networks. LIDB also interfaces to administrative systems.
- 7.3.2 <u>Technical Requirements</u>
- 7.3.2.1 BellSouth will offer to UTI any additional capabilities that are developed for LIDB during the life of this Agreement.
- 7.3.2.2 BellSouth shall process UTI's customer records in LIDB at least at parity with BellSouth customer records, with respect to other LIDB functions. BellSouth shall indicate to UTI what additional functions (if any) are performed by LIDB in the BellSouth network.
- 7.3.2.3 Within two (2) weeks after a request by UTI, BellSouth shall provide UTI with a list of the customer data items, which UTI would have to provide in order to support each required LIDB function. The list shall indicate which data items are essential to LIDB function and which are required only to support certain services. For each data item, the list shall show the data formats, the acceptable values of the data item and the meaning of those values.
- 7.3.2.4 BellSouth shall provide LIDB systems for which operating deficiencies that would result in calls being blocked shall not exceed thirty (30) minutes per year.
- 7.3.2.5 BellSouth shall provide LIDB systems for which operating deficiencies that would not result in calls being blocked shall not exceed twelve (12) hours per year.
- 7.3.2.6 BellSouth shall provide LIDB systems for which the LIDB function shall be in overload no more than twelve (12) hours per year.
- 7.3.2.7 All additions, updates and deletions of UTI data to the LIDB shall be solely at the direction of UTI. Such direction from UTI will not be required where the addition, update or deletion is necessary to perform standard fraud control measures (e.g., calling card auto-deactivation).
- 7.3.2.8 BellSouth shall provide priority updates to LIDB for UTI data upon UTI's request (e.g., to support fraud detection), via password-protected telephone card,

facsimile, or electronic mail within one hour of notice from the established BellSouth contact.

- 7.3.2.9 BellSouth shall provide LIDB systems such that no more than 0.01% of UTI customer records will be missing from LIDB, as measured by UTI audits. BellSouth will audit UTI records in LIDB against Data Base Administration System (DBAS) to identify record mismatches and provide this data to a designated UTI contact person to resolve the status of the records and BellSouth will update system appropriately. BellSouth will refer record of mismatches to UTI within one (1) business day of audit. Once reconciled records are received back from UTI, BellSouth will update LIDB the same business day if less than 500 records are received before 1:00 p.m. Central Time. If more than 500 records are received, BellSouth will contact UTI to negotiate a time frame for the updates, not to exceed three (3) business days.
- 7.3.2.10 BellSouth shall perform backup and recovery of all of UTI's data in LIDB including sending to LIDB all changes made since the date of the most recent backup copy, in at least the same time frame BellSouth performs backup and recovery of BellSouth data in LIDB for itself. Currently, BellSouth performs backups of the LIDB for itself on a weekly basis; and when a new software release is scheduled, a backup is performed prior to loading the new release.
- 7.3.2.11 BellSouth shall provide UTI with LIDB reports of data which are missing or contain errors, as well as any misrouted errors, within a reasonable time period as negotiated between UTI and BellSouth.
- 7.3.2.12 BellSouth shall prevent any access to or use of UTI data in LIDB by BellSouth personnel that are outside of established administrative and fraud control personnel, or by any other Party that is not authorized by UTI in writing.
- 7.3.2.13 BellSouth shall provide UTI performance of the LIDB Data Screening function, which allows a LIDB to completely or partially deny specific query originators access to LIDB data owned by specific data owners, for Customer Data that is part of an NPA-NXX or RAO-0/1XX wholly or partially owned by UTI at least at parity with BellSouth Customer Data. BellSouth shall obtain from UTI the screening information associated with LIDB Data Screening of UTI data in accordance with this requirement. BellSouth currently does not have LIDB Data Screening capabilities. When such capability is available, BellSouth shall offer it to UTI under the BFR/NBR Process as set forth in Attachment 11.
- 7.3.2.14 BellSouth shall accept queries to LIDB associated with UTI customer records and shall return responses in accordance with industry standards.
- 7.3.2.15 BellSouth shall provide mean processing time at the LIDB within 0.50 seconds under normal conditions as defined in industry standards.

- 7.3.2.16 BellSouth shall provide processing time at the LIDB within 1 second for ninety-nine percent (99%) of all messages under normal conditions as defined in industry standards.
- 7.3.3 <u>Interface Requirements</u>
- 7.3.3.1 BellSouth shall offer LIDB in accordance with the requirements of this subsection.
- 7.3.3.2 The interface to LIDB shall be in accordance with the technical references contained within.
- 7.3.3.3 The CCS interface to LIDB shall be the standard interface described herein.
- 7.3.3.4 The LIDB Data Base interpretation of the ANSI-TCAP messages shall comply with the technical reference herein. Global Title Translation (GTT) shall be maintained in the signaling network in order to support signaling network routing to the LIDB.
- 7.3.3.5 The application of the LIDB rates contained in Exhibit A will be based on a Percent CLEC LIDB Usage (PCLU) factor. UTI shall provide BellSouth a PCLU. The PCLU will be applied to determine the percentage of total LIDB usage to be billed to the other Party at local rates. UTI shall update its PCLU on the first of January, April, July and October and shall send it to BellSouth to be received no later than thirty (30) calendar days after the first of each such month based on local usage for the past three months ending the last day of December, March, June and September, respectively. Requirements associated with PCLU calculation and reporting shall be as set forth in BellSouth's Jurisdictional Factors Reporting Guide, as it is amended from time to time.
- 7.4 <u>Signaling.</u> BellSouth shall offer access to signaling and access to BellSouth's signaling databases subject to compatibility testing and at the rates set forth in this Attachment. BellSouth may provide mediated access to BellSouth signaling systems and databases. Available signaling elements include signaling links, STPs and SCPs. Signaling functionality will be available with both A-link and B-link connectivity.
- 7.4.1 <u>Signaling Link Transport.</u> Signaling Link Transport is a set of two (2) or four (4) dedicated 56 kbps transmission paths between UTI designated SPOI that provide appropriate physical diversity.
- 7.4.1.1 <u>Technical Requirements</u>
- 7.4.1.1.1 Signaling Link Transport shall consist of full duplex mode 56 kbps transmission paths and shall perform in the following two ways:

- 7.4.1.1.1.1 As an "A-link" Signaling Link Transport is a connection between a switch or SCP and a home STP switch pair; and
- 7.4.1.1.2 As a "B-link" Signaling Link Transport is a connection between two (2) STP switch pairs in different company networks (e.g., between two (2) STP switch pairs for two (2) CLECs).
- 7.4.1.2 Signaling Link Transport shall consist of two (2) or more signaling link layers as follows:
- 7.4.1.2.1 An A-link layer shall consist of two (2) links; and
- 7.4.1.2.2 A B-link layer shall consist of four (4) links.
- 7.4.1.3 A signaling link layer shall satisfy interoffice and intraoffice diversity of facilities and equipment, such that:
- 7.4.1.3.1 No single failure of facilities or equipment causes the failure of both links in an Alink layer (i.e., the links should be provided on a minimum of two (2) separate physical paths end-to-end); and
- 7.4.1.3.2 No two (2) concurrent failures of facilities or equipment shall cause the failure of all four (4) links in a B-link layer (i.e., the links should be provided on a minimum of three (3) separate physical paths end-to-end).
- 7.4.2 <u>Interface Requirements.</u> There shall be a DS1 (1.544 Mbps) interface at UTI's designated SPOIs. Each 56 kbps transmission path shall appear as a DS0 channel within the DS1 interface.
- 7.4.3 <u>STP.</u> An STP is a signaling network function that includes all of the capabilities provided by the signaling transfer point switches and their associated signaling links that enables the exchange of SS7 messages among and between switching elements, database elements and signaling transfer point switches.
- 7.4.3.1 <u>Technical Requirements</u>
- 7.4.3.1.1 STPs shall provide access to BellSouth Local Switching or Tandem Switching and to BellSouth SCPs/Databases connected to BellSouth SS7 network. STPs also provide access to third party local or tandem switching and third party provided STPs.
- 7.4.3.1.2 The connectivity provided by STPs shall fully support the functions of all other Network Elements connected to the BellSouth SS7 network. This includes the use of the BellSouth SS7 network to convey messages that neither originate nor terminate at a signaling end point directly connected to the BellSouth SS7 network (i.e., transit messages). When the BellSouth SS7 network is used to convey transit

messages, there shall be no alteration of the Integrated Services Digital Network User Part (ISDNUP) or Transaction Capabilities Application Part (TCAP) user data that constitutes the content of the message.

- 7.4.3.1.3 If a BellSouth tandem switch routes traffic, based on dialed or translated digits, on SS7 trunks between a UTI local switch and third party local switch, the BellSouth SS7 network shall convey the TCAP messages that are necessary to provide Call Management features (Automatic Callback, Automatic Recall, and Screening List Editing) between UTI local STPs and the STPs that provide connectivity with the third party local switch, even if the third party local switch is not directly connected to BellSouth STPs.
- 7.4.3.1.4 STPs shall provide all functions of the SCCP necessary for Class 0 (basic connectionless) service as defined in Telcordia ANSI Interconnection Requirements. This includes GTT and SCCP Management procedures, as specified in ANSI T1.112.4. Where the destination signaling point is a UTI or third party local or tandem switching system directly connected to BellSouth SS7 network, BellSouth shall perform final GTT of messages to the destination and SCCP Subsystem Management of the destination. In all other cases, BellSouth shall perform intermediate GTT of messages to a gateway pair of STPs in an SS7 network connected with BellSouth SS7 network and shall not perform SCCP Subsystem Management of the destination. If BellSouth performs final GTT to a UTI database, then UTI agrees to provide BellSouth with the Destination Point Code for UTI database.
- 7.4.3.1.5 STPs shall provide all functions of the Operations, Maintenance and Administration Part (OMAP) as specified in applicable industry standard technical references, which may include, where available in BellSouth's network, MTP Routing Verification Test (MRVT) and SCCP Routing Verification Test (SRVT).
- 7.4.3.1.6 Where the destination signaling point is a BellSouth local or tandem switching system or database, or is a UTI or third party local or tandem switching system directly connected to the BellSouth SS7 network, STPs shall perform MRVT and SRVT to the destination signaling point. In all other cases, STPs shall perform MRVT and SRVT to a gateway pair of STPs in an SS7 network connected with the BellSouth SS7 network. This requirement may be superseded by the specifications for Internetwork MRVT and SRVT when these become approved ANSI standards and available capabilities of BellSouth STPs.
- 7.4.4 <u>SS7</u>
- 7.4.4.1 When technically feasible and upon request by UTI, SS7 AIN Access shall be made available in association with switching. SS7 AIN Access is the provisioning of AIN 0.1 triggers in an equipped BellSouth local switch and interconnection of

the BellSouth SS7 network with UTI's SS7 network to exchange TCAP queries and responses with a UTI SCP.

- 7.4.4.2 SS7 AIN Access shall provide UTI SCP access to an equipped BellSouth local switch via interconnection of BellSouth's SS7 and UTI SS7 Networks. BellSouth shall offer SS7 AIN Access through its STPs. If BellSouth requires a mediation device on any part of its network specific to this form of access, BellSouth must route its messages in the same manner. The interconnection arrangement shall result in the BellSouth local switch recognizing the UTI SCP as at least at parity with BellSouth's SCPs in terms of interfaces, performance and capabilities.
- 7.4.4.3 <u>Interface Requirements</u>
- 7.4.4.3.1 BellSouth shall provide the following STP options to connect UTI or UTIdesignated Local Switching systems to the BellSouth SS7 network:
- 7.4.4.3.1.1 An A-link interface from UTI Local Switching systems; and
- 7.4.4.3.1.2 A B-link interface from UTI local STPs.
- 7.4.4.3.2 Each type of interface shall be provided by one or more layers of signaling links.
- 7.4.4.3.3 The SPOI for each link shall be located at a cross-connect element in the CO where the BellSouth STP is located. There shall be a DS1 or higher rate transport interface at each of the SPOIs. Each signaling link shall appear as a DS0 channel within the DS1 or higher rate interface.
- 7.4.4.3.4 BellSouth shall provide intraoffice diversity between the SPOI and BellSouth STPs so that no single failure of intraoffice facilities or equipment shall cause the failure of both B-links in a layer connecting to a BellSouth STP.
- 7.4.4.3.5 STPs shall provide all functions of the MTP as defined in the applicable industry standard technical references.
- 7.4.4.4 <u>Message Screening</u>
- 7.4.4.1 BellSouth shall set message screening parameters so as to accept valid messages from UTI local or tandem switching systems destined to any signaling point within BellSouth's SS7 network where the UTI switching system has a valid signaling relationship.
- 7.4.4.2 BellSouth shall set message screening parameters so as to pass valid messages from UTI local or tandem switching systems destined to any signaling point or network accessed through BellSouth's SS7 network where the UTI switching system has a valid signaling relationship.

- 7.4.4.3 BellSouth shall set message screening parameters so as to accept and pass/send valid messages destined to and from UTI from any signaling point or network interconnected through BellSouth's SS7 network where the UTI SCP has a valid signaling relationship.
- 7.4.5 <u>SCP/Databases</u>
- 7.4.5.1 Call Related Databases provide the storage of, access to, and manipulation of information required to offer a particular service and/or capability. BellSouth shall provide access to the following Databases: LNP, LIDB, Toll Free Number Database, ALI/DMS, and CNAM Database. BellSouth also provides access to SCE/SMS application databases and DA.
- 7.4.5.2 A SCP is deployed in a SS7 network that executes service application logic in response to SS7 queries sent to it by a switching system also connected to the SS7 network. SMS provides operational interfaces to allow for provisioning, administration and maintenance of subscriber data and service application data stored in SCPs.
- 7.4.5.3 <u>Technical Requirements for SCPs/Databases</u>
- 7.4.5.3.1 BellSouth shall provide physical access to SCPs through the SS7 network and protocols with TCAP as the application layer protocol.
- 7.4.5.3.2 BellSouth shall provide physical interconnection to databases via industry standard interfaces and protocols (e.g., SS7, ISDN and X.25).
- 7.4.5.3.3 The reliability of interconnection options shall be consistent with requirements for diversity and survivability.
- 7.5 <u>LNP Database.</u> The Permanent Number Portability (PNP) database supplies routing numbers for calls involving numbers that have been ported from one local service provider to another. BellSouth agrees to provide access to the PNP database at rates, terms and conditions as set forth by BellSouth and in accordance with an effective FCC or Commission directive.
- 7.6 <u>CNAM Database Service</u>
- 7.6.1 CNAM is the ability to associate a name with the calling party number, allowing the End User (to which a call is being terminated) to view the calling party's name before the call is answered. The calling party's information is accessed by queries launched to the CNAM database. This service also provides UTI the opportunity to load and store its subscriber names in the BellSouth CNAM SCPs.
- 7.6.2 UTI shall submit to BellSouth a notice of its intent to access and utilize BellSouth CNAM Database Services. Said notice shall be in writing no less than sixty (60)

calendar days prior to UTI's access to BellSouth's CNAM Database Services and shall be addressed to UTI's Local Contract Manager.

- 7.6.3 BellSouth's provision of CNAM Database Services to UTI requires interconnection from UTI to BellSouth CNAM SCPs. Such interconnections shall be established pursuant to Attachment 3 of this Agreement.
- 7.6.4 In order to formulate a CNAM query to be sent to the BellSouth CNAM SCP, UTI shall provide its own CNAM SSP. UTI's CNAM SSPs must be compliant with TR-NWT-001188, "CLASS Calling Name Delivery Generic Requirements".
- 7.6.5 If UTI elects to access the BellSouth CNAM SCP via a third party CCS7 transport provider, the third party CCS7 provider shall interconnect with the BellSouth CCS7 network according to BellSouth's Common Channel Signaling Interconnection Guidelines and Telcordia's TR-TSV-000905 CCS Network Interface Specification. In addition, the third party provider shall establish CCS7 interconnection at the BellSouth Local Signal Transfer Points (LSTPs) serving the BellSouth CNAM SCPs that UTI desires to query.
- 7.6.6 If UTI queries the BellSouth CNAM SCP via a third party national SS7 transport provider, the third party SS7 provider shall interconnect with the BellSouth CCS7 network according to BellSouth's Common Channel Signaling Interconnection Guidelines and Telcordia's TR-TSV-000905 CCS Network Interface Specification. In addition, the third party provider shall establish SS7 interconnection at one or more of the BellSouth Gateway STPs. The payment of all costs associated with the transport of SS7 signals via a third party will be established by mutual agreement of the Parties and this Agreement shall be amended in accordance with modification of the General Terms and Conditions incorporated herein by this reference.
- 7.6.7 The mechanism to be used by UTI for initial CNAM record load and/or updates shall be determined by mutual agreement. The initial load and all updates shall be provided by UTI in the BellSouth specified format and shall contain records for every working telephone number that can originate phone calls. It is the responsibility of UTI to provide accurate information to BellSouth on a current basis.
- 7.6.8 Updates to the SMS shall occur no less than once a week, reflect service order activity affecting either name or telephone number, and involve only record additions, deletions or changes.
- 7.6.9 UTI CNAM records provided for storage in the BellSouth CNAM SCP shall be available, on a SCP query basis only, to all Parties querying the BellSouth CNAM SCP. Further, CNAM service shall be provided by each Party consistent with state and/or federal regulation.

7.7 <u>SCE/SMS AIN Access</u>

- 7.7.1 BellSouth's SCE/SMS AIN Access shall provide UTI the capability to create service applications in a BellSouth SCE and deploy those applications in a BellSouth SMS to a BellSouth SCP.
- 7.7.2 BellSouth's SCE/SMS AIN Access shall provide access to SCE hardware, software, testing and technical support (e.g., help desk, system administrator) resources available to UTI. Training, documentation, and technical support will address use of SCE and SMS access and administrative functions but will not include support for the creation of a specific service application.
- 7.7.3 BellSouth SCP shall partition and protect UTI service logic and data from unauthorized access.
- 7.7.4 When UTI selects SCE/SMS AIN Access, BellSouth shall provide training, documentation, and technical support to enable UTI to use BellSouth's SCE/SMS AIN Access to create and administer applications.
- 7.7.5 UTI access will be provided via remote data connection (e.g., dial-in, ISDN).
- 7.7.6 BellSouth shall allow UTI to download data forms and/or tables to BellSouth SCP via BellSouth SMS without intervention from BellSouth.
- 8 Automatic Location Identification/Data Management System (ALI/DMS)
- 8.1 <u>911 and E911 Databases</u>
- 8.1.1 BellSouth shall provide UTI with nondiscriminatory access to 911 and E911 databases on an unbundled basis, in accordance with 47 C.F.R. § 51.319 (f).
- 8.1.2 The ALI/DMS database contains End User information (including name, address, telephone information, and sometimes special information from the local service provider or End User) used to determine to which PSAP to route the call. The ALI/DMS database is used to provide enhanced routing flexibility for E911. UTI will be required to provide the BellSouth 911 database vendor daily service order updates to E911 database in accordance with Section 8.2.1.
- 8.2 <u>Technical Requirements</u>
- 8.2.1 BellSouth's 911 database vendor shall provide UTI the capability of providing updates to the ALI/DMS database through a specified electronic interface. UTI shall contact BellSouth's 911 database vendor directly to request interface. UTI shall provide updates directly to BellSouth's 911 database vendor on a daily basis. Updates shall be the responsibility of UTI and BellSouth shall not be liable for the transactions between UTI and BellSouth's 911 database vendor.

- 8.2.2 It is UTI's responsibility to retrieve and confirm statistical data and to correct errors obtained from BellSouth's 911 database vendor on a daily basis. All errors will be assigned a unique error code and the description of the error and the corrective action is described in the CLEC Users Guide for Facility Based Providers that is found on the BellSouth Interconnection Web site.
- 8.2.3 UTI shall conform to the BellSouth standards as described in the CLEC Users Guide to E911 for Facilities Based Providers that is located on the BellSouth Interconnection Web site at http://www.interconnection.bellsouth.com/guides.
- 8.2.4 Stranded Unlocks are defined as End User records in BellSouth's ALI/DMS database that have not been migrated for over ninety (90) days to UTI, as a new provider of local service to the End User. Stranded Unlocks are those End User records that have been "unlocked" by the previous local exchange carrier that provided service to the End User and are open for UTI to assume responsibility for such records.
- 8.2.4.1 Based upon End User record ownership information available in the NPAC database, BellSouth shall provide a Stranded Unlock annual report to UTI that reflects all Stranded Unlocks that remain in the ALI/DMS database for over ninety (90) days. UTI shall review the Stranded Unlock report, identify its End User records and request to either delete such records or migrate the records to UTI within two (2) months following the date of the Stranded Unlock report provided by BellSouth. UTI shall reimburse BellSouth for any charges BellSouth's database vendor imposes on BellSouth for the deletion of UTI's records.

9 OSS

- 9.1 BellSouth has developed and made available electronic interfaces by which UTI may submit LSRs electronically.
- 9.2 LSRs submitted by means of one of these electronic interfaces will incur an electronic service order charge. LSRs submitted by means other than one of these interactive interfaces (e.g., mail, fax, courier, etc.) will incur a manual order service charge. An individual LSR will be identified for billing purposes by its Purchase Order Number (PON). Electronic and manual service order charges are specified in Exhibit A.
- 9.3 BellSouth will bill the electronic or manual service order charge for Network Elements as applicable, for an LSR, regardless of whether that LSR is later supplemented, clarified or cancelled.
- 9.4 Notwithstanding the foregoing, BellSouth will not bill an additional electronic or manual service order charge for supplements to any LSR submitted to clarify, correct, change or cancel a previously submitted LSR.

- 9.5 <u>Denial/Restoral OSS Charge.</u> BellSouth reserves the right to bill electronic or manual service order charges for each account as applicable. In the event UTI provides a list of customers to be denied and restored, rather than an LSR, each location on the list will require a separate PON and therefore will be billed as one LSR per location.
- 9.6 <u>Network Elements and Other Services Manual Additive.</u> The Commissions in some states have ordered per element manual additive NRC for Network Elements and Other Services ordered by means other than one of the interactive interfaces. These ordered Network Elements and Other Services manual additive NRCs will apply in these states, rather than the charge per LSR. The per element charges are listed in Exhibit A.

| UNBUN | DLED | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|--------|---------|--|-----------|---------|--------------------------------|----------------|-----------------|-----------------|------------------|-----------------|---|--------------|---------------|-----------------|----------------|---------------|--------------|
| | | · · · · · · · · · · · · · · · · · · · | | | | | | | | | | | Svc Order | Incremental | | Incremental | Incremental |
| | | | | | | | | | | | | Submitted | Submitted | Charge - | Charge - | Charge - | Charge - |
| | | | | | | | | | | | | Elec | Manually | Manual Svc | Manual Svc | Manual Svc | Manual Svc |
| CATEGO | DRY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | | | | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | | Nonree | curring | Nonrecurring | Disconnect | - | l | 220 | Rates (\$) | | L |
| | | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | | | | | | | | , | | , | | | | | | |
| Т | The "Zo | one" shown in the sections for stand-alone loops or loops as | part of a | combin | ation refers to Geogr | raphically D | eaveraged UNE | Zones. To vie | ew Geographic | ally Deaverage | d UNE Zone D | esignations | s by Central | Office, refer t | o internet We | bsite: | |
| | | ww.interconnection.bellsouth.com/become_a_clec/html/inter | connecti | on.htm | | | | | | | | | | | | | |
| | | SUPPORT SYSTEMS (OSS) - "REGIONAL RATES" | | | | | | | | | | | | | L | | <u> </u> |
| | | (1) CLEC should contact its contract negotiator if it prefers th | | | | | | | | | | | | | | | |
| | | ther the state specific Commission ordered rates for the servi | ce orderi | ng cnar | ges, or CLEC may ele | ect the regio | onal service or | dering charge, | nowever, CLE | c can not obtai | in a mixture of | the two reg | jardiess if C | LEC has a int | erconnection | contract esta | blished in |
| | | the 9 states. (2) Any element that can be ordered electronically will be bill | ad accord | ding to | he SOMEC rate liste | d in this sat | | rofor to BallCo | | daring Handha | | tormino if a | nroduct or | n ha ardarad | alaatraniaallu | | lomonto that |
| | | be ordered electronically at present per the LOH, the listed S | | | | | | | | | | | | | | | |
| | | applied to a CLECs bill when it submits an LSR to BellSouth. | | e in un | s category renects th | e charge the | at would be bli | | Since electronit | c ordening capa | abilities come | | that element | t. Otherwise, | the manual o | ruening charg | e, oomaa, |
| | | OSS - Electronic Service Order Charge, Per Local Service | | | | | 1 | | | | | | | | 1 | 1 | |
| | | Request (LSR) - UNE Only | | 1 | | SOMEC | | 3.50 | 0.00 | 3.50 | 0.00 | | | | 1 | 1 | 1 |
| | | OSS - Manual Service Order Charge, Per Local Service Request | | | | | | | | | | | | | | | |
| | | (LSR) - UNE Only | | | | SOMAN | | 7.86 | 0.00 | 0.99 | 0.00 | | | | | | ļ |
| | | DATE ADVANCEMENT CHARGE | | | | | | <u> </u> | | <u> </u> | | | | | | | ļ |
| N | NOTE: | The Expedite charge will be maintained commensurate with | BellSouth | 's FCC | No.1 Tariff, Section 5 | as applicat | ole. | ł | | ł | | <u> </u> | <u> </u> | ł | L | | |
| | | | | | UAL, UEANL, UCL, | | | | | | | | | | | | |
| | | | | | UEF. UDF. UEQ. | | | | | | | | | | | | |
| | | | | | UDL, UENTW, UDN, | | | | | | | | | | | | 1 |
| | | | | | UEA, UHL, ULC, | | | | | | | | | | | | |
| | | | | | USL, U1T12, U1T48, | | | | | | | | | | | | |
| | | | | | U1TD1, U1TD3, | | | | | | | | | | | | |
| | | | | | U1TDX, U1TO3, | | | | | | | | | | | | |
| | | | | | U1TS1, U1TVX, | | | | | | | | | | | | |
| | | | | | UC1BC, UC1BL, | | | | | | | | | | | | |
| | | | | | UC1CC, UC1CL, UC1DC, UC1DL, | | | | | | | | | | | | |
| | | | | | UC1EC, UC1EL, | | | | | | | | | | | | |
| | | | | | UC1FC, UC1FL, | | | | | | | | | | | | |
| | | | | | UC1GC, UC1GL, | | | | | | | | | | | | |
| | | | | | UC1HC, UC1HL, | | | | | | | | | | | | |
| | | | | | UDL12, UDL48, | | | | | | | | | | | | |
| | | | | | UDLO3, UDLSX, | | | | | | | | | | | | |
| | | | | | UE3, ULD12, | | | | | | | | | | | | |
| | | | | 1 | ULD48, ULDD1, | | | | | | | | | | 1 | 1 | 1 |
| | | | | 1 | ULDD3, ULDDX, ULDO3, ULDS1, | | | | | | | | | | 1 | 1 | 1 |
| | | | | | ULDU3, ULDS1, ULDVX, UNC1X, | | | | | | | | | | | | 1 |
| | | | | 1 | UNC3X, UNCDX, | | | | | | | | | | 1 | 1 | 1 |
| | | | | | UNCNX, UNCSX, | | | | | | | | | | 1 | | 1 |
| | | | | | UNCVX, UNLD1, | | | | | | | | | | | | 1 |
| | | | | 1 | UNLD3, UXTD1, | | | | | | | | | | 1 | 1 | 1 |
| | | | | | UXTD3, UXTS1, | | | | | | | | | | 1 | | 1 |
| | | UNE Expedite Charge per Circuit or Line Assignable USOC, per | | 1 | U1TUC, U1TUD, | 00405 | | 000.00 | | | | | | | 1 | 1 | 1 |
| | | Day XCHANGE ACCESS LOOP | | | U1TUB, U1TUA | SDASP | | 200.00 | | | | <u> </u> | | | <u> </u> | | <u> </u> |
| | | ANALOG VOICE GRADE LOOP | | | | | | | | | | | | | | | <u> </u> |
| ⊢ f | | 2-Wire Analog Voice Grade Loop - Service Level 1- Zone 1 | | 1 | UEANL | UEAL2 | 10.56 | 46.66 | 22.57 | 26.65 | 7.65 | t | 1 | 1 | 1 | 1 | <u> </u> |
| | | 2-Wire Analog Voice Grade Loop - Service Level 1- Zone 2 | | 2 | UEANL | UEAL2 | 15.34 | 46.66 | 22.57 | 26.65 | 7.65 | 1 | 1 | | 1 | 1 | i |
| | | 2-Wire Analog Voice Grade Loop - Service Level 1- Zone 3 | | 3 | UEANL | UEAL2 | 31.11 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | | 2-Wire Analog Voice Grade Loop - Service Level 1- Zone 1 | | 1 | UEANL | UEASL | 10.56 | | 22.57 | 26.65 | 7.65 | | | | | | |
| | | 2-Wire Analog Voice Grade Loop - Service Level 1- Zone 2 | | 2 | UEANL | UEASL | 15.34 | 46.66 | 22.57 | 26.65 | 7.65 | | | <u> </u> | | | Ļ |
| | | 2-Wire Analog Voice Grade Loop - Service Level 1- Zone 3 | | 3 | UEANL | UEASL | 31.11 | 46.66 | 22.57 | 26.65 | 7.65 | | | <u> </u> | | | <u> </u> |
| | | Unbundled Miscellaneous Rate Element, Tag Loop at End User | | 1 | | | | 0.00 | 0.00 | | | | | | 1 | 1 | 1 |
| + | | Premise Loop Testing - Basic 1st Half Hour | | | UEANL UEANL | URETL URET1 | <u> </u> | 8.33 46.88 | 0.83 46.88 | | | | | | <u> </u> | <u> </u> | <u> </u> |
| ++ | | Loop Testing - Basic Ist Hall Hour Loop Testing - Basic Additional Half Hour | | | UEANL | URETA | 1 | 24.16 | 24.16 | | | - | 1 | | | | <u> </u> |
| L | | | | 1 | | ONLIA | l | 24.10 | 27.10 | | l | 1 | 1 | 1 | 1 | 1 | 1 |

| IUNBUNDLE ² | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | · · · · · · |
|------------------------|--|---------|------|----------------|----------------|----------------|------------------|------------------|----------------|----------------|---|-------|--|--|---|---------------|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | Svc Order Submitted Elec per LSR | | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'I | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Charge - |
| | | | | | | Rec | Nonrec | urring | Nonrecurring | Disconnect | | | | Rates (\$) | | |
| | | | | | | Neu | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | CLEC to CLEC Conversion Charge Without Outside Dispatch | | | | | | 45 70 | 0.04 | | | | | | | | |
| | (UVL-SL1) Unbundled Voice Loop, Non-Design Voice Loop, billing for BST | | | UEANL | UREWO | | 15.78 | 8.94 | | | | | | | | ļ/ |
| | providing make-up (Engineering Information - E.I.) | | | UEANL | UEANM | | 13.49 | 13.49 | | | | | | | | |
| | Manual Order Coordination for UVL-SL1s (per loop) | | | UEANL | UEAMC | | 9.00 | 9.00 | | | | | | | | |
| | Order Coordination for Specified Conversion Time for UVL-SL1 | | | | | | | | | | | | | | | |
| | (per LSR) | | | UEANL | OCOSL | | 23.01 | 23.01 | | | | | | | | ! |
| 2-WIRE | Unbundled COPPER LOOP | | 4 | | | 40.50 | 44.97 | 20.00 | 25.64 | 0.05 | | | | | | ļ/ |
| | 2-Wire Unbundled Copper Loop - Non-Designed Zone 1 2 Wire Unbundled Copper Loop - Non-Designed - Zone 2 | | 2 | UEQ UEQ | UEQ2X UEQ2X | 10.58 11.51 | 44.97 | 20.89 20.89 | 25.64 | 6.65 6.65 | | | | | | I |
| | 2 Wire Unbundled Copper Loop - Non-Designed - Zone 2 | | 3 | UEQ | UEQ2X | 13.19 | 44.97 | 20.89 | 25.64 | 6.65 | | | | | | ┟────┤ |
| | Unbundled Miscellaneous Rate Element, Tag Loop at End User | 1 | | | | | | 20.00 | 20.04 | 0.00 | 1 | 1 | 1 | | | |
| | Premise | | | UEQ | URETL | | 8.33 | 0.83 | | | | | | | | |
| | Manual Order Coordination 2 Wire Unbundled Copper Loop - | | | | | | | | | | | | | | | |
| ┝──┤─── | Non-Designed (per loop) | I | | UEQ | USBMC | | 9.00 | 9.00 | | | | | | | | Į' |
| | Unbundled Copper Loop, Non-Design Copper Loop, billing for BST providing make-up (Engineering Information - E.I.) | | | UEQ | UEQMU | | 13.49 | 13.49 | | | | | | | | |
| <u> </u> | Loop Testing - Basic 1st Half Hour | | | UEQ | URET1 | | 46.88 | 46.88 | | | | | | | | |
| | Loop Testing - Basic Additional Half Hour | | | UEQ | URETA | | 24.16 | 24.16 | | | | | | | | łł |
| | CLEC to CLEC Conversion Charge Without Outside Dispatch | | | | | | | | | | | | | | | |
| | (UCL-ND) | | | UEQ | UREWO | | 14.27 | 7.43 | | | | | | | | |
| | EXCHANGE ACCESS LOOP | | | | | | | | | | | | | | | ! |
| 2-WIRE | 2 Wire Analog Voice Grade Loop-Service Level 1-Line Splitting- | | | | | | | | | | | | | | | ļ/ |
| | Zone 1 | | 1 | UEPSR UEPSB | UEALS | 10.56 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | 2 Wire Analog Voice Grade Loop-Service Level 1-Line Splitting- | | | 021 011 021 05 | 02/20 | 10.00 | 10.00 | 22.01 | 20.00 | 1100 | | | | | | ł – – ł |
| | Zone 1 | | 1 | UEPSR UEPSB | UEABS | 10.56 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | 2 Wire Analog Voice Grade Loop- Service Level 1-Line Splitting- | | _ | | | | | | | | | | | | | |
| | Zone 2 2 Wire Analog Voice Grade Loop- Service Level 1-Line Splitting- | | 2 | UEPSR UEPSB | UEALS | 15.34 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | Zone 2 | | 2 | UEPSR UEPSB | UEABS | 15.34 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | 2 Wire Analog Voice Grade Loop-Service Level 1-Line Splitting- | | - | 021 011 021 05 | 02/20 | 10.01 | 10.00 | 22.01 | 20.00 | 1100 | | | | | | |
| | Zone 3 | | 3 | UEPSR UEPSB | UEALS | 31.11 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | 2 Wire Analog Voice Grade Loop-Service Level 1-Line Splitting- | | | | | | | | | | | | | | | |
| | Zone 3 EXCHANGE ACCESS LOOP | | 3 | UEPSR UEPSB | UEABS | 31.11 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | - |
| | ANALOG VOICE GRADE LOOP | | | | | | | | | | | | | | | |
| | 2-Wire Analog Voice Grade Loop - Service Level 2 w/Loop or | | | | | | | | | | | | | | | |
| | Ground Start Signaling - Zone 1 | | 1 | UEA | UEAL2 | 12.67 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| | 2-Wire Analog Voice Grade Loop - Service Level 2 w/Loop or | | | | | 47.5 | 101.00 | 04.07 | 70.07 | 44.00 | | | | | | |
| ┝──┼─── | Ground Start Signaling - Zone 2 2-Wire Analog Voice Grade Loop - Service Level 2 w/Loop or | | 2 | UEA | UEAL2 | 17.45 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| | Ground Start Signaling - Zone 3 | | 3 | UEA | UEAL2 | 33.22 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | ' |
| <u>├──┤</u> ── | Order Coordination for Specified Conversion Time (per LSR) | 1 | Ť | UEA | OCOSL | 00.22 | 23.01 | 007 | | | | | | | | 1 |
| | 2-Wire Analog Voice Grade Loop - Service Level 2 w/Reverse | 1 | | | | | | | | | | 1 | İ | | | |
| | Battery Signaling - Zone 1 | | 1 | UEA | UEAR2 | 12.67 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | ↓ ' |
| | 2-Wire Analog Voice Grade Loop - Service Level 2 w/Reverse | | 2 | | | 47 45 | 104.00 | 04.07 | 70.05 | 44.00 | | | | | | |
| ├──├ ── | Battery Signaling - Zone 2 2-Wire Analog Voice Grade Loop - Service Level 2 w/Reverse | | 2 | UEA | UEAR2 | 17.45 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | ───┘ |
| | Battery Signaling - Zone 3 | 1 | 3 | UEA | UEAR2 | 33.22 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| | Order Coordination for Specified Conversion Time (per LSR) | | Ĵ | UEA | OCOSL | 00.22 | 23.01 | 01.07 | , 0.00 | 14.00 | | | | | | <u>├</u> ───┤ |
| | CLEC to CLEC Conversion Charge without outside dispatch | | | UEA | UREWO | | 87.72 | 36.36 | | | | | | | | |
| | Loop Tagging - Service Level 2 (SL2) | | | UEA | URETL | | 11.21 | 1.10 | | | | | | | | |
| 4-WIRE | ANALOG VOICE GRADE LOOP | | | | | | 10.1.1. | | | 10.77 | | | | | | ─── |
| ┝───┼──── | 4-Wire Analog Voice Grade Loop - Zone 1 4-Wire Analog Voice Grade Loop - Zone 2 | | 1 2 | UEA UEA | UEAL4 UEAL4 | 29.26 34.25 | 164.11 164.11 | 112.36 112.36 | 78.91 78.91 | 18.66 18.66 | | | | | | |
| ├──┤ ── | 4-Wire Analog Voice Grade Loop - Zone 2 4-Wire Analog Voice Grade Loop - Zone 3 | | 2 | UEA | UEAL4 UEAL4 | 34.25 85.06 | 164.11 | 112.36 | 78.91 | 18.66 | | | | | | ├────┘ |
| | Order Coordination for Specified Conversion Time (per LSR) | 1 | 5 | UEA | OCOSL | 00.00 | 23.01 | 112.00 | 10.31 | 10.00 | 1 | | | | | ├─── ┘ |
| | CLEC to CLEC Conversion Charge without outside dispatch | 1 | | UEA | UREWO | | 87.72 | 36.36 | | | | | | | | |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|-------------------------|---|----------|------|------|----------|--------|--------|------------|-------|--------------|-------|---|-----------|--|----------|---|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Svc Order Submitted Manually per LSR | Charge - | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Charge - | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | | | | | | Rec | Nonrec | | | g Disconnect | | | | Rates (\$) | | |
| | | | | | | Nec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| 2-WIRE | E ISDN DIGITAL GRADE LOOP | | | | | | | | | | | | | | | L |
| | 2-Wire ISDN Digital Grade Loop - Zone 1 | | 1 | UDN | U1L2X | 18.44 | 146.77 | 95.02 | 71.38 | 13.83 | | | | | | L |
| | 2-Wire ISDN Digital Grade Loop - Zone 2 | | 2 | UDN | U1L2X | 25.08 | 146.77 | 95.02 | 71.38 | 13.83 | | | | | | L |
| | 2-Wire ISDN Digital Grade Loop - Zone 3 | | 3 | UDN | U1L2X | 42.87 | 146.77 | 95.02 | 71.38 | 13.83 | | | | | | |
| | Order Coordination For Specified Conversion Time (per LSR) | | | UDN | OCOSL | | 23.01 | 44.40 | | | - | | | | | |
| 2 WIDE | CLEC to CLEC Conversion Charge without outside dispatch ASYMMETRICAL DIGITAL SUBSCRIBER LINE (ADSL) COMP | | 008 | UDN | UREWO | | 91.63 | 44.16 | | | | | | | | <u> </u> |
| 2-11/16 | 2 Wire Unbundled ADSL Loop including manual service inquiry | | .00P | | | | | | | | | | | | | <u> </u> |
| | & facility reservation - Zone 1 | | 1 | UAL | UAL2X | 10.82 | 141.98 | 79.73 | 69.02 | 11.47 | | | | | | |
| | 2 Wire Unbundled ADSL Loop including manual service inquiry | | 1 | UAL | UALZA | 10.02 | 141.50 | 19.13 | 09.02 | 11.47 | 1 | | | | | l |
| | & facility reservation - Zone 2 | | 2 | UAL | UAL2X | 11.79 | 141.98 | 79.73 | 69.02 | 11.47 | | | | | | |
| | 2 Wire Unbundled ADSL Loop including manual service inquiry | <u> </u> | - 2 | UAL | UALZA | 11.79 | 141.30 | 13.13 | 03.02 | 11.47 | | | | | | <u> </u> |
| | & facility reservation - Zone 3 | | 3 | UAL | UAL2X | 12.87 | 141.98 | 79.73 | 69.02 | 11.47 | | | | | | 1 |
| | Order Coordination for Specified Conversion Time (per LSR) | | 0 | UAL | OCOSL | 12.07 | 23.01 | 10.10 | 00.02 | 11.47 | | | | | | <u> </u> |
| | 2 Wire Unbundled ADSL Loop without manual service inquiry & | | | 0,12 | 00002 | | 20.01 | | | | 1 | | | | | |
| | facility reservaton - Zone 1 | | 1 | UAL | UAL2W | 10.82 | 121.18 | 69.00 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled ADSL Loop without manual service inquiry & | | | 0.12 | | | | | | | | | | | | |
| | facility reservaton - Zone 2 | | 2 | UAL | UAL2W | 11.79 | 121.18 | 69.00 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled ADSL Loop without manual service inquiry & | | | | - | - | - | | | - | | | | | | |
| | facility reservaton - Zone 3 | | 3 | UAL | UAL2W | 12.87 | 121.18 | 69.00 | 69.09 | 11.54 | | | | | | |
| | Order Coordination for Specified Conversion Time (per LSR) | | | UAL | OCOSL | | 23.01 | | | | | | | | | |
| | CLEC to CLEC Conversion Charge without outside dispatch | | | UAL | UREWO | | 86.20 | 40.40 | | | | | | | | |
| 2-WIRE | E HIGH BIT RATE DIGITAL SUBSCRIBER LINE (HDSL) COMPA | TIBLE LC | OP | | | | | | | | | | | | | |
| | 2 Wire Unbundled HDSL Loop including manual service inquiry & facility reservation - Zone 1 | | 1 | UHL | UHL2X | 8.75 | 151.54 | 89.29 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled HDSL Loop including manual service inquiry | | _ | | | | | | | | | | | | | |
| | & facility reservation - Zone 2 2 Wire Unbundled HDSL Loop including manual service inquiry | | 2 | UHL | UHL2X | 9.56 | 151.54 | 89.29 | 69.09 | 11.54 | | | | | | |
| | & facility reservation - Zone 3 | | 3 | UHL | UHL2X | 10.61 | 151.54 | 89.29 | 69.09 | 11.54 | | | | | | 1 |
| | Order Coordination for Specified Conversion Time (per LSR) | | - | UHL | OCOSL | | 23.01 | | | | | | | | | |
| | 2 Wire Unbundled HDSL Loop without manual service inquiry | | | | | | | | | | | | | | | |
| | and facility reservation - Zone 1 | | 1 | UHL | UHL2W | 8.75 | 130.74 | 78.56 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled HDSL Loop without manual service inquiry | | | | | | | | | | | | | | | |
| | and facility reservation - Zone 2 | | 2 | UHL | UHL2W | 9.56 | 130.74 | 78.56 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled HDSL Loop without manual service inquiry | | | | | | | | | | | | | | | |
| | and facility reservation - Zone 3 | | 3 | UHL | UHL2W | 10.61 | 130.74 | 78.56 | 69.09 | 11.54 | | | | | | |
| | Order Coordination for Specified Conversion Time (per LSR) | | | UHL | OCOSL | | 23.01 | | | | | | | | | |
| | CLEC to CLEC Conversion Charge without outside dispatch | | | UHL | UREWO | | 86.14 | 40.40 | | | | | | | | L |
| 4-WIRE | E HIGH BIT RATE DIGITAL SUBSCRIBER LINE (HDSL) COMPA | TIBLE LC | OP | | | | | | | | ļ | | | | | ─── |
| | 4 Wire Unbundled HDSL Loop including manual service inquiry | | | | | | | | | | | | | | | 1 |
| | and facility reservation - Zone 1 | | 1 | UHL | UHL4X | 13.95 | 185.75 | 123.50 | 74.95 | 14.69 | | | | | | |
| | 4-Wire Unbundled HDSL Loop including manual service inquiry | | 2 | | | 15.00 | 105 75 | 100 50 | 74.05 | 14.00 | | | | | | 1 |
| ├ ── ├ | and facility reservation - Zone 2 4-Wire Unbundled HDSL Loop including manual service inquiry | | 2 | UHL | UHL4X | 15.68 | 185.75 | 123.50 | 74.95 | 14.69 | | | | | | |
| | and facility reservation - Zone 3 | | 3 | UHL | UHL4X | 16.98 | 185.75 | 123.50 | 74.95 | 14.69 | | | | | | 1 |
| \vdash | Order Coordination for Specified Conversion Time (per LSR) | | 3 | UHL | OCOSL | 10.98 | 23.01 | 123.50 | 74.95 | 14.69 | | | | ł | | t |
| | 4-Wire Unbundled HDSL Loop without manual service inquiry | - | | UTL | OCOSL | | 23.01 | | | | t | | | | | <u> </u> |
| | and facility reservation - Zone 1 | | 1 | UHL | UHL4W | 13.95 | 164.95 | 114.04 | 77.32 | 15.80 | | | | | | 1 |
| | 4-Wire Unbundled HDSL Loop without manual service inquiry | | · · | OTIL | OT IL TO | 10.00 | 104.00 | 114.04 | 11.52 | 10.00 | | | | | | <u> </u> |
| | and facility reservation - Zone 2 | | 2 | UHL | UHL4W | 15.68 | 164.95 | 114.04 | 77.32 | 15.80 | | | | | | |
| | 4-Wire Unbundled HDSL Loop without manual service inquiry | | ~ | | | | | | | | | | | | | 1 |
| ├ ── ├ ── | and facility reservation - Zone 3 | <u> </u> | 3 | UHL | UHL4W | 16.98 | 164.95 | 114.04 | 77.32 | 15.80 | L | | | | | |
| ┝───┤─── | Order Coordination for Specified Conversion Time (per LSR) | | | UHL | OCOSL | | 23.01 | 40.40 | | | | | | | | ─── |
| 4 14/10/ | CLEC to CLEC Conversion Charge without outside dispatch | | | UHL | UREWO | | 86.14 | 40.40 | | | | | | | | ł |
| 4-WIR | E DS1 DIGITAL LOOP 4-Wire DS1 Digital Loop - Zone 1 | <u> </u> | 1 | USL | USLXX | 86.47 | 306.69 | 174.44 | 65.83 | 14.55 | | | | | | ├ ──── |
| \vdash | 4-Wire DS1 Digital Loop - Zone 1 4-Wire DS1 Digital Loop - Zone 2 | | 1 2 | USL | USLXX | 86.47 | 306.69 | 174.44 | 65.83 | 14.55 | | | | ł | | t |
| \vdash | 4-Wire DST Digital Loop - Zone 2 4-Wire DST Digital Loop - Zone 3 | | 2 | USL | USLXX | 297.76 | 306.69 | 174.44 | 65.83 | 14.55 | | | | ł | | t |
| | Order Coordination for Specified Conversion Time (per LSR) | | 5 | USL | OCOSL | 201.10 | 23.01 | 174.44 | 05.05 | 14.55 | ł | | | | | t |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | - |
|-------------|--|----------|----------|------------------------|---------|-------|---------|------------|--------------|--------|-----------|-----------|-------------|--------------|-------------|-------------|
| | | | | | | | | | | | Svc Order | Svc Order | Incremental | Incremental | Incremental | Incrementa |
| | | | | | | | | | | | Submitted | Submitted | Charge - | Charge - | Charge - | Charge - |
| | | | | | | | | | | | Elec | Manually | Manual Svc | Manual Svc | Manual Svc | |
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | 1. | | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | | | | | | | | | | |
| | | | | | | Rec | Nonrec | | Nonrecurring | | | | | Rates (\$) | | |
| | | | | 1101 | UREWO | | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| 4 WID | CLEC to CLEC Conversion Charge without outside dispatch E 19.2, 56 OR 64 KBPS DIGITAL GRADE LOOP | | | USL | UREWO | | 101.09 | 43.04 | | | | | | | | |
| 4-9916 | 4 Wire Unbundled Digital 19.2 Kbps | | 1 | UDL | UDL19 | 27.59 | 157.81 | 106.06 | 78.91 | 18.66 | | | | | | |
| | 4 Wire Unbundled Digital 19.2 Kbps | | 2 | UDL | UDL19 | 32.48 | 157.81 | 106.06 | 78.91 | 18.66 | 1 | | | | | |
| | 4 Wire Unbundled Digital 19.2 Kbps | - | 3 | UDL | UDL19 | 36.37 | 157.81 | 106.06 | 78.91 | 18.66 | 1 | | | | | - |
| | 4 Wire Unbundled Digital Loop 56 Kbps - Zone 1 | | 1 | UDL | UDL56 | 27.59 | 157.81 | 106.06 | 78.91 | 18.66 | 1 | | | | | |
| | 4 Wire Unbundled Digital Loop 56 Kbps - Zone 2 | | 2 | UDL | UDL56 | 32.48 | 157.81 | 106.06 | 78.91 | 18.66 | | | | | | |
| | 4 Wire Unbundled Digital Loop 56 Kbps - Zone 3 | | 3 | UDL | UDL56 | 36.37 | 157.81 | 106.06 | 78.91 | 18.66 | | | | | | |
| | Order Coordination for Specified Conversion Time (per LSR) | | | UDL | OCOSL | | 23.01 | | | | | | | | | |
| | 4 Wire Unbundled Digital Loop 64 Kbps - Zone 1 | | 1 | UDL | UDL64 | 27.59 | 157.81 | 106.06 | 78.91 | 18.66 | | | | | | 1 |
| | 4 Wire Unbundled Digital Loop 64 Kbps - Zone 2 | | 2 | UDL | UDL64 | 32.48 | 157.81 | 106.06 | 78.91 | 18.66 | | | | | | |
| | 4 Wire Unbundled Digital Loop 64 Kbps - Zone 3 | | 3 | UDL | UDL64 | 36.37 | 157.81 | 106.06 | 78.91 | 18.66 | | | | | | |
| | Order Coordination for Specified Conversion Time (per LSR) | | | UDL | OCOSL | | 23.01 | | | | | | | | | |
| | CLEC to CLEC Conversion Charge without outside dispatch | | | UDL | UREWO | | 102.13 | 49.75 | | | | | | | | |
| 2-WIR | E Unbundled COPPER LOOP | | | | | | | | | | | | | | | |
| | 2-Wire Unbundled Copper Loop-Designed including manual | | | 110 | | 10.0- | | | | | | | | 1 | | |
| \vdash | service inquiry & facility reservation - Zone 1 | <u> </u> | 1 | UCL | UCLPB | 10.82 | 140.95 | 78.70 | 69.09 | 11.54 | <u> </u> | | | | | |
| | 2-Wire Unbundled Copper Loop-Designed including manual | | 2 | | | 44 70 | 4 40.05 | 70 70 | 00.00 | 44 5 4 | | | | 1 | | |
| | service inquiry & facility reservation - Zone 2 | | 2 | UCL | UCLPB | 11.79 | 140.95 | 78.70 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled Copper Loop-Designed including manual service inquiry & facility reservation - Zone 3 | | 3 | UCL | UCLPB | 12.87 | 140.95 | 78.70 | 69.09 | 11.54 | | | | | | |
| | Order Coordination for Unbundled Copper Loops (per loop) | | 3 | UCL | UCLMC | 12.07 | 9.00 | 9.00 | 69.09 | 11.54 | 1 | | | | | |
| | 2-Wire Unbundled Copper Loop-Designed without manual | | | UCL | OCLIVIC | | 9.00 | 9.00 | ł | | 1 | | | | | |
| | service inquiry and facility reservation - Zone 1 | | 1 | UCL | UCLPW | 10.82 | 120.15 | 67.97 | 69.09 | 11.54 | | | | | | |
| | 2-Wire Unbundled Copper Loop-Designed without manual | | | OOL | OOLI W | 10.02 | 120.10 | 01.01 | 00.00 | 11.04 | | | | | | |
| | service inquiry and facility reservation - Zone 2 | | 2 | UCL | UCLPW | 11.79 | 120.15 | 67.97 | 69.09 | 11.54 | | | | | | |
| | 2-Wire Unbundled Copper Loop-Designed without manual | | _ | | | | | | | | | | | | | |
| | service inquiry and facility reservation - Zone 3 | | 3 | UCL | UCLPW | 12.87 | 120.15 | 67.97 | 69.09 | 11.54 | | | | | | |
| | Order Coordination for Unbundled Copper Loops (per loop) | | | UCL | UCLMC | | 9.00 | 9.00 | | | | | | | | |
| | CLEC to CLEC Conversion Charge without outside dispatch | | | | | | | | | | | | | | | 1 |
| | (UCL-Des) | | | UCL | UREWO | | 97.23 | 42.48 | | | | | | | | |
| 4-WIR | E COPPER LOOP | | | | | | | | | | | | | | | |
| | 4-Wire Copper Loop-Designed including manual service inquiry | | | | | | | | | | | | | | | |
| | and facility reservation - Zone 1 | | 1 | UCL | UCL4S | 16.92 | 170.31 | 108.06 | 74.95 | 14.69 | | | | | | |
| | 4-Wire Copper Loop-Designed including manual service inquiry | | | | | | | | | | | | | | | |
| | and facility reservation - Zone 2 | | 2 | UCL | UCL4S | 17.36 | 170.31 | 108.06 | 74.95 | 14.69 | | | | | | |
| | 4-Wire Copper Loop-Designed including manual service inquiry | | | | | | 170.01 | | | | | | | | | |
| | and facility reservation - Zone 3 | | 3 | UCL | UCL4S | 28.10 | 170.31 | 108.06 | 74.95 | 14.69 | - | | | - | | 4 |
| | Order Coordination for Unbundled Copper Loops (per loop) | | | UCL | UCLMC | | 9.00 | 9.00 | - | | | | | | | 4 |
| | 4-Wire Copper Loop-Designed without manual service inquiry and facility reservation - Zone 1 | | 1 | UCL | UCL4W | 16.92 | 149.52 | 97.33 | 74.95 | 14.69 | | | | | | |
| | 4-Wire Copper Loop-Designed without manual service inquiry | - | - | UCL | UCL4W | 10.92 | 149.52 | 91.55 | 74.55 | 14.09 | 1 | | | | | + |
| | and facility reservation - Zone 2 | | 2 | UCL | UCL4W | 17.36 | 149.52 | 97.33 | 74.95 | 14.69 | | | | | | |
| | 4-Wire Copper Loop-Designed without manual service inquiry | | - | OOL | OOLHII | 17.00 | 140.02 | 57.00 | 14.00 | 14.00 | | | | | | |
| | and facility reservation - Zone 3 | | 3 | UCL | UCL4W | 28.10 | 149.52 | 97.33 | 74.95 | 14.69 | | | | | | |
| | Order Coordination for Unbundled Copper Loops (per loop) | | - | UCL | UCLMC | | 9.00 | 9.00 | | | | | | | | |
| | CLEC to CLEC Conversion Charge without outside dispatch | | | | | | | | | | | | | | | |
| | (UCL-Des) | | | UCL | UREWO | | 97.23 | 42.48 | | | | | | | | |
| LOOP MODIFI | CATION | | | | | | | | | | | | | | | |
| | | | | UAL, UHL, UCL, | | | | | | | | | | | | |
| | | 1 | | UEQ, ULS, UEA, | | | | | | | | | | 1 | | |
| | Unbundled Loop Modification, Removal of Load Coils - 2 Wire | | | UEANL, UEPSR, | | | | | | | | | | | | |
| | pair less than or equal to 18k ft, per Unbundled Loop | <u> </u> | | UEPSB | ULM2L | | 9.24 | 9.24 | ļ | | | | | ļ | | |
| | Unbundled Loop Modification Removal of Load Coils - 4 Wire | | | | | | | | | | | | | 1 | | |
| ┝──┤── | less than or equal to 18K ft, per Unbundled Loop | <u> </u> | <u> </u> | UHL, UCL, UEA | ULM4L | | 9.24 | 9.24 | | | <u> </u> | | | | | <u> </u> |
| | | | | UAL, UHL, UCL, | | | | | 1 | | | | | 1 | | |
| | Induced Loop Medification Removal of Bridged Ter Demoval | 1 | | UEQ, ULS, UEA, | | | | | | | | | | 1 | | |
| | Unbundled Loop Modification Removal of Bridged Tap Removal, per unbundled loop | 1 | | UEANL, UEPSR, UEPSB | ULMBT | | 10.47 | 10.47 | | | | | | 1 | | |
| , I | her annaugieg jooh | 1 | | UEL9R | | | 10.47 | 10.47 | I | | | 1 | | | | L |

| UNB | | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | (| |
|----------|---------------------------|--|---------|------|-----------------|----------------|--------------|----------------|----------------|----------------|--------------|-----------|-----------|-------------|--------------|---|---------------|
| 0.12 | | | | | | | | | | | | Svc Order | Svc Order | Incremental | Incremental | Incremental | Incremental |
| | | | | | | | | | | | | | Submitted | | Charge - | Charge - | Charge - |
| | | | | | | | | | | | | Elec | | Manual Svc | Manual Svc | | Manual Svc |
| CATE | GORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | | per Lord | per Loit | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | | | | | | | | | | Diac fac | Disc Add I |
| | | | | | | | Rec | Nonree | curring | Nonrecurring | g Disconnect | | | | Rates (\$) | | |
| | | | | | | | 1100 | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| SUB-L | OOPS | | | | | | | | | | | | | | | ļ' | |
| | Sub-Lo | Dop Distribution Sub-Loop - Per Cross Box Location - CLEC Feeder Facility Set- | | | | | | | | - | | | - | | | ا | ⊢−−−− |
| | | Up | | | UEANL | USBSA | | 207.91 | 207.91 | | | | | | | 1 ' | 1 |
| - | | | 1 | | ULANL | 0303A | | 207.91 | 207.91 | | | | | | | <u>├</u> ────┦ | |
| | | Sub-Loop - Per Cross Box Location - Per 25 Pair Panel Set-Up | | | UEANL | USBSB | | 12.50 | 12.50 | | | | | | | 1 ' | i |
| - | | Sub-Loop - Per Building Equipment Room - CLEC Feeder | | | 02/112 | 00202 | | 12.00 | 12.00 | | | | | | | / · · · · · · · · · · · · · · · · · · · | |
| | | Facility Set-Up | 1 | | UEANL | USBSC | | 80.87 | 80.87 | | | | | | | 1 ' | i |
| - | | Sub-Loop - Per Building Equipment Room - Per 25 Pair Panel | | | | | | | | | | | | | | ſ | |
| | | Set-Up | | | UEANL | USBSD | | 45.04 | 45.04 | | | | | | | <u> </u> | 1 |
| | | Sub-Loop Distribution Per 2-Wire Analog Voice Grade Loop - | | | | | | | | | | | | | | 1 ' | 1 |
| - | | Zone 1 | | 1 | UEANL | USBN2 | 6.34 | 85.03 | 39.05 | 59.81 | 7.90 | | | | | └──── ┘ | |
| | | Sub-Loop Distribution Per 2-Wire Analog Voice Grade Loop - | | 0 | | | 0.00 | 05.00 | 00.05 | 50.04 | 7.00 | | | | | 1 ' | 1 |
| | | Zone 2 | I | 2 | UEANL | USBN2 | 9.06 | 85.03 | 39.05 | 59.81 | 7.90 | | | | | └──── ┘ | |
| | | Sub-Loop Distribution Per 2-Wire Analog Voice Grade Loop - Zone 3 | | 3 | UEANL | USBN2 | 14.82 | 85.03 | 39.05 | 59.81 | 7.90 | | | | | 1 ' | 1 |
| | | 2016 5 | | 3 | ULANL | USBINZ | 14.02 | 05.05 | 39.05 | 39.01 | 7.50 | | | | | | |
| | | Order Coordination for Unbundled Sub-Loops, per sub-loop pair | | | UEANL | USBMC | | 9.00 | 9.00 | | | | | | | 1 ' | 1 |
| | | Sub-Loop Distribution Per 4-Wire Analog Voice Grade Loop - | | | | | | | | | | | | | | / · · · · · · · · · · · · · · · · · · · | |
| | | Zone 1 | | 1 | UEANL | USBN4 | 8.14 | 102.31 | 56.32 | 65.24 | 10.88 | | | | | 1 ' | 1 |
| | | Sub-Loop Distribution Per 4-Wire Analog Voice Grade Loop - | | | | | | | | | | | | | | í – T | |
| | | Zone 2 | | 2 | UEANL | USBN4 | 8.63 | 102.31 | 56.32 | 65.24 | 10.88 | | | | | <u> </u> | |
| | | Sub-Loop Distribution Per 4-Wire Analog Voice Grade Loop - | | - | | | | | | | | | | | | 1 1 | 1 |
| | | Zone 3 | | 3 | UEANL | USBN4 | 25.60 | 102.31 | 56.32 | 65.24 | 10.88 | | | | | ļ! | |
| | | Order Coordination for Unbundled Sub-Loops, per sub-loop pair | | | UEANL | USBMC | | 9.00 | 9.00 | | | | | | | 1 ' | 1 |
| | | Sub-Loop 2-Wire Intrabuilding Network Cable (INC) | 1 | | UEANL | USBR2 | 2.57 | 68.35 | 22.36 | 59.81 | 7.90 | | | | | <u>├</u> ────┦ | |
| | | | | | OLANE | OODINZ | 2.01 | 00.00 | 22.50 | 55.01 | 7.50 | | | | | | |
| | | Order Coordination for Unbundled Sub-Loops, per sub-loop pair | | | UEANL | USBMC | | 9.00 | 9.00 | | | | | | | 1 ' | 1 |
| | | Sub-Loop 4-Wire Intrabuilding Network Cable (INC) | I | | UEANL | USBR4 | 4.98 | 76.49 | 30.51 | 65.24 | 10.88 | | | | | l – – I | |
| | | | | | | | | | | | | | | | | (| |
| | | Order Coordination for Unbundled Sub-Loops, per sub-loop pair | | | UEANL | USBMC | | 9.00 | 9.00 | | | | | | | <u> </u> | 1 |
| | | Loop Testing - Basic 1st Half Hour | | | UEANL | URET1 | | 46.88 | 46.88 | | | | | | | ļ' | L |
| | | Loop Testing - Basic Additional Half Hour | | | UEANL | URETA | | 24.16 | 24.16 | | = | | | | | ļ! | |
| | | 2 Wire Copper Unbundled Sub-Loop Distribution - Zone 1 | | 1 | UEF | UCS2X | 5.45 | 85.03 | 39.05 | 59.81 | 7.90 | | | | | └──── ┘ | |
| - | _ | 2 Wire Copper Unbundled Sub-Loop Distribution - Zone 2 2 Wire Copper Unbundled Sub-Loop Distribution - Zone 3 | | 2 | UEF UEF | UCS2X UCS2X | 7.06 9.67 | 85.03 85.03 | 39.05 39.05 | 59.81 59.81 | 7.90 7.90 | | | | | ļ/ | |
| | _ | | 1 | 3 | UEF | 00327 | 9.07 | 65.05 | 39.05 | 59.01 | 7.90 | | | | | j/ | |
| | | Order Coordination for Unbundled Sub-Loops, per sub-loop pair | | | UEF | USBMC | | 9.00 | 9.00 | | | | | | | 1 ' | 1 1 |
| | 1 | 4 Wire Copper Unbundled Sub-Loop Distribution - Zone 1 | I | 1 | UEF | UCS4X | 7.09 | 102.31 | 56.32 | 65.24 | 10.88 | | | | | / | I |
| | | 4 Wire Copper Unbundled Sub-Loop Distribution - Zone 2 | I | 2 | UEF | UCS4X | 8.66 | 102.31 | 56.32 | 65.24 | 10.88 | | | | | | |
| | | 4 Wire Copper Unbundled Sub-Loop Distribution - Zone 3 | I | 3 | UEF | UCS4X | 19.40 | 102.31 | 56.32 | 65.24 | 10.88 | | | | | | |
| | | | | | | | | | | | | | | | | 1 | |
| L | 1 | Order Coordination for Unbundled Sub-Loops, per sub-loop pair | | | UEF | USBMC | | 9.00 | 9.00 | | | ļ | L | | | └──── ′ | I |
| <u> </u> | _ | Loop Testing - Basic 1st Half Hour | | | UEF | URET1 | | 46.88 | 46.88 | | | | | | | <u>ا</u> | |
| | 1 1 1 1 1 1 1 1 1 1 1 1 1 | Loop Testing - Basic Additional Half Hour | | | UEF | URETA | | 24.16 | 24.16 | | | | | | | ا | ⊢−−−−− |
| | onbuh | dled Network Terminating Wire (UNTW) Unbundled Network Terminating Wire (UNTW) per Pair | | | UENTW | UENPP | 0.53 | 23.51 | 23.51 | | | | | | | ¹ | I |
| | Networ | rk Interface Device (NID) | | | ULINIW | JLINF P | 0.55 | 20.01 | 23.51 | <u> </u> | | | <u> </u> | | | / [/] | I |
| | | Network Interface Device (NID) - 1-2 lines | | | UENTW | UND12 | | 73.53 | 49.47 | | | 1 | <u> </u> | | | | I |
| | 1 | Network Interface Device (NID) - 1-6 lines | | | UENTW | UND16 | | 115.96 | 91.91 | 1 | | 1 | | | | (| I |
| | 1 | Network Interface Device Cross Connect - 2 W | 1 | 1 | UENTW | UNDC2 | | 8.56 | 8.56 | 1 | | 1 | 1 | 1 | l | ا ا | I |
| | 1 | Network Interface Device Cross Connect - 4W | | | UENTW | UNDC4 | | 8.56 | 8.56 | | | | | | | | |
| UNE C | DTHER, P | ROVISIONING ONLY - NO RATE | | | | | | | | | | | | | | | |
| | | NID - Dispatch and Service Order for NID installation | | | UENTW | UNDBX | 0.00 | 0.00 | | | | | | | | L | |
| | 1 | UNTW Circuit Id Establishment, Provisioning Only - No Rate | | | UENTW | UENCE | 0.00 | 0.00 | | | | <u> </u> | 1 | | | <u>ا</u> | II |
| | | Unbundled Contract Name, Brovisioning Only, No. Date | | | UEANL,UEF,UEQ,U | | 0.00 | 0.00 | | | | | | | | 1 ' | 1 1 |
| | | Unbundled Contract Name, Provisioning Only - No Rate ROVISIONING ONLY - NO RATE | | | ENTW | UNECN | 0.00 | 0.00 | | <u> </u> | | | | | | └────┘ | I |
| ONE C | ZINER, P | NOTICIONING UNET - NO MATE | I | 1 | l | ı I | | | I | I | | 1 | I | I | I | لـــــــــــــــــــــــــــــــــــــ | I |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|---------------|---|-----------|--------|-------------------------------------|----------------|-----------------|----------------|----------------|--------|--------------|-------|---|--|--|----------|----------|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Svc Order Submitted Manually per LSR | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Charge - | Charge - |
| | | | | | | Rec | | curring | | g Disconnect | | 1 | | Rates (\$) | | |
| | | | | | | | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | Unbundled Contact Name, Provisioning Only - no rate | | | UAL,UCL,UDC,UDL, UDN,UEA,UHL,USL | UNECN | 0.00 | 0.00 | | | | | | | | | |
| | Unbundled Sub-Loop Feeder-2 Wire Cross Box Jumper - no | | | | | | | | | | | | | | | |
| | rate Unbundled Sub-Loop Feeder-4 Wire Cross Box Jumper - no | | | UEA,UDN,UCL,UDC | USBFQ | 0.00 | 0.00 | | | | | | | | | l |
| | rate | | | UEA,USL,UCL,UDL | USBFR | 0.00 | 0.00 | | | | | | | | | 1 |
| | Unbundled DS1 Loop - Superframe Format Option - no rate | | | USL | CCOSF | 0.00 | 0.00 | | | | | | | | | |
| | Unbundled DS1 Loop - Expanded Superframe Format option - | | | | | | | | | | | | | | | |
| | | | | USL | CCOEF | 0.00 | 0.00 | | | | | | | | | l |
| HIGH CAPACI | TY UNBUNDLED LOCAL LOOP High Capacity Unbundled Local Loop - DS3 - Per Mile per | | | | | | | | | | | | | | | i |
| | month | | | UE3 | 1L5ND | 9.25 | | | | | | | | | | 1 |
| | High Capacity Unbundled Local Loop - DS3 - Facility | | | | | | | | | | 1 | | | | | |
| | Termination per month | | | UE3 | UE3PX | 308.31 | 634.087 | 388.792 | 198.95 | 138.483 | | | | | | ļ] |
| | High Capacity Unbundled Local Loop - STS-1 - Per Mile per month | | | UDLSX | 1L5ND | 9.25 | | | | | | | | | | 1 |
| | High Capacity Unbundled Local Loop - STS-1 - Facility | | | ODLOX | ILJIND | 9.23 | | | | | | | | | | |
| | Termination per month | | | UDLSX | UDLS1 | 320.51 | 634.087 | 388.792 | 198.95 | 138.483 | | | | | | |
| LOOP MAKE-U | | | | | | | | | | | | | | | | |
| | Loop Makeup - Preordering Without Reservation, per working or spare facility queried (Manual). | | | UMK | UMKLW | | 23.40 | 23.40 | | | | | | | | |
| | Loop Makeup - Preordering With Reservation, per spare facility queried (Manual). | | | UMK | UMKLP | | 24.85 | 24.85 | | | | | | | | 1 |
| | Loop MakeupWith or Without Reservation, per working or | | | ONIX | ONINCE | | 24.00 | 24.00 | | | | | | | | |
| | spare facility queried (Mechanized) | | | UMK | UMKMQ | | 0.67 | 0.67 | | | | | | | | 1 |
| LINE SPLITTIN | | | | | | | | | | | | | | | | |
| | PLITTING SER ORDERING-CENTRAL OFFICE BASED | | | | | | | | | | | | | | | ļ] |
| END U | Line Splitting - per line activation DLEC owned splitter | - | | UEPSR UEPSB | UREOS | 0.61 | | | | | | | - | | | |
| | Line Splitting - per line activation BST owned - physical | | | UEPSR UEPSB | UREBP | 0.61 | 37.02 | 21.20 | 21.10 | 9.87 | | | | | | |
| | Line Splitting - per line activation BST owned - virtual | | | UEPSR UEPSB | UREBV | 0.61 | 37.02 | 21.20 | 21.10 | 9.87 | | | | | | |
| | ENANCE | | | | | | | | | | | | | | | |
| NOTE: | The Expedite charge will be maintained commensurate with | BellSouth | 's FCC | No.1 Tariff, Section 1 | 3.3.1 as app | olicable. | | | | | | | | | | l |
| | No Trouble Found - per 1/2 hour increments - Basic No Trouble Found - per 1/2 hour increments - Overtime | | | | | | 80.00 90.00 | 55.00 65.00 | | | | | | | | |
| | No Trouble Found - per 1/2 hour increments - Overtime | 1 | | | | | 100.00 | 75.00 | | | | | | | | |
| UNBUNDLED | DEDICATED TRANSPORT | | | | | | | | | | | | | | | l l |
| INTER | OFFICE CHANNEL - DEDICATED TRANSPORT | | | | | | | | | | | | | | | |
| | Interoffice Channel - Dedicated Transport - 2-Wire Voice Grade - | | | | | | | | | | | | | | | 1 |
| | Per Mile per month Interoffice Channel - Dedicated Transport- 2- Wire Voice Grade - | - | | U1TVX | 1L5XX | 0.01 | | | | | | | - | | | i |
| | Facility Termination | | | U1TVX | U1TV2 | 29.11 | 47.34 | 31.78 | 22.77 | 8.75 | | | | | | 1 |
| | Interoffice Channel - Dedicated Transport- 2-Wire Voice Grade | | | | | | | | | | | | | | | |
| | Rev Bat Per Mile per month | | | U1TVX | 1L5XX | 0.01 | | | | | | | | | | ļ |
| | Interoffice Channel - Dedicated Transport- 2- Wire VG Rev Bat | | | | | 00.44 | 17.04 | 04 70 | 00.77 | 0.75 | | | | | | 1 |
| | Facility Termination Interoffice Channel - Dedicated Transport - 4-Wire Voice Grade - | | | U1TVX | U1TR2 | 29.11 | 47.34 | 31.78 | 22.77 | 8.75 | | | | | | |
| | Per Mile per month | | | U1TVX | 1L5XX | 0.01 | | | | | | | | | | 1 |
| | Interoffice Channel - Dedicated Transport - 4- Wire Voice Grade - Facility Termination | | | U1TVX | U1TV4 | 25.86 | 47.34 | 31.78 | 22.77 | 8.75 | | | | | | |
| | Interoffice Channel - Dedicated Transport - 56 kbps - per mile per month | | | U1TDX | 1L5XX | 0.0115 | | | | | | | | | | |
| | Interoffice Channel - Dedicated Transport - 56 kbps - Facility | | | | | | | a | | | | | | | | 1 7 |
| | Termination Interoffice Channel - Dedicated Transport - 64 kbps - per mile per mosth | | | | U1TD5 | 20.97 | 47.35 | 31.78 | 22.77 | 8.75 | | | | | | |
| | per month Interoffice Channel - Dedicated Transport - 64 kbps - Facility | | | U1TDX U1TDX | 1L5XX U1TD6 | 0.0115 20.97 | 47.35 | 31.78 | 22.77 | 0.75 | | | | | | |
| | Termination | 1 | | UTIDA | | 20.97 | 47.35 | 31.78 | 22.11 | 8.75 | | | | 1 | | I |

| UNB | JNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|---------|---------|---|----------|----------|---------------|------------|-----------|------------|------------|--------------|----------|-------|---|-------------|-------------------------|----------|---|
| CATE | | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Svc Order Submitted Manually per LSR | Incremental | Incremental Charge - | Charge - | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | | | | | | | Rec | Nonrec | curring | Nonrecurring | | | | | Rates (\$) | | |
| | | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | Interoffice Channel - Dedicated Channel - DS1 - Per Mile per | | | | | | | | | | | | | | | |
| | - | month Interoffice Channel - Dedicated Tranport - DS1 - Facility | | - | U1TD1 | 1L5XX | 0.23 | | | | | | | | | | └──── ′ |
| | | Termination | | | U1TD1 | U1TF1 | 96.04 | 105.52 | 98.46 | 23.09 | 20.49 | | | | | | |
| | | Interoffice Channel - Dedicated Transport - DS3 - Per Mile per month | | | U1TD3 | 1L5XX | 4.97 | | | | | | | | | | |
| | | Interoffice Channel - Dedicated Transport - DS3 - Facility | | | | | | | | | | | | | | | |
| | | Termination per month | | | U1TD3 | U1TF3 | 1,175.15 | 335.40 | 219.24 | 89.57 | 87.75 | | | | | | ļ/ |
| | | Interoffice Channel - Dedicated Transport - STS-1 - Per Mile per month | | | U1TS1 | 1L5XX | 4.97 | | | | | | | | | | |
| | | Interoffice Channel - Dedicated Transport - STS-1 - Facility | | | | | | | | | | | | | | | |
| | FIBER | Termination | | | U1TS1 | U1TFS | 1,149.51 | 335.40 | 219.24 | 89.57 | 87.75 | | | | | | |
| DARK | IDER | Dark Fiber, Four Fiber Strands, Per Route Mile or Fraction | <u> </u> | | | | | | | | | | | | | | ┟────┤ |
| | | Thereof per month - Local Channel | | 1 | UDF, UDFCX | 1L5DC | 54.06 | | | | | | | | | | 1 |
| | 1 | Dark Fiber, Four Fiber Strands, Per Route Mile or Fraction | 1 | | | | | | | | | 1 | 1 | | l | l | |
| | | Thereof per month - Interoffice Channel | | | UDF, UDFCX | 1L5DF | 30.74 | | | | | | | | | | |
| | | NRC Dark Fiber - Interoffice Channel | | | UDF, UDFCX | UDF14 | | 732.53 | 192.67 | 377.27 | 241.67 | | | | | | |
| | | Dark Fiber, Four Fiber Strands, Per Route Mile or Fraction | | | | | | | | | | | | | | | |
| | 00500 | Thereof per month - Local Loop TEN DIGIT SCREENING | | - | UDF, UDFCX | 1L5DL | 54.06 | | | | | | | | | | └──── ′ |
| 8XX A | CCESS | 8XX Access Ten Digit Screening, Per Call | | | | | 0.0006478 | | | | | | | | | | J |
| | | 8XX Access Ten Digit Screening w/ 8FL No. Delivery, | | | | | 0.0006478 | | | | | | | | | | ├ ────┦ |
| | | 8XX Access Ten Digit Screening, w/ POTS No. Delivery, | | | | | 0.0006478 | | | | | | | | | | ┟────┤ |
| LINE I | NFORM | ATION DATA BASE ACCESS (LIDB) | | | | | | | | | | | | | | | |
| | | LIDB Common Transport Per Query | | | | | 0.000023 | | | | | | | | | | 1 |
| | | LIDB Validation Per Query | | | | | 0.0137322 | | | | | | | | | | |
| | | LIDB Originating Point Code Establishment or Change | | | OQU | NRBPX | | 55.12 | | 67.59 | | | | | | | |
| CALLI | NG NAN | IE (CNAM) SERVICE | | | | | | | | | | | | | | | |
| | | CNAM for DB Owners, Per Query | | | | | 0.0010348 | | | | | | | | | | |
| | | CNAM for Non DB Owners, Per Query | | | | | 0.0010348 | | | | | | | | | | ' |
| | uery Se | LNP Charge Per query | | | | | 0.0008695 | | | | | | | | | | |
| | | LNP Service Establishment Manual | | | | | 0.0008093 | 13.82 | 13.82 | 12.71 | 12.71 | | | | | | |
| | | LNP Service Provisioning with Point Code Establishment | | | | | | 953.27 | 487.00 | 431.95 | 317.61 | | | | | | |
| SELEC | CTIVE R | DUTING | | | | | | | | | | | | | | | |
| | | Selective Routing Per Unique Line Class Code Per Request Per | | 1 | | | | | | | | | | | | | |
| | | Switch | | | | | | 93.53 | 93.53 | 15.58 | 15.58 | | | | | | |
| VIRTU | AL COL | LOCATION | | | | | | | | | | | | | | | |
| | | Virtual Collocation-2 Wire Cross Connects (Loop) for Line | | 1 | | | 0.0000 | 04.00 | 00.00 | | 10.07 | | | | | | |
| DUVE | | Splitting LLOCATION | <u> </u> | | UEPSR UEPSB | VE1LS | 0.0309 | 24.68 | 23.68 | 12.14 | 10.95 | | | | | | <u> </u> |
| F113 | | Physical Collocation-2 Wire Cross Connects (Loop) for Line | | | + | | | | | | 1 | | 1 | | | | ł |
| | | Splitting | | | UEPSR UEPSB | PE1LS | 0.0333 | 24.68 | 23.68 | 12.14 | 10.95 | | | | | | |
| AIN SI | ELECTIV | E CARRIER ROUTING | 1 | 1 | 21. 0. 02. 0D | | 0.0000 | 2 | 20.00 | | . 5.55 | | | | 1 | 1 | 1 |
| | T | Regional Service Establishment | | | | | | 193,401.00 | 193,401.00 | 9,483.34 | 9,483.34 | | | | | | |
| | | End Office Establishment | | | | | | 194.09 | 194.09 | 0.85 | 0.85 | | | | | | |
| | | Line/Port NRC, per end user | | | | | | 2.06 | 2.06 | | | | | | | | |
| | | Query NRC, per query | | ļ | | | 0.0037502 | | | | | | | | | | ļ' |
| AIN - E | BELLSO | UTH AIN SMS ACCESS SERVICE | | <u> </u> | + | | | | | | | | | | | | ↓ ' |
| | | AIN SMS Access Service - Service Establishment, Per State, Initial Setup | | | A1N | CAMSE | | 43.55 | 43.55 | 44.93 | 44.93 | | | | | | |
| | | AIN SMS Access Service - Port Connection - Dial/Shared Access | | | A1N | CAMDP | | 8.64 | 8.64 | 10.03 | 10.03 | | | | | | |
| | | AIN SMS Access Service - Port Connection - ISDN Access | | | A1N | CAM1P | | 8.64 | 8.64 | 10.03 | 10.03 | | | | | | |
| | | AIN SMS Access Service - User Identification Codes - Per User ID Code | | | A1N | CAMAU | | 38.65 | 38.65 | 29.88 | 29.88 | | | | | | |
| | | AIN SMS Access Service - Security Card, Per User ID Code, Initial or Replacement | | | A1N | CAMRC | | 75.08 | 75.08 | 12.93 | 12.93 | | | | | | |
| | | | | 1 | 73118 | 0/ 10/11/0 | | 10.00 | 10.00 | 12.00 | 12.30 | | 1 | | | | |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | | t: 1 Table 1 | | |
|----------|--|-----------|--------|----------------------|----------------|----------------|------------------|----------------|-----------------|----------------|---------|-----------|-------------|--------------|-------------|-------------|
| | | _ | | | | | | | | | | Svc Order | | Incremental | | |
| | | | | | | | | | | | | Submitted | • | Charge - | Charge - | Charge - |
| | | | _ | | | | | | | | Elec | Manually | Manual Svc | Manual Svc | Manual Svc | Manual Sv |
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | - | - | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | | - | | | | | | | | |
| | | | | | | Rec | Nonrec | U | Nonrecurring | | | | | Rates (\$) | | |
| | | | | | _ | | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | AIN SMS Access Service - Storage, Per Unit (100 Kilobytes) | | | | - | 0.0025 | | | | | | | | | | ł |
| | AIN SMS Access Service - Session, Per Minute | | | | - | 0.666 | | | | | | | | | | ł |
| | AIN SMS Access Service - Company Performed Session, Per Minute | | | | | 0.4608 | | | | | | | | | | i |
| | XTENDED LINK (EELs) | | | | | 0.4000 | | | | | | | | | | i |
| | The monthly recurring and non-recurring charges below will a | annly and | the Su | vitch-As-ls Charge v | vill not apply | for LINE combi | nations provis | ioned as ' Ord | linarily Combin | ed' Network F | lements | | | | | i |
| | The monthly recurring and the Switch-As-Is Charge and not t | | | | | | | | | | | | | | | <u> </u> |
| | E VOICE GRADE LOOP FOR USE IN A COMBINATION | | l | charges below with | | | s provisioneu | us ouriently | Combined Net | North Elementa | | | | | | <u> </u> |
| | 2-Wire VG Loop (SL2) in Combination - Zone 1 | | 1 | UNCVX | UEAL2 | 12.67 | 125.22 | 60.48 | 59.69 | 7.84 | | 1 | | | | i |
| | 2-Wire VG Loop (SL2) in Combination - Zone 2 | | 2 | UNCVX | UEAL2 | 17.45 | 125.22 | 60.48 | | 7.84 | | | | | | |
| | 2-Wire VG Loop (SL2) in Combination - Zone 3 | 1 | 3 | UNCVX | UEAL2 | 33.22 | 125.22 | 60.48 | | 7.84 | 1 | 1 | 1 | t | t | (|
| | Voice Grade COCI - Per Month | | - | UNCVX | 1D1VG | 0.62 | 6.71 | 4.84 | | | 1 | 1 | | İ | İ | |
| 4-WIR | E VOICE GRADE LOOP FOR USE IN A COMBINATION | <u> </u> | | - | - | | | | 1 | | 1 | 1 | İ | 1 | 1 | |
| | 4-Wire Analog Voice Grade Loop in Combination - Zone 1 | | 1 | UNCVX | UEAL4 | 29.26 | 125.22 | 60.48 | 59.69 | 7.84 | 1 | | | | | |
| | 4-Wire Analog Voice Grade Loop in Combination - Zone 2 | | 2 | UNCVX | UEAL4 | 34.25 | 125.22 | 60.48 | | 7.84 | 1 | 1 | | 1 | 1 | (|
| | 4-Wire Analog Voice Grade Loop in Combination - Zone 3 | | 3 | UNCVX | UEAL4 | 85.06 | 125.22 | 60.48 | 59.69 | 7.84 | | | | 1 | 1 | |
| | Voice Grade COCI in combination - per month | | | UNCVX | 1D1VG | 0.62 | 6.71 | 4.84 | | | | | | | | (|
| 4-WIR | E 56 KBPS DIGITAL LOOP FOR USE IN A COMBINATION | | | | | | | | | | | | | | | ſ |
| | 4-Wire 56Kbps Digital Grade Loop in Combination - Zone 1 | | 1 | UNCDX | UDL56 | 27.59 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | í |
| | 4-Wire 56Kbps Digital Grade Loop in Combination - Zone 2 | | 2 | UNCDX | UDL56 | 32.48 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | ſ |
| | 4-Wire 56Kbps Digital Grade Loop in Combination - Zone 3 | | 3 | UNCDX | UDL56 | 36.37 | 125.22 | 60.48 | | 7.84 | | | | | | Í |
| | OCU-DP COCI (data) per month (2.4-64kbs) | | | UNCDX | 1D1DD | 1.32 | 6.71 | 4.84 | | | | | | | | 1 |
| 4-WIR | E 64 KBPS DIGITAL LOOP FOR USE IN A COMBINATI\ON | | | | | | | | | | | | | | | I |
| | 4-Wire 64Kbps Digital Grade Loop in Combination - Zone 1 | | 1 | UNCDX | UDL64 | 27.59 | 125.22 | 60.48 | | 7.84 | | | | | | 1 |
| | 4-Wire 64Kbps Digital Grade Loop in Combination - Zone 2 | | 2 | UNCDX | UDL64 | 32.48 | 125.22 | 60.48 | | 7.84 | | | | | | ļ |
| | 4-Wire 64Kbps Digital Grade Loop in Combination - Zone 3 | | 3 | UNCDX | UDL64 | 36.37 | 125.22 | 60.48 | | 7.84 | | | | | | ļ |
| | OCU-DP COCI (data) - in combination - per month (2.4-64kbs) | | | UNCDX | 1D1DD | 1.32 | 6.71 | 4.84 | | | | | | | | |
| 2-WIR | E ISDN LOOP FOR USE IN COMBINATION | | | | 1141.01/ | 10.11 | 105.00 | 00.40 | 50.00 | 7.04 | | | | | | ł |
| | 2-Wire ISDN Loop in Combination - Zone 1 2-Wire ISDN Loop in Combination - Zone 2 | | 1 | | U1L2X | 18.44 | 125.22 | 60.48 | | 7.84 | | | | | | ł |
| | 2-Wire ISDN Loop in Combination - Zone 2 2-Wire ISDN Loop in Combination - Zone 3 | | 2 | UNCNX | U1L2X U1L2X | 25.08 42.87 | 125.22 125.22 | 60.48 60.48 | | 7.84 7.84 | | | | | | ł |
| | 2-wire ISDN COCI (BRITE) - in combination - per month | | 3 | UNCNX | UC1CA | 42.87 | 6.71 | 4.84 | | 7.84 | | - | | | | i |
| 4.WID | E DS1 DIGITAL LOOP FOR USE IN A COMBINATION | | | UNCINA | UCICA | 2.04 | 0.71 | 4.04 | | | | 1 | | - | - | i |
| 4-111 | 4-Wire DS1 Digital Loop in Combination - Zone 1 | | 1 | UNC1X | USLXX | 86.47 | 210.70 | 114.60 | 63.96 | 17.97 | | | | | | <u> </u> |
| | 4-Wire DS1 Digital Loop in Combination - Zone 1 | | 2 | UNC1X | USLXX | 114.10 | 210.70 | 114.60 | | 17.97 | | | | | | <u> </u> |
| | 4-Wire DS1 Digital Loop in Combination - Zone 3 | | | UNC1X | USLXX | 297.76 | 210.70 | 114.60 | | 17.97 | | | | | | |
| | DS1 COCI in combination per month | | Ŭ | UNC1X | UC1D1 | 11.80 | 6.71 | 4.84 | | | | 1 | | | | i |
| 2 WIR | E VOICE GRADE INTEROFFICE TRANSPORT FOR USE IN A CO | MBINAT | ION | | 00.01 | 11.00 | 0.11 | | | | | | | | | - |
| | Interoffice Transport - 2-wire VG - Dedicated- Per Mile Per | | r | | 1 | 1 | | | 1 | | 1 | 1 | İ | 1 | 1 | |
| | Month | | | UNCVX | 1L5XX | 0.01 | | | | | 1 | | | 1 | 1 | 1 |
| | Interoffice Transport - 2-wire VG - Dedicated - Facility | | | | | | | | | | | | | | | Í |
| | Termination per month | | | UNCVX | U1TV2 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| 4 WIR | E VOICE GRADE INTEROFFICE TRANSPORT FOR USE IN A CO | MBINAT | ION | | | | | | | | | | | ļ | ļ | |
| | Interoffice Transport - 4-wire VG - Dedicated - Per Mile Per | | | | | | | | | | | | | I | I | 1 |
| | Month | L | ļ | UNCVX | 1L5XX | 0.01 | | | | | | ļ | | | | L |
| | Interoffice Transport - 4-wire VG - Dedicated - Facility | | | | | | | | | | 1 | | | 1 | 1 | 1 |
| | Termination per month | L | | UNCVX | U1TV4 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | l | l | <u> </u> |
| DS1 IN | NTEROFFICE TRANSPORT FOR COMBINATION | | | | + | | | | | | | | | <u> </u> | <u> </u> | |
| | Interoffice Transport - Dedicated - DS1 combination - Per Mile | | | | 1L5XX | 0.40 | | | | | | | | 1 | 1 | i |
| | per month Interoffice Transport - Dedicated - DS1 combination - Facility | | - | UNC1X | ILOAA | 0.19 | | | | | | | | <u> </u> | <u> </u> | |
| | Termination per month | | | UNC1X | U1TF1 | 79.02 | 181.24 | 123.53 | 56.72 | 22.32 | | | | 1 | 1 | i |
| | 1/0 Channelization System in combination Per Month | | | UNC1X UNC1X | MQ1 | 113.33 | 181.24 57.26 | 123.53 | | 22.32 | | | | | | <u> </u> |
| | ITEROFFICE TRANSPORT FOR USE IN A COMBINATION | | | | | 113.33 | 51.20 | 14.74 | 00.1 | 1.07 | | | | 1 | 1 | |
| 233 1 | Interoffice Transport - Dedicated - DS3 combination - Per Mile | | | | | | | | | | | | | | | <u> </u> |
| | Per Month | | | UNC3X | 1L5XX | 4.09 | | | | | | | | 1 | 1 | i |
| | Interoffice Transport - Dedicated - DS3 - Facility Termination per | | 1 | | | | | | 1 | | 1 | 1 | 1 | 1 | 1 | |
| | month | | | UNC3X | U1TF3 | 966.89 | 350.56 | 141.58 | 48.00 | 23.39 | 1 | | | 1 | 1 | 1 |
| STS-1 | INTEROFFICE TRANSPORT FOR USE IN COMBINATION | | l | | | | | | | | 1 | i – | | | | ſ |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | 1 | 1 | 1 | | | | | | | - | - | | t: 1 Table 1 | | |
|----------|---|---------|------|----------------|----------------|----------------|------------------|----------------|----------------|--------------|-------|-----------|---|---|---|-------------------------------------|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Submitted | Manual Svc Order vs. Electronic- 1st | Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Charge - Manual Svo Order vs. |
| | | | | | | Rec | Nonrec | | Nonrecurring | | | | | Rates (\$) | - | |
| | | | | | | 1100 | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | Interoffice Transport - Dedicated - STS-1 combination - Per Mile | | | | 41 5307 | 4.00 | | | | | | | | | | |
| | Per Month | | | UNCSX | 1L5XX | 4.09 | | | | | | | | | | ┥───── |
| | Interoffice Transport - Dedicated - STS-1 combination - Facility Termination per month | | | UNCSX | U1TFS | 945.79 | 350.56 | 141.58 | 48.00 | 23.39 | | | | | | |
| 4-WIR | E 56 KBPS DIGITAL LOOP WITH 56 KBPS INTEROFFICE TRAN | SPORT | | UNCOX | 01110 | 343.73 | 330.30 | 141.50 | 40.00 | 20.00 | | | | | | |
| | 4-wire 56 kbps Local Loop in combination - Zone 1 | | 1 | UNCDX | UDL56 | 27.59 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | |
| | 4-wire 56 kbps Local Loop in combination - Zone 2 | | 2 | UNCDX | UDL56 | 32.48 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | |
| | 4-wire 56 kbps Local Loop in combination - Zone 3 | | 3 | UNCDX | UDL56 | 36.37 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | |
| | Interoffice Transport - Dedicated - 4-wire 56 kbps combination - | | | | | | | | | | | | | | | |
| | Per Mile per month | | | UNCDX | 1L5XX | 0.01 | | | | | | | | | | |
| | Interoffice Transport - Dedicated - 4-wire 56 kbps combination - | | | LINCDY | LIATOS | 17.0- | | F0 67 | 50.01 | | | | | | | |
| 4 14/15/ | Facility Termination per month E 64 KBPS DIGITAL EXTENDED LOOP WITH 64 KBPS INTERO | | | | U1TD5 | 17.25 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| 4-WIR | 4-wire 64 kbps Lcoal Loop in Combination - Zone 1 | | 1 | | UDL64 | 27.59 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | l |
| | 4-wire 64 kbps Lcoal Loop in Combination - Zone 2 | | 2 | UNCDX | UDL64 | 32.48 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | - |
| | 4-wire 64 kbps Looal Loop in Combination - Zone 3 | | | UNCDX | UDL64 | 36.37 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | |
| | Interoffice Transport - Dedicated - 4-wire 64 kbps combination - | | | | | | | | | | | | | | | |
| | Per Mile per month | | | UNCDX | 1L5XX | 0.01 | | | | | | | | | | |
| | Interoffice Transport - Dedicated - 4-wire 64 kbps combination - | | | | | | | | | | | | | | | |
| | Facility Termination per month | | | UNCDX | U1TD6 | 17.25 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| 4-WIR | E 56 KBPS DIGITAL EXTENDED LOOP WITH DS0 INTEROFFIC | E TRANS | PORT | | | | | | | | | | | | | |
| | 4-wire 56 kbps Local Loop in combination - Zone 1 | | 1 | UNCDX | UDL56 | 27.59 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | |
| | 4-wire 56 kbps Local Loop in combination - Zone 2 4-wire 56 kbps Local Loop in combination - Zone 3 | | 2 | UNCDX UNCDX | UDL56 UDL56 | 32.48 36.37 | 125.22 125.22 | 60.48 60.48 | 59.69 59.69 | 7.84 7.84 | | | | | | 4 |
| | 4-wire 56 kbps Local Loop in combination - 20ne 5 4-wiree 56 kbps Interoffice Transport - Dedicated - Per Mile per | | 3 | UNCDA | UDL36 | 30.37 | 125.22 | 00.40 | 59.69 | 7.04 | | | | | | |
| | month | | | UNCDX | 1L5XX | 0.01 | | | | | | | | | | |
| | 4-wire 56 kbps Interoffice Transport - Dedicated - Facility | | | UNUD/ | 120/01 | 0.01 | | | | | | | | | | |
| | Termination per month | | | UNCDX | U1TD5 | 17.25 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| 4-WIR | E 64 KBPS DIGITAL EXTENDED LOOP WITH DS0 INTEROFFIC | E TRANS | PORT | | | | | | | | | | | | | |
| | 4-wire 64 kbps Local Loop in combination - Zone 1 | | 1 | UNCDX | UDL64 | 27.59 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | |
| | 4-wire 64 kbps Local Loop in combination - Zone 2 | | 2 | UNCDX | UDL64 | 32.48 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | |
| | 4-wire 64 kbps Local Loop in combination - Zone 3 | | 3 | UNCDX | UDL64 | 36.37 | 125.22 | 60.48 | 59.69 | 7.84 | | | | | | |
| | I4-wire 65 kbps Interoffice Transport - Dedicated - Per Mile per month | | | UNCDX | 1L5XX | 0.01 | | | | | | | | | | |
| | 4-wire 64 kbps Interoffice Transport - Dedicated - Facility | | | UNCDA | IL3AA | 0.01 | | | | | | | | | | |
| | Termination per month | | | UNCDX | U1TD6 | 17.25 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| DS1 D | GITAL LOOP AND DS1 INTERFOFFICE TRANSPORT | | | 0.100/ | 01100 | 17.25 | 00.09 | 00.07 | 00.01 | 22.72 | | | 1 | 1 | | 1 |
| | 4-Wire DS1 Digital Loop in Combination - Zone 1 | | 1 | UNC1X | USLXX | 86.47 | 210.70 | 114.60 | 63.96 | 17.97 | | | | | | |
| | 4-Wire DS1 Digital Loop in Combination - Zone 2 | | 2 | UNC1X | USLXX | 114.10 | 210.70 | 114.60 | 63.96 | 17.97 | | | | | | |
| | 4-Wire DS1 Digital Loop in Combination - Zone 3 | | 3 | UNC1X | USLXX | 297.76 | 210.70 | 114.60 | 63.96 | 17.97 | | | | | | |
| | Interoffice Transport - Dedicated - DS1 combination - Per Mile | | | | | | | | | | | | | | | |
| | per month | | | UNC1X | 1L5XX | 0.19 | | | | | | | | | | - |
| | Interoffice Transport - Dedicated - DS1 combination - Facility | | | | | 79.02 | 404.04 | 400 50 | 56.72 | 00.00 | | | | | | |
| 052 0 | Termination per month GITAL LOOP WITH DEDICATED DS3 INTEROFFICE TRANSPO | TR | | UNC1X | U1TF1 | 79.02 | 181.24 | 123.53 | 56.72 | 22.32 | | | | | | ł |
| 035 0 | DS3 Local Loop in combination - per mile per month | | | UNC3X | 1L5ND | 10.6375 | | | | | | | | | | + |
| | | | | 0.100/1 | TEORE | 10.0070 | | | | | | | | | | |
| | DS3 Local Loop in combination - Facility Termination per month | | | UNC3X | UE3PX | 354.5565 | 634.087 | 388.792 | 198.95 | 138.483 | | | | | | |
| İ | Interoffice Transport - Dedicated - DS3 - Per Mile per month | | | UNC3X | 1L5XX | 4.09 | | | | | | | | | | |
| | Interoffice Transport - Dedicated - DS3 combination - Facility | | | | | | | | | | | | | | | |
| | Termination per month | | | UNC3X | U1TF3 | 966.89 | 350.56 | 141.58 | 48.00 | 23.39 | | | | | | |
| STS-1 | DIGITAL LOOP WITH DEDICATED STS-1 INTEROFFICE TRAN | ISPORT | | | | 10.00 | | | | | | | | | | 4 |
| | STS-1 Local Lolp in combination - per mile per month | | | UNCSX | 1L5ND | 10.6375 | | | | | | | | | | |
| | STS-1 Local Loop in combination - Facility Termination per month | | | UNCSX | UDLS1 | 368.5865 | 634.087 | 388.792 | 198.95 | 138.483 | | | | | | |
| <u> </u> | Interoffice Transport - Dedicated - STS-1 combination - per mile | | | | ODLOT | 300.3003 | 034.007 | 300.792 | 190.95 | 130.403 | | | | | | <u> </u> |
| | per month | | | UNCSX | 1L5XX | 4.09 | | | | | | | | | | |
| 1 | Interoffice Transport - Dedicated - STS-1 combination - Facility | | | | | | | | | | 1 | | İ | İ | | 1 |
| | Termination per month | | | UNCSX | U1TFS | 945.79 | 350.56 | 141.58 | 48.00 | 23.39 | | | | | | 1 |

| BUNDLE | D NETWORK ELEMENTS - Kentucky | - | | | | | | | | | | | Attachment | t: 1 Table 1 | | |
|------------------|---|---------------------|------------|---------------------------------|----------------|-----------------|--------------|------------|--|-------|-----------|---|---------------------------------|---|---|---|
| EGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Svc Order Submitted Manually per LSR | Order vs. Electronic- 1st | Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| <u> </u> | | <u> </u> | ' | | ' | Rec | Nonrec | | Nonrecurring | | 001150 | | | Rates (\$) | | - |
| | NETWORK ELEMENTS | | | | - | ↓ ↓ | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | used as a part of a currently combined facility, the non-recurr | rng charc | tos do r | ot apply but a Swi | itch As Is cha | rce does annly | | ł | ├──── ┤ | | | | 1 | /P | / [/] | t |
| When | used as ordinarily combined network elements in All States, the | he non-rr | -currinc | charges apply and | the Switch A | e le Charge do | es not | ł | <u>├</u> { | | | | | /P | / [/] | t |
| | curring Currently Combined Network Elements in Air States, in | | | | | | 33 1101. | ł | <u> </u> | | | | | ا ا ا ا | · · · · · · · · · · · · · · · · · · · | t |
| | | T T | T | UNCVX, UNCDX, | T + | ++ | [| | <u> </u> | | | | l | 1 1 | (| 1 |
| | Nonrecurring Currently Combined Network Elements Switch -As- Is Charge | | | UNC1X, UNC3X, UNCSX | UNCCC | | 8.98 | 8.98 | 11.17 | 11.17 | | | | | | |
| Option | nal Features & Functions: | | | | <u> </u> | | | | | | | | | ! | ' | |
|] | Clear Channel Capability Extended Frame Option - per DS1 | | [' | U1TD1, ULDD1,UNC1X U1TD1, | CCOEF | | 0.00 | 0.00 | 0.00 | 0.00 | | _ | | | | <u> </u> |
| | Clear Channel Capability Super FrameOption - per DS1 | | 1 | ULDD1,UNC1X | CCOSF | 1 1 | 0.00 | 0.00 | 0.00 | 0.00 | | | | 1 1 | 1 | 1 |
| 1 | Clear Channel Capability SUPEr TraineOption - per DST Activity - per DS1 Activity - per DS1 | 1 | | ULDD1, U1TD1, UNC1X, USL | NRCCC | † | 184.91 | 23.82 | 1.99 | 0.00 | | | | | | |
| | C-bit Parity Option - Subsequent Activity - per DS3 | i | | U1TD3, ULDD3, UE3, UNC3X | NRCC3 | | 205.70 | 7.20 | 0.6924 | 0.00 | | | | | | |
| MULTI | IPLEXERS | <u> </u> | | | <u> </u> | <u> </u> | ' | L | | | | | | ļ' | ļ' | |
| | DS1 to DS0 Channel System per month | <u> </u> | ' | UNC1X | MQ1 | 113.33 | 57.26 | 14.74 | 1.86 | 1.67 | | | | <u>ا</u> ــــــــــــــــــــــــــــــــــــ | ' | |
| | OCU-DP COCI (data) - DS1 to DS0 Channel System - per month (2.4-64kbs) used for a Local Loop OCU-DP COCI (data) - DS1 to DS0 Channel System - per | ' | ' | UDL | 1D1DD | 1.32 | 10.07 | 7.08 | | | | | | ! | | <u> </u> |
| | month (2.4-64kbs) used for connection to a channelized DS1 Local Channel in the same SWC as collocation | | | U1TUD | 1D1DD | 1.32 | 10.07 | 7.08 | | | | | | | | |
| | 2-wire ISDN COCI (BRITE) - DS1 to DS0 Channel Systsem - per | | | | , | | [| | | | | | | 1 | 1 | |
| | month for a Local Loop | <u> </u> | | UDN | UC1CA | 2.84 | 10.07 | 7.08 | | | | | | ļ' | ļ' | 1 |
| | 2-wire ISDN COCI (BRITE) - DS1 to DS0 Channel Systsem - per month used for connection to a channelized DS1 Local Channel in the same SWC as collocation | | | U1TUB | UC1CA | 2.84 | 10.07 | 7.08 | | | | | | | ļ | |
| _ | Voice Grade COCI - DS1 to DS0 Channel System - per month | <u>+</u> ' | | UTIUB | UCICA | 2.84 | 10.07 | 7.08 | | | | | | <u>ا</u> | / [!] | |
| _ | used for a Local Loop Voice Grade COCI - DS1 to DS0 Channel System - per month | ' | ' | UEA | 1D1VG | 0.6228 | 10.07 | 7.08 | | | | | | ļļ | | |
| | used for connection to a channelized DS1 Local Channel in the same SWC as collocation | | | U1TUC | 1D1VG | 0.6228 | 10.07 | 7.08 | | | | | | | | |
| | DS3 to DS1 Channel System per month | | | UNC3X | MQ3 | 158.20 | 115.48 | 56.53 | 15.12 | 5.30 | | | | <u> </u> | ļ | 1 |
| + | STS-1 to DS1 Channel System per month | ' | ' | UNCSX | MQ3 | 158.20 | 115.48 | 56.53 | 15.12 | 5.30 | | | | <u>ا</u> | ' | ─── |
| + | DS1 COCI used with Loop per month | <u> </u> | | USL | UC1D1 | 11.80 | 10.07 | 7.08 | ┟────┤ | | <u>↓ </u> | | | <u>'</u> ' | | |
| | DS1 COCI (used for connection to a channelized DS1 Local Channel in the same SWC as collocation) per month | 1 | 1 | U1TUA | UC1D1 | 11.80 | 10.07 | 7.08 | | | | | | 1 | l | 1 |
| + | DS1 COCI used with Interoffice Channel per month | <u> </u> | <u>+</u> ' | U1TD1 | UC1D1 | 11.80 | 10.07 | 7.08 | <u>├</u> † | | | | | , ا | [] | i |
| | DS3 Interface Unit (DS1 COCI) used with Local Channel per month | | | ULDD1 | UC1D1 | 11.80 | | 7.08 | | | | | | | | |
| JNDLED I | LOCAL EXCHANGE SWITCHING(PORTS) | <u> </u> | <u> </u> | | | 11.00 | 10.07 | 1.00 | <u>├</u> ───┤ | | | | | · | | |
| The Ex and Co | xchange Switching Port Rates Reflected Here Apply to Embedd onsist of the TELRIC Cost Based Rates Plus \$1.00 in Accordan | | | | .h 10, 2005 | | | | | | | | | | | |
| | nge Ports | | | | ' | | L | L | | | | | | | | 1 |
| | Although the Port Rate includes all available features in GA, H | <u>XY, LA &</u> | ΓN, the | desired features wil | I need to be c | ordered using r | retail USOCs | | ───┤ | | | | | ·' | | ─── |
| 2-WIRE | E VOICE GRADE LINE PORT RATES (RES) Exchange Ports - 2-Wire Analog Line Port- Res. | <u>+</u> ' | <u> </u> ' | UEPSR | UEPRL | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | · | | t |
| 1 | Exchange Ports - 2-Wire Analog Line Port- Res. Exchange Ports - 2-Wire Analog Line Port with Caller ID - Res. | ' | <u> </u> ' | UEPSR | UEPRL | 2.49 | | 3.63 | 2.23 | 2.13 | | | | | | |
| | Exchange Ports - 2-Wire Analog Line Port outgoing only - Res. | | | UEPSR | UEPRO | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | |
| | Exchange Ports - 2-Wire VG unbundled KY extended local | 1 | 1 | | | 1 | 1 | 1 | | | | | | ,, | | 1 |
| + | dialing parity Port with Caller ID - Res. Exchange Ports - 2-Wire VG unbundled res, low usage line port | ' | <u> </u> | UEPSR | UEPRM | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | <u> </u> |
| | with Caller ID (LUM) Exchange Ports - 2-Wire Voice Kentucky Residence Dialing Plan without Caller ID | /' | <u> </u> ' | UEPSR | UEPAP | 2.49 | | 3.63 | 2.23 | 2.13 | | | | /ł | | <u> </u> |

| UNB | | NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|--------|--|---------------|------------|----------------------------|-----------------|-------------------|-----------------|-------------------|------------------|---|-----------|-----------|-------------|--------------|-------------|-------------|
| OND | | | I | | | | | | | | | Svc Order | Svc Order | Incremental | | Incremental | Incremental |
| | | | | | | | | | | | | | Submitted | | Charge - | Charge - | Charge - |
| | | | | | | | | | | | | Elec | | Manual Svc | Manual Svc | Manual Svc | Manual Svc |
| CATE | GORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | - (0) | | | per Lok | perLon | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | _ | Nonree | curring | Nonrecurring | a Disconnect | | 1 | OSS | Rates (\$) | | |
| | | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | | SOMAN | SOMAN | SOMAN |
| | | 2-Wire voice unbundled Low Usage Line Port without Caller ID | | | | | | 1 | , | | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | 00 | 00 | | | | |
| | | Capability | | | UEPSR | UEPRT | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | 1 |
| | | Subsequent Activity | | | UEPSR | USASC | 0.00 | 0.00 | 0.00 | | | | | | | | |
| | FEATU | | | | | | | | | | | | | | | | |
| | | All Available Vertical Features | | | UEPSR | UEPVF | 0.00 | 0.00 | 0.00 | | | | | | | | |
| | 2-WIRE | VOICE GRADE LINE PORT RATES (BUS) | | | 02.0.0 | 02. 11 | 0.00 | 0.00 | 0.00 | | | | | | | | |
| | | Exchange Ports - 2-Wire Analog Line Port without Caller ID - | | | | | | | | | | | | | | | |
| | | Bus | | | UEPSB | UEPBL | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | 1 |
| | | Exchange Ports - 2-Wire VG unbundled Line Port with | | | | | | | 0.00 | | | | | | | | |
| | | unbundled port with Caller+E484 ID - Bus. | | | UEPSB | UEPBC | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | 1 |
| | | | | | | | | | | | | | | | | | |
| 1 | | Exchange Ports - 2-Wire Analog Line Port outgoing only - Bus. | | | UEPSB | UEPBO | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | 1 |
| | | Exchange Ports - 2-Wire VG unbundled KY extended local | | | | | | | 0.00 | | | | | | | | |
| | | dialing parity Port with Caller ID - Bus. | | | UEPSB | UEPBM | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | 1 |
| | | Exhange Ports - 2-Wire VG unbundled incoming only port with | | | | | | | 0.00 | | | | | | | | |
| | | Caller ID - Bus | | | UEPSB | UEPB1 | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | 1 |
| | | Exchange Ports - 2-Wire Voice Kentucky Business Dialing Plan | | | | | | | | | | | | | | | |
| | | without Caller ID | | | UEPSB | UEPWF | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | 1 |
| | | 2-Wire voice unbundled Incoming Only Port without Caller ID | | | | | | | 0.00 | | | | | | | | |
| | | Capability | | | UEPSB | UEPBE | 2.49 | 3.74 | 3.63 | 2.23 | 2.13 | | | | | | 1 |
| - | | Subsequent Activity | | | UEPSB | USASC | 0.00 | 0.00 | 0.00 | 2.20 | 2.10 | 1 | | | | | |
| | FEATU | | | | 02.05 | 00,100 | 0.00 | 0.00 | 0.00 | | | | | | | | |
| | | All Available Vertical Features | | | UEPSB | UEPVF | 0.00 | 0.00 | 0.00 | | | | | | | | |
| | | NGE PORT RATES (DID & PBX) | | | 02.05 | 02. 11 | 0.00 | 0.00 | 0.00 | | | | | | | | |
| | | 2-Wire VG Unbundled 2-Way PBX Trunk - Res | | | UEPSE | UEPRD | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | 1 | | | | | |
| - | | 2-Wire VG Line Side Unbundled 2-Way PBX Trunk - Bus | | | UEPSP | UEPPC | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | 1 | | | | | |
| | | 2-Wire VG Line Side Unbundled Outward PBX Trunk - Bus | | | UEPSP | UEPPO | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire VG Line Side Unbundled Incoming PBX Trunk - Bus | | | UEPSP | UEPP1 | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire Analog Long Distance Terminal PBX Trunk - Bus | | | UEPSP | UEPLD | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire Voice Unbundled PBX LD Terminal Ports | | | UEPSP | UEPLD | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire Vice Unbundled 2-Way PBX Usage Port | | | UEPSP | UEPXA | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire Voice Unbundled PBX Toll Terminal Hotel Ports | | | UEPSP | UEPXB | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire Voice Unbundled PBX LD DDD Terminals Port | | | UEPSP | UEPXC | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire Voice Unbundled PBX LD Terminal Switchboard Port | | | UEPSP | UEPXD | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire Voice Unbundled PBX LD Terminal Switchboard IDD | | | | | | | | | | | | | | | |
| 1 | | Capable Port | | | UEPSP | UEPXE | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | 1 |
| | 1 | 2-Wire Voice Unbundled 2-Way PBX Kentucky Room Area | 1 | 1 | 32. 01 | 01.72 | 2.43 | 00.00 | 10.17 | 10.00 | 0.03 | 1 | 1 | | 1 | | |
| 1 | | Calling Port Without LUD | | | UEPSP | UEPXF | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | 1 |
| | | 2-Wire Voice Unbundled PBX Kentucky LUD Area Calling Port | | | UEPSP | UEPXG | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | | 2-Wire Voice Unbundled PBX Kentucky Premium Callling Port | | | UEPSP | UEPXH | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | |
| | 1 | 2-Wire Voice Unbundled 2-Way PBX Kentucky Area Callling | 1 | 1 | 32. 01 | 02.701 | 2.43 | 00.00 | 10.17 | 10.00 | 0.03 | 1 | 1 | | 1 | | |
| 1 | | Port Without LUD | | | UEPSP | UEPXJ | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | 1 |
| | 1 | 2-Wire Voice Unbundled 2-Way PBX Hotel/Hospital Economy | 1 | 1 | 52. 01 | 02.70 | 2.40 | 00.00 | 10.17 | 10.00 | 0.03 | 1 | 1 | | | | |
| 1 | | Administrative Calling Port | | | UEPSP | UEPXL | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | 1 | | | | | 1 |
| | 1 | 2-Wire Voice Unbundled 2-Way PBX Hotel/Hospital Economy | 1 | 1 | 52. 01 | 01. AL | 2.40 | 00.00 | 10.17 | 10.00 | 0.03 | 1 | 1 | | | | |
| 1 | | Room Calling Port | | | UEPSP | UEPXM | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | 1 | | | | | 1 |
| | 1 | 2-Wire Voice Unbundled 1-Way Outgoing PBX Hotel/Hospital | 1 | 1 | 02101 | | 2.73 | 53.05 | 10.17 | 13.30 | 0.09 | 1 | 1 | | | | |
| 1 | | Discount Room Calling Port | | | UEPSP | UEPXO | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | | | | | | 1 |
| | + | 2-Wire Voice Unbundled 1-Way Outgoing PBX Measured Port | | | UEPSP | UEPXS | 2.49 | 39.05 | 18.17 | 15.38 | 0.89 | 1 | 1 | | | | |
| | + | Subsequent Activity | - | 1 | UEPSP | USASC | 0.00 | 0.00 | 0.00 | 13.30 | 0.09 | 1 | 1 | | | | |
| | FEATU | | | | | 30400 | 0.00 | 0.00 | 0.00 | | | 1 | 1 | | | | |
| <u> </u> | | All Available Vertical Features | 1 | 1 | UEPSP UEPSE | UEPVF | 0.00 | 0.00 | 0.00 | | | 1 | 1 | | | | |
| | | witching Features offered with Port | - | 1 | JEI GI ULI UL | | 0.00 | 0.00 | 0.00 | | | 1 | 1 | | | | |
| - | | ransmission/usage charges associated with POTS circuit switched usage w | /ill also app | v to circu | it switched voice and/or c | ircuit switched | data transmission | by B-Channels a | sociated with 2-w | vire ISDN ports. | | | | | | | |
| | | ccess to B Channel or D Channel Packet capabilities will be available only the | | | | | | | | | ness Request Pro | cess. | 1 | 1 | 1 | | |
| | | VOICE GRADE LINE PORT RATES (DID) | | | | | | | | | | | 1 | | | | |
| | | Exchange Ports - 2-Wire DID Port | | 1 | UEPEX | UEPP2 | 11.51 | 92.18 | 15.82 | 52.16 | 5.30 | 1 | 1 | | | | |
| | 2-WIRE | VOICE GRADE LINE PORT RATES (ISDN-BRI) | | 1 | | | | | | | | 1 | 1 | | | | |
| | | Exchange Ports - 2-Wire ISDN Port (See Notes below.) | | 1 | UEPTX, UEPSX | U1PMA | 14.46 | 60.60 | 50.67 | 32.83 | 14.17 | 1 | 1 | | | | |
| | | All Features Offered | | | UEPTX, UEPSX | UEPVF | 0.00 | 0.00 | 0.00 | | | 1 | | | | | |
| | | | | | | | | | | | | | | | | | |

| UNBUNDL | ED NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|------------|--|---------------|--------------|----------------------------|------------------|---------------------|---------------------|-------------------|------------------|-------------------|---|---|--|--|---|---|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | Svc Order Submitted Elec per LSR | Svc Order Submitted Manually per LSR | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | | | | | | Rec | Nonrec | | | g Disconnect | 001150 | 001111 | | Rates (\$) | 001141 | 001111 |
| i | Exchange Ports - 2-Wire ISDN Port Channel Profiles | | | UEPTX. UEPSX | U1UMA | 0.00 | First 0.00 | Add'l 0.00 | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| NOTE: | Transmission/usage charges associated with POTS circuit switched usage w | ill also appl | y to circu | it switched voice and/or o | ircuit switched | data transmission | by B-Channels as | sociated with 2-w | /ire ISDN ports. | | | | | | | |
| NOTE: | Access to B Channel or D Channel Packet capabilities will be available only th | rough BFR | New Busi | iness Request Process. A | Rates for the pa | cket capabilities w | ill be determined v | ria the Bona Fide | Request/New Bus | iness Request Pro | ocess. | | | | | |
| | INDLED PORT with REMOTE CALL FORWARDING CAPABILITY | | | | | | | | | | | | | | | |
| UNBU | INDLED REMOTE CALL FORWARDING SERVICE - RESIDENCE | | | | | 0.40 | | | | | | | | | | ļ |
| ┝──┼── | Unbundled Remote Call Forwarding Service, Area Calling, Res | | | UEPVR | UERAC | 2.49 | 3.74 | 3.63 | | | - | | | | | <u> </u> |
| 1 | Unbundled Remote Call Forwarding Service, Local Calling - Res | | | UEPVR | UERLC | 2.49 | 3.74 | 3.63 | | | | | | | | |
| | Unbundled Remote Call Forwarding Service, InterLATA - Res | | | UEPVR | UERTE | 2.49 | 3.74 | 3.63 | | | | | | | | <u> </u> |
| | Unbundled Remote Call Forwarding Service, IntraLATA - Res | | | UEPVR | UERTR | 2.49 | 3.74 | 3.63 | | | | | | | | |
| Non-F | Recurring | | | | | | | | 1 | 1 | 1 | | | | | [|
| | Unbundled Remote Call Forwarding Service - Conversion - | | | | | | | | | | | | | | | |
| | Switch-as-is | | | UEPVR | USAC2 | | 0.10 | 0.10 | | | | | | | | ļ |
| | Unbundled Remote Call Forwarding Service - Conversion with | | | | | | | | | | 1 | | | | | 1 |
| <u>├──</u> | allowed change (PIC and LPIC) | | | UEPVR | USACC | | 0.10 | 0.10 | l | l | | | | | | |
| UNBL | INDLED REMOTE CALL FORWARDING - Bus | | | | | | | | <u> </u> | <u> </u> | + | | | | | ł |
| | Unbundled Remote Call Forwarding Service, Area Calling - Bus | | | UEPVB | UERAC | 2.49 | 3.74 | 3.63 | | | | | | | | |
| | Choundled Remote Carr Orwarding Service, Area Caning - Dus | | | OLI VB | OLIVAO | 2.43 | 3.74 | 5.05 | | | | | | | | <u> </u> |
| 1 | Unbundled Remote Call Forwarding Service, Local Calling - Bus | | | UEPVB | UERLC | 2.49 | 3.74 | 3.63 | | | | | | | | |
| | Unbundled Remote Call Forwarding Service, InterLATA - Bus | | | UEPVB | UERTE | 2.49 | 3.74 | 3.63 | | | | | | | | |
| | Unbundled Remote Call Forwarding Service, IntraLATA - Bus | | | UEPVB | UERTR | 2.49 | 3.74 | 3.63 | | | | | | | | |
| | Unbundled Remote Call Forwarding Service Expanded and | | | | | | | | | | | | | | | |
| | Exception Local Calling | | | UEPVB | UERVJ | 2.49 | 3.74 | 3.63 | | | | | | | | |
| Non-F | Recurring | | | | | | | | | | | | | | | |
| | Unbundled Remote Call Forwarding Service - Conversion - | | | | 110.4.00 | | 0.40 | 0.40 | | | | | | | | |
| | Switch-as-is Unbundled Remote Call Forwarding Service - Conversion with | | | UEPVB | USAC2 | | 0.10 | 0.10 | | | | | | | | <u> </u> |
| 1 | allowed change (PIC and LPIC) | | | UEPVB | USACC | | 0.10 | 0.10 | | | | | | | | |
| | LOCAL SWITCHING, PORT USAGE | | | OLI VD | 00400 | | 0.10 | 0.10 | | | | | | | | |
| | Diffice Switching (Port Usage) | | | | | | | | | | | | | | | |
| | End Office Switching Function, Per MOU | | | | | 0.0011971 | | | | | | | | | | |
| | End Office Trunk Port - Shared, Per MOU | | | | | 0.0002112 | | | | | | | | | | |
| Tando | em Switching (Port Usage) (Local or Access Tandem) | | | | | | | | | | | | | | | |
| | Tandem Switching Function Per MOU | | | | | 0.000194 | | | | | | | | | | ļ |
| | Tandem Trunk Port - Shared, Per MOU | | | | | 0.0002416 | | | | | | | | | | <u> </u> |
| ┢────┤──── | Tandem Switching Function Per MOU (Melded) | | | | | 0.000094381 | | | | | - | | | | | |
| Melde | Tandem Trunk Port - Shared, Per MOU (Melded) ad Factor: 48.65% of the Tandem Rate | | | | | .000117538 | | | ł | ł | + | | | | | ł |
| | non Transport | | | | | | | | | | | | | | | |
| | Common Transport - Per Mile, Per MOU | | | | | 0.000003 | | | 1 | 1 | | | | | | l |
| | Common Transport - Facilities Termination Per MOU | | | | | 0.0007466 | | | 1 | 1 | 1 | | | | | [|
| UNBUNDLED | PORT/LOOP COMBINATIONS - COST BASED RATES | | | | | | | | | | | | | | | |
| | t Based Rates are applied where BellSouth is required by FCC a | nd/or Sta | te Com | mission rule to prov | ide Unbundl | led Local Switc | hing or | | | | | | | | | |
| | h Ports. | | | | | 40.000 | | | | | L | | | | | ļ |
| | UNE-P Switching Port Rates Reflected in the Cost Based Section | on Apply | to Emb | eaded Base UNE-Ps | as of March | 10, 2005 and C | onsist of the | | | | 1 | | | | | 1 |
| | IC Cost Based Rates Plus \$1.00 in Accordance with the TRRO. ures shall apply to the Unbundled Port/Loop Combination - Co | et Bacad | Pato co | ction in the same m | annor ac tha | varo applied to | the Stand | | <u> </u> | <u> </u> | + | | | | | ł |
| | Unbundled Port section of this Rate Exhibit. | ar Dased | Nate Se | cuon in the same ma | anner as une | y are applied to | , the Stanu- | | | | 1 | | | | | 1 |
| | Office and Tandem Switching Usage and Common Transport U | sage rate | s in the | Port section of this | rate exhibit | shall apply to a | all | | 1 | | + | | | | | t |
| | inations of loop/port network elements except for UNE Coin Po | | | | | | - | | | | 1 | | | | | 1 |
| | first and additional Port nonrecurring charges apply to Not Cur | | | | ntly Combin | ed Combos the | 9 | | 1 | 1 | 1 | | | | | |
| | ecurring charges shall be those identified in the Nonrecurring - | Currently | <u>Combi</u> | ned sections. | | | | | | | | | | | | |
| | RE VOICE GRADE LOOP WITH 2-WIRE LINE PORT (RES) | | | | | | | | | | | | | | | |
| UNE F | Port/Loop Combination Rates | | | | | | | | | ļ | | | | | | |
| <u> </u> | 2-Wire VG Loop/Port Combo - Zone 1 | | | | | 11.79 | | | ļ | ļ | <u> </u> | | | | | <u> </u> |
| ┍───┼─── | 2-Wire VG Loop/Port Combo - Zone 2 | | | | | 16.52 | | | <u> </u> | <u> </u> | + | | | | | |
| | 2-Wire VG Loop/Port Combo - Zone 3 | | | | | 32.74 | | | | <u> </u> | | | | | | <u> </u> |
| | 2-Wire Voice Grade Loop (SL1) - Zone 1 | | 1 | UEPRX | UEPLX | 9.64 | | | ł | ł | + | | | | | ł |
| | 2 TTIL TOILE CIAGE LOOP (OL 1) - 2011E 1 | | <u> </u> | ULENA | ULFLA | 5.04 | | | 1 | 1 | 1 | 1 | | 1 | | <u>ا</u> |

| UNB | UNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|--------|---|----------|-----------|----------------|----------------|----------------|------------------|----------------|----------------|----------------|----------|---|---|--|----------|---|
| | GORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Svc Order Submitted Manually per LSR | Charge - Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Charge - | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | _ | | | | | | Rec | Nonrec | | Nonrecurring | | | | | Rates (\$) | | |
| | | 2-Wire Voice Grade Loop (SL1) - Zone 2 | | 2 | UEPRX | UEPLX | 14.37 | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | 2-Wire Voice Grade Loop (SL1) - Zone 2 2-Wire Voice Grade Loop (SL1) - Zone 3 | | 2 | UEPRX | UEPLX | 30.59 | | | | | | | | | | i |
| | 2-Wire | Voice Grade Line Port Rates (Res) | | 5 | OLITIX | OLI LA | 30.33 | | | | | | | | | | |
| | | 2-Wire voice unbundled port - residence | | | UEPRX | UEPRL | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire voice unbundled port with Caller ID - res | | | UEPRX | UEPRC | 2.15 | 21.29 | 15.49 | | 2.67 | | | | | | |
| | | 2-Wire voice unbundled port outgoing only - res | | | UEPRX | UEPRO | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire voice Grade unbundled Kentucky extended local dialing | | | | | | | | | | | | | | | i |
| | | parity port with Caller ID - res | | | UEPRX | UEPRM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | I |
| | | 2-Wire voice unbundles res, low usage line port with Caller ID (LUM) | | | UEPRX | UEPAP | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Unbundled Kentucky Residence Dialing Plan without Caller ID | | | UEPRX | UEPWE | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire voice unbundled Low Usage Line Port without Caller ID | | | | | | | | | | | | | | | 1 |
| L | | Capability | I | | UEPRX | UEPRT | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | ļ | | | | l |
| | FEATU | | | | | | 0.00 | 0.00 | 0.00 | | | | | | | | ł |
| | NONDE | All Features Offered CURRING CHARGES (NRCs) - CURRENTLY COMBINED | | | UEPRX | UEPVF | 0.00 | 0.00 | 0.00 | | | | | | | | |
| | NONKE | 2-Wire Voice Grade Loop / Line Port Combination - Conversion - | | | | | | | | | | | | | | | i |
| | _ | 2-Wire Voice Grade Loop / Line Port Combination - Conversion - | | | UEPRX | USAC2 | | 0.10 | 0.10 | | | | | | | | |
| | | Switch with change | | | UEPRX | USACC | | 0.10 | 0.10 | | | | | | | | |
| | | 2-Wire Voice Grade Loop / Line Port Platform - Installation Charge at QuickService location - Not Conversion of Existing | | | | | | | | | | | | | | | i |
| | | Service | | | UEPRX | URECC | | 0.10 | | | | | | | | | i |
| - | ADDITI | ONAL NRCs | | | OLITIK | ONLOG | | 0.10 | | | | | | | | | |
| | | 2-Wire Voice Grade Loop/Line Port Combination - Subsequent | | | | | | | | | | 1 | | | | | l . |
| | | Activity | | | UEPRX | USAS2 | 0.00 | 0.00 | 0.00 | | | | | | | | i |
| | | Unbundled Miscellaneous Rate Element, Tag Loop at End User Premise | | | UEPRX | URETL | | 8.33 | 0.83 | | | | | | | | |
| | OFF/OI | N PREMISES EXTENSION CHANNELS | | | - | - | | | | | | | | | | | |
| | | 2 Wire Analog Voice Grade Extension Loop – Non-Design | | 1 | UEPRX | UEAEN | 10.56 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | | 2 Wire Analog Voice Grade Extension Loop – Non-Design | | 2 | UEPRX | UEAEN | 15.34 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | | 2 Wire Analog Voice Grade Extension Loop – Non-Design | | 3 | UEPRX | UEAEN | 31.11 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | 1 |
| | | 2 Wire Analog Voice Grade Extension Loop – Design | | 1 | UEPRX | UEAED | 12.67 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | I |
| | _ | 2 Wire Analog Voice Grade Extension Loop – Design 2 Wire Analog Voice Grade Extension Loop – Design | | 2 | UEPRX UEPRX | UEAED UEAED | 17.45 33.22 | 134.89 134.89 | 81.87 81.87 | 73.65 73.65 | 14.88 14.88 | | | | | | l |
| - | | DFFICE TRANSPORT | | 3 | UEPRA | UEAED | 33.22 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | i |
| | | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Facility | | | | | | | | | | | | | | | <u> </u> |
| | | Termination | | | UEPRX | U1TV2 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | 1 |
| | | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Per Mile or Fraction Mile | | | UEPRX | U1TVM | 0.0095 | 0.00 | 0.00 | | | | | | | | |
| | 2-WIRE | VOICE GRADE LOOP WITH 2-WIRE LINE PORT (BUS) | 1 | | | 1 | | | | | l | 1 | 1 | | l | 1 | |
| | | ort/Loop Combination Rates | | | | <u> </u> | | | | | | | | | | | |
| | | 2-Wire VG Loop/Port Combo - Zone 1 | | | | | 11.79 | | | | | | | | | | |
| | | 2-Wire VG Loop/Port Combo - Zone 2 | | | | | 16.52 | | | <u> </u> | | | | | | | ļ |
| | LINE | 2-Wire VG Loop/Port Combo - Zone 3 | | | | | 32.74 | | | ł | | | | | | | |
| | UNE LO | 2-Wire Voice Grade Loop (SL1) - Zone 1 | | 1 | UEPBX | UEPLX | 9.64 | | | | | - | | | | | |
| | 1 | 2-Wire Voice Grade Loop (SL1) - Zone 2 | | 2 | UEPBX | UEPLX | 14.37 | | | 1 | | 1 | - | | | | |
| | 1 | 2-Wire Voice Grade Loop (SL1) - Zone 2 2-Wire Voice Grade Loop (SL1) - Zone 3 | 1 | 3 | UEPBX | UEPLX | 30.59 | | | 1 | | 1 | <u> </u> | | | | i |
| | 2-Wire | Voice Grade Line Port (Bus) | 1 | - | | | | | | | | | | | | | (|
| | | 2-Wire voice unbundled port without Caller ID - bus | | | UEPBX | UEPBL | 2.15 | 21.29 | 15.49 | | 2.67 | | | | | | |
| | | 2-Wire voice unbundled port with Caller + E484 ID - bus | | | UEPBX | UEPBC | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire voice unbundled port outgoing only - bus | L | \square | UEPBX | UEPBO | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | <u> </u> | | | | | ļ |
| 1 | | 2-Wire voice Grade unbundled Kentucky extended local dialing | | | | LIEDDIA | 0.45 | 01.02 | 45.40 | 0.07 | 0.07 | | | | | | 1 |
| | | parity port with Caller ID - bus 2-Wire voice unbundled incoming only port with Caller ID - Bus | <u> </u> | ┝──┤ | UEPBX UEPBX | UEPBM UEPB1 | 2.15 2.15 | 21.29 21.29 | 15.49 15.49 | 2.85 2.85 | 2.67 2.67 | + | | | | | |
| <u> </u> | + | 2-Wire Voice Unbundled Incoming only port with Caller ID - Bus 2-Wire Voice Unbundled Kentucky Business Dialing Plan | | | ULFDA | ULFDI | 2.13 | 21.29 | 15.49 | 2.65 | 2.07 | + | <u> </u> | | | | |
| | | without Caller ID | | | UEPBX | UEPWF | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | i i |
| | • | • | • | • • | | | | | | | | | | | | | - |

| UNBUNDLE | ED NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmer | nt: 1 Table 1 | | |
|-----------------|---|--------------|----------|---------|--------|----------|--------|------------|--------------|------------|-----------|-----------|-------------|---------------|-------------|-------------|
| ONDONDEE | | 1 | 1 | | | | | | | | Svc Order | Svc Order | Incremental | | Incremental | Incremental |
| | | | | | | | | | | | | Submitted | | Charge - | Charge - | Charge - |
| | | | | | | | | | | | | | | | | |
| OATE OODY | | La de antres | | 500 | 11000 | | | | | | Elec | Manually | | | | |
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | | | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | | | | | | | 150 | Auu | 2130 130 | Dist Add I |
| | | | | | | D | Nonreo | urring | Nonrecurring | Disconnect | | | OSS | Rates (\$) | | |
| | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | 2-Wire voice unbundled Incoming Only Port without Caller ID | | | | | | | | | | | | | | | |
| | Capability | | | UEPBX | UEPBE | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| FFAT | URES | - | | OEI DA | OLI DE | 2.10 | 21.20 | 10.40 | 2.00 | 2.07 | | | | | | |
| | All Features Offered | | | UEPBX | UEPVF | 0.00 | 0.00 | 0.00 | ┥───┤ | | 1 | - | | | | |
| NOND | ECURRING CHARGES (NRCs) - CURRENTLY COMBINED | | | ULFBA | OLF VI | 0.00 | 0.00 | 0.00 | | | | | | | | |
| NONR | | | | | - | | | | ┥────┤ | | - | - | | | | |
| | 2-Wire Voice Grade Loop / Line Port Combination - Conversion - | | | | | | | | | | | | | | | |
| | Switch-as-is | | | UEPBX | USAC2 | | 0.10 | 0.10 | | | | | | | | |
| | 2-Wire Voice Grade Loop / Line Port Combination - Conversion - | - | | | | | | | | | | | | | | |
| | Switch with change | | | UEPBX | USACC | | 0.10 | 0.10 | | | | | | | | |
| ADDIT | FIONAL NRCs | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Loop/Line Port Combination - Subsequent | | | | | | | | | | | | | | | |
| | Activity | 1 | | UEPBX | USAS2 | | 0.00 | 0.00 | | | 1 | 1 | | | 1 | |
| | Unbundled Miscellaneous Rate Element, Tag Loop at End User | 1 | | | - | | | | 1 1 | | 1 | 1 | 1 | 1 | 1 | 1 |
| | Premise | 1 | | UEPBX | URETL | | 8.33 | 0.83 | | | 1 | 1 | | | | |
| OFF/C | DN PREMISES EXTENSION CHANNELS | 1 | <u> </u> | | ONLIE | | 0.00 | 0.00 | ┼───┤ | | 1 | 1 | 1 | 1 | 1 | 1 |
| | 2 Wire Analog Voice Grade Extension Loop – Non-Design | + | 1 | UEPBX | UEAEN | 10.56 | 46.66 | 22.57 | 26.65 | 7.65 | ł | ł | 1 | ł | | 1 |
| | | | | | | | | | | | - | - | | | | |
| | 2 Wire Analog Voice Grade Extension Loop – Non-Design | | 2 | UEPBX | UEAEN | 15.34 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | 2 Wire Analog Voice Grade Extension Loop – Non-Design | | 3 | UEPBX | UEAEN | 31.11 | 46.66 | 22.57 | 26.65 | 7.65 | | | | | | |
| | 2 Wire Analog Voice Grade Extension Loop – Design | | 1 | UEPBX | UEAED | 12.67 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| | 2 Wire Analog Voice Grade Extension Loop – Design | | 2 | UEPBX | UEAED | 17.45 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| | 2 Wire Analog Voice Grade Extension Loop – Design | | 3 | UEPBX | UEAED | 33.22 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| INTER | ROFFICE TRANSPORT | | | | | | | | | | | | | | | |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Facility | | | | | | | | | | | | | | | |
| | Termination | | | UEPBX | U1TV2 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Per Mile | | | | | | | | | | 1 | 1 | | | | |
| | or Fraction Mile | | | UEPBX | U1TVM | 0.0095 | 0.00 | 0.00 | | | | | | | | |
| 2.W/ID | E VOICE GRADE LOOP WITH 2-WIRE LINE PORT (RES - PBX) | - | | | 01111 | 0.0035 | 0.00 | 0.00 | + + | | | | | | | |
| | | | | | - | | | | ┥────┤ | | - | - | | | | |
| UNE P | Port/Loop Combination Rates | | | | | 44.70 | | | | | | | | | | |
| | 2-Wire VG Loop/Port Combo - Zone 1 | | | | | 11.79 | | | | | | | | | | |
| | 2-Wire VG Loop/Port Combo - Zone 2 | | | | | 16.52 | | | | | | | | | | |
| | 2-Wire VG Loop/Port Combo - Zone 3 | | | | | 32.74 | | | | | | | | | | |
| UNE L | Loop Rates | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 1 | | 1 | UEPRG | UEPLX | 9.64 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 2 | | 2 | UEPRG | UEPLX | 14.37 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 3 | | 3 | UEPRG | UEPLX | 30.59 | | | 1 | | | | | | | |
| 2-Wire | e Voice Grade Line Port Rates (RES - PBX) | 1 | | - | | | | | 1 | | 1 | 1 | 1 | 1 | 1 | 1 |
| | 2-Wire VG Unbundled Combination 2-Way PBX Trunk Port - | 1 | 1 | | 1 | | | | ++ | | 1 | 1 | 1 | 1 | 1 | 1 |
| | Res | 1 | | UEPRG | UEPRD | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | 1 | 1 | | | 1 | |
| FEATU | | + | | 01110 | OLI ND | 2.13 | 21.23 | 13.49 | 2.00 | 2.07 | 1 | 1 | + | 1 | ł | 1 |
| FLAT | | | | UEPRG | UEPVF | 0.00 | 0.00 | 0.00 | ┥────┤ | | | | | | | |
| Nous | All Features Offered | + | + | UEPKG | UEPVF | 0.00 | 0.00 | 0.00 | ┥────┤ | | + | | - | 1 | <u> </u> | |
| NONR | ECURRING CHARGES (NRCs) - CURRENTLY COMBINED | <u> </u> | | | + | | | | ┥────┤ | | + | + | 1 | ł | | + |
| | 2-Wire Voice Grade Loop/ Line Port Combination (PBX) - | 1 | | | | | | | | | 1 | 1 | | | | |
| | Conversion - Switch-As-Is | | | UEPRG | USAC2 | | 8.45 | 1.91 | | | | | | | | |
| | 2-Wire Voice Grade Loop/ Line Port Combination (PBX) - | | | | | | | | | | I | 1 | | | | |
| | Conversion - Switch with Change | | | UEPRG | USACC | | 8.45 | 1.91 | | | | | | I | | |
| ADDIT | TIONAL NRCs | 1 | T | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Loop/ Line Port Combination (PBX) - | | | | | | | | | | | | | | | |
| | Subsequent Activity | 1 | | UEPRG | USAS2 | 0.00 | 0.00 | 0.00 | | | 1 | 1 | | | 1 | |
| | PBX Subsequent Activity - Change/Rearrange Multiline Hunt | 1 | 1 | | | | | 2.50 | ++ | | 1 | 1 | 1 | 1 | 1 | 1 |
| | Group | 1 | | | | | 7.86 | 7.86 | | | 1 | 1 | | | 1 | |
| ├── ┤─── | Unbundled Miscellaneous Rate Element, Tag Loop at End User | 1 | <u> </u> | | | | 1.00 | 7.00 | ┼───┤ | | 1 | 1 | 1 | 1 | 1 | 1 |
| | | 1 | | UEPRG | LIDETI | | 8.33 | 0.83 | | | 1 | 1 | | | | |
| 0551 | | + | | UEPKG | URETL | | ö.33 | 0.83 | ┥────┤ | | | | | | | |
| UFF/0 | ON PREMISES EXTENSION CHANNELS | | | 11585.0 | 50.00 | 10 | 101 | | | | I | I | | l | | |
| | Local Channel Voice grade, per termination | L | 1 | UEPRG | P2JHX | 12.67 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| | Local Channel Voice grade, per termination | | 2 | UEPRG | P2JHX | 17.45 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| | Local Channel Voice grade, per termination | | 3 | UEPRG | P2JHX | 33.22 | 134.89 | 81.87 | 73.65 | 14.88 | | | | | | |
| | Non-Wire Direct Serve Channel Voice Grade | | 1 | UEPRG | SDD2X | 12.68 | 170.06 | 78.10 | 119.62 | 15.80 | 1 | 1 | | 1 | | |
| 1 1 | | | | | | | | | | | | | | | 1 | 1 |
| ├ | Non-Wire Direct Serve Channel Voice Grade | | 2 | UEPRG | SDD2X | 18.12 | 170.06 | 78.10 | 119.62 | 15.80 | | | | | | |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|---|---------|----------|----------------|----------------|----------------|------------------|------------|--------------|----------------|---|---|---|---|---|--|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | Svc Order Submitted Elec per LSR | Svc Order Submitted Manually per LSR | Charge - Manual Svc Order vs. Electronic- 1st | Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incrementa Charge - Manual Svo Order vs. Electronic- Disc Add'I |
| | | | | | | Rec | Nonrec | | Nonrecurring | | | | | Rates (\$) | | |
| | | | | | - | | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| INTER | OFFICE TRANSPORT Interoffice Transport - Dedicated - 2 Wire Voice Grade - Facility | | | | | | | | | | | | | | | <u> </u> |
| | Termination | | | UEPRG | U1TV2 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Per Mile | | | UEFRG | 01172 | 23.95 | 96.09 | 55.67 | 50.51 | 22.42 | | | | | | <u> </u> |
| | or Fraction Mile | | | UEPRG | U1TVM | 0.0095 | 0.00 | 0.00 | | | | | | | | |
| 2-WIR | E VOICE GRADE LOOP WITH 2-WIRE LINE PORT (BUS - PBX) | | | 02.110 | 0.111 | 0.0000 | 0.00 | 0.00 | | | | | | | | |
| | ort/Loop Combination Rates | | | | | | | | | | | | | | | |
| - | 2-Wire VG Loop/Port Combo - Zone 1 | | | | | 11.79 | | | | | | | | | | |
| | 2-Wire VG Loop/Port Combo - Zone 2 | | | | | 16.52 | | | | | | | | | | |
| | 2-Wire VG Loop/Port Combo - Zone 3 | | | | | 32.74 | | | | | | | | | | |
| UNE L | oop Rates | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 1 | | 1 | UEPPX | UEPLX | 9.64 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 2 | | 2 | UEPPX | UEPLX | 14.37 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 3 | | 3 | UEPPX | UEPLX | 30.59 | | | | | | | | | | |
| 2-Wire | Voice Grade Line Port Rates (BUS - PBX) | | | | | | | | | | | | | | | |
| | Line Olde Halowedlad Combinetics COMICS DDV To SL D. S. D. | | | UEPPX | UEPPC | 0.45 | 01.02 | 15.49 | 0.07 | 0.07 | | | | | | 1 |
| | Line Side Unbundled Combination 2-Way PBX Trunk Port - Bus | | | UEPPX | | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | ł |
| | Line Side Unbundled Outward PBX Trunk Port - Bus Line Side Unbundled Incoming PBX Trunk Port - Bus | | | UEPPX | UEPPO UEPP1 | 2.15 2.15 | 21.29 21.29 | 15.49 | 2.85 2.85 | 2.67 2.67 | | | | | | |
| | 2-Wire Voice Unbundled PBX LD Terminal Ports | | | UEPPX | UEPLD | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled 2-Way Combination PBX Usage Port | | | UEPPX | UEPXA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | ł |
| | 2-Wire Voice Unbundled PBX Toll Terminal Hotel Ports | | | UEPPX | UEPXB | 2.15 | 21.29 | 15.49 | 2.85 | 2.07 | | | | | | - |
| | 2-Wire Voice Unbundled PBX LD DDD Terminals Port | | | UEPPX | UEPXC | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | - |
| | 2-Wire Voice Unbundled PBX LD Terminal Switchboard Port | | | UEPPX | UEPXD | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled PBX LD Terminal Switchboard IDD | | | | | | | | | | | | | | | |
| | Capable Port | | | UEPPX | UEPXE | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled 2-Way PBX Kentucky Room Area | | | | | | | | | | | | | | | |
| | Calling Port without LUD | | | UEPPX | UEPXF | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled PBX Kentucky LUD Area Calling Port | | | UEPPX | UEPXG | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled PBX Kentucky Premium Calling Port | | | UEPPX | UEPXH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled 2-Way Kentucky Area Calling Port | | | | | | | | | | | | | | | |
| | without LUD | | | UEPPX | UEPXJ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled OutDial Kentucky NAR Area Calling | | | | | | | | | | | | | | | |
| | Port | | | UEPPX | UEPOK | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled 2-Way PBX Hotel/Hospital Economy | | | | | | | | | | | | | | | |
| | Administrative Calling Port | | | UEPPX | UEPXL | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Unbundled 2-Way PBX Hotel/Hospital Economy | | | | | | | | | | | | | | | |
| | Room Calling Port | | | UEPPX | UEPXM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | <u> </u> |
| | 2-Wire Voice Unbundled 1-Way Outgoing PBX Hotel/Hospital | | | UEPPX | UEPXO | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | 1 |
| | Discount Room Calling Port 2-Wire Voice Unbundled 1-Way Outgoing PBX Measured Port | | ├ | UEPPX | UEPXO | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | <u> </u> |
| FEATU | | | | UEPPA | UEFAS | 2.15 | 21.29 | 15.49 | 2.00 | 2.07 | | | | | | ├ ──── |
| FLAIG | All Features Offered | | | UEPPX | UEPVF | 0.00 | 0.00 | 0.00 | | | | | | | | ├ ──── |
| NONR | ECURRING CHARGES (NRCs) - CURRENTLY COMBINED | | | OLITX | OLI VI | 0.00 | 0.00 | 0.00 | | | | | | | | - |
| | 2-Wire Voice Grade Loop/ Line Port Combination (PBX) - | | <u> </u> | | + + | | | | | | 1 | | | | | |
| | Conversion - Switch-As-Is | | | UEPPX | USAC2 | | 8.45 | 1.91 | | | | | | | | 1 |
| 1 | 2-Wire Voice Grade Loop/ Line Port Combination (PBX) - | | | | | | 0.10 | | l | | 1 | | | | | |
| | Conversion - Switch with Change | | | UEPPX | USACC | | 8.45 | 1.91 | | | | | | | | 1 |
| ADDIT | IONAL NRCs | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Loop/ Line Port Combination (PBX) - | | | | | | | | | | | | | | | |
| | Subsequent Activity | | | UEPPX | USAS2 | 0.00 | 0.00 | 0.00 | | | | | | | | ļ |
| | PBX Subsequent Activity - Change/Rearrange Multiline Hunt | | ΙT | | I T | Π | | | | | | | | | | 1 |
| | Group | | | | | | 7.86 | 7.86 | | | | | | | | ļ |
| | Unbundled Miscellaneous Rate Element, Tag Loop at End User | | | | | | | | | | | | | | | 1 |
| | Premise | | \vdash | UEPPX | URETL | | 8.33 | 0.83 | | | | | | | | <u> </u> |
| OFF/O | N PREMISES EXTENSION CHANNELS | | | | DO ILIX | 40.07 | 404.00 | 04.07 | 70.05 | 44.00 | | L | | | | |
| | Local Channel Voice grade, per termination | | 1 2 | UEPPX UEPPX | P2JHX P2JHX | 12.67 17.45 | 134.89 134.89 | 81.87 | 73.65 | 14.88 14.88 | | L | | | | |
| | Local Channel Voice grade, per termination | | 2 | | | | | 81.87 | 73.65 | | | | | | | l |
| 1 | Local Channel Voice grade, per termination | | 3 | UEPPX | P2JHX | 33.22 | 134.89 | 81.87 | 73.65 | 14.88 | 1 | | | | | L |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|---|----------|--|----------|----------------|----------------|------------------|----------------|--------------|----------------|----------|-----------|--|--|---|--------------|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Submitted | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Charge - |
| | | | | | | Rec | Nonrec | | Nonrecurring | | | | | Rates (\$) | | |
| | | | | UEPPX | 00000 | 12.68 | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | Non-Wire Direct Serve Channel Voice Grade Non-Wire Direct Serve Channel Voice Grade | | 1 2 | UEPPX | SDD2X SDD2X | 12.68 | 170.06 170.06 | 78.10 78.10 | | 15.80 15.80 | | | | | | |
| | Non-Wire Direct Serve Channel Voice Grade | | 3 | UEPPX | SDD2X SDD2X | 29.64 | 170.06 | 78.10 | | 15.00 | | | | | | |
| INTER | OFFICE TRANSPORT | | 3 | OLITX | GDDZA | 23.04 | 170.00 | 70.10 | 113.02 | 13.00 | | | | | | |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Facility | | | | + + | | | | | | 1 | | | | | |
| | Termination | | | UEPPX | U1TV2 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Per Mile | | | | | | | | | | | | | | | |
| | or Fraction Mile | | | UEPPX | U1TVM | 0.0095 | 0.00 | 0.00 | | | | | | | | |
| | E VOICE GRADE LOOP WITH 2-WIRE ANALOG LINE COIN PO | RT | | | | | | | | | | | | | | |
| UNE P | ort/Loop Combination Rates | | | | | | | | | | | | | | | |
| \vdash | 2-Wire VG Coin Port/Loop Combo – Zone 1 | | | | ┥───┤ | 11.79 | | | | | <u> </u> | | ļ | | | |
| ┝──┼── | 2-Wire VG Coin Port/Loop Combo – Zone 2 | | $ \vdash $ | | | 16.52 32.74 | | | | | | | ł | | | <u> </u> |
| | 2-Wire VG Coin Port/Loop Combo – Zone 3 oop Rates | <u> </u> | <u> </u> | | | 32.74 | | | | 1 | | | <u> </u> | | | |
| | 2-Wire Voice Grade Loop (SL1) - Zone 1 | | 1 | UEPCO | UEPLX | 9.64 | | | ├ | <u> </u> | <u> </u> | + | ł | - | | <u>├</u> ─── |
| | 2-Wire Voice Grade Loop (SL1) - Zone 1 2-Wire Voice Grade Loop (SL1) - Zone 2 | | 2 | UEPCO | UEPLX | 9.64 | | | | | | | 1 | | | ł |
| | 2-Wire Voice Grade Loop (SL1) - Zone 2 | | 3 | UEPCO | UEPLX | 30.59 | | | 1 | | | | 1 | | | 1 |
| 2-Wire | Voice Grade Line Ports (COIN) | 1 | | | | 22.00 | | | | | | | 1 | | | 1 |
| | 2-Wire Coin 2-Way without Operator Screening and without | | | | | | | | | | | | | | | |
| | Blocking (AL, KY, LA, MS) | | | UEPCO | UEPRF | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Coin 2-Way with Operator Screening (AL, KY) | | | UEPCO | UEPRE | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Coin 2-Way with Operator Screening and Blocking: 011, | | | | | | | | | | | | | | | |
| | 900/976, 1+DDD (AL, KY, LA, MS) | | | UEPCO | UEPRA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Coin 2-Way with Operator Screening and 011 Blocking | | | | | | | | | | | | | | | |
| | (KY) | | | UEPCO | UEPKA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Coin 2-Way with Operator Screening & Blocking: | | | UEPCO | UEPCD | 0.45 | 04.00 | 45.40 | 0.05 | 0.07 | | | | | | |
| | 900/976, 1+DDD, 011+, & Local (AL, KY, LA, MS) 2-Wire Coin Outward without Blocking and without Operator | | | UEPCO | UEPCD | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | Screening (KY, LA, MS) | | | UEPCO | UEPRN | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Coin Outward with Operator Screening and 011 Blocking | | | 01100 | OLITAN | 2.15 | 21.23 | 13.43 | 2.00 | 2.07 | | | | | | |
| | (GA, KY, MS) | | | UEPCO | UEPRJ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Coin Outward with Operator Screening and Blocking: | | | | | | | | | | | | | | | |
| | 011, 900/976, 1+DDD (AL, KY, LA, MS) | | | UEPCO | UEPRH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Coin Outward Operator Screening & Blocking: 900/976, | | | | | | | | | | | | | | | |
| | 1+DDD, 011+, and Local (AL, KY, LA, MS) | | | UEPCO | UEPCN | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire 2-Way Smartline with 900/976 (all states except LA) | | | UEPCO | UEPCK | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Coin Outward Smartline with 900/976 (all states except | | | | | | | | | | | | | | | |
| | LA) IONAL UNE COIN PORT/LOOP (RC) | | | UEPCO | UEPCR | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | - | | - | | | |
| ADDIT | UNE Coin Port/Loop Combo Usage (Flat Rate) | | | UEPCO | URECU | 2.57 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| NONR | ECURRING CHARGES - CURRENTLY COMBINED | | | ULFCO | UKLCU | 2.57 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | 2-Wire Voice Grade Loop / Line Port Combination - Conversion - | | | | | | | | | | | | | | | |
| | Switch-as-is | | | UEPCO | USAC2 | | 0.10 | 0.10 | | | | | | | | |
| | 2-Wire Voice Grade Loop / Line Port Combination - Conversion - | | | | | | | | | | | | | | | |
| | Switch with change | | | UEPCO | USACC | | 0.10 | 0.10 | | | | | | | | |
| ADDIT | IONAL NRCs | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Loop/Line Port Combination - Subsequent | | I T | | | | | | | | | | | | | |
| | Activity | | | UEPCO | USAS2 | | 0.00 | 0.00 | ļ | | | ļ | ļ | | | L |
| | Unbundled Miscellaneous Rate Element, Tag Loop at End User | 1 | | | | | 0.00 | 0.00 | | | | | 1 | | | |
| 0.14/15 | Premise E VOICE LOOP/ 2WIRE VOICE GRADE IO TRANSPORT/ 2-WIRI | | | UEPCO | URETL | | 8.33 | 0.83 | | | l | | <u> </u> | | L | ─── |
| | - VOICE LOOP/ 2WIRE VOICE GRADE IO TRANSPORT/ 2-WIRI ort/Loop Combination Rates | | | <i>)</i> | + | | | | | 1 | | | <u> </u> | | | <u> </u> |
| | 2-Wire VG Loop/IO Tranport/Port Combo - Zone 1 | | + | | + + | 14.90 | | | ├ | | <u> </u> | + | ł | - | | ╂──── |
| | 2-Wire VG Loop/IO Tranport/Port Combo - Zone 1 | | | | + + | 19.68 | | | | | | | 1 | | | <u> </u> |
| | 2-Wire VG Loop/IO Tranport/Port Combo - Zone 3 | 1 | 1 | | 1 1 | 35.45 | | | 1 | | 1 | 1 | ł | | | <u> </u> |
| UNE L | oop Rates | 1 | | | 1 1 | 00.10 | | | | | 1 | 1 | t | | | |
| | 2-Wire Voice Grade Loop (SL2) - Zone 1 | 1 | 1 | UEPFR | UECF2 | 12.67 | | | | | 1 | 1 | 1 | | | |
| | 2-Wire Voice Grade Loop (SL2) - Zone 2 | | 2 | UEPFR | UECF2 | 17.45 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL2) - Zone 3 | | 3 | UEPFR | UECF2 | 33.22 | | | | | | | | | | |

| | ED NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|-------------------|---|--------------|-----------|----------------|------------------|--------------|------------------|----------------|----------------|--------------|-------|-----------|-------------|--|---|---|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Submitted | Incremental | Incremental Charge - Manual Svc Order vs. Electronic- Add'I | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | | | | | | Rec | Nonree | | Nonrecurring | | | | | Rates (\$) | | |
| | | | | | | Nec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| 2-Wire | e Voice Grade Line Port Rates (Res) | | | | | 0.00 | 400.00 | 04.44 | 01.00 | 0.07 | | | | | | I |
| ├── ┤── | 2-Wire voice unbundled port - residence 2-Wire voice unbundled port with Caller ID - res | | | UEPFR UEPFR | UEPRL UEPRC | 2.23 2.23 | 128.96 128.96 | 64.11 64.11 | 61.92 61.92 | 9.97 9.97 | | | | | | |
| ├── ┤── | 2-Wire voice unbundled port with Caller ID - res 2-Wire voice unbundled port outgoing only - res | | | UEPFR | UEPRO | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | i |
| | 2-Wire voice and unbundled port outgoing only real | | | OLITIK | OLINO | 2.25 | 120.30 | 04.11 | 01.32 | 3.31 | | | | | | |
| | parity port with Caller ID - res | | | UEPFR | UEPRM | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | ł |
| | 2-Wire voice unbundles res, low usage line port with Caller ID | | | | | | | | | | | | | | | l |
| | (LUM) | | | UEPFR | UEPAP | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | |
| | 2-Wire Voice Unbundled Kentucky Residence Dialing Plan | | | | | | 100.00 | | | | | | | | | ł |
| INITE | without Caller ID ROFFICE TRANSPORT | | | UEPFR | UEPWE | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Facility | | \vdash | | 1 | | - | | | | + | | | | | · |
| 1 1 | Termination | | | UEPFR | U1TV2 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | ł |
| <u>├───</u> | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Per Mile | | | 02 | | 20.00 | 00.00 | 00.07 | 00.01 | 72 | | | | | | · |
| | or Fraction Mile | | | UEPFR | 1L5XX | 0.0095 | | | | | | | | | | ł |
| FEAT | URES | | | | | | | | | | | | | | | |
| | All Features Offered | | | UEPFR | UEPVF | 0.00 | 0.00 | 0.00 | | | | | | | | |
| NONR | ECURRING CHARGES (NRCs) - CURRENTLY COMBINED | | | | | | | | | | | | | | | I |
| | 2-Wire Loop / Dedicated IO Transport / 2 Wire Line Port | | | | 110.4.00 | | 0.00 | 4.07 | | | | | | | | ł |
| └── ┤─── | Combination - Conversion - Switch-as-is 2-Wire Loop / Dedicated IO Transport / 2 Wire Line Port | | | UEPFR | USAC2 | | 9.03 | 1.87 | | | | | | | | J |
| | Combination - Conversion - Switch-With-Change | | | UEPFR | USACC | | 9.03 | 1.87 | | | | | | | | ł |
| | Unbundled Miscellaneous Rate Element, Tag Designed Loop at | | | OLITIK | UUACC | | 3.03 | 1.07 | | | | | | | | |
| | End User Premise | | | UEPFR | URETN | | 11.21 | 1.10 | | | | | | | | ł |
| 2-WIR | E VOICE LOOP/ 2WIRE VOICE GRADE IO TRANSPORT/ 2-WIRE | E LINE PC | RT (BUS | 5) | | | | | | | | | | | | Í |
| UNE F | Port/Loop Combination Rates | | | | | | | | | | | | | | | <u> </u> |
| | 2-Wire VG Loop/IO Tranport/Port Combo - Zone 1 | | | | | 14.90 | | | | | | | | | | |
| | 2-Wire VG Loop/IO Tranport/Port Combo - Zone 2 | | | | | 19.68 | | | | | | | | | | |
| | 2-Wire VG Loop/IO Tranport/Port Combo - Zone 3 | | | | | 35.45 | | | | | | | | | | J |
| ONEL | 2-Wire Voice Grade Loop (SL2) - Zone 1 | | 1 | UEPFB | UECF2 | 12.67 | | | | | | | | | | · |
| | 2-Wire Voice Grade Loop (SL2) - Zone 2 | | 2 | UEPFB | UECF2 | 17.45 | | | | | | | | | | (|
| | 2-Wire Voice Grade Loop (SL2) - Zone 3 | | 3 | UEPFB | UECF2 | 33.22 | | | | | | | | | | 1 |
| 2-Wire | Voice Grade Line Port (Bus) | | | | 1 | | | | | | | | | | | i |
| | 2-Wire voice unbundled port without Caller ID - bus | | | UEPFB | UEPBL | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | |
| | 2-Wire voice unbundled port with Caller + E484 ID - bus | L | \square | UEPFB | UEPBC | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | |
| └─── │ ─── | 2-Wire voice unbundled port outgoing only - bus | | | UEPFB | UEPBO | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | |
| | 2-Wire voice Grade unbundled Kentucky extended local dialing parity port with Caller ID - bus | | | UEPFB | UEPBM | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | ł |
| ├───- | 2-Wire voice unbundled incoming only port with Caller ID - Bus | | \vdash | UEPFB | UEPBIVI UEPB1 | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | - | | | | |
| | 2-Wire Voice Unbundled Mcoming only port with Caller ID - Bus | | \vdash | | 02101 | 2.23 | 120.30 | 07.11 | 01.32 | 3.31 | 1 | - | | | | 1 |
| | without Caller ID | | | UEPFB | UEPWF | 2.23 | 128.96 | 64.11 | 61.92 | 9.97 | | | | | | ł |
| INTEF | ROFFICE TRANSPORT | | | | | | | | | | | | | | | |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Facility | | | | | | | | | | | | | | | |
| └───└─── | Termination | | | UEPFB | U1TV2 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | |
| 1 | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Per Mile | | | | 11 5 11 | 0.0005 | | | | | | | | | | ł |
| EEAT | or Fraction Mile URES | | | UEPFB | 1L5XX | 0.0095 | | | | | | | | | | |
| FEAT | All Features Offered | | | UEPFB | UEPVF | 0.00 | 0.00 | 0.00 | | | | | | | | |
| NONF | ECURRING CHARGES (NRCs) - CURRENTLY COMBINED | | \vdash | 02.10 | 021 11 | 0.00 | 0.00 | 0.00 | | | 1 | - | | | | · |
| | 2-Wire Loop / Dedicated IO Transport / 2 Wire Line Port | 1 | | | | | | | | | 1 | | | | | |
| | Combination - Conversion - Switch-as-is | | | UEPFB | USAC2 | | 9.03 | 1.87 | | | | | | | | <u> </u> |
| | 2-Wire Loop / Dedicated IO Transport / 2 Wire Line Port | | | | | | | | | | | | | | | |
| | Combination - Conversion - Switch with change | | | UEPFB | USACC | | 9.03 | 1.87 | | | | | | | | |
| | Unbundled Miscellaneous Rate Element, Tag Designed Loop at | | | | | | 44.04 | 4.40 | | | | | | | | ł |
| | End User Premise E VOICE LOOP/ 2WIRE VOICE GRADE IO TRANSPORT/ 2-WIRE | | DT (DP) | UEPFB | URETN | | 11.21 | 1.10 | | 1 | | | | | | |
| 12_\\//10 | L VOIGE LOOF/ ZWINE VOIGE GRADE ID TRANSFORT/ Z-WIRE | | | 9 | - | | | | | | 1 | | | | | |
| | Port/Loop Combination Rates | | | | | | | | | | | | | | | |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | | | |
|----------|--|---------|------|----------------|----------------|----------------|--------|------------|--------------|--------------|-------|-----------------------|-----------|--|---|--|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Submitted Manually | • | Incremental Charge - Manual Svc Order vs. Electronic- Add'I | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incrementa Charge - Manual Svo Order vs. Electronic- Disc Add'I |
| | | | | | | Rec | Nonree | curring | Nonrecurring | g Disconnect | | • | OSS | Rates (\$) | | - |
| | | | | | | | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | 2-Wire VG Loop/IO Tranport/Port Combo - Zone 2 | | | | | 19.68 | | | | | | | | | | 1 |
| | 2-Wire VG Loop/IO Tranport/Port Combo - Zone 3 | | | | | 35.45 | | | | | | | | | | 1 |
| UNE Lo | pop Rates | | | | | | | | | | | | | | | l |
| | 2-Wire Voice Grade Loop (SL2) - Zone 1 | | 1 | UEPFP | UECF2 | 12.67 | | | | | | | | | | ļ |
| | 2-Wire Voice Grade Loop (SL2) - Zone 2 2-Wire Voice Grade Loop (SL2) - Zone 3 | | 2 | UEPFP UEPFP | UECF2 UECF2 | 17.45 33.22 | | | | | | | | | | l |
| 2-Wiro | Voice Grade Line Port Rates (BUS - PBX) | | 3 | UEPFP | UECF2 | 33.22 | | | | | | | | | | i |
| 2-Wile | Voice Grade Line Port Rates (BOS - PBA) | | | | | | | | | | | | | | | i |
| | Line Side Unbundled Combination 2-Way PBX Trunk Port - Bus | | | UEPFP | UEPPC | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | i i |
| | Line Side Unbundled Outward PBX Trunk Port - Bus | | | UEPFP | UEPPO | 2.23 | 164.27 | 78.65 | | 8.73 | | 1 | | | | i |
| | Line Side Unbundled Incoming PBX Trunk Port - Bus | | | UEPFP | UEPP1 | 2.23 | 164.27 | 78.65 | | 8.73 | | | İ | | | |
| | 2-Wire Voice Unbundled PBX LD Terminal Ports | | | UEPFP | UEPLD | 2.23 | 164.27 | 78.65 | | 8.73 | 1 | 1 | İ | ĺ | | |
| | 2-Wire Voice Unbundled 2-Way Combination PBX Usage Port | | | UEPFP | UEPXA | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | İ | 1 | l | 1 | | (|
| | 2-Wire Voice Unbundled PBX Toll Terminal Hotel Ports | | | UEPFP | UEPXB | 2.23 | 164.27 | 78.65 | | 8.73 | | | | | | |
| | 2-Wire Voice Unbundled PBX LD DDD Terminals Port | | | UEPFP | UEPXC | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | Í |
| | 2-Wire Voice Unbundled PBX LD Terminal Switchboard Port | | | UEPFP | UEPXD | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | Í . |
| | 2-Wire Voice Unbundled PBX LD Terminal Switchboard IDD | | | | | | | | | | | | | | | i |
| | Capable Port | | | UEPFP | UEPXE | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | 1 |
| | 2-Wire Voice Unbundled 2-Way PBX Kentucky Room Area | | | | | | | | | | | | | | | i |
| | Calling Port without LUD | | | UEPFP | UEPXF | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | |
| | 2-Wire Voice Unbundled PBX Kentucky LUD Area Calling Port | | | UEPFP | UEPXG | 2.23 | 164.27 | 78.65 | | 8.73 | | | | | | |
| | 2-Wire Voice Unbundled PBX Kentucky Premium Calling Port | | | UEPFP | UEPXH | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | |
| | 2-Wire Voice Unbundled 2-Way Kentucky Area Calling Port | | | | | 0.00 | 404.07 | 70.05 | 75.05 | 0.70 | | | | | | i |
| | without LUD | | | UEPFP | UEPXJ | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | l |
| | 2-Wire Voice Unbundled 2-Way PBX Hotel/Hospital Economy Administrative Calling Port | | | UEPFP | UEPXL | 2.23 | 164.27 | 70.05 | 75.05 | 8.73 | | | | | | i |
| | 2-Wire Voice Unbundled 2-Way PBX Hotel/Hospital Economy | | | UEPFP | UEPAL | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | i |
| | Room Calling Port | | | UEPFP | UEPXM | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | i |
| | 2-Wire Voice Unbundled 1-Way Outgoing PBX Hotel/Hospital | | | OLITI | | 2.25 | 104.27 | 70.05 | 75.05 | 0.75 | | | | | | <u> </u> |
| | Discount Room Calling Port | | | UEPFP | UEPXO | 2.23 | 164.27 | 78.65 | 75.05 | 8.73 | | | | | | i |
| | 2-Wire Voice Unbundled 1-Way Outgoing PBX Measured Port | | | UEPFP | UEPXS | 2.23 | 164.27 | 78.65 | | 8.73 | | | | | | 1 |
| INTER | DFFICE TRANSPORT | | | | | | | | | | | | | | | i |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Facility | | | | | | | | | | | | | | | [|
| | Termination | | | UEPFP | U1TV2 | 23.95 | 98.09 | 53.67 | 56.31 | 22.42 | | | | | | i |
| | Interoffice Transport - Dedicated - 2 Wire Voice Grade - Per Mile | | | | | | | | | | | | | | | ſ |
| | or Fraction Mile | | | UEPFP | 1L5XX | 0.0095 | | | | | | | | | | 1 |
| FEATU | | | | | | | | | | | | | | | | 1 |
| | All Features Offered | | | UEPFP | UEPVF | 0.00 | 0.00 | 0.00 | | | | | | | | 1 |
| NONRE | CURRING CHARGES (NRCs) - CURRENTLY COMBINED | | | | | | | | | | | | | | | l |
| | 2-Wire Loop / Dedicated IO Transport / 2 Wire Line Port | | | | | | | | | | | | | | | i |
| | Combination - Conversion - Switch-as-is | | | UEPFP | USAC2 | | 9.03 | 1.87 | | | | - | | | | ł |
| | 2-Wire Loop / Dedicated IO Transport / 2 Wire Line Port | | | | 110400 | | 0.02 | 4.07 | | | | | | | | i |
| | Combination - Conversion - Switch with change | | | UEPFP | USACC | | 9.03 | 1.87 | | | | | | | | l |
| | Unbundled Miscellaneous Rate Element, Tag Designed Loop at End User Premise | | | UEPFP | URETN | | 11.21 | 1.10 | | | | | | | | i |
| 2 WIDE | VOICE GRADE LOOP- BUS ONLY - WITH 2-WIRE DID TRUNK | DODT | | UEPFP | UREIN | | 11.21 | 1.10 | | | | | | | | i |
| | ort/Loop Combination Rates | FUNI | | | | | | | | | | | | | | <u> </u> |
| | 2-Wire VG Loop/2-Wire DID Trunk Port Combo - UNE Zone 1 | | | | 1 | 22.30 | | | 1 | | | | | | | |
| | 2-Wire VG Loop/2-Wire DID Trunk Port Combo - UNE Zone 1 | | | | 1 | 27.08 | | | 1 | | | 1 | | | | |
| 1 | 2-Wire VG Loop/2-Wire DID Trunk Port Combo - UNE Zone 2 | | 1 | | 1 | 42.85 | | | 1 | | | t | 1 | 1 | | |
| | pop Rates | | | | | | | | İ | | 1 | 1 | İ | ĺ | | |
| | 2-Wire Analog Voice Grade Loop - (SL2) - UNE Zone 1 | | 1 | UEPPX | UECD1 | 12.67 | | | 1 | | 1 | | | | | [|
| | 2-Wire Analog Voice Grade Loop - (SL2) - UNE Zone 2 | | 2 | UEPPX | UECD1 | 17.45 | | | 1 | | 1 | | | | | (|
| | 2-Wire Analog Voice Grade Loop - (SL2) - UNE Zone 3 | | 3 | UEPPX | UECD1 | 33.22 | | | | | | | | | | |
| UNE Po | ort Rate | | | | | | | | | | | | | | | |
| | Exchange Ports - 2-Wire DID Port | | | UEPPX | UEPD1 | 9.63 | 336.11 | 27.75 | 132.37 | 9.31 | | | | | | |
| NONRE | CURRING CHARGES - CURRENTLY COMBINED | | | | | | | | | | | | | | | |
| 1 | 2-Wire Voice Grade Loop / 2-Wire DID Trunk Port Conversion | | | | | | | | | | | | | | | 1 |
| | with BellSouth Allowable Changes | | | UEPPX | USA1C | | 7.85 | 1.87 | | | | l | | | | L |

| UNB | | ONETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | (| |
|----------|--------|---|-----------|----------|---------------|---------|-------|--------|------------|----------------|-----------|-----------|-----------|-------------|--------------|--------------------|--|
| UND | UNDEEL | | | | | | | | | | | Svc Ordor | Svc Ordor | Incremental | | Incremental | Incremental |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | Submitted | Charge - | Charge - | Charge - | Charge - |
| | | | | _ | | | | | | | | Elec | Manually | Manual Svc | Manual Svc | Manual Svc | Manual Svc |
| CATE | GORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | | - | - | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | | | | | | | | 101 | Addi | 2130 131 | DISC Add I |
| | | | | | | | P | Nonrec | urring | Nonrecurring D | isconnect | | | OSS | Rates (\$) | | |
| | | | | | | 1 | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | ADDITI | ONAL NRCs | | | | | | | | | | | | | | | |
| | | 2-Wire DID Subsequent Activity - Add Trunks, Per Trunk | | | UEPPX | USAS1 | | 32.25 | 32.25 | | | | | | | | |
| | | Unbundled Miscellaneous Rate Element, Tag Designed Loop at | | | 02117 | 00/101 | | 02.20 | 02.20 | | | | | | | | |
| | | End User Premise | | | UEPPX | URETN | | 11.21 | 1.10 | | | | | | | 1 ' | 1 |
| | Talant | | | | UEFFA | UREIN | | 11.21 | 1.10 | | | | | | | └────┘ | |
| | | one Number/Trunk Group Establisment Charges | | | | NOT | | | | | | | | | | ┢─────┘ | L |
| | | DID Trunk Termination (One Per Port) | | | UEPPX | NDT | 0.00 | 0.00 | 0.00 | | | | | | | ļ! | |
| | | Additional DID Numbers for each Group of 20 DID Numbers | | | UEPPX | ND4 | 0.00 | 0.00 | 0.00 | | | | | | | I | |
| | | DID Numbers, Non- consecutive DID Numbers , Per Number | | | UEPPX | ND5 | 0.00 | 0.00 | 0.00 | | | | | | | <u> </u> | |
| | | Reserve Non-Consecutive DID numbers | | | UEPPX | ND6 | 0.00 | 0.00 | 0.00 | | | | | | | í , | |
| | | Reserve DID Numbers | | | UEPPX | NDV | 0.00 | 0.00 | 0.00 | | | | | | | (| |
| | 2-WIRE | ISDN DIGITAL GRADE LOOP WITH 2-WIRE ISDN DIGITAL LII | NE SIDE I | PORT | | | | | | | | | | | | · · · · | |
| | | rt/Loop Combination Rates | | | | | | | | 1 | | 1 | | | | (, | |
| | | 2W ISDN Digital Grade Loop/2W ISDN Digital Line Side Port - | | 1 | 1 | 1 | | | | 1 | | 1 | 1 | 1 | 1 | r | <u> </u> |
| 1 | | UNE Zone 1 | | 1 | | | 26.69 | | | | | 1 | 1 | | | 1 ' | 1 1 |
| | + | 2W ISDN Digital Grade Loop/2W ISDN Digital Line Side Port - | | | | ł | 20.09 | | | <u>├</u> | | | + | | ł | J | ┢────┤ |
| | | | | | | | 00.00 | | | | | | | | | 1 ' | |
| | | UNE Zone 2 | | | | | 32.92 | | | | | | | | | ┢─────┘ | L |
| | | 2W ISDN Digital Grade Loop/2W ISDN Digital Line Side Port - | | | | | | | | | | | | | | 1 ' | |
| | | UNE Zone 3 | | | | | 51.21 | | | | | | | | | I | |
| | | op Rates | | | | | | | | | | | | | | <u> </u> | |
| | | 2-Wire ISDN Digital Grade Loop - UNE Zone 1 | | 1 | UEPPB UEPPR | USL2X | 16.10 | | | | | | | | | í – T | |
| | | | | | | | | | | | | | | | | í , | |
| | | 2-Wire ISDN Digital Grade Loop - UNE Zone 2 | | 2 | UEPPB UEPPR | USL2X | 22.33 | | | | | | | | | 1 ' | |
| | | 2-Wire ISDN Digital Grade Loop - UNE Zone 3 | | 3 | UEPPB UEPPR | USL2X | 40.63 | | | | | | | | | r | |
| | | art Rate | | - | | | | | | | | | | | 1 | | <u> </u> |
| | | Exchange Port - 2-Wire ISDN Line Side Port | | | UEPPR | UEPPR | 10.59 | 320.53 | 289.13 | 92.19 | 17.56 | | | | | | |
| | | Exchange Port - 2-Wire ISDN Line Side Port | | | UEPPB | UEPPB | 10.59 | 320.53 | 289.13 | 92.19 | 17.56 | | | | | ┢─────┛ | |
| | | | | - | UEFFD | UEPPD | 10.59 | 320.55 | 209.13 | 92.19 | 17.30 | | | | | └────┘ | <u> </u> |
| | NONKE | CURRING CHARGES - CURRENTLY COMBINED | | | | | | | | | | | | | | ļ! | |
| | | 2-Wire ISDN Digital Grade Loop / 2-Wire ISDN Line Side Port | | | | | | | | | | | | | | 1 ' | 1 |
| | | Combination - Conversion | | | UEPPB UEPPR | USACB | 0.00 | 22.77 | 17.00 | | | | | | | I | |
| | ADDITI | ONAL NRCs | | | | | | | | | | | | | | <u> </u> | |
| | | Unbundled Miscellaneous Rate Element, Tag Designed Loop at | | | | | | | | | | | | | | (| |
| | | End User Premise | | | UEPPB UEPPR | URETN | | 11.21 | 1.10 | | | | | | | 1 ' | |
| | | Unbundled Miscellaneous Rate Element, Tag Loop at End User | | | | | | | | | | | | | | (| |
| | | Premise | | | UEPPB UEPPR | URETL | | 8.33 | 0.83 | | | | | | | 1 ' | 1 |
| | B-CHAP | INEL USER PROFILE ACCESS: | | 1 | 02.110 02.111 | 0.12.12 | | 0.00 | 0.00 | | | | | | | | |
| | | CVS/CSD (DMS/5ESS) | <u> </u> | 1 | UEPPB UEPPR | U1UCA | 0.00 | 0.00 | 0.00 | 1 1 | | 1 | 1 | | 1 | | <u> </u> |
| | | | | ł | UEPPB UEPPR | | 0.00 | 0.00 | 0.00 | <u> </u> | | ł | + | | ł | J | ┟────┤ |
| | | CVS (EWSD) | | <u> </u> | | U1UCB | | | | ├ | | | + | | ł | └──── ′ | ┟────┤ |
| | | | | | UEPPB UEPPR | U1UCC | 0.00 | 0.00 | 0.00 | | | | | | | └──── ′ | ↓ |
| <u> </u> | | NEL AREA PLUS USER PROFILE ACCESS: (AL,KY,LA,MS SO | с,MS,&1 | N) | | | | | | | | | | | | └──── ′ | L |
| | | CVS/CSD (DMS/5ESS) | | | UEPPB UEPPR | U1UCD | 0.00 | 0.00 | 0.00 | | | | | | | └─── ′ | |
| | | CVS (EWSD) | | | UEPPB UEPPR | U1UCE | 0.00 | 0.00 | 0.00 | | | | | | | | |
| 1 | | CSD | | | UEPPB UEPPR | U1UCF | 0.00 | 0.00 | 0.00 | | | | | | | 1 | |
| | USER T | ERMINAL PROFILE | | | | | | | | | | | | | | (| |
| | | User Terminal Profile (EWSD only) | 1 | 1 | UEPPB UEPPR | U1UMA | 0.00 | 0.00 | 0.00 | 1 | | 1 | 1 | | | (| |
| | | AL FEATURES | | 1 | | | | | | 1 | | 1 | 1 | | 1 | · · · · · · | <u> </u> |
| <u> </u> | | All Vertical Features - One per Channel B User Profile | 1 | 1 | UEPPB UEPPR | UEPVF | 0.00 | 0.00 | 0.00 | | | | 1 | | | | <u> </u> |
| | | DFFICE CHANNEL MILEAGE | | 1 | JEITE OLIFR | | 0.00 | 0.00 | 0.00 | | | | 1 | | | <u>ا</u> | <u> </u> |
| | INTERC | | | <u> </u> | | | | | | | | | | | | └──── [─] | <u>↓ </u> |
| | | Interoffice Channel mileage each, including first mile and | | 1 | UEPPB UEPPR | MICNO | 00.40 | 47.04 | 04 70 | 00.77 | 0.75 | 1 | | | | 1 ' | 1 |
| | | facilities termination | <u> </u> | ļ | | M1GNC | 29.12 | 47.34 | 31.78 | 22.77 | 8.75 | l | | | ļ | └──── ′ | └─── │ |
| L | | Interoffice Channel mileage each, additional mile | | <u> </u> | UEPPB UEPPR | M1GNM | 0.01 | 0.00 | 0.00 | | | | | | | └──── ′ | |
| UNBU | | ENTREX PORT/LOOP COMBINATIONS - COST BASED RATES | | ļ | | ļ | | | | | | | | | ļ | └──── ′ | |
| | | CENTREX - 1AESS - (Valid in AL,FL,GA,KY,LA,MS,&TN only | <u>')</u> | L | | | | | | | | | | | | <u> </u> | |
| | | VG Loop/2-Wire Voice Grade Port (Centrex) Combo | | | | | | | | | | | | | | I | |
| | UNE Po | rt/Loop Combination Rates (Non-Design) | | 1 | | | | | | | | | | | | (| |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex) Port Combo - | | | | | | | | | | | | | | (, | |
| | | Non-Desian | | 1 | | 1 | 11.79 | | | | | 1 | | | | 1 ' | 1 1 |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | 1 | | 1 | | | | 1 | | 1 | 1 | | 1 | · · · · · · | <u> </u> |
| | | Non-Design | | 1 | | 1 | 16.52 | | | | | 1 | | | | 1 ' | 1 |
| L | | | I | 1 | I | I | 10.32 | | | I | | 1 | ı | I | I | J | L |

| UNBL | JNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmer | t: 1 Table 1 | | |
|------------|----------|---|---------|--------------------------|--------|--------|--------|--------|------------|--------------|-------|-----------|-----------|-------------|--------------|-------------|----------------|
| 0.120 | | | | | | | | | | | | Svc Order | Svc Order | Incremental | | Incremental | Incremental |
| | | | | | | | | | | | | | Submitted | Charge - | Charge - | Charge - | Charge - |
| | | | | | | | | | | | | Elec | Manually | Manual Svc | | | |
| CATEC | GORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | , | | | per Loix | per Loix | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | | | | | | | | 130 | Add I | 0130 130 | DISC Add I |
| | | | | | | | Rec | | curring | Nonrecurring | | | | | Rates (\$) | | |
| | | | | | | | 1100 | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | | | | | | | | | | | | | | |
| | | Non-Design | | | | | 32.74 | | | | | | | | | | |
| | UNE PO | ort/Loop Combination Rates (Design) | | | | | | | | | | | | | | | ļ/ |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex) Port Combo - | | | | | 44.00 | | | | | | | | | | |
| | | Design | | | | | 14.82 | | | | | | | | | | l |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - Design | | | | | 19.60 | | | | | | | | | | |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | | | | 19.00 | | | | | | | | | | ├ ────┦ |
| | | Design | | | | | 35.37 | | | | | | | | | | |
| | UNE Lo | pop Rate | | | | | 00.01 | | | 1 | | 1 | 1 | | | | ├ ───┤ |
| | | 2-Wire Voice Grade Loop (SL 1) - Zone 1 | | 1 | UEP91 | UECS1 | 9.64 | | | | | | | | | | |
| | | 2-Wire Voice Grade Loop (SL 1) - Zone 2 | | 2 | UEP91 | UECS1 | 14.37 | | | | | | | | | | |
| | | 2-Wire Voice Grade Loop (SL 1) - Zone 3 | | 3 | UEP91 | UECS1 | 30.59 | | | | | | | | | | |
| | | 2-Wire Voice Grade Loop (SL 2) - Zone 1 | | 1 | UEP91 | UECS2 | 12.67 | | | | | | | | | | |
| | | 2-Wire Voice Grade Loop (SL 2) - Zone 2 | | 2 | UEP91 | UECS2 | 17.45 | | | | | | | | | | |
| | | 2-Wire Voice Grade Loop (SL 2) - Zone 3 | | 3 | UEP91 | UECS2 | 33.22 | | | | | | | | | | |
| | UNE Po | | | | | | | | | | | | | | | | |
| | All Stat | tes (Except North Carolina and Sout Carolina) | | | | | | | | | | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex) Basic Local Area | | | UEP91 | UEPYA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | ! |
| | | 2-Wire Voice Grade Port (Centrex 800 termination)Basic Local | | | | | | | | | | | | | | | |
| | | Area | | | UEP91 | UEPYB | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex with Caller ID)Note1 Basic | | | | | | | | | | | | | | | |
| | | Local Area | | | UEP91 | UEPYH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex from diff Serving Wire Center) | | | | | 0.45 | 04.00 | 45.40 | 0.05 | 0.07 | | | | | | |
| | | Note 2, 3 Basic Local Area 2-Wire Voice Grade Port, Diff Serving Wire Center - 800 Service | | | UEP91 | UEPYM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | Term - Basic Local Area | | | UEP91 | UEPYZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | OLI 31 | ULI 12 | 2.15 | 21.23 | 13.43 | 2.00 | 2.07 | 1 | | | | | |
| | | - Basic Local Area | | | UEP91 | UEPY9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port Terminated on 800 Service Term - | | | 02.0. | 02.10 | 2.10 | 21.20 | 10.10 | 2.00 | 2.07 | 1 | 1 | | | | |
| | | Basic Local Area | | | UEP91 | UEPY2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | AL, KY | , LA, MS, & TN Only | | | | | | | | | | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex) | | | UEP91 | UEPQA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex 800 termination) | | | UEP91 | UEPQB | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex with Caller ID)1 | | | UEP91 | UEPQH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex from diff Serving Wire | | | | | | | | | | | | | | | |
| | | Center)2,3 | | | UEP91 | UEPQM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port, Diff Serving Wire Center - 2,3 - 800 | | | | | | | | | | | | | | | |
| | 1 | Service Term | | | UEP91 | UEPQZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | ļ | | Į |
| | 1 | | | | | | a : | a | | | a | | | | 1 | | |
| | <u> </u> | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | UEP91 | UEPQ9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | ļ | | ł | | ł |
| | | 2-Wire Voice Grade Port Terminated on 800 Service Term | | \vdash | UEP91 | UEPQ2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | ļ | | ł | | ł |
| | Local S | Switching Centrex Intercom Funtionality, per port | | \vdash | UEP91 | URECS | 0.8873 | | | | 1 | | | | | | <u> </u> |
| | Feature | | | \vdash | UEF91 | UREUS | 0.0073 | | | <u> </u> | | | | | ł | | ┟────┘ |
| | reature | All Standard Features Offered, per port | - | | UEP91 | UEPVF | 0.00 | | | | | 1 | t | | | | ┢────┘ |
| <u> </u> | ł | All Select Features Offered, per port | | | UEP91 | UEPVS | 0.00 | 405.66 | | | | 1 | <u> </u> | | | | |
| | 1 | All Centrex Control Features Offered, per port | - | | UEP91 | UEPVC | 0.00 | +00.00 | | | | 1 | 1 | | | | <u> </u> |
| | NARS | · · · · · · · · · · · · · · · · · · · | | | | | 2.00 | | | 1 | | | | | 1 | İ | · · · · · |
| | 1 | Unbundled Network Access Register - Combination | | | UEP91 | UARCX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 1 | | | İ | 1 | 1 |
| | 1 | Unbundled Network Access Register - Indial | | | UEP91 | UAR1X | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 1 | | | 1 | | |
| | | Unbundled Network Access Register - Outdial | | | UEP91 | UAROX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | | aneous Terminations | | | | | | | | | | | | | | | |
| | 2-Wire | Trunk Side | | | | | | | | | | | | | | | |
| | | Trunk Side Terminations, each | | | UEP91 | CENA6 | 10.51 | 92.18 | 15.82 | 52.16 | 5.30 | | | | | | |
| | Interof | fice Channel Mileage - 2-Wire | | | | | | | | ļ | | | | | ļ | | L |
| | L | Interoffice Channel Facilities Termination - Voice Grade | | | UEP91 | M1GBC | 29.11 | | | ļ | | | | | ļ | | Ļ |
| | | Interoffice Channel mileage, per mile or fraction of mile | _ | $ \downarrow \downarrow$ | UEP91 | M1GBM | 0.01 | | | ļ | | | | | ļ | | ' |
| . <u> </u> | Feature | e Activations (DS0) Centrex Loops on Channelized DS1 Servic | e | | | | | | | | | | | | | | <u> </u> |

| D4 Channel Bank Feature Activation on D-4 Feature Activation on D-4 Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Feature Activation on D-4 Feature Activation on D-4 Feature Activation on D-4 Slot Feature Activation on D-4 Slot Conversion - Currently Co Conversion - Currently Co Conversion of Existing Cere New Centrex Standard Co New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous Premise UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voice Gr Non-Design 2-Wire VG Loop/2-Wire Voice Mon-Design 2-Wire VG Loop/2-Wire Voice Gr Non-Design 2-Wire VG Loop/2-Wire Voice Gr Design 2-Wire VG Loop/2-Wire Voice Gr Desi | | | | | | | | | | - | Cure Onder | Cure Orden | | | | |
|--|---|---------|------------------|----------------|----------------|-------|-----------------|---------------|--------------|-------|---|---|--|---|---|-------------|
| Feature Activation on D-4 Feature Activation on D-4 Stot Feature Activation on D-4 Slot Feature Activation on D-4 Different Wire Center Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Non-Recurring Charges (NRC) A Conversion - Currently Co changes, per port Conversion of Existing Centers Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise UNE-P CENTREX - SESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voic Non-Design 2-Wire VG Loop/2-Wire Voic Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voic </th <th>RATE ELEMENTS</th> <th>Interim</th> <th>Zone</th> <th>BCS</th> <th>USOC</th> <th></th> <th></th> <th>RATES (\$)</th> <th></th> <th></th> <th>Svc Order Submitted Elec per LSR</th> <th>Svc Order Submitted Manually per LSR</th> <th>Incremental Charge - Manual Svc Order vs. Electronic- 1st</th> <th>Charge - Manual Svc Order vs. Electronic- Add'l</th> <th>Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st</th> <th>Charge -</th> | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | Svc Order Submitted Elec per LSR | Svc Order Submitted Manually per LSR | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Charge - |
| Feature Activation on D-4 Feature Activation on D-4 Stot Feature Activation on D-4 Slot Feature Activation on D-4 Different Wire Center Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Non-Recurring Charges (NRC) A Conversion - Currently Co changes, per port Conversion of Existing Centers Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise UNE-P CENTREX - SESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voic Non-Design 2-Wire VG Loop/2-Wire Voic Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voic </th <th></th> <th></th> <th></th> <th></th> <th></th> <th>Rec</th> <th>Nonrec</th> <th></th> <th>Nonrecurring</th> <th></th> <th></th> <th></th> <th></th> <th>Rates (\$)</th> <th></th> <th></th> | | | | | | Rec | Nonrec | | Nonrecurring | | | | | Rates (\$) | | |
| Feature Activation on D-4 Feature Activation on D-4 Stot Feature Activation on D-4 Slot Feature Activation on D-4 Different Wire Center Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Stot Feature Activation on D-4 Non-Recurring Charges (NRC) A Conversion - Currently Co changes, per port Conversion of Existing Centers Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise UNE-P CENTREX - SESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voic Non-Design 2-Wire VG Loop/2-Wire Voic Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voic </th <th></th> <th></th> <th></th> <th></th> <th></th> <th>1100</th> <th>First</th> <th>Add'l</th> <th>First</th> <th>Add'l</th> <th>SOMEC</th> <th>SOMAN</th> <th>SOMAN</th> <th>SOMAN</th> <th>SOMAN</th> <th>SOMAN</th> | | | | | | 1100 | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| Feature Activation on D-4 Feature Activation on D-4 Slot Feature Activation on D-4 Different Wire Center Feature Activation on D-4 Feature Activation on D-4 Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Conversion of Existing Centres Non-Recurring Charges (NRC) A Conversion of Existing Centres Customized Secondary Block, per Bloc New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous Premise UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voice Grade Loop Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voice Design UNE Loop Rate 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | | | | | | | | | | | | | | | | ļ |
| Feature Activation on D-4 Slot Feature Activation on D-4 Different Wire Center Feature Activation on D-4 Different Wire Center Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Conversion - Currently Co changes, per port Conversion of Existing Center New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charge Unbundled Miscellaneous End Use Premise Unbundled Miscellaneous End Use Premise UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC | D-4 Channel Bank Centrex Loop Slot | | | UEP91 | 1PQWS | 0.62 | | | | | | | | | | ļ |
| Slot Feature Activation on D-4 Different Wire Center Feature Activation on D-4 Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Slot Feature Activation on D-4 Non-Recurring Charges (NRC) A Conversion - Currently Co changes, per port Conversion of Existing Cei New Centrex Standard Co New Centrex Standard Co New Centrex Customized Secondary Block, per Bloto NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voc Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voc Design 2-Wire VG Loop/2-Wire Voc Design 2-Wire VG Loop/2-Wire Voc Design 2-Wire V | D-4 Channel Bank FX line Side Loop Slot | | | UEP91 | 1PQW6 | 0.62 | | | | | | | | | | |
| Different Wire Center Feature Activation on D-4 Feature Activation on D-4 Stot Feature Activation on D-4 Stot Non-Recurring Charges (NRC) A Conversion - Currently Co changes, per port Conversion of Existing Cen New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charge Unbundled Miscellaneous Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loo | D-4 Channel Bank FX Trunk Side Loop | | | UEP91 | 1PQW7 | 0.62 | | | | | | | | | | |
| Feature Activation on D-4 Slot Feature Activation on D-4 Non-Recurring Charges (NRC) A Conversion - Currently Co changes, per port Conversion of Existing Cei New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charge Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voc Non-Design 2-Wire VG Loop/2-Wire Voc Non-Design 2-Wire VG Loop/2-Wire Voc Non-Design 2-Wire VG Loop/2-Wire Voc Non-Design 2-Wire VG Loop/2-Wire Voc Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | D-4 Channel Bank Centrex Loop Slot - | | | UEP91 | 1PQWP | 0.62 | | | | | | | | | | |
| Slot Feature Activation on D-4 Non-Recurring Charges (NRC) A Conversion - Currently Co charges, per port Conversion of Existing Cer New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co NAR Establishment Charg Additional Non-Recurring Charge Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Vo Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Vo Design 2-Wire VG Loop/2-Wire Vo Design 2-Wire VG Loop/2-Wire Vo Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2 | D-4 Channel Bank Private Line Loop Slot | | | UEP91 | 1PQWV | 0.62 | | | | | | | | | | |
| Feature Activation on D-4 Non-Recurring Charges (NRC) A Conversion - Currently Co changes, per port Conversion of Existing Ce New Centrex Standard Co New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charge Unbundled Miscellaneous Premise Unbundled Miscellaneous Premise UNE-P CENTREX - SESS (Valid 2-Wire VG Loop/2-Wire Voice Grad Non-Design 2-Wire VG Loop/2-Wire Voic Non-Design 2-Wire VG Loop/2-Wire Voic Non-Design 2-Wire VG Loop/2-Wire Voic Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade | D-4 Channel Bank Tjie Line/Trunk Loop | | | | | | | | | | | | | | | i - |
| Non-Recurring Charges (NRC) A Conversion - Currently Cohanges, per port Conversion of Existing Cei New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Design 2-Wire Voice Grade Loop < | | I | | UEP91 | 1PQWQ | 0.62 | | | | | | | | | | — |
| Conversion - Currently Co changes, per port Conversion of Existing Cer New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc INAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voice Non-Design 2-Wire VG Loop/2-Wire Voice Non-Design 2-Wire VG Loop/2-Wire Voice Non-Design 2-Wire VG Loop/2-Wire Voice Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | | | | UEP91 | 1PQWA | 0.62 | | | | | | | | | | — |
| changes, per port Conversion of Existing Cei New Centrex Standard Co New Centrex Standard Co New Centrex Standard Co NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Grad 2-Wire VG Loop/2-Wire Voice Grad 2-Wire VG Loop/2-Wire Voice Grad 2-Wire VG Loop/2-Wire Voice Grade Loop 2-Wire VG Loop/2-Wire Voice Grade Loop Voire VG Loop/2-Wire Voice Grade Loop 2-Wire VG Loop/2-Wire Voice Grade Loop 2-Wire VG Loop/2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Gra | | | | | + | | | | | | | | | | | ł |
| Conversion of Existing Cel New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voic Non-Design 2-Wire VG Loop/2-Wire Voic Non-Design 2-Wire VG Loop/2-Wire Voic Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | y Combined Switch-As-Is with allowed | | | UEP91 | | | 0.102 | 0.400 | | | | | | | | i |
| New Centrex Standard Co New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voice Non-Design 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Don-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade | Contras Common Diagle | | | UEP91 UEP91 | USAC2 USACN | | | 0.102 | | | | | | | | ├ ── |
| New Centrex Customized Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire | | - | | UEP91 | MIACS | 0.00 | 18.95 669.80 | 8.32 78.32 | 111.05 | 13.27 | | | | | | |
| Secondary Block, per Bloc NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voice Grade Loop Non-Design 2-Wire VG Loop/2-Wire Voice Grade Loop Non-Design 2-Wire VG Loop/2-Wire Voice Grade Loop Ver VG Loop/2-Wire Voice Grade Loop 2-Wire VG Loop/2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wi | | | | UEP91 | MIACS | 0.00 | 669.80 | 78.32 | | 13.27 | | | | | | |
| NAR Establishment Charg Additional Non-Recurring Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voce Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voc Non-Design 2-Wire VG Loop/2-Wire Voc Non-Design 2-Wire VG Loop/2-Wire Voc Non-Design 2-Wire VG Loop/2-Wire Voc Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voc Design 2-Wire VG Loop/2-Wire Voc Design 2-Wire VG Loop/2-Wire Voc Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Vo | | | | UEP91 | M1ACC M2CC1 | 0.00 | 78.32 | 78.32 | | 13.27 | | | | | | <u> </u> |
| Additional Non-Recurring Charg Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE-P CENTREX - SESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voice Grad 2-Wire VG Loop/2-Wire Voice Grad 2-Wire VG Loop/2-Wire Voice Grad 2-Wire VG Loop/2-Wire Voice Grad 2-Wire VG Loop/2-Wire Voice Grade Loop | | - | <u> </u> | UEP91 | URECA | 0.00 | 72.75 | 70.32 | 13.27 | 13.27 | | | | | | |
| Unbundled Miscellaneous Premise Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gri 2-Wire VG Loop/2-Wire Voice Gri 2-Wire VG Loop/2-Wire Voice Gri 2-Wire VG Loop/2-Wire Voice Non-Design 2-Wire VG Loop/2-Wire Voice Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Voice Design 2-Wire VG Loop/2-Wire Voice Design 2-Wire VG Loop/2-Wire Voice Design UNE Loop Rate 2-Wire VG Loop/2-Wire Voice Design UNE Loop Rate 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 0-2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 0-2-Wire V | | - | <u> </u> | OLF91 | UNLOA | 0.00 | 12.15 | | | | | | | | | |
| Premise Unbundled Miscellaneous End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Non-Design 2-Wire VG Loop/2-Wire Vc Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire Vc Design 2-Wire VG Loop/2-Wire Vc Design 2-Wire VG Loop/2-Wire Vc Design 2-Wire VG Loop/2-Wire Vc Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | eous Rate Element, Tag Loop at End Use | - | <u> </u> | | | | | | | | | | | | | |
| End Use Premise UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire Voice Grade Loop - 2-Wire Voice Grade Loop - 2-Wire Voice Grade Loop - 2-Wire Voice Grade Loop - 2-Wire Voice Grade Loop - 2-Wire Voice Grade Loop - 2-Wire Voice Grade Loop - 2-Wire Voice Grade Loop - 2-Wire Voice Grade Loop - | the boost have bloment, hag boop at the boo | | | UEP91 | URETL | | 8.33 | 0.83 | | | | | | | | 1 |
| UNE-P CENTREX - 5ESS (Valid 2-Wire VG Loop/2-Wire Voice GT UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design 2-Wire VG Loop/2-Wire VC Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | eous Rate Element, Tag Design Loop at | | | UEP91 | URETN | | 11.21 | 1.10 | | | | | | | | |
| 2-Wire VG Loop/2-Wire Voice Gr UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VG Non-Design 2-Wire VG Loop/2-Wire VG Non-Design 2-Wire VG Loop/2-Wire VG Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | (alid in All States) | | | | | | | | | | | | | | | |
| 2-Wire VG Loop/2-Wire VG Non-Design 2-Wire VG Loop/2-Wire VG Non-Design 2-Wire VG Loop/2-Wire VG Non-Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop Rate 2-Wire VG Corade Loop 2-Wire VG | | | | | | | | | | | | | | | | |
| Non-Design 2-Wire VG Loop/2-Wire VG Non-Design 2-Wire VG Loop/2-Wire VG Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | | | | | | | | | | | | | | | | |
| 2-Wire VG Loop/2-Wire VG Non-Design 2-Wire VG Loop/2-Wire VG Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Loop | re Voice Grade Port (Centrex) Port Combo | - | | | | 11.79 | | | | | | | | | | |
| Non-Design UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design 2-Wire VG Loop/2-Wire VC Design UNE Loop Rate 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | re Voice Grade Port (Centrex)Port Combo | • | | | | 16.52 | | | | | | | | | | |
| UNE Port/Loop Combination Ra 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design UNE Loop Rate 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | re Voice Grade Port (Centrex)Port Combo | | | | | 32.74 | | | | | | | | | | |
| 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design 2-Wire VG Loop/2-Wire VG Design UNE Loop Rate 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | n Rates (Design) | | | | | | | | | | | | | | | |
| 2-Wire VG Loop/2-Wire Vc Design 2-Wire VG Loop/2-Wire Vc Design UNE Loop Rate 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | re Voice Grade Port (Centrex) Port Combo | - | | | | 14.82 | | | | | | | | | | |
| 2-Wire VG Loop/2-Wire VG Design UNE Loop Rate 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | re Voice Grade Port (Centrex)Port Combo | • | | | | 19.60 | | | | | | | | | | |
| UNE Loop Rate 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop UNE Port Rate | re Voice Grade Port (Centrex)Port Combo | | | | | | | | | | | | | | | |
| 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop UNE Port Rate | | | + | | + | 35.37 | | | | | | | | | | |
| 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | oop (SL 1) - Zone 1 | 1 | 1 | UEP95 | UECS1 | 9.64 | | | 1 | | | | | | | <u> </u> |
| 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop | | 1 | 2 | UEP95 | UECS1 | 14.37 | | | 1 | | 1 | | | | | , |
| 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop UNE Port Rate | | 1 | 3 | UEP95 | UECS1 | 30.59 | | | 1 | 1 | | | 1 | | 1 | |
| 2-Wire Voice Grade Loop 2-Wire Voice Grade Loop UNE Port Rate | | 1 | 1 | UEP95 | UECS2 | 12.67 | | | 1 | | 1 | | 1 | | | |
| 2-Wire Voice Grade Loop UNE Port Rate | | 1 | 2 | UEP95 | UECS2 | 17.45 | | | 1 | İ | 1 | | l | | ĺ | |
| | | | 3 | UEP95 | UECS2 | 33.22 | | | | | | | | | | (|
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| | ort (Centrex) Basic Local Area | | | UEP95 | UEPYA | 2.15 | 21.29 | 15.49 | | 2.67 | | | | | | |
| | ort (Centrex 800 termination) | | | UEP95 | UEPYB | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | ort (Centrex with Caller ID)1Basic Local | | | | | | | | | | | | | | | 1 |
| | ort (Centrex from diff Serving Wire | | $\left \right $ | UEP95 | UEPYH | 2.15 | 21.29 | 15.49 | | 2.67 | | | | | | |
| Center)2,3 Basic Local Are 2-Wire Voice Grade Port, I | | | $\left \right $ | UEP95 | UEPYM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|--|---------|--------------------------|--------|----------------|--------|--------|------------|--------------|------------|-------|-----------|-------------------------|--|---|---|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Submitted | Incremental Charge - | Incremental Charge - Manual Svc Order vs. Electronic- Add'I | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'l |
| | | | | | | Rec | Nonrec | urring | Nonrecurring | Disconnect | | | | Rates (\$) | | |
| | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | | | | | | | | | | | | | |
| | - Basic Local Area 2-Wire Voice Grade Port Terminated on 800 Service Term - | | | UEP95 | UEPY9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | Basic Local Area | | | UEP95 | UEPY2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| AL K | (, LA, MS, SC, & TN Only | | | OLI 35 | ULI 12 | 2.10 | 21.23 | 13.43 | 2.00 | 2.07 | | | | | | <u> </u> |
| ,,, | 2-Wire Voice Grade Port (Centrex) | | | UEP95 | UEPQA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex 800 termination) | | | UEP95 | UEPQB | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex with Caller ID)1 | | | UEP95 | UEPQH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex from diff Serving Wire | | | | | | | | | | | | | | | |
| | Center)2,3 | | | UEP95 | UEPQM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | ļ |
| | 2-Wire Voice Grade Port, Diff Serving Wire Center - 800 Service | | | LIEDOC | | 0.45 | 04.00 | 45 40 | 0.05 | 0.07 | 1 | | | | | 1 |
| | Term 2,3 | | | UEP95 | UEPQZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | + | | | | | |
| | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | UEP95 | UEPQ9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | 1 | | | | | 1 |
| | 2-Wire Voice Grade Port Terminated on 800 Service Term | | | UEP95 | UEPQ2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| Local | Switching | | | 02.00 | 02. 02 | 2.10 | 21120 | 10110 | 2.00 | 2.01 | | | | | | |
| | Centrex Intercom Funtionality, per port | | | UEP95 | URECS | 0.8873 | | | | | | | | | | |
| Featur | | | | | | | | | | | | | | | | |
| | All Standard Features Offered, per port | | | UEP95 | UEPVF | 0.00 | | | | | | | | | | |
| | All Select Features Offered, per port | | | UEP95 | UEPVS | 0.00 | 405.66 | | | | | | | | | |
| | All Centrex Control Features Offered, per port | | | UEP95 | UEPVC | 0.00 | | | | | | | | | | |
| NARS | Unbundled Network Access Register - Combination | | | UEP95 | UARCX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | Unbundled Network Access Register - Indial | | | UEP95 | UARCX UAR1X | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | Unbundled Network Access Register - Outdial | | | UEP95 | UAROX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| Misce | Ianeous Terminations | | | 02.00 | 0/11/0// | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | Trunk Side | | | | | | | | | | | | | | | |
| | Trunk Side Terminations, each | | | UEP95 | CEND6 | 10.51 | 92.18 | 15.82 | 52.16 | 5.30 | | | | | | |
| 4-Wire | Digital (1.544 Megabits) | | | | | | | | | | | | | | | |
| | DS1 Circuit Terminations, each | | | UEP95 | M1HD1 | 74.77 | 164.86 | 77.74 | 60.69 | 3.86 | | | | | | |
| | DS0 Channels Activated, each | | | UEP95 | M1HDO | 0.00 | 15.09 | | | | - | | | | | ł |
| Intero | fice Channel Mileage - 2-Wire Interoffice Channel Facilities Termination | | | UEP95 | M1GBC | 29.11 | | | | | | | | | | <u> </u> |
| | Interoffice Channel mileage, per mile or fraction of mile | | | UEP95 | MIGBO | 0.01 | | | | | | | | | | <u> </u> |
| Featur | e Activations (DS0) Centrex Loops on Channelized DS1 Service | e | | 02.00 | | 0.01 | | | | | | | | | | |
| | annel Bank Feature Activations | | | | | | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank Centrex Loop Slot | | | UEP95 | 1PQWS | 0.62 | | | | | | | | | | |
| | | | | | | | | | | | | | | | | 1 |
| | Feature Activation on D-4 Channel Bank FX line Side Loop Slot | | $ \downarrow \downarrow$ | UEP95 | 1PQW6 | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank FX Trunk Side Loop | | | LIEDOC | 1PQW7 | 0.62 | | | | | 1 | | | | | 1 |
| | Slot Feature Activation on D-4 Channel Bank Centrex Loop Slot - | | | UEP95 | IPQW/ | 0.62 | | | | | + | 1 | | | | <u> </u> |
| | Different Wire Center | | | UEP95 | 1PQWP | 0.62 | | | | | 1 | | | | | 1 |
| | | | | 021 00 | | 0.02 | | | | | 1 | 1 | | | | |
| | Feature Activation on D-4 Channel Bank Private Line Loop Slot | | | UEP95 | 1PQWV | 0.62 | | | | | 1 | | | | | 1 |
| 1 | Feature Activation on D-4 Channel Bank Tjie Line/Trunk Loop | | | | | | | | | | | | | | | |
| | Slot | | | UEP95 | 1PQWQ | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank WATS Loop Slot | L | | UEP95 | 1PQWA | 0.62 | | | | | | | | | | ļ |
| Non-R | ecurring Charges (NRC) Associated with UNE-P Centrex | | | | + | ├ | | | | | | | | | | ł |
| | NRC Conversion Currently Combined Switch-As-Is with allowed changes, per port | | | UEP95 | USAC2 | | 0.102 | 0.102 | | | 1 | | | | | 1 |
| | Conversion of Existing Centrex Common Block, each | | | UEP95 | USAC2 USACN | | 18.95 | 8.32 | | | + | | | | | <u> </u> |
| | New Centrex Standard Common Block | | | UEP95 | MIACS | 0.00 | 669.80 | 78.32 | 111.05 | 13.27 | | | | | | <u> </u> |
| 1 | New Centrex Customized Common Block | l | | UEP95 | MIACC | 0.00 | 669.80 | 78.32 | 111.05 | 13.27 | 1 | 1 | 1 | 1 | | |
| | NAR Establishment Charge, Per Occasion | | | UEP95 | URECA | 0.00 | 72.75 | | | | | | | | | |
| Additi | onal Non-Recurring Charges (NRC) | | | | | | | | | | | | | | | |
| | Unbundled Miscellaneous Rate Element, Tag Loop at End Use | | | | | | | | | | 1 | | | | | 1 |
| | Premise | | | UEP95 | URETL | | 8.33 | 0.83 | | | | | | | | L |

| UNB | UNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|-----|--------|--|---------|------|----------------|----------------|---------------|----------------|------------|--------------|------------|-------|-----------|-------------|--|----------|---|
| | GORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Submitted | Incremental | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Charge - | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | | | | | | | Rec | Nonrec | urring | Nonrecurring | Disconnect | | | | Rates (\$) | | |
| | | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | Unbundled Miscellaneous Rate Element, Tag Design Loop at | | | LIEDOS | | | 44.04 | | | | | | | | | |
| | | End Use Premise CENTREX - DMS100 (Valid in All States) | | | UEP95 | URETN | | 11.21 | 1.10 | | | | | | | | |
| | | VG Loop/2-Wire Voice Grade Port (Centrex) Combo | | | | | | | | | | | | | | | |
| - | | ort/Loop Combination Rates (Non-Design) | | | | | | | | | | | | | | | |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex) Port Combo - Non-Design | | | | | 11.79 | | | | | | | | | | |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - Non-Design | | | | | 16.52 | | | | | | | | | | |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - Non-Design | | | | | 32.74 | | | | | | | | | | |
| | UNE P | ort/Loop Combination Rates (Design) | | | | | | | | | | | | | | | |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex) Port Combo - Design | | | | | 14.82 | | | | | | | | | | |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - Design | | | | | 19.60 | | | | | | | | | | |
| | | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - Design | | | | | 35.37 | | | | | | | | | | |
| | UNE Lo | pop Rate | | | | | | | | | | | | | | | |
| | _ | 2-Wire Voice Grade Loop (SL 1) - Zone 1 | | 1 | UEP9D UEP9D | UECS1 UECS1 | 9.64 14.37 | | | | | | | | | | <u> </u> |
| | | 2-Wire Voice Grade Loop (SL 1) - Zone 2 2-Wire Voice Grade Loop (SL 1) - Zone 3 | | 2 | UEP9D UEP9D | UECS1 | 30.59 | | | | | | | | | | |
| | | 2-Wire Voice Grade Loop (SL 2) - Zone 1 | | 1 | UEP9D | UECS2 | 12.67 | | | | | | | | | | |
| - | | 2-Wire Voice Grade Loop (SL 2) - Zone 2 | | 2 | UEP9D | UECS2 | 17.45 | | | | | | | | | | |
| | | 2-Wire Voice Grade Loop (SL 2) - Zone 3 | | 3 | UEP9D | UECS2 | 33.22 | | | | | | | | | | |
| | | ort Rate | | | | | | | | | | | | | | | |
| | ALL ST | 2-Wire Voice Grade Port (Centrex) Basic Local Area | | | UEP9D | UEPYA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| - | | 2-Wire Voice Grade Port (Centrex 800 termination)Basic Local Area | | | UEP9D | UEPYB | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex / EBS-PSET)3Basic Local Area | | | UEP9D | UEPYC | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| - | | 2-Wire Voice Grade Port (Centrex / EBS-M5009)3Basic Local | | | | | | | | | | | | | | | |
| | | Area 2-Wire Voice Grade Port (Centrex / EBS-M5209))3 Basic Local | | | UEP9D | UEPYD | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | Area | | | UEP9D | UEPYE | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex / EBS-M5112))3 Basic Local Area | | | UEP9D | UEPYF | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex / EBS-M5312))3Basic Local Area | | | UEP9D | UEPYG | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex / EBS-M5008))3 Basic Local Area | | | UEP9D | UEPYT | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex / EBS-M5208))3 Basic Local Area | | | UEP9D | UEPYU | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex / EBS-M5216))3 Basic Local Area | | | UEP9D | UEPYV | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex / EBS-M5316))3 Basic Local Area | | | UEP9D | UEPY3 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex with Caller ID) Basic Local Area | | | UEP9D | UEPYH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2-Wire Voice Grade Port (Centrex/Caller ID/Msg Wtg Lamp Indication))4 Basic Local Area | | | UEP9D | UEPYW | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| 1 | | 2-Wire Voice Grade Port (Centrex/Msg Wtg Lamp Indication))4 | | | | | 0.45 | 04.00 | 45 40 | 0.05 | 0.07 | | | | | | |
| | | Basic Local Area 2-Wire Voice Grade Port (Centrex from diff Serving Wire Center) 2.3 Residued Area | | | UEP9D UEP9D | UEPYJ | 2.15 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | 2,3-Basic Local Area 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-PSET)2,3,4 Basic Local Area | | | UEP9D | UEPYM | 2.15 | 21.29 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| L | 1 | Daoio Loodi Aiba | 1 | 1 | 011.90 | ULFIU | 2.13 | 21.29 | 15.49 | 2.00 | 2.07 | 1 | 1 | 1 | I | 1 | 1 |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|--|---------|------|----------------|----------------|--------------|----------------|----------------|--------------|--------------|---|--------|--|---|---|---|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | Svc Order Submitted Elec per LSR | | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'l |
| | | | | | | Rec | Nonrec | | Nonrecurring | | 0.0115.0 | 001411 | | Rates (\$) | | |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5009)2,3,4 | | | | | | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | Basic Local Area | | | UEP9D | UEPYP | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | <u> </u> |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-5209)2,3,4 Basic Local Area | | | UEP9D | UEPYQ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | l |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5112)2,3,4 Basic Local Area | | | UEP9D | UEPYR | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | 1 |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5312)2,3,4 | | | | | | | | | | | | | | | |
| | Basic Local Area 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5008)2,3,4 | | | UEP9D | UEPYS | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | Basic Local Area 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5208)2, 3 | | | UEP9D | UEPY4 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | - | | | | ł |
| | Basic Local Area | | | UEP9D | UEPY5 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5216)2,3,4 Basic Local Area | | | UEP9D | UEPY6 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | I |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5316)2,3,4 Basic Local Area | | | UEP9D | UEPY7 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | 1 |
| | 2-Wire Voice Grade Port, Diff Serving Wire Center - 800 Service | | | | | | | | | | | | | | | |
| | Term 2,3 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | UEP9D | UEPYZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | Basic Local Area 2-Wire Voice Grade Port Terminated on 800 Service Term Basic | | | UEP9D | UEPY9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | Local Area | | | UEP9D | UEPY2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | <u> </u> |
| AL, KY | , LA, MS, SC, & TN Only | | | 115545 | | | | 1 = 10 | 0.07 | | | | | | | I |
| | 2-Wire Voice Grade Port (Centrex) | | | UEP9D | UEPQA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | - | | | | ł |
| | 2-Wire Voice Grade Port (Centrex 800 termination) 2-Wire Voice Grade Port (Centrex / EBS-PSET)4 | | | UEP9D UEP9D | UEPQB UEPQC | 2.15 2.15 | 21.29 21.29 | 15.49 15.49 | 2.85 2.85 | 2.67 2.67 | | | | | | i |
| | 2-Wire Voice Grade Port (Centrex / EBS-PSE1)4 2-Wire Voice Grade Port (Centrex / EBS-M5009)4 | | | UEP9D | UEPQC | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | 1 | 1 | - | | | 1 |
| | 2-Wire Voice Grade Port (Centrex / EBS-M5003)4 | | | UEP9D | UEPQE | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | 1 |
| | 2-Wire Voice Grade Port (Centrex / EBS-M5112)4 | | | UEP9D | UEPQF | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | (|
| | 2-Wire Voice Grade Port (Centrex / EBS-M5312)4 | | | UEP9D | UEPQG | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | (|
| | 2-Wire Voice Grade Port (Centrex / EBS-M5008)4 | | | UEP9D | UEPQT | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | (|
| | 2-Wire Voice Grade Port (Centrex / EBS-M5208)4 | | | UEP9D | UEPQU | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | í |
| | 2-Wire Voice Grade Port (Centrex / EBS-M5216)4 | | | UEP9D | UEPQV | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | í |
| | 2-Wire Voice Grade Port (Centrex / EBS-M5316)4 | | | UEP9D | UEPQ3 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | í |
| | 2-Wire Voice Grade Port (Centrex with Caller ID) | | | UEP9D | UEPQH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex/Caller ID/Msg Wtg Lamp | | | | | | | 1 = 10 | | | | | | | | ł |
| | Indication)4 | | | UEP9D | UEPQW | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | l |
| | 2-Wire Voice Grade Port (Centrex/Msg Wtg Lamp Indication)4 | | | UEP9D | UEPQJ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | I |
| | 2-Wire Voice Grade Port (Centrex from diff Serving Wire Center) 2,3 | | | UEP9D | UEPQM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-PSET)2,3,4 | | | UEP9D | UEPQO | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | ł |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5009)2,3,4 | | | UEP9D | UEPQP | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-5209)2,3,4 | | | UEP9D | UEPQQ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | 1 |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5112)2,3,4 | | | UEP9D | UEPQR | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5312)2,3,4 | | | UEP9D | UEPQS | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5008)2,3,4 | | | UEP9D | UEPQ4 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5208)2,3,4 | | | UEP9D | UEPQ5 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | 1 |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5216)2,3,4 | | | UEP9D | UEPQ6 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | | | | | | | | | | 1 | 1 | | | | |
| | 2-Wire Voice Grade Port (Centrex/differ SWC /EBS-M5316)2,3,4 | | | UEP9D | UEPQ7 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | I | | | | ı |

| UNBUND | LED NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|---|----------|--|----------------|----------------|--------|---------------------------------------|------------|--------------|-------|----------|--------------|--|--|---|---|
| CATEGORY | | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Submitted | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | | | | | | Rec | Nonrec | | Nonrecurring | | | | | Rates (\$) | | |
| | | | | | | 1100 | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | 2-Wire Voice Grade Port, Diff Serving Wire Center - 800 Service | | | | | | | | | | | | | | | |
| | Term 2,3 | | | UEP9D | UEPQZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | UEP9D | UEPQ9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port Terminated in On Negalink of equivalent 2-Wire Voice Grade Port Terminated on 800 Service Term | | | UEP9D | UEPQ2 | 2.15 | 21.29 | 15.49 | | 2.07 | 1 | 1 | | | | ł |
| Loc | al Switching | 1 | | OLI 3D | ULI QZ | 2.15 | 21.23 | 13.43 | 2.00 | 2.07 | | | | | | |
| | Centrex Intercom Funtionality, per port | | | UEP9D | URECS | 0.8873 | | | | | | | | | | |
| Fea | tures | | | | | | | | | | | | | | | |
| | All Standard Features Offered, per port | | | UEP9D | UEPVF | 0.00 | | | | | | | | | | |
| | All Select Features Offered, per port | | | UEP9D | UEPVS | 0.00 | 405.66 | | | | | | | | | |
| | All Centrex Control Features Offered, per port | | | UEP9D | UEPVC | 0.00 | | | | | | | | | | L |
| NAF | | l | | | | | | | | | | ļ | | | | |
| | Unbundled Network Access Register - Combination | <u> </u> | | UEP9D | UARCX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | l |
| | Unbundled Network Access Register - Inward Unbundled Network Access Register - Outdial | + | <u> </u> | UEP9D UEP9D | UAR1X UAROX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | - | | | | + |
| Mie | cellaneous Terminations | | | UEP9D | UARUX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | ł |
| | ire Trunk Side | 1 | | | | | | | | | | | | | | |
| | Trunk Side Terminations, each | | | UEP9D | CEND6 | 10.51 | 92.18 | 15.82 | 52.16 | 5.30 | | 1 | | | | |
| 4-W | ire Digital (1.544 Megabits) | | | | | | | | | | | | | | | |
| | DS1 Circuit Terminations, each | | | UEP9D | M1HD1 | 74.77 | 164.86 | 77.74 | 60.69 | 3.86 | | | | | | |
| | DS0 Channels Activiated per Channel | | | UEP9D | M1HDO | 0.00 | 15.09 | | | | | | | | | |
| Inte | roffice Channel Mileage - 2-Wire | | | | | | | | | | | | | | | |
| | Interoffice Channel Facilities Termination | | | UEP9D | M1GBC | 29.11 | | | | | | | | | | |
| | Interoffice Channel mileage, per mile or fraction of mile | | | UEP9D | M1GBM | 0.01 | | | | | | | | | | ļ |
| | ture Activations (DS0) Centrex Loops on Channelized DS1 Servic | ce | | | | | | | | | | | | | | |
| D4 (| Channel Bank Feature Activations Feature Activation on D-4 Channel Bank Centrex Loop Slot | | | UEP9D | 1PQWS | 0.62 | | | - | | | | | | | ł |
| | Teaure Activation on D-4 Channel Bank Centrex Loop Slot | | | ULF3D | IFQW3 | 0.02 | | | | | | | | | | ł |
| | Feature Activation on D-4 Channel Bank FX line Side Loop Slot | | | UEP9D | 1PQW6 | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank FX Trunk Side Loop | | | | | | | | | | | | | | | |
| | Slot | | | UEP9D | 1PQW7 | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank Centrex Loop Slot - | | | | | | | | | | | | | | | |
| | Different Wire Center | | | UEP9D | 1PQWP | 0.62 | | | | | | | | | | ļ |
| | | | | | (50)40/ | | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank Private Line Loop Slot | | | UEP9D | 1PQWV | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank Tjie Line/Trunk Loop Slot | | | UEP9D | 1PQWQ | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank WATS Loop Slot | - | | UEP9D | 1PQWQ | 0.62 | | | | | | | | | | |
| Nor | -Recurring Charges (NRC) Associated with UNE-P Centrex | 1 | 1 | | 1 | 0.02 | | | 1 | | 1 | 1 | 1 | | | |
| | NRC Conversion Currently Combined Switch-As-Is with allowed | 1 | 1 | | | | | | | | 1 | | | | | |
| | changes, per port | | | UEP9D | USAC2 | | 0.102 | 0.102 | | | | | | | | |
| | Conversion of existing Centrex Common Block, each | | | UEP9D | USACN | | 18.95 | 8.32 | | | | | | | | |
| | New Centrex Standard Common Block | | | UEP9D | M1ACS | 0.00 | 669.80 | 78.32 | 111.05 | 13.27 | | | | | | L |
| | New Centrex Customized Common Block | <u> </u> | <u> </u> | UEP9D | M1ACC | 0.00 | 669.80 | 78.32 | 111.05 | 13.27 | <u> </u> | - | | | | <u> </u> |
| | NAR Establishment Charge, Per Occasion | ł | | UEP9D | URECA | 0.00 | 72.75 | | | | | <u>├</u> ─── | | | | |
| Add | litional Non-Recurring Charges (NRC) Unbundled Miscellaneous Rate Element, Tag Loop at End Use | | | | + | | | | | | | | | | | <u> </u> |
| | Premise | 1 | 1 | UEP9D | URETL | | 8.33 | 0.83 | | | | | | | | 1 |
| | Unbundled Miscellaneous Rate Element, Tag Design Loop at | 1 | 1 | 021.00 | 0 | | 0.00 | 0.00 | | | 1 | 1 | | | | <u> </u> |
| | End Use Premise | 1 | | UEP9D | URETN | | 11.21 | 1.10 | | | | | | | | 1 |
| | -P CENTREX - EWSD (Valid in AL, FL, KY, LA, MS & TN) | | | | 1 | | | | | | | | | | | |
| 2-W | ire VG Loop/2-Wire Voice Grade Port (Centrex) Combo | | | | | | | | | | | | | | | |
| UNE | Port/Loop Combination Rates (Non-Design) | | | | | | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex) Port Combo | - | | | | | | | | | | | | | | 1 |
| | Non-Design | <u> </u> | <u> </u> | | + | 11.79 | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - Non-Design | 1 | | | | 16.52 | | | | | | | | | | 1 |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | + | 1 | | | 10.32 | | | | | | - | | | | t |
| | Non-Design | 1 | | | | 32.74 | | | | | | | | | | 1 |
| | | | | | | | · · · · · · · · · · · · · · · · · · · | | | | | | | | | |

| UNBUNDL | ED NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|---|-------------|--|--------|---------|--------|--------|------------|--------------|------------|-----------|-----------|-------------|--------------|-------------|-------------|
| | | | | | 1 | | | | | | Svc Order | Svc Order | Incremental | | Incremental | Incremental |
| | | | | | | | | | | | | Submitted | Charge - | Charge - | Charge - | Charge - |
| | | | | | | | | | | | | | | | | |
| CATEGORY | RATE ELEMENTS | Interim | Zono | BCS | USOC | | | RATES (\$) | | | Elec | | Manual Svc | | | |
| CATEGORI | KATE ELEMENTS | memm | 20116 | 803 | 0300 | | | KATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | | | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | Nonro | curring | Nonrecurring | Disconnect | | | 220 | Rates (\$) | | L |
| | | | | | | Rec | First | | | | COMEC | COMAN | | | COMAN | COMAN |
| | Bartill son Combination Bates (Besinn) | | | | | | FIrSt | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| UNE | Port/Loop Combination Rates (Design) | | | | | | | | | | | | | | | ┥────┤ |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex) Port Combo | | | | | 44.00 | | | | | | | | | | 1 |
| | Design | | | | _ | 14.82 | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | | | | | | | | | | | | | | |
| | Design | | | | | 19.60 | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | | | | | | | | | | | | | | |
| | Design | | | | | 35.37 | | | | | | | | | | |
| UNE | Loop Rate | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 1 | | 1 | UEP9E | UECS1 | 9.64 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 2 | | 2 | UEP9E | UECS1 | 14.37 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 3 | | 3 | UEP9E | UECS1 | 30.59 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 2) - Zone 1 | | 1 | UEP9E | UECS2 | 12.67 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 2) - Zone 2 | | 2 | UEP9E | UECS2 | 17.45 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 2) - Zone 3 | | 3 | UEP9E | UECS2 | 33.22 | | | | | | | | | | |
| UNE | Port Rate | | | | | | | | | | | | | | | |
| AL, F | L, KY, LA, MS, & TN only | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Port (Centrex) Basic Local Area | | | UEP9E | UEPYA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex 800 termination)Basic Local | | | | | | | | | | | | | | | 1 |
| | Area | | | UEP9E | UEPYB | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex with Caller ID)1Basic Local | | | | | - | | | | | | | | | | + + |
| | Area | | | UEP9E | UEPYH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex from diff Serving Wire | | | 02.02 | 02 | 2.10 | 21.20 | 10.10 | 2.00 | 2.07 | | | | | | |
| | Center)2,3 Basic Local Area | | | UEP9E | UEPYM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port, Diff Serving Wire Center 2,3 - 800 | | | OEI OE | OEI IM | 2.10 | 21.20 | 10.40 | 2.00 | 2.01 | | | | | | + |
| | Service Term - Basic Local Area | | | UEP9E | UEPYZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | OLI SL | ULI 12 | 2.15 | 21.23 | 13.43 | 2.00 | 2.07 | | | | | | + |
| | - Basic Local Area | | | UEP9E | UEPY9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port Terminated on 800 Service Term - | | | ULF9L | ULF 19 | 2.15 | 21.29 | 13.43 | 2.03 | 2.07 | | | | | | |
| | | | | UEP9E | | 2.15 | 21.20 | 15 40 | 2.95 | 2.67 | | | | | | |
| | Basic Local Area | | | UEP9E | UEPY2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | <u> </u> |
| AL, K | Y, LA, MS, & TN Only | | | LIEDOE | | 0.45 | 04.00 | 15.40 | 0.05 | 0.07 | | | | | | + |
| | 2-Wire Voice Grade Port (Centrex) | | | UEP9E | UEPQA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex 800 termination) | | | UEP9E | UEPQB | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex with Caller ID)1 | | | UEP9E | UEPQH | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex from diff Serving Wire | | | | | | | | | | | | | | | |
| | Center)2,3 | | | UEP9E | UEPQM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port, Diff Serving Wire Center 2,3 - 800 | | | | | | | | | | | | | | | |
| | Service Term | | | UEP9E | UEPQZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | UEP9E | UEPQ9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port Terminated on 800 Service Term | | | UEP9E | UEPQ2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| Local | Switching | | | | | | | | | | | | | | | |
| | Centrex Intercom Funtionality, per port | | | UEP9E | URECS | 0.8873 | | | | | | | | | | |
| Featu | | | | | | | | | | | | | | | | T |
| | All Standard Features Offered, per port | | | UEP9E | UEPVF | 0.00 | | | | | | 1 | | | | 1 |
| | All Select Features Offered, per port | 1 | 1 | UEP9E | UEPVS | 0.00 | 405.66 | | | | | 1 | | | | 1 |
| | All Centrex Control Features Offered, per port | Ì | | UEP9E | UEPVC | 0.00 | | | | | | | | | | 1 |
| NARS | | 1 | 1 | | | | | | | | I | İ | | l I | | 1 |
| | Unbundled Network Access Register - Combination | 1 | 1 | UEP9E | UARCX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | 1 | 1 | 1 | 1 | 1 | 1 1 |
| | Unbundled Network Access Register - Indial | 1 | 1 1 | UEP9E | UAR1X | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | + |
| | Unbundled Network Access Register - Outdial | | | UEP9E | UAROX | 0.00 | 0.00 | 0.00 | | 0.00 | | | | | | + |
| Misca | ellaneous Terminations | | | | 0,110/1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | + |
| | e Trunk Side | t | 1 1 | | + | | | | | | t | 1 | | t | | + |
| 2-9911 | Trunk Side Terminations, each | + | | UEP9E | CEND6 | 10.51 | 92.18 | 15.82 | 52.16 | 5.30 | ł | | | ł | | + |
| 4_10/:- | e Digital (1.544 Megabits) | + | | ULFUL | CLINDO | 10.51 | 32.10 | 13.02 | 52.10 | 5.30 | ł | | | ł | | + |
| 4-141 | | | | | MILIDA | 74 77 | 164.90 | 77 74 | 60.00 | 2.00 | | | | | | + |
| | DS1 Circuit Terminations, each | ├ ── | <u> </u> | UEP9E | M1HD1 | 74.77 | 164.86 | 77.74 | 60.69 | 3.86 | | | | | | + |
| | DS0 Channel Activated Per Channel | <u> </u> | <u> </u> | UEP9E | M1HDO | 0.00 | 15.09 | | | | + | | | l | | |
| interc | office Channel Mileage - 2-Wire | | | | MICEO | 00.11 | | | | | ł | | | ł | | ┥────┤ |
| \vdash | Interoffice Channel Facilities Termination | l | | UEP9E | M1GBC | 29.11 | | | | | | | | | | ∔′ |
| | Interoffice Channel mileage, per mile or fraction of mile | 1 | 1 | UEP9E | M1GBM | 0.01 | | | | | | | | I | I | |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|--------------|---|---------|------------|--------|----------------|-------|--------|------------|--------------|--------------|-------------------|---|-------------------------|--------------|---|---|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | Submitted Elec | Svc Order Submitted Manually per LSR | Incremental Charge - | | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | | | | | | _ | Nonre | curring | Nonrecurring | g Disconnect | | | OSS | Rates (\$) | | |
| | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | | SOMAN | SOMAN | SOMAN |
| Feature | Activations (DS0) Centrex Loops on Channelized DS1 Servic | е | | | | | | | | | | | | | | |
| | nnel Bank Feature Activations | | | | | | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank Centrex Loop Slot | | | UEP9E | 1PQWS | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank FX line Side Loop Slot | | | UEP9E | 1PQW6 | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank FX Trunk Side Loop | | | | | | | | | | | | | | | |
| | Slot | | | UEP9E | 1PQW7 | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank Centrex Loop Slot - | | | | | | | | | | | | | | | |
| | Different Wire Center | | | UEP9E | 1PQWP | 0.62 | | | | | | | | | | |
| | | | | | 100000 | | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank Private Line Loop Slot | | \vdash | UEP9E | 1PQWV | 0.62 | | | + | | | ļ | | | | |
| I ' | Feature Activation on D-4 Channel Bank Tjie Line/Trunk Loop Slot | | | UEP9E | 1PQWQ | 0.62 | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank WATS Loop Slot | | | UEP9E | 1PQWQ 1PQWA | 0.62 | | | - | | | | | | | |
| | ecurring Charges (NRC) Associated with UNE-P Centrex | | | ULF 9L | IFQWA | 0.02 | | | | | | 1 | | | | - |
| | NRC Conversion Currently Combined Switch-As-Is with allowed | | <u> </u> | | + | | | | + | | | t | | | | |
| | changes, per port | | | UEP9E | USAC2 | | 0.102 | 0.102 | | | | | | | | |
| | Conversion of Existing Centrex Common Block, each | | | UEP9E | USACN | | 18.95 | 8.32 | | | | | | | | |
| | New Centrex Standard Common Block | | | UEP9E | MIACS | 0.00 | 669.80 | 78.32 | | 13.27 | | 1 | | | | |
| | New Centrex Customized Common Block | | | UEP9E | M1ACC | 0.00 | 669.80 | 78.32 | | | | | | | | |
| | NAR Establishment Charge, Per Occasion | | | UEP9E | URECA | 0.00 | 72.75 | | | | | | | | | |
| | onal Non-Recurring Charges (NRC) | | | | | | | | | | | | | | | |
| | Unbundled Miscellaneous Rate Element, Tag Loop at End Use | | | | | | | | | | | | | | | |
| | Premise Unbundled Miscellaneous Rate Element, Tag Design Loop at | | | UEP9E | URETL | | 8.33 | 0.83 | | | | | | | | |
| | End Use Premise CENTREX - DCO - Valid in AL, KY, LA, MS, & TN) | | | UEP9E | URETN | | 11.21 | 1.10 | | | | | | | | |
| | VG Loop/2-Wire Voice Grade Port (Centrex) Combo | | | | - | | | | - | | | | | | | |
| | ort/Loop Combination Rates (Non-Design) | | | | | | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex) Port Combo - | | | | 1 | | | | | | | 1 | | | | |
| | Non-Design | | | | | 11.79 | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | | | | | | | | | | | | | | |
| | Non-Design | | | | | 16.52 | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | | | | | | | | | | | | | | |
| | Non-Design | | | | | 32.74 | | | | | | | | | | |
| | ort/Loop Combination Rates (Design) | | | | | | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex) Port Combo - Design | | | | | 14.82 | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | | | | | | | | | | | | | | |
| | Desian | | | | | 19.60 | | | | | | | | | | |
| | 2-Wire VG Loop/2-Wire Voice Grade Port (Centrex)Port Combo - | | 1 | | | | | | 1 | | 1 | | | | | |
| | Design | | | | | 35.37 | | | | | | | | | | |
| | pop Rate | | | | | | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 1 | | 1 | UEP93 | UECS1 | 9.64 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 2 | | 2 | UEP93 | UECS1 | 14.37 | | | 1 | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 1) - Zone 3 | | 3 | UEP93 | UECS1 | 30.59 | | | | | | L | | | | |
| | 2-Wire Voice Grade Loop (SL 2) - Zone 1 | | 1 | UEP93 | UECS2 | 12.67 | | | | | | L | | | | |
| | 2-Wire Voice Grade Loop (SL 2) - Zone 2 | | 2 | UEP93 | UECS2 | 17.45 | | | | | | | | | | |
| | 2-Wire Voice Grade Loop (SL 2) - Zone 3 | | 3 | UEP93 | UECS2 | 33.22 | | | + | | | <u> </u> | | | | |
| | ort Rate , LA, MS, & TN only | | + | | | | | | | | | | | | | |
| AL, KT, | 2-Wire Voice Grade Port (Centrex) Basic Local Area | | | UEP93 | UEPYA | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | <u> </u> | | | | - |
| | 2-Wire Voice Grade Port (Centrex) Basic Local Area 2-Wire Voice Grade Port (Centrex 800 termination)Basic Local | | <u> </u> | 027 33 | ULFIA | 2.13 | 21.29 | 15.49 | 2.00 | 2.07 | | t | 1 | | | |
| | Area | | | UEP93 | UEPYB | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex with Caller ID)1Basic Local Area | | | UEP93 | UEPYH | 2.15 | 21.29 | 15.49 | | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex from diff Serving Wire | | | | | | | | | | | | | | | |
| | Center)2,3 Basic Local Area | | | UEP93 | UEPYM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |

| UNBUNDLE | ED NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | | t: 1 Table 1 | | |
|----------|--|----------|------|----------------|----------------|--------|------------------|----------------|--------------|----------------|----------|-----------------------|---|--|---|---|
| CATEGORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | | Submitted Manually | Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svo Order vs. Electronic- Disc Add'I |
| | | | | | | Rec | Nonrec | | Nonrecurring | | | | | Rates (\$) | | <u> </u> |
| | | | | | | 1100 | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | 2-Wire Voice Grade Port, Diff Serving Wire Center - 2,3 - 800 | | | | | | | | | | | | | | | |
| | Service Term - Basic Local Area | | | UEP93 | UEPYZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | L |
| | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | | | | | | | | | | | | | |
| | - Basic Local Area | | | UEP93 | UEPY9 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | L |
| | 2-Wire Voice Grade Port Terminated on 800 Service Term - Basic Local Area | | | UEP93 | UEPY2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex) | | | UEP93 | UEPQA | 2.15 | 21.29 | 15.49 | | 2.67 | | | | | | ł |
| | 2-Wire Voice Grade Port (Centrex 800 termination) | | | UEP93 | UEPQB | 2.15 | 21.29 | 15.49 | | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port (Centrex with Caller ID)1 | | | UEP93 | UEPQH | 2.15 | 21.29 | 15.49 | | 2.67 | 1 | | | | | |
| | 2-Wire Voice Grade Port (Centrex from diff Serving Wire | | | | | - | - | | | - | | | | | | |
| | Center)2,3 | | | UEP93 | UEPQM | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port, Diff Serving Wire Center - 2,3 -800 | | | | | | | | | | | | | | | |
| | Service Term | | | UEP93 | UEPQZ | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | | | | | | ļ |
| | | | | | | | | | | | | | | | | 1 |
| | 2-Wire Voice Grade Port terminated in on Megalink or equivalent | | | UEP93 | UEPQ9 | 2.15 | 21.29 | 15.49 | | 2.67 | | | | | | |
| | 2-Wire Voice Grade Port Terminated on 800 Service Term | | | UEP93 | UEPQ2 | 2.15 | 21.29 | 15.49 | 2.85 | 2.67 | - | | | | | ł |
| Local | Switching Centrex Intercom Funtionality, per port | | | UEP93 | URECS | 0.8873 | | | | | | | | | | |
| Featu | | | | UEP93 | URECS | 0.8873 | | | | | | | | | | <u> </u> |
| reatu | All Standard Features Offered, per port | | | UEP93 | UEPVF | 0.00 | | | | | | | | | | ł |
| | All Centrex Control Features Offered, per port | | | UEP93 | UEPVC | 0.00 | | | | | | | | | | |
| NARS | | | | 02.00 | 02.100 | 0.00 | | | | | | | | | | |
| | Unbundled Network Access Register - Combination | | | UEP93 | UARCX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | Unbundled Network Access Register - Indial | | | UEP93 | UAR1X | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | Unbundled Network Access Register - Outdial | | | UEP93 | UAROX | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | Ilaneous Terminations | | | | | | | | | | | | | | | |
| 2-Wire | e Trunk Side | | | | | | | | | | | | | | | |
| | Trunk Side Terminations, each | | | UEP93 | CEND6 | 10.51 | 92.18 | 15.82 | 52.16 | 5.30 | | | | | | |
| 4-WIR | Digital (1.544 Megabits) | | | UEP93 | MUDA | 74 77 | 404.00 | 77.74 | 00.00 | 0.00 | | | | | | ł |
| | DS1 Circuit Terminations, each DS0 Channels Activated, Per Channel | | | UEP93 UEP93 | M1HD1 M1HDO | 74.77 | 164.86 15.09 | 77.74 | 60.69 | 3.86 | | | | | | <u> </u> |
| Intero | ffice Channel Mileage - 2-Wire | | | UEP93 | WITHDO | 0.00 | 15.09 | | | | | | | | | ł |
| intero | Interoffice Channel Facilities Termination | | | UEP93 | M1GBC | 29.11 | | | | | | | | | | - |
| | Interoffice Channel mileage, per mile or fraction of mile | | | UEP93 | M1GBM | 0.01 | | | | | 1 | | | | | |
| Featu | re Activations (DS0) Centrex Loops on Channelized DS1 Service | e | | | | | | | | | | | | | | |
| | annel Bank Feature Activations | | | | | | | | | | | | | | | |
| | Feature Activation on D-4 Channel Bank Centrex Loop Slot | | | UEP93 | 1PQWS | 0.62 | | | | | | | | | | |
| | | | I T | | | | | | | | | | | | | 1 |
| | Feature Activation on D-4 Channel Bank FX Line Side Loop Slot | ļ | | UEP93 | 1PQW6 | 0.62 | | | ļ | | | | | | | |
| | Feature Activation on D-4 Channel Bank FX Trunk Side Loop | | | | 10014/7 | 0.00 | | | | | | | | | | 1 |
| | Slot Feature Activation on D-4 Channel Bank Centrex Loop Slot - | | + | UEP93 | 1PQW7 | 0.62 | | | | | | | | | | <u> </u> |
| | Different Wire Center | 1 | | UEP93 | 1PQWP | 0.62 | | | | | | | | | | 1 |
| | | | | OLI 35 | II GAVE | 0.02 | | | | | | | | | | t |
| | Feature Activation on D-4 Channel Bank Private Line Loop Slot | 1 | | UEP93 | 1PQWV | 0.62 | | | | | | | | | | 1 |
| | Feature Activation on D-4 Channel Bank Tie Line/Trunk Loop | 1 | | | | 2.02 | | | | | 1 | 1 | | | | |
| | Slot | 1 | | UEP93 | 1PQWQ | 0.62 | | | | | | | | | | 1 |
| | Feature Activation on D-4 Channel Bank WATS Loop Slot | L | | UEP93 | 1PQWA | 0.62 | | | 1 | | | | | | | |
| Non-R | Recurring Charges (NRC) Associated with UNE-P Centrex | | | | | | | | | | | | | | | |
| | NRC Conversion Currently Combined Switch-As-Is with allowed | 1 | | | | | | | | | | | | | | 1 |
| | changes, per port | <u> </u> | + | UEP93 | USAC2 | | 0.102 | 0.102 | | | <u> </u> | | | | | <u> </u> |
| | Conversion of Existing Centrex Common Block, each | ļ | | UEP93 | USACN | 0.00 | 18.95 | 8.32 | | 40.07 | | | | | | |
| | New Centrex Standard Common Block New Centrex Customized Common Block | <u> </u> | + + | UEP93 UEP93 | M1ACS M1ACC | 0.00 | 669.80 669.80 | 78.32 78.32 | | 13.27 13.27 | | | | | | + |
| | NAR Establishment Charge, Per Occasion | | ╉ | UEP93 UEP93 | URECA | 0.00 | 72.75 | 10.32 | 111.05 | 13.27 | <u> </u> | + | { | ł | ł | t |
| Additi | ional Non-Recurring Charges (NRC) | | | 0LF 33 | UNLUA | 0.00 | 12.13 | | | | | 1 | | | | <u> </u> |
| | Unbundled Miscellaneous Rate Element, Tag Loop at End Use | 1 | 1 1 | | 1 1 | | | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| | Premise | 1 | | UEP93 | URETL | | 8.33 | 0.83 | | | | | | | | 1 |

| UNB | UNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|------|--------|--|------------|--------|-----------|-------|----------|--------|------------|--------------|--------------|-----------|-----------|-------------|--------------|-------------|-------------|
| | | | | | | | | | | | | Svc Order | Svc Order | Incremental | Incremental | Incremental | Incremental |
| | | | | | | | | | | | | Submitted | Submitted | Charge - | Charge - | Charge - | Charge - |
| | | | | | | | | | | | | Elec | Manually | Manual Svc | Manual Svc | Manual Svc | Manual Svc |
| CATE | GORY | RATE ELEMENTS | Interim | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | | | | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| - | | | | | | | B | Nonrec | urring | Nonrecurring | g Disconnect | | | OSS | Rates (\$) | L | L |
| - | | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | Unbundled Miscellaneous Rate Element, Tag Design Loop at | | | | | | | | | | | | | | | |
| | | End Use Premise | | | UEP93 | URETN | | 11.21 | 1.10 | | | | | | | | |
| | Note 1 | - Required Port for Centrex Control in 1AESS, 5ESS & EWSD | | | | | | | | | | | | | | | |
| | Note 2 | - Requres Interoffice Channel Mileage | | | | | | | | | | | | | | | |
| | Note 3 | - Installation is combination of Installation charge for SL2 Loc | op and Po | ort | | | | | | | | | | | | | |
| | Note 4 | - Requires Specific Customer Premises Equipment | | | | | | | | | | | | | | | |
| | Note: | Rates displaving an "I" in Interim column are interim as a resu | It of a Co | mmissi | on order. | | | | | | | | | | | | |

| UNBUNDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|-------------------------|---|-------------|------|--------------|-------|---------|--------|------------|--------------|------------|---|-------|--|--|----------|---|
| CATEGORY | RATE ELEMENTS | Interi m | Zone | BCS | USOC | | | RATES (\$) | | | Svc Order Submitted Elec per LSR | | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Charge - | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'l |
| <u> </u> | | | | | | | Nonrec | urring | Nonrecurring | Disconnect | | | 055 | Rates (\$) | | |
| | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | | SOMAN | SOMAN | SOMAN |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | ' |
| 2-WIRE | E HIGH BIT RATE DIGITAL SUBSCRIBER LINE (HDSL) COMPA 2 Wire Unbundled HDSL Loop including manual service inquiry | | LOOP | | | | | | | | | | | | | ' |
| | & facility reservation - Zone 1 | | 1 | UHL | UHL2X | 10.06 | 151.54 | 89.29 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled HDSL Loop including manual service inquiry | 1 | | İ | | | | | | | | - | | | | |
| | & facility reservation - Zone 2 | | 2 | UHL | UHL2X | 10.99 | 151.54 | 89.29 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled HDSL Loop including manual service inquiry | | ~ | | | 10.00 | 454.54 | 00.00 | | | | | | | | |
| | & facility reservation - Zone 3 2 Wire Unbundled HDSL Loop without manual service inquiry | | 3 | UHL | UHL2X | 12.20 | 151.54 | 89.29 | 69.09 | 11.54 | | | | | | ' |
| | and facility reservation - Zone 1 | | 1 | UHL | UHL2W | 10.06 | 130.74 | 78.56 | 69.09 | 11.54 | | | | | | |
| | 2 Wire Unbundled HDSL Loop without manual service inquiry | | | İ | | | | | | | | | | | | |
| | and facility reservation - Zone 2 | | 2 | UHL | UHL2W | 10.99 | 130.74 | 78.56 | 69.09 | 11.54 | | | | | | Ļ |
| | 2 Wire Unbundled HDSL Loop without manual service inquiry | | | | | 10.55 | 100 - | 70 -0 | 00.00 | | | | | | | |
| 4 W/D | and facility reservation - Zone 3 E HIGH BIT RATE DIGITAL SUBSCRIBER LINE (HDSL) COMPA | | 3 | UHL | UHL2W | 12.20 | 130.74 | 78.56 | 69.09 | 11.54 | | | | | | <u> </u> |
| 4-WIR | 4 Wire Unbundled HDSL Loop including manual service inquiry | | | | | | | | | | | | | | | |
| | and facility reservation - Zone 1 | | 1 | UHL | UHL4X | 16.04 | 185.75 | 123.50 | 74.95 | 14.69 | | | | | | |
| | 4-Wire Unbundled HDSL Loop including manual service inquiry | | | İ | | | | | | | | | | | i i | |
| | and facility reservation - Zone 2 | 1 | 2 | UHL | UHL4X | 18.03 | 185.75 | 123.50 | 74.95 | 14.69 | | | | | | |
| | 4-Wire Unbundled HDSL Loop including manual service inquiry | | 2 | UHL | UHL4X | 19.53 | 185.75 | 123.50 | 74.95 | 44.00 | | | | | | |
| | and facility reservation - Zone 3 4-Wire Unbundled HDSL Loop without manual service inquiry | | 3 | UHL | UHL4X | 19.53 | 185.75 | 123.50 | 74.95 | 14.69 | | | | | | ' |
| | and facility reservation - Zone 1 | | 1 | UHL | UHL4W | 16.04 | 164.95 | 114.04 | 77.32 | 15.80 | | | | | | |
| | 4-Wire Unbundled HDSL Loop without manual service inquiry | | | - | - | | | | - | | | | | | | |
| | and facility reservation - Zone 2 | | 2 | UHL | UHL4W | 18.03 | 164.95 | 114.04 | 77.32 | 15.80 | | | | | | |
| | 4-Wire Unbundled HDSL Loop without manual service inquiry | | | | | 10.50 | | | | 15.00 | | | | | | |
| 4 W/D | and facility reservation - Zone 3 DS1 DIGITAL LOOP | | 3 | UHL | UHL4W | 19.53 | 164.95 | 114.04 | 77.32 | 15.80 | | | | | | |
| 4-1111 | 4-Wire DS1 Digital Loop - Zone 1 | | 1 | USL | USLXX | 99.44 | 306.69 | 174.44 | 65.83 | 14.55 | <u> </u> | | | | | |
| | 4-Wire DS1 Digital Loop - Zone 2 | | 2 | USL | USLXX | 131.22 | 306.69 | 174.44 | 65.83 | 14.55 | | | | | | |
| | 4-Wire DS1 Digital Loop - Zone 3 | | 3 | USL | USLXX | 342.42 | 306.69 | 174.44 | 65.83 | 14.55 | | | | | | |
| HIGH CAPACI | TY UNBUNDLED LOCAL LOOP | | | | | | | | | | | | | | | L |
| | High Capacity Unbundled Local Loop - DS3 - Per Mile per | | | UE3 | 1L5ND | 10.01 | | | | | | | | | | |
| | month High Capacity Unbundled Local Loop - DS3 - Facility | | | UE3 | TLOND | 10.64 | | | | | łł | | | | | |
| | Termination per month | | | UE3 | UE3PX | 354.56 | | | | | | | | | | |
| | High Capacity Unbundled Local Loop - STS-1 - Per Mile per | | | | | | | | | | | | | | | 1 |
| | month | | | UDLSX | 1L5ND | 10.64 | | | | | | | | | | |
| | High Capacity Unbundled Local Loop - STS-1 - Facility | | | | | 000 50 | | | | | | | | | | |
| | Termination per month DEDICATED TRANSPORT | | | UDLSX | UDLS1 | 368.59 | | | | | | | | | | |
| | OFFICE CHANNEL - DEDICATED TRANSPORT | | | | 1 | | | | | | | | | | | |
| | Interoffice Channel - Dedicated Channel - DS1 - Per Mile per | | | | 1 | | | | | | | | | | | |
| | month | | | U1TD1 | 1L5XX | 0.26 | | | | | | | | | | |
| | Interoffice Channel - Dedicated Tranport - DS1 - Facility | | | | | 110.5 | | | | | | | | | | |
| | Termination Interoffice Channel - Dedicated Transport - DS3 - Per Mile per | | | U1TD1 | U1TF1 | 110.45 | | | | | | | | | | ' |
| | month | | | U1TD3 | 1L5XX | 5.72 | | | | | | | | | | |
| | Interoffice Channel - Dedicated Transport - DS3 - Facility | | 1 | | | 0.12 | | | İ | | | | | | | <u> </u> |
| | Termination per month | | | U1TD3 | U1TF3 | 1351.42 | | | | | | | | | | <u> </u> |
| | Interoffice Channel - Dedicated Transport - STS-1 - Per Mile per | | | | | | | | | | | | | | | |
| ├ ── ├ ── | month Interoffice Channel - Dedicated Transport - STS-1 - Facility | | | U1TS1 | 1L5XX | 5.72 | | | | | | | | | | ─── |
| | Termination | | | U1TS1 | U1TFS | 1321.94 | | | | | | | | | | |
| | Local Channel - Dedicated - 2-Wire Voice Grade | <u> </u> | 1 | ULDVX, UNCVX | ULDV2 | 21.36 | | | 1 | | | | | | | <u> </u> |
| | Local Channel - Dedicated - 2-Wire Voice Grade Rev Bat | | 1 | ULDVX | ULDR2 | 21.36 | | | | | | | | | | |
| | Local Channel - Dedicated - 4-Wire Voice Grade | | | ULDVX, UNCVX | ULDV4 | 22.84 | | | | | | | | | | \square |
| | Local Channel - Dedicated - DS1 - Zone 1 | | 1 | ULDD1, UNC1X | ULDF1 | 46.53 | | | | | | | | | | <u> </u> |

| UNBUNDL | ED NETWORK ELEMENTS - Kentucky | | | | | - | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|--|-------------|----------|------------------------------|----------------|-----------------|----------------|----------------|-----------------|----------------|-------------|---|--|-----------------------------------|---|----------|
| CATEGORY | RATE ELEMENTS | Interi m | Zone | BCS | USOC | | | RATES (\$) | | | | Svc Order Submitted Manually per LSR | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Charge - |
| | | | | | | Rec | | curring | | g Disconnect | | | | Rates (\$) | | |
| | | | | | | | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | Local Channel - Dedicated - DS1 - Zone 2 Local Channel - Dedicated - DS1 - Zone 3 | | | ULDD1, UNC1X ULDD1, UNC1X | ULDF1 ULDF1 | 49.90 189.18 | | | | | | | | | | |
| | Local Channel - Dedicated - DS1 - Zone 3 | | 3 | ULDD3, UNC3X | 1L5NC | 189.18 | | | | | | | | | | ┣──── |
| | Local Channel - Dedicated - DS3 - Fei Mile per Month | | | ULDD3, UNC3X | ULDF3 | 662.46 | | | 1 | | | | | | | |
| | Local Channel - Dedicated - STS-1- Per Mile per month | | | ULDS1, UNCSX | 1L5NC | 10.05 | | | | | | | | | | |
| | Local Channel - Dedicated - STS-1 - Facility Termination | | | ULDS1, UNCSX | ULDFS | 624.73 | | | 1 | | | | | | | |
| ENHANCED | EXTENDED LINK (EELs) | | | | | | | | | | | | | | | |
| | E: The monthly recurring and non-recurring charges below will | apply a | nd the | Switch-As-Is Charg | ge will not ap | ply for UNE con | nbinations pro | visioned as ' | Ordinarily Com | bined' Networl | k Elements. | | | | | |
| | E: The monthly recurring and the Switch-As-Is Charge and not t | the non- | -recurri | ng charges below | will apply for | UNE combinati | ons provision | ed as ' Curren | tly Combined' I | Network Eleme | ents. | | | | | |
| 2-WI | RE VOICE GRADE LOOP FOR USE IN A COMBINATION | | | | | | | | | | | | | | | |
| | 2-Wire VG Loop (SL2) in Combination - Zone 1 | | 1 | UNCVX | UEAL2 | 14.57 | | | L | | | | | | | Ļ |
| | 2-Wire VG Loop (SL2) in Combination - Zone 2 | | 2 | UNCVX | UEAL2 | 20.07 | | | | | | | | | | |
| | 2-Wire VG Loop (SL2) in Combination - Zone 3 | <u> </u> | 3 | UNCVX | UEAL2 | 38.20 | | | | | | | | | | |
| 4 10/11 | | I | | UNCVX | 1D1VG | 0.71 | | | + | | <u> </u> | | | | | ─── |
| 4-WI | RE VOICE GRADE LOOP FOR USE IN A COMBINATION 4-Wire Analog Voice Grade Loop in Combination - Zone 1 | | 1 | UNCVX | UEAL4 | 33.65 | <u> </u> | | | | - | | | | | |
| | 4-Wire Analog Voice Grade Loop in Combination - Zone 1 4-Wire Analog Voice Grade Loop in Combination - Zone 2 | | 2 | UNCVX | UEAL4 | 33.65 | | | | | | | | | | |
| | 4-Wire Analog Voice Grade Loop in Combination - Zone 2 4-Wire Analog Voice Grade Loop in Combination - Zone 3 | - | | UNCVX | UEAL4 | 97.82 | | | | | 1 | | | | | |
| | Voice Grade COCI in combination - per month | - | 5 | UNCVX | 1D1VG | 0.71 | | | | | 1 | | | | | |
| 4-WI | RE 56 KBPS DIGITAL LOOP FOR USE IN A COMBINATION | | | | 10110 | 0.71 | | | | | | | | | | |
| | 4-Wire 56Kbps Digital Grade Loop in Combination - Zone 1 | | 1 | UNCDX | UDL56 | 31.73 | | | 1 | | | | | | | |
| | 4-Wire 56Kbps Digital Grade Loop in Combination - Zone 2 | | 2 | UNCDX | UDL56 | 37.35 | | | | | | | | | | |
| | 4-Wire 56Kbps Digital Grade Loop in Combination - Zone 3 | | 3 | UNCDX | UDL56 | 41.83 | | | | | | | | | | |
| | OCU-DP COCI (data) per month (2.4-64kbs) | 1 | | UNCDX | 1D1DD | 1.52 | | | | | | | | | | |
| 4-WI | RE 64 KBPS DIGITAL LOOP FOR USE IN A COMBINATI\ON | | | | | | | | | | | | | | | |
| | 4-Wire 64Kbps Digital Grade Loop in Combination - Zone 1 | | 1 | UNCDX | UDL64 | 31.73 | | | | | | | | | | |
| | 4-Wire 64Kbps Digital Grade Loop in Combination - Zone 2 | | | UNCDX | UDL64 | 37.35 | | | | | | | | | | |
| | 4-Wire 64Kbps Digital Grade Loop in Combination - Zone 3 | | 3 | UNCDX | UDL64 | 41.83 | | | | | | | | | | |
| | OCU-DP COCI (data) - in combination - per month (2.4-64kbs) | | | UNCDX | 1D1DD | 1.52 | | | | | | | | | | |
| 2-WI | RE ISDN LOOP FOR USE IN COMBINATION | | | | | | | | | | | | | | | |
| | 2-Wire ISDN Loop in Combination - Zone 1 | | 1 | UNCNX | U1L2X | 21.21 | | | | | | | | | | |
| | 2-Wire ISDN Loop in Combination - Zone 2 | | 3 | UNCNX | U1L2X U1L2X | 28.84 49.30 | | | | | | | | - | | |
| | 2-Wire ISDN Loop in Combination - Zone 3 2-wire ISDN COCI (BRITE) - in combination - per month | | 3 | UNCNX UNCNX | UC1CA | 49.30 | | | | | | | | - | | |
| 4-10/10 | RE DS1 DIGITAL LOOP FOR USE IN A COMBINATION | | | UNCINA | UCICA | 5.21 | | | | | 1 | | | | | ł |
| 4-771 | 4-Wire DS1 Digital Loop in Combination - Zone 1 | | 1 | UNC1X | USLXX | 99.44 | | | 1 | | | | | | | 1 |
| | 4-Wire DS1 Digital Loop in Combination - Zone 2 | | 2 | UNC1X | USLXX | 131.22 | | | 1 | | | | | | | |
| | 4-Wire DS1 Digital Loop in Combination - Zone 3 | | 3 | UNC1X | USLXX | 342.42 | | | | | | | | | | |
| | DS1 COCI in combination per month | | | UNC1X | UC1D1 | 13.57 | | | | | | | | | | |
| 2 WI | RE VOICE GRADE INTEROFFICE TRANSPORT FOR USE IN A CO | OMBINA | TION | | | | | | | | | | | | | |
| | Interoffice Transport - 2-wire VG - Dedicated- Per Mile Per | | | | | | | | | | | | | | | |
| | Month | | | UNCVX | 1L5XX | 0.01 | | | | | | | | | | |
| | Interoffice Transport - 2-wire VG - Dedicated - Facility | | | | | | | | | | | | | | | |
| | Termination per month | | | UNCVX | U1TV2 | 27.54 | | | | | | | | | | |
| 4 WI | RE VOICE GRADE INTEROFFICE TRANSPORT FOR USE IN A CO | | TION | | _ | | | | | | | | | | | |
| | Interoffice Transport - 4-wire VG - Dedicated - Per Mile Per Month | | | UNCVX | 1L5XX | 0.01 | | | | | | | | | | |
| | Interoffice Transport - 4-wire VG - Dedicated - Facility Termination per month | | | UNCVX | U1TV4 | 27.54 | | | | | | | | | | |
| | | | | | | | | | | | | | | | | |
| DS1 | INTEROFFICE TRANSPORT FOR COMBINATION | I | L | | | ļ | | | | | ļ | | | | | <u> </u> |
| | Interoffice Transport - Dedicated - DS1 combination - Per Mile per month | | | UNC1X | 1L5XX | 0.22 | | | | | | | | | | |
| | Interoffice Transport - Dedicated - DS1 combination - Facility Termination per month | | | UNC1X | U1TF1 | 90.87 | | | ļ | | | | | | | |
| DS3 | INTEROFFICE TRANSPORT FOR USE IN A COMBINATION | | <u> </u> | | | | | | | | | | | | | ─── |
| | Interoffice Transport - Dedicated - DS3 combination - Per Mile Per Month | | | UNC3X | 1L5XX | 4.70 | | | | | | | | | | |

| UNBUN | IDLE | O NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|--------|-------|--|---------|--------------|---------|-------|---------|-------|------------|-------|--------------|-----------|-----------|-------------|--------------|-------------|----------------|
| | | | | | | | | | | | | Svc Order | Svc Order | Incremental | Incremental | Incremental | Incremental |
| | | | | | | | | | | | | Submitted | Submitted | Charge - | Charge - | Charge - | Charge - |
| | | | Interi | | | | | | | | | Elec | Manually | Manual Svc | Manual Svc | Manual Svc | Manual Svc |
| CATEGO | RY | RATE ELEMENTS | m | Zone | BCS | USOC | | | RATES (\$) | | | per LSR | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | | | | | | | | | | | | | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | _ | | | | | | | | | | | |
| | | | | | | | Rec | | curring | | g Disconnect | | | | Rates (\$) | | |
| | | | | | | | | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | Interoffice Transport - Dedicated - DS3 - Facility Termination per month | | | UNC3X | U1TF3 | 1111.92 | | | | | | | | | | |
| - | TC 41 | NTEROFFICE TRANSPORT FOR USE IN COMBINATION | | - | UNC3X | UTIF3 | 1111.92 | | | - | | | | | | | |
| | 13-11 | Interoffice Transport - Dedicated - STS-1 combination - Per Mile | | | | | | | | | | | | | | | |
| | | Per Month | | | UNCSX | 1L5XX | 4.70 | | | | | | | | | | |
| | | Interoffice Transport - Dedicated - STS-1 combination - Facility | | | UNCOX | TLOAN | 4.70 | | | | | | | | | | |
| | | Termination per month | | | UNCSX | U1TFS | 1087.66 | | | | | | | | | | |
| 4 | -WIRF | 56 KBPS DIGITAL LOOP WITH 56 KBPS INTEROFFICE TRAN | SPORT | - | 01100/1 | 01110 | 1007.00 | | | | | | | | | | |
| | | 4-wire 56 kbps Local Loop in combination - Zone 1 | 1 | 1 | UNCDX | UDL56 | 31.73 | | | | | | | | | | |
| | | 4-wire 56 kbps Local Loop in combination - Zone 2 | 1 | 2 | UNCDX | UDL56 | 37.35 | | İ | 1 | İ | | | İ | İ | İ | |
| | | 4-wire 56 kbps Local Loop in combination - Zone 3 | 1 | 3 | UNCDX | UDL56 | 41.83 | | İ | 1 | İ | 1 | İ | İ | İ | İ | |
| | | Interoffice Transport - Dedicated - 4-wire 56 kbps combination - | 1 | | 1 | | | | | 1 | 1 | Ì | | | 1 | 1 | |
| | | Per Mile per month | | 1 | UNCDX | 1L5XX | 0.01 | | | | | | | | | | |
| | | Interoffice Transport - Dedicated - 4-wire 56 kbps combination - | | | İ | | | | 1 | 1 | 1 | | | 1 | 1 | 1 | |
| | | Facility Termination per month | | | UNCDX | U1TD5 | 19.84 | | | | | | | | | | |
| 4 | -WIRE | 64 KBPS DIGITAL EXTENDED LOOP WITH 64 KBPS INTERO | FFICE 1 | FRANS | PORT | | | | | | | | | | | | |
| | | 4-wire 64 kbps Lcoal Loop in Combination - Zone 1 | | 1 | UNCDX | UDL64 | 31.73 | | | | | | | | | | |
| | | 4-wire 64 kbps Lcoal Loop in Combination - Zone 2 | | 2 | UNCDX | UDL64 | 37.35 | | | | | | | | | | |
| | | 4-wire 64 kbps Lcoal Loop in Combination - Zone 3 | | 3 | UNCDX | UDL64 | 41.83 | | | | | | | | | | |
| | | Interoffice Transport - Dedicated - 4-wire 64 kbps combination - | | | | | | | | | | | | | | | |
| | | Per Mile per month | | | UNCDX | 1L5XX | 0.01 | | | | | | | | | | |
| | | Interoffice Transport - Dedicated - 4-wire 64 kbps combination - | | | | | | | | | | | | | | | |
| | | Facility Termination per month | | | UNCDX | U1TD6 | 19.84 | | | | | | | | | | |
| 4 | -WIRE | 56 KBPS DIGITAL EXTENDED LOOP WITH DS0 INTEROFFIC | ETRAN | | | | | | | | | | | | | | |
| | | 4-wire 56 kbps Local Loop in combination - Zone 1 | | 1 | UNCDX | UDL56 | 31.73 | | | | | | | | | | |
| | | 4-wire 56 kbps Local Loop in combination - Zone 2 | | 2 | UNCDX | UDL56 | 37.35 | | | | | | | | | | |
| | | 4-wire 56 kbps Local Loop in combination - Zone 3 | | 3 | UNCDX | UDL56 | 41.83 | | | | | | | | | | |
| | | 4-wiree 56 kbps Interoffice Transport - Dedicated - Per Mile per | | | | | 0.01 | | | | | | | | | | |
| | | month | | | UNCDX | 1L5XX | 0.01 | | | | | | | | | | |
| | | 4-wire 56 kbps Interoffice Transport - Dedicated - Facility | | | | U1TD5 | 10.04 | | | | | | | | | | |
| | WIDE | Termination per month 64 KBPS DIGITAL EXTENDED LOOP WITH DS0 INTEROFFIC | | ISDOD. | | 01105 | 19.84 | | | | | | | | | | |
| - | | 4-wire 64 kbps Local Loop in combination - Zone 1 | | 1 | UNCDX | UDL64 | 31.73 | | | | | | | | | | |
| | | 4-wire 64 kbps Local Loop in combination - Zone 1 | | 2 | UNCDX | UDL64 | 37.35 | | | | | | | | | | |
| | | 4-wire 64 kbps Local Loop in combination - Zone 2 4-wire 64 kbps Local Loop in combination - Zone 3 | | 3 | UNCDX | UDL64 | 41.83 | | | | | | | | | | |
| | | I4-wire 65 kbps Interoffice Transport - Dedicated - Per Mile per | | 5 | SI ODA | 50204 | 71.03 | | | + | 1 | | | | | | |
| | | month | 1 | 1 | UNCDX | 1L5XX | 0.01 | | | | 1 | | | | | | |
| + | | 4-wire 64 kbps Interoffice Transport - Dedicated - Facility | 1 | 1 | | | 0.01 | | i | 1 | 1 | | | i | İ | İ | |
| | | Termination per month | | | UNCDX | U1TD6 | 19.84 | | | 1 | | | | | | | |
| | S1 DI | GITAL LOOP AND DS1 INTERFOFFICE TRANSPORT | | 1 | | | | | | 1 | 1 | | | | | | |
| | | 4-Wire DS1 Digital Loop in Combination - Zone 1 | 1 | 1 | UNC1X | USLXX | 99.44 | | İ | 1 | İ | 1 | İ | İ | İ | İ | |
| | | 4-Wire DS1 Digital Loop in Combination - Zone 2 | | 2 | UNC1X | USLXX | 131.22 | | 1 | 1 | 1 | | | 1 | 1 | 1 | |
| | | 4-Wire DS1 Digital Loop in Combination - Zone 3 | | 3 | UNC1X | USLXX | 342.42 | | | | | | | | | | |
| | | Interoffice Transport - Dedicated - DS1 combination - Per Mile | | | | | | | | | | | | | | | |
| | | per month | | | UNC1X | 1L5XX | 0.22 | | | | | | | | | | |
| | | Interoffice Transport - Dedicated - DS1 combination - Facility | | | | | | | | | | | | | | | |
| | | Termination per month | | 1 | UNC1X | U1TF1 | 90.87 | | | 1 | 1 | | | | | | |
| | | GITAL LOOP WITH DEDICATED DS3 INTEROFFICE TRANSPO | ORT | L | | | | | ļ | 1 | ļ | | | ļ | ļ | ļ | |
| | | DS3 Local Loop in combination - per mile per month | I | L | UNC3X | 1L5ND | 12.23 | | | | 1 | | | | | | |
| | | | | | | | | | | 1 | | | | | | | |
| | | DS3 Local Loop in combination - Facility Termination per month | | | UNC3X | UE3PX | 407.74 | | | | | ļ | | | | | |
| + | | Interoffice Transport - Dedicated - DS3 - Per Mile per month | I | | UNC3X | 1L5XX | 4.70 | | | + | | L | | | | | |
| | | Interoffice Transport - Dedicated - DS3 combination - Facility | | | LINCOV | | 4444.00 | | | 1 | | | | | | | |
| | TC 4 | Termination per month | I CROPT | - | UNC3X | U1TF3 | 1111.92 | | | + | | | | | | | ├──── ┤ |
| | | DIGITAL LOOP WITH DEDICATED STS-1 INTEROFFICE TRAN | 13PORT | | LINCOV | | 40.00 | | | + | | | | | | | |
| + | | STS-1 Local Lolp in combination - per mile per month STS-1 Local Loop in combination - Facility Termination per | | - | UNCSX | 1L5ND | 12.23 | | | + | | | | | | | |
| | | month | 1 | 1 | UNCSX | UDLS1 | 423.87 | | | | 1 | | | | | | |
| | | monu | 1 | 1 | 014007 | 00131 | 423.07 | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |

Exhibit 1

| UNBUN | NDLE | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachmen | t: 1 Table 1 | | |
|----------|---------|---|-------------|--------|-----------------------------|--------------|----------------|-----------|------------|--------------|------------|---|----------|--|--|---|---|
| CATEGO | ORY | RATE ELEMENTS | Interi m | Zone | BCS | USOC | | | RATES (\$) | | | Svc Order Submitted Elec per LSR | Manually | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Incremental Charge - Manual Svc Order vs. Electronic- Add'l | Incremental Charge - Manual Svc Order vs. Electronic- Disc 1st | Incremental Charge - Manual Svc Order vs. Electronic- Disc Add'I |
| | | | | | | | Dur | Nonrec | urring | Nonrecurring | Disconnect | | 1 | OSS | Rates (\$) | 1 | |
| | | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | Interoffice Transport - Dedicated - STS-1 combination - per mile per month | | | UNCSX | 1L5XX | 4.70 | | | | | | | | | | |
| | | Interoffice Transport - Dedicated - STS-1 combination - Facility Termination per month | | | UNCSX | U1TFS | 1087.66 | | | | | | | | | | |
| | | ETWORK ELEMENTS | | | | | | | | | | | | | | | |
| | | used as a part of a currently combined facility, the non-recurr | | | | | | | | | | | | | | | ' |
| | | used as ordinarily combined network elements in All States, the | | | | | As Is Charge d | loes not. | | | | | | | | | ' |
| | | urring Currently Combined Network Elements "Switch As Is" | Charge | (One a | pplies to each com | bination) | | | | | | | | | | | ' |
| (| Optiona | al Features & Functions: | | | | | | | | | | | | | | | ' |
| | | Clear Channel Capability Extended Frame Option - per DS1 | Ι | | U1TD1, ULDD1,UNC1X | CCOEF | | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | | Clear Channel Capability Super FrameOption - per DS1 | Ι | | U1TD1, ULDD1,UNC1X | CCOSF | | 0.00 | 0.00 | 0.00 | 0.00 | | | | | | |
| | | Clear Channel Capability (SF/ESF) Option - Subsequent | | | ULDD1, U1TD1, | | | | | | | | | | | | i i |
| | | Activity - per DS1 | I | | UNC1X, USL U1TD3, ULDD3, | NRCCC | | 184.91 | 23.82 | 1.99 | 0.78 | | | | | | ' |
| | | C-bit Parity Option - Subsequent Activity - per DS3 | | | UE3, UNC3X | NRCC3 | | 205.70 | 7.20 | 0.6924 | 0.00 | | | | | | 1 |
| | | PLEXERS | 1 | | UES, UNCSA | INRCCS | | 205.70 | 7.20 | 0.0924 | 0.00 | | | | | | i' |
| ľ | | DS1 to DS0 Channel System per month | | | UNC1X | MQ1 | 130.33 | | | | | | | | | | i' |
| | | OCU-DP COCI (data) - DS1 to DS0 Channel System - per | | | | | 130.33 | | | | | | | | | | i |
| | | month (2.4-64kbs) used for a Local Loop | | | UDL | 1D1DD | 1.52 | | | | | | | | | | 1 |
| | | OCU-DP COCI (data) - DS1 to DS0 Channel System - per | | | | | | | | | | | | | | | 1 |
| | | month (2.4-64kbs) used for connection to a channelized DS1 | | | | | | | | | | | | | | | 1 |
| | | Local Channel in the same SWC as collocation | | | U1TUD | 1D1DD | 1.52 | | | | | | | | | | 1 |
| | | 2-wire ISDN COCI (BRITE) - DS1 to DS0 Channel Systsem - per | | | | | | | | | | | | | | | (|
| | | month for a Local Loop | | | UDN | UC1CA | 3.27 | | | | | | | | | | i |
| | | 2-wire ISDN COCI (BRITE) - DS1 to DS0 Channel Systsem - per month used for connection to a channelized DS1 Local Channel in the same SWC as collocation | | | U1TUB | UC1CA | 3.27 | | | | | | | | | | |
| \vdash | | Voice Grade COCI - DS1 to DS0 Channel System - per month | | | | UCICA | 3.27 | | | | | | | | | | l |
| | | used for a Local Loop Voice Grade COCI - DS1 to DS0 Channel System - per month | | | UEA | 1D1VG | 0.72 | | | | | | | | | | |
| | | used for connection to a channelized DS1 Local Channel in the | | | | 1041/0 | 0.70 | | | | | | | | | | 1 |
| \vdash | | same SWC as collocation DS3 to DS1 Channel System per month | | | U1TUC UNC3X | 1D1VG MQ3 | 0.72 181.93 | | | | | | | | | | l |
| \vdash | | STS-1 to DS1 Channel System per month | | | UNC3X | MQ3 MQ3 | 181.93 | | | | | | | | | | I |
| | | DS1 COCI used with Loop per month | | | USL | UC1D1 | 13.57 | | | | | | | | | | ł |
| | | DS1 COCI used for connection to a channelized DS1 Local | | | | 00101 | 13.57 | | | | | | | | | | |
| | | Channel in the same SWC as collocation) per month | | | U1TUA | UC1D1 | 13.57 | | | | | | | | | | I |
| | | DS1 COCI used with Interoffice Channel per month | | | U1TD1 | UC1D1 | 13.57 | | | | | | | | | | |
| T | | DS3 Interface Unit (DS1 COCI) used with Local Channel per month | | | ULDD1 | UC1D1 | 13.57 | | | | | | | | | | |

| LOCAL INT | ERCONNECTION - Kentucky | | | | | | | | | | | | Attachment: | 1 Table 1 | | |
|-------------|---|-------------|------|-----|-------|-----------|--------|-----------|--------------|------------|-------|-----------|--|-----------|----------|----------|
| CATEGORY | RATE ELEMENTS | Interi m | Zone | BCS | USOC | | | RATES(\$) | | | | Submitted | Incremental Charge - Manual Svc Order vs. Electronic- 1st | Charge - | Charge - | Charge - |
| | | 1 | | | | _ | Nonrec | urrina | Nonrecurring | Disconnect | | | OSS | Rates(\$) | | |
| | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| SIGNALING (| | | | | | | | | | | | | | | | |
| SIGNALING (| CCS7 Signaling Termination, Per STP Port | | | UDB | PT8SX | 151.39 | | | ł | | | 1 | | | ł | ╂───── |
| | CCS7 Signaling Usage, Per TCAP Message | | | 000 | 11007 | 0.0000656 | | | - | | | | | | | |
| | CCS7 Signaling Connection, Per link (A link) | | | UDB | TPP6A | 20.71 | 43.56 | 43.56 | 22.45 | 22.45 | | | | - | | |
| | CCS7 Signaling Connection, Per link (B link) (also known as D link) | | | UDB | TPP6B | 20.71 | 43.56 | 43.56 | 22.45 | 22.45 | | | | | | |
| | CCS7 Signaling Connection, Switched access service, interface groups, transmissiom paths 6 DS1 level path with bit stream signaling | | | UDB | TPP6X | 20.71 | 43.56 | 43.56 | 22.45 | 22.45 | | | | | | |
| | CCS7 Signaling Connection-A link, per month | | | UDB | TPP9A | 20.71 | 43.56 | 43.56 | 22.45 | 22.45 | | | | | | |
| | CCS7 Signaling Connection-B link(also known as D link) per month | | | UDB | TPP9B | 20.71 | 43.56 | 43.56 | 22.45 | 22.45 | | | | | | |
| | CCS7 Signaling Connection, Switched access service, interface groups, transmissiom paths 9 DS3 level path with bit stream signaling | | | UDB | TPP9X | 20.71 | 43.56 | 43.56 | 22.45 | 22.45 | | | | | | |
| | CCS7 Signaling Usage, Per ISUP Message | | | | | 0.0000164 | | | | | | | | | | |
| | CCS7 Signaling Usage Surrogate, per link per LATA | | | UDB | STU56 | 751.08 | | | | | | | | | | |
| | CCS7 Signaling Point Code, per Originating Point Code Establishment or Change, per STP affected | | | UDB | CCAPO | | 46.02 | 46.02 | 56.43 | 56.43 | | | | | | |
| | CCS7 Signaling Point Code, per Destination Point Code Establishment or Change, Per Stp Affected | | | UDB | CCAPD | | 46.02 | 46.02 | 56.43 | 56.43 | | | | | | |

| UNBUNDLED | D NETWORK ELEMENTS - Kentucky | | | | | | | | | | | | Attachment: | 1 Table 1 | | |
|--------------|---|----------|----------|-----------------------|---------------|-----------------|-----------------|------------------|--------------|--------------|-----------|-----------|-------------|-------------|-------------|-------------|
| | | | | | | | | | | | Svc Order | Svc Order | Incremental | Incremental | Incremental | Incremental |
| | | | | | | | | | | | | Submitted | Charge - | Charge - | Charge - | Charge - |
| | | | | | | | | | | | Elec | | Manual Svc | | Manual Svc | |
| CATEGORY | RATE ELEMENTS | Interi | Zone | BCS | USOC | | | RATES(\$) | | | | per LSR | Order vs. | Order vs. | Order vs. | Order vs. |
| | | m | | | | | | | | | per Loix | per Loix | Electronic- | Electronic- | Electronic- | Electronic- |
| | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | 1st | Add'l | Disc 1st | Disc Add'l |
| | | | | | | | Nonrec | urring | Nonrecurring | g Disconnect | | | OSS | Rates(\$) | | |
| | | | | | | Rec | First | Add'l | First | Add'l | SOMEC | SOMAN | SOMAN | SOMAN | SOMAN | SOMAN |
| | | | | | | | | | | | | | | | | |
| LINE SHARING | | | | | | | | | | | | | | | | |
| NOTE 1 | : The Line Sharing monthly recurring rates for all installation | ns comp | pleted f | rom October 02, 200 | 3 through m | idnight Octobe | r 01, 2004 shal | l be billed as f | ollows: | | | | | | | 1 |
| NOTE 1 | : 10/02/2003 - 10/01/2004: 25% of the rate for an unbundled co | opper lo | op non | -designed ("UCLND | ") | | | | | | | | | | | |
| NOTE 1 | : 10/02/2004 - 10/01/2005: 50% of the rate for UCLND | | | | | | | | | | | | | | | |
| NOTE 1 | : 10/02/2005 - 10/01/2006: 75% of the rate for UCLND | | | | | | | | | | | | | | | |
| NOTE 1 | : Above will apply to USOCS: ULSDT and ULSCT | | | | | | | | | | | | | | | |
| **NOTE | 2: The Line Sharing monthly recurring rates with USOCs ULS | SDC and | d ULSC | C applies only to cir | cuits install | ed and inservic | e on or before | October 1, 200 | 03 | | | | | | | |
| LINE S | HARING | | | | | | | | | | | | | | | |
| SPLITT | ERS-CENTRAL OFFICE BASED | | | | | | | | | | | | | | | 1 |
| | Line Sharing Splitter, per System 96 Line Capacity | | | ULS | ULSDA | 198.83 | 379.05 | 0.00 | 358.55 | 0.00 | | | | | | 1 |
| | Line Sharing Splitter, per System 24 Line Capacity | | | ULS | ULSDB | 49.71 | 379.05 | 0.00 | 358.55 | 0.00 | | | | | | |
| | Line Sharing Splitter, Per System, 8 Line Capacity | | | ULS | ULSD8 | 16.94 | 377.71 | 0.00 | 357.29 | 0.00 | | | | | | |
| | Line Sharing-DLEC Owned Splitter in CO-CFA activaton- | | | | | | - | | | | | | | | | |
| | deactivation (per LSOD) | | | ULS | ULSDG | | 173.62 | 0.00 | 100.40 | 0.00 | | | | | | |
| | SER ORDERING-CENTRAL OFFICE BASED LINE SHARING | | | | | | | | | | | | | | | |
| | Line Sharing - per Line Activation (BST Owned splitter) - | | | | | | | | | | | | | | | |
| | OBSOLETE see **NOTE 2 | | | ULS | ULSDC | 0.61 | 37.16 | 21.28 | 20.17 | 9.90 | | | | | | |
| | Line Share Service, TRO per line activation, BST owned splitter - | | | | | | | | - | | | | | | | |
| | Central Office Located (50% of UCLND) - please see NOTE 1 | | | | | | | | | | | | | | | |
| | (E:10/2/2004) | | | ULS | ULSDT | 5.29 | 37.16 | 21.28 | 20.17 | 9.90 | | | | | | |
| | Line Share Service, TRO per line activation, BST owned splitter - | | | | | 0 | | | | | | | | | | |
| | Central Office Located (75% of UCLND) - please see NOTE 1 | | | | | | | | | | | | | | | |
| | (E:10/2/2005) | | | ULS | ULSDT | 7.94 | 37.16 | 21.28 | 20.17 | 9.90 | | | | | | |
| | Line Sharing - per Subsequent Activity per Line | | | | | | | | | | | | | | | |
| | Rearrangement(BST Owned Splitter) | | | ULS | ULSDS | | 32.90 | 16.43 | | | | | | | | |
| | Line Sharing - per Subsequent Activity per Line | | | 010 | 01000 | | 02.00 | 10.10 | | | | | | | | |
| | Rearrangement(DLEC Owned Splitter) | | | ULS | ULSCS | | 32.90 | 16.43 | | | | | | | | |
| | Line Sharing - per Line Activation (DLEC owned Splitter) - | | | 010 | 01000 | | 02.00 | 10.40 | | | 1 | | | | | <u> </u> |
| | OBSOLETE see **NOTE 2 | | | ULS | ULSCC | 0.61 | 47.44 | 19.31 | 20.67 | 12.74 | | | | | 1 | |
| | Line Share Service. TRO per line activation. CLEC owned | | | 010 | 01000 | 0.01 | 47.44 | 10.01 | 20.07 | 12.74 | | | | | | †' |
| | splitter - Central Office Located (50% of UCLND) - please see | | | | | | | | | | | | | | | |
| | NOTE 1 (E:10/2/2004) | | | ULS | ULSCT | 5.29 | 47.44 | 19.31 | 20.67 | 12.74 | | | | | 1 | |
| | Line Share Service, TRO per line activation, CLEC owned | | | 010 | 01001 | 5.23 | 47.44 | 13.51 | 20.07 | 12.14 | | | | | | 1 |
| | splitter - Central Office Located (75% of UCLND) - please see | | | | | | | | | | | | | | 1 | |
| | NOTE 1 (E:10/2/2005) | | | ULS | ULSCT | 7.94 | 47.44 | 19.31 | 20.67 | 12.74 | | 1 | | | | |
| | NOTE 1 (L. 10/2/2003) | I | 1 | ULO | 01301 | 1.94 | 47.44 | 19.31 | 20.07 | 12.74 | 1 | I | l | I | 1 | L |