

ATTACHMENT 5
**Description of the Facility's Impact on Transportation Routes, Prime
Agricultural Lands, Water Resources, Historic Properties, and
Endangered and Threatened Species**
Special Waste Landfill Permit
Big Sandy Plant – Ash Pond Closure
Lawrence County, Kentucky


Closure of the existing facility would have no impact on local transportation routes. US Route 23 is a major, four-lane road that passes between Big Sandy Plant and the existing ash pond. The proposed closure of the ash pond suggests future traffic and transport of materials to the ash pond will be reduced and/or eliminated.

The ash pond is an existing facility. A table review of available aerial photography and topographic maps indicate that the site is a valley surrounded by fairly steep, wooded hills. As the facility is considered an existing fly ash impoundment, there is no prime agricultural land present on, or near the proposed closure site. There will be no impact to prime agricultural land as a result of the pond closure. Site survey performed as part of the Site Cultural Resources walkover and Wetland Delineation Investigation performed in 2012 confirm the absence of agricultural land within the area of interest.

An application for coverage under the KPDES permit program for storm water associated with construction activities will be submitted to the Kentucky Department for Environmental Protection (KDEP) prior to construction activities. During construction, a Storm Water Pollution Prevention Plan (SWPPP) will be implemented, including controls to avoid or minimized impacts to storm water. After construction, water quality will be monitored in accordance with the facility's KPDES permit (**KY0000221**), attached. Additional storm water calculations may be found in **Attachment 23**: Surface water controls report.

The proposed closure of the existing ash pond will have no impact on archaeological resources or historic properties, as presented in the Archaeological Site Review (**Attachment 16**). Construction for the closure of the existing ash pond will not impact threatened or endangered species. The Kentucky State Nature Preserves Commission was contacted and a search of their database previously performed by GeoSyntec revealed no records for federal or state listed species or critical habitats on the landfill site. Several listed species were noted within 1, 5, and 10 miles of the site, but closure of the existing facility will not impact these areas. Additional information on critical habitats is provided in **Attachment 17**. A letter was also submitted to the USFWS requesting review of the project and its potential to affect the federally-listed Indiana bat (*Myotis sodalists*), which is identified to potentially be present in Lawrence County. Trees requiring removal will be taken prior to migration/roosting season as to not affect the Indiana bat.

KPDES

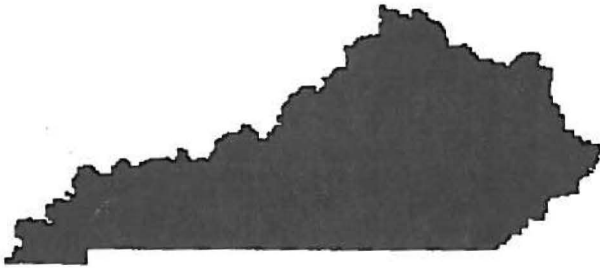

**KENTUCKY POLLUTANT
DISCHARGE ELIMINATION
SYSTEM**

PERMIT

PERMIT NO.: KY0000221

**AUTHORIZATION TO DISCHARGE UNDER THE
KENTUCKY POLLUTANT DISCHARGE ELIMINATION SYSTEM**

Pursuant to Authority in KRS 224,

Kentucky Power Company
1 Riverside Plaza
Columbus, Ohio 43215-2373

is authorized to discharge from a facility located at

Kentucky Power Company
Big Sandy Plant
U.S. Highway 23
Louisa, Lawrence County, Kentucky

to receiving waters named

Outfalls 001 and 018 are to Blaine Creek at milepoints 2.0 and 1.9, respectively.
Outfalls 002, 003, and 005 are to Outfall 001 via the bottom ash pond.
Outfalls 004, 007 through 017, and 019 are to the Big Sandy River between milepoints 19.6 and 20.45.
Outfall 006 is the plant intake.


in accordance with effluent limitations, monitoring requirements, and other conditions set forth in PARTS I, II, III, IV, and V hereof. The permit consists of this cover sheet and PART I 8 pages, PART II 1 page, PART III 1 page, PART IV 3 pages, and PART V 3 pages.

This permit shall become effective on **APR 1 2003**

This permit and the authorization to discharge shall expire at midnight, March 31, 2006.

FEB 4 2003

Date Signed


Jeffrey W. Pratt, Director
Division of Water

Robert W. Logan
Commissioner

DEPARTMENT FOR ENVIRONMENTAL PROTECTION
Division of Water, Frankfort Office Park, 14 Reilly Road, Frankfort, Kentucky 40601

Printed on Recycled Paper

A1. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

During the period beginning on the effective date of this permit and lasting through the term of this permit, the permittee is authorized to discharge from Outfall serial number: 001 - Combined wastewaters of fly ash pond overflow (ash transport waters, coal pile runoff and bottom ash pond overflow consisting of low volume wastes, sump waters, storm water runoff, metal cleaning wastes (Outfall 005), and cooling tower blowdown (Outfalls 002 and 003)).

Such discharges shall be limited and monitored by the permittee as specified below:

<u>EFFLUENT CHARACTERISTICS</u>	<u>DISCHARGE LIMITATIONS</u>		<u>MONITORING REQUIREMENTS</u>	
	<u>Monthly Avg.</u>	<u>Daily Max.</u>	<u>Measurement Frequency</u>	<u>Sample Type</u>
Flow (MGD)	Report	Report	2/Month	Instantaneous
Total Suspended Solids (mg/l)	30	60	2/Month	Grab
Oil & Grease (mg/l)	6.0	6.0	2/Month	Grab
Hardness (as mg/l) (CaCO ₃)	Report	Report	2/Month	Grab
Total Recoverable Metals (mg/l)	Report	Report	1/Quarter	Grab
Chronic Toxicity (TU _c)	N/A	2.12	1/Quarter	3 Grabs

The pH of the effluent shall not be less than 6.0 standard units nor greater than 9.0 standard units and shall be monitored 2/Month by grab sample.

There shall be no discharge of floating solids or visible foam or sheen in other than trace amounts.

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location: nearest accessible point after final treatment, but prior to actual discharge to or mixing with the receiving waters or wastestreams from other outfalls.

The abbreviation N/A means Not Applicable.

The effluent characteristic "Total Recoverable Metals" means Antimony, Arsenic, Beryllium, Cadmium, Chromium, Copper, Lead, Mercury, Nickel, Selenium, Silver, Thallium, and Zinc. To report the results of the analyses for this parameter, the permittee shall total the results of the analyses for each individual parameter, and report that aggregate value on the DMR. The laboratory bench sheets showing the results for each parameter shall be attached to the DMR.

A2. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

During the period beginning on the effective date of this permit and lasting through the term of this permit, the permittee is authorized to discharge from Outfall serial number: 002 - Unit 1 cooling tower blowdown. Outfall 002 is an internal outfall discharges to Outfall 001.

Such discharges shall be limited and monitored by the permittee as specified below:

<u>EFFLUENT CHARACTERISTICS</u>	<u>DISCHARGE LIMITATIONS</u>		<u>MONITORING REQUIREMENTS</u>	
	Monthly <u>Avg.</u>	Daily <u>Max.</u>	Measurement <u>Frequency</u>	Sample <u>Type</u>
Flow (MGD)	Report	Report	1/Month	Calculated
Free Available Chlorine (mg/l)	0.2	0.5	Occurrence	Multiple Grab
Total Residual Chlorine (mg/l)	0.2	0.2	Occurrence	Multiple Grab
Total Residual Oxidants (mg/l)	Report	0.2	Occurrence	Multiple Grab
Time of Oxidant Addition (Minutes/unit/day)	N/A	120--DISCHARGE	Occurrence	Log
Total Chromium (mg/l)	0.2	0.2	Annually	Grab
Total Zinc (mg/l)	1.0	1.0	Annually	Grab
Priority Pollutants (mg/l)	Report	NDA	Annually	Grab

There shall be no discharge of floating solids or visible foam or sheen in other than trace amounts.

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location: nearest accessible point after final treatment, but prior to actual discharge to or mixing with the receiving waters or wastestreams from other outfalls.

Priority Pollutants shall be monitored annually by grab sample or by engineering calculations. The results of the analyses/engineering calculations shall be totaled and reported as a single concentration on the DMR. The laboratory bench sheets/engineering calculations showing the results for each pollutant shall be attached to the DMR. The term Priority Pollutants means the 126 priority pollutants listed in 40 CFR Part 423 Appendix A. See Attachment A - Fact Sheet Addendum for Steam Electric Power Generating Plants.

The term Total Residual Oxidants (TRO) means the value obtained using the amperometric titration or DPD methods for total residual chlorine described in 40 CFR Part 136. In the event of addition of an oxidant other than chlorine, the permittee shall receive prior approval from the Division of Water permitting staff before the initial use.

The measurement frequency "Occurrence" means during periods of chlorination or oxidant addition, but no more frequent than once per week.

The sample type "Multiple Grab" means grab samples collected at the approximate beginning of oxidant discharge and once every fifteen (15) minutes thereafter until the end of oxidant discharge.

The abbreviation N/A means Not Applicable.

The abbreviation NDA means No Detectable Amount.

A3. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

During the period beginning on the effective date of this permit and lasting through the term of this permit, the permittee is authorized to discharge from Outfall serial number: 003 - Unit 2 cooling tower blowdown. Outfall 003 is an internal outfall that discharges to Outfall 001.

Such discharges shall be limited and monitored by the permittee as specified below:

<u>EFFLUENT CHARACTERISTICS</u>	<u>DISCHARGE LIMITATIONS</u>		<u>MONITORING REQUIREMENTS</u>	
	Monthly <u>Avg.</u>	Daily <u>Max.</u>	Measurement <u>Frequency</u>	Sample <u>Type</u>
Flow (MGD)	Report	Report	1/Month	Calculated
Free Available Chlorine (mg/l)	0.2	0.5	Occurrence	Multiple Grab
Total Residual Chlorine (mg/l)	0.2	0.2	Occurrence	Multiple Grab
Total Residual Oxidants (mg/l)	Report	0.2	Occurrence	Multiple Grab
Time of Oxidant Addition (Minutes/unit/day)	N/A	120	Occurrence	Log
Total Chromium (mg/l)	0.2	0.2	Annually	Grab
Total Zinc (mg/l)	1.0	1.0	Annually	Grab
Priority Pollutants (mg/l)	Report	NDA	Annually	Grab

There shall be no discharge of floating solids or visible foam or sheen in other than trace amounts.

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location: nearest accessible point after final treatment, but prior to actual discharge to or mixing with the receiving waters or wastestreams from other outfalls.

Priority Pollutants shall be monitored annually by grab sample or by engineering calculations. The results of the analyses/engineering calculations shall be totaled and reported as a single concentration on the DMR. The laboratory bench sheets/engineering calculations showing the results for each pollutant shall be attached to the DMR. The term Priority Pollutants means the 126 priority pollutants listed in 40 CFR Part 423 Appendix A. See Attachment A - Fact Sheet Addendum for Steam Electric Power Generating Plants.

The term Total Residual Oxidants (TRO) means the value obtained using the amperometric titration or DPD methods for total residual chlorine described in 40 CFR Part 136. In the event of addition of an oxidant other than chlorine, the permittee shall receive prior approval from the Division of Water permitting staff before the initial use.

The measurement frequency "Occurrence" means during periods of chlorination or oxidant addition, but no more frequent than once per week.

The sample type "Multiple Grab" means grab samples collected at the approximate beginning of oxidant discharge and once every fifteen (15) minutes thereafter until the end of oxidant discharge.

The abbreviation N/A means Not Applicable.

The abbreviation NDA means No Detectable Amount.

A3. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

During the period beginning on the effective date of this permit and lasting through the term of this permit, the permittee is authorized to discharge from Outfall serial number: 004 - Sanitary wastewater.

Such discharges shall be limited and monitored by the permittee as specified below:

<u>EFFLUENT CHARACTERISTICS</u>	<u>DISCHARGE LIMITATIONS</u>		<u>MONITORING REQUIREMENTS</u>	
	<u>Monthly</u> <u>Avg.</u>	<u>Daily</u> <u>Max.</u>	<u>Measurement</u> <u>Frequency</u>	<u>Sample</u> <u>Type</u>
Flow (MGD)	Report	Report	1/Month	Instantaneous
Biochemical Oxygen Demand, 5-day (mg/l)	30	45	1/Month	Grab
Total Suspended Solids (mg/l)	30	45	1/Month	Grab
Ammonia (as N) (mg/l)	20	30	1/Month	Grab
Fecal Coliform Bacteria (#/100 ml)	200	400	1/Month	Grab
Dissolved Oxygen (minimum) (mg/l)	2.0	N/A	1/Month	Grab
Total Residual Chlorine (mg/l)	0.019	0.019	1/Month	Grab

The pH of the effluent shall not be less than 6.0 standard units nor greater than 9.0 standard units and shall be monitored 1/Month by grab sample.

There shall be no discharge of floating solids or visible foam or sheen in other than trace amounts.

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location: nearest accessible point after final treatment, but prior to actual discharge to or mixing with the receiving waters or wastestreams from other outfalls.

The abbreviation N/A means Not Applicable.

A3. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

During the period beginning on the effective date of this permit and lasting through the term of this permit, the permittee is authorized to discharge from Outfall serial number: 005 - Metal cleaning wastes. Outfall 005 is an internal outfall that discharges to Outfall 001.

Such discharges shall be limited and monitored by the permittee as specified below:

<u>EFFLUENT CHARACTERISTICS</u>	<u>DISCHARGE LIMITATIONS</u>		<u>MONITORING REQUIREMENTS</u>	
	<u>Monthly</u> <u>Avg.</u>	<u>Daily</u> <u>Max.</u>	<u>Measurement</u> <u>Frequency</u>	<u>Sample</u> <u>Type</u>
Flow (MGD)	Report	Report	1/Batch	Calculated
Total Copper	1.0 mg/l	1.0 mg/l	1/Batch	Grab
Total Iron	1.0 mg/l	1.0 mg/l	1/Batch	Grab

The pH of the effluent shall be monitored 1/Batch by grab sample.

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location: nearest point prior to commingling with the waters of either ash pond.

Metal cleaning waste shall mean any wastewater resulting from cleaning (with or without chemical cleaning compounds) any metal process equipment including, but not limited to, boiler tube cleaning, boiler fireside cleaning, and air preheater cleaning. In accordance with the conditions of the previous permits, the permittee is allowed to discharge air preheater wash waters and boiler fireside cleaning directly to the ash pond without limitations or monitoring requirements, pursuant to the Jordan Memorandum. Monitoring is required only when chemical metal cleaning activities are being performed.

A3. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

During the period beginning on the effective date of this permit and lasting through the term of this permit, the permittee is authorized to discharge from Outfall serial number: 006 - Plant intake.

Such discharges shall be limited and monitored by the permittee as specified below:

<u>EFFLUENT CHARACTERISTICS</u>	<u>DISCHARGE LIMITATIONS</u>		<u>MONITORING REQUIREMENTS</u>	
	<u>Monthly</u> <u>Avg.</u>	<u>Daily</u> <u>Max.</u>	<u>Measurement</u> <u>Frequency</u>	<u>Sample</u> <u>Type</u>
Flow (MGD)	Report	Report	1/Week	Instantaneous
Temperature (°F)	Report	Report	1/Week	Grab
Total Suspended Solids (mg/l)	Report	Report	1/Week	Grab
Hardness (as mg/l) (CaCO ₃)	Report	Report	1/Week	Grab
pH (Standard Units)	Report	Report	1/Week	Grab
Total Recoverable Metals	N/A	Report	1/Quarter	Grab

There shall be no discharge of floating solids or visible foam or sheen in other than trace amounts.

Samples taken in compliance with the monitoring requirements specified above shall be taken at the following location: plant intake, except that temperature may be monitored at the river pumps.

The effluent characteristic "Total Recoverable Metals" means Antimony, Arsenic, Beryllium, Cadmium, Chromium, Copper, Lead, Mercury, Nickel, Selenium, Silver, Thallium, and Zinc. To report the results of the analyses for this parameter, the permittee shall total the results of the analyses for each individual parameter and report that aggregate value on the DMR. The laboratory bench sheets showing the results for each parameter shall be attached to the DMR.

A4. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

During the period beginning on the effective date of this permit and lasting through the term of this permit, the permittee is authorized to discharge from Outfall serial number: **Outfall 007** - Storm water runoff from 91.8 acres north of U.S. Highway 23, the area north of Unit 2, and the area around the performance building and behind the storage warehouses. Additional wastewaters include occasional fire header flushing, Unit 1 cooling tower emergency overflow and cooling waters and auxiliary blowdown during Unit 2 outage, **Outfall 008** - Storm water runoff from 5.7 acres west of Unit 2 coal storage area and Unit 2 turbine roof drains. Additional wastewaters include Unit 2 condensate storage tank overflow, Unit 2 wastewater sump overflow, south Unit 2 coal pile drainage pond sump overflow, occasional fire header flushing and Unit 2 cooling tower emergency overflow, **Outfall 009** - Storm water runoff from 104.3 acres north of U.S. Highway 23 and north of Unit 2 coal storage area, **Outfall 010** - Storm water runoff from 0.8 acres east of Unit 2 coal yard buildings, **Outfall 011** - Storm water runoff from coal yard building roof drains and 1.3 acres south of Unit 2 coal yard buildings, **Outfall 012** - Has been eliminated by rerouting to coal pile runoff ponds, **Outfall 013** - Storm water runoff from 0.4 acres south of Unit 2 cooling tower, **Outfall 014** - Storm water runoff from 2.0 acres west of Unit 2 cooling tower, **Outfall 015** - Storm water runoff from 1.7 acres around storeroom warehouses, parking lot and roof drains, **Outfall 016** - Storm water runoff from 0.7 acres around Unit 1 condensate storage tank and road. Additional wastewaters include Unit 1 condensate storage tank overflow, Unit 1 cooling tower basin drain, and tower flume overflow, **Outfall 017** - Storm water runoff from 38.8 acres north of U.S. Highway 23 around bottom ash ponds and parking lot, Unit 1 service building, coal storage area, tractor sheds, and roof drains, **Outfall 018** - Interior drains of the fly ash dam. May include overflow of mine seepage sump if sump pump fails, and **Outfall 019** - Storm water runoff from 1.5 acres east of Unit 1 cooling tower.

Such discharges shall be limited and monitored by the permittee as specified below:

<u>EFFLUENT CHARACTERISTICS</u>	<u>DISCHARGE LIMITATIONS</u>		<u>MONITORING REQUIREMENTS</u>	
	Monthly <u>Avg.</u>	Daily <u>Max.</u>	Measurement <u>Frequency</u>	Sample <u>Type</u>

The Division of Water has determined that implementation of Best Management Practices (BMPs) would be the most effective approach for controlling pollutants from these areas.

B. Schedule of Compliance

The permittee shall achieve compliance with all requirements on the effective date of this permit.

C. Cooling Water Additives, FIFRA, and Mollusk Control

The discharge of any product registered under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA) in cooling water which ultimately may be released to the waters of the Commonwealth is prohibited, except Herbicides, unless specifically identified and authorized by the KPDES permit. In the event the permittee needs to use a biocide or chemical not previously reported for mollusk control or other purpose the permittee shall submit sufficient information, a minimum of thirty (30) days prior to the commencement of use of said biocides or chemicals, to the Division of Water for review and establishment of appropriate control parameters. Such information requirements shall include:

1. Name and general composition of biocide or chemical,
2. Any and all aquatic organism toxicity data,
3. Quantities to be used,
4. Frequencies of use,
5. Proposed discharge concentrations, and
6. EPA registration number, if applicable.

D. Polychlorinated Biphenyls

Pursuant to the requirements of 401 KAR 5:065, Section 4(4) (40 CFR Parts 423.12(b)(2) and 423.13(a)), there shall be no discharge from any point source of polychlorinated biphenyl compounds such as those commonly used in transformer fluids. The permittee shall implement this requirement as a specific section of the BMP plan developed for this station.

E. Selective Catalytic Reduction Devices or Systems (SCRs) and Nonselective Catalytic Reduction Devices or Systems (NSCRs)

In response to recent Clean Air Act amendments, the installation of these devices for NOx reduction may become necessary. Associated with the installation and operation of these units, an "ammonia slip" may occur resulting in the discharge of ammonia to the ash pond. The impact of such an occurrence on the performance of the ash pond and any eventual impact on the environment is not known. Therefore, should it become necessary to install these devices, the permittee shall develop and implement an Ammonia Monitoring Plan. The plan shall be submitted to the Division of Water within ninety (90) days of the determination that these devices will be installed, and shall include at a minimum influent and effluent monitoring of each unit on a monthly basis with submission of the data as a quarterly report.

F. Section 311, Clean Water Act Exclusion

The permittee is relieved of the reporting and liability requirements under Section 311 of the Clean Water Act for the following substances, consistent with Exclusion 2, authorized by Section 311(a)(a)(B) and 40 CFR Part 117.12 for: Ammonium Hydroxide, Sodium Hypochlorite, Ethylene Diaminetetracetic Acid (EDTA), Sodium Hydroxide, Sodium Nitrite, Sodium Phosphate (Dibasic), and Sulfuric Acid.

STANDARD CONDITIONS FOR KPDES PERMIT

The permittee is also advised that all KPDES permit conditions in KPDES Regulation 401 KAR 5:065, Section 1 will apply to all discharges authorized by this permit.

This permit has been issued under the provisions of KRS Chapter 224 and regulations promulgated pursuant thereto. Issuance of this permit does not relieve the permittee from the responsibility of obtaining any other permits or licenses required by this Cabinet and other state, federal, and local agencies.

It is the responsibility of the permittee to demonstrate compliance with permit parameter limitations by utilization of sufficiently sensitive analytical methods.

PART III

OTHER REQUIREMENTS

A. Reporting of Monitoring Results

Monitoring results obtained during each month must be reported on a preprinted Discharge Monitoring Report (DMR) Form, which will be mailed to you. Each month's completed DMR must be sent to the Division of Water at the address listed below (with a copy to the appropriate Regional Office) postmarked no later than the 28th day of the month following the month for which monitoring results were obtained.

Division of Water
Morehead Regional Office
200 Christy Creek Road, Suite 2
Morehead, Kentucky 40351
ATTN: Supervisor

Kentucky Natural Resources and
Environmental Protection Cabinet
Dept. for Environmental Protection
Division of Water/KPDES Branch
14 Reilly Road, Frankfort Office Park
Frankfort, Kentucky 40601

B. Reopener Clause

This permit shall be modified, or alternatively revoked and reissued, to comply with any applicable effluent standard or limitation issued or approved under 401 KAR 5:050 through 5:080, if the effluent standard or limitation so issued or approved:

1. Contains different conditions or is otherwise more stringent than any effluent limitation in the permit; or
2. Controls any pollutant not limited in the permit.

The permit as modified or reissued under this paragraph shall also contain any other requirements of KRS Chapter 224 when applicable.

PART IV
CHRONIC CONCERNS
Biomonitoring

In accordance with PART I of this permit, the permittee shall initiate the series of tests described below within 30 days of the effective date of this permit to evaluate wastewater toxicity of the discharge from Outfall 001. If the permittee is using a more sensitive species, the initial four (4) tests shall be conducted using both test species as indicated below to provide confirmation of previously identified most sensitive test organism.

1. Test Requirements

- A. The permittee shall perform one (1) short-term fathead minnow (*Pimephales promelas*) growth test and one (1) short-term daphnid (*Ceriodaphnia* sp.) life-cycle test. Tests shall be conducted with appropriate replicates of 69% effluent, a control, and a minimum of four (4) evenly spaced effluent concentrations. If the permit limit is less than 100% effluent and greater than or equal to 75% effluent, then one (1) concentration should be 100%. If the permit limit is less than 75% effluent, the permit limit concentration shall be bracketed with two (2) concentrations above and two (2) concentrations below. The selection of the effluent concentrations is subject to revision by the Division. Controls shall be tested concurrently with effluent testing using a synthetic water. The analysis will be deemed reasonable and good only if the minimum control requirements are met (i.e. >80% survival; 60% adults with 3 broods and 15 young/female for the *Ceriodaphnia* test; an average 0.25 mg weight for the minnow growth test). Any test that does not meet the control acceptability criteria shall be repeated as soon as practicable within the monitoring period (i.e. monthly or quarterly). Noncompliance with the toxicity limit will be demonstrated if the IC₂₅ (inhibition concentration) for reproduction or growth is less than 69% effluent. The average reproduction for *Ceriodaphnia* shall be calculated by dividing the total number of live *Ceriodaphnia* young in each concentration by the total number of organisms used to initiate that concentration; the average growth for the fathead minnows shall be calculated by dividing the total weight of surviving minnow larvae in each replicate by the total number of organisms used to initiate that replicate.

- B. Tests shall be conducted quarterly or at a frequency to be determined by the permitting authority.

A minimum of three (3) Grab samples will be collected at a frequency of one (1) sample every other day, or at a frequency to be determined by the permitting authority. For example, the first sample would be used for test initiation, day 1, and for test solution renewal on day 2. The second sample would be used for test solution renewal on days 3 and 4. The third sample would be used for test solution renewal on days 5, 6, and 7. The lapsed time from collection of the last aliquot of the composite and its first use for test initiation, or for test solution renewal shall not exceed 36 hours. Grab samples shall be iced during collection and maintained at 4° C until used.

After the first four (4) tests with both species, upon written request to the Division of Water's Bioassay Section, subsequent testing may be performed using only the most sensitive species.

2. Reporting Requirements

Results of all tests conducted with any organism shall be reported according to the most recent format provided by the Division of Water. Test results shall be submitted to the Division of Water with the next regularly scheduled discharge monitoring report.

Due to administrative and regulatory constraints regarding the requirements of Section 3 of this Part, monthly DMRs shall be submitted. Those required to conduct tests on a frequency other than monthly shall submit DMRs with "Not required this monitoring period" typed or written in the parameter row in addition to the DMR reporting the results of the test. All DMRs for Biomonitoring shall be submitted monthly regardless of required monitoring frequency.

3. Chronic Toxicity

- A. If noncompliance with the toxicity limit occurs (IC_{25} for reproduction or growth is less than 69% effluent), the permittee must conduct a second test within 15 days of the first failure. This test will be used in evaluating the persistence of the toxic event and the possible need for a Toxicity Reduction Evaluation (TRE).

If the second test demonstrates noncompliance with the toxicity limit, the permittee will be required to perform either of the options listed below. The Division must be notified of the option selected within five (5) days of the failure of this second test.

1) Accelerated Testing

Complete four (4) tests within 90 days of selection of this option to evaluate the frequency and degree of toxicity. The results of the two (2) tests specified in Section 3.A and of the four (4) additional tests will be used for purposes of this evaluation.

If results from two (2) of any six (6) tests show a significant non-compliance with the chronic limit (>1.2 times the TU_c), or results from four (4) of any six (6) tests show chronic toxicity (as defined in 1.A), a Toxicity Reduction Evaluation (TRE) will be required. The Division reserves the right to require a TRE in situations of recurring toxicity.

2) Toxicity Reduction Evaluation (TRE)

If it is determined that a TRE is required, a plan and implementation schedule must be submitted to the Division within 30 days of notification. The TRE shall include appropriate measures such as in-plant controls, additional wastewater treatment, or changes in the operation of the wastewater discharge to meet permit conditions. The TRE protocol shall follow that outlined in the most recent edition of EPA's guidance for conducting TRES.

- B. If a violation of the toxicity limit occurs, different or more stringent monitoring requirements may be imposed in lieu of the normal requirements of this permit for whatever period of time is specified by the Division of Water. The Division reserves the right to require additional testing or a TRE in situations of recurring toxicity.

4. Test Methods

All test organisms, procedures and quality assurance criteria used shall be in accordance with Short-term Methods for Estimating the Chronic Toxicity of Effluents and Receiving Waters to Freshwater Organisms (Third Edition), EPA-600-4-91-002, or the most recent edition of this publication.

PART V

BEST MANAGEMENT PRACTICES

SECTION A. GENERAL CONDITIONS

1. Applicability

These conditions apply to all permittees who use, manufacture, store, handle, or discharge any pollutant listed as: (1) toxic under Section 307(a)(1) of the Clean Water Act; (2) oil, as defined in Section 311(a)(1) of the Act; (3) any pollutant listed as hazardous under Section 311 of the Act; or (4) is defined as a pollutant pursuant to KRS 224.01-010(35) and who have ancillary manufacturing operations which could result in (1) the release of a hazardous substance, pollutant, or contaminant, or (2) an environmental emergency, as defined in KRS 224.01-400, as amended, or any regulation promulgated pursuant thereto (hereinafter, the "BMP pollutants"). These operations include material storage areas; plant site runoff; in-plant transfer, process and material handling areas; loading and unloading operations, and sludge and waste disposal areas.

2. BMP Plan

The permittee shall develop and implement a Best Management Practices (BMP) plan consistent with 401 KAR 5:065, Section 2(10) pursuant to KRS 224.70-110, which prevents or minimizes the potential for the release of "BMP pollutants" from ancillary activities through plant site runoff; spillage or leaks, sludge or waste disposal; or drainage from raw material storage. A Best Management Practices (BMP) plan will be prepared by the permittee unless the permittee can demonstrate through the submission of a BMP outline that the elements and intent of the BMP have been fulfilled through the use of existing plans such as the Spill Prevention Control and Countermeasure (SPCC) plans, contingency plans, and other applicable documents.

3. Implementation

If this is the first time for the BMP requirement, then the plan shall be developed and submitted to the Division of Water within 90 days of the effective date of the permit. Implementation shall be within 180 days of that submission. For permit renewals the plan in effect at the time of permit reissuance shall remain in effect. Modifications to the plan as a result of ineffectiveness or plan changes to the facility shall be submitted to the Division of Water and implemented as soon as possible.

4. General Requirements

The BMP plan shall:

- a. Be documented in narrative form, and shall include any necessary plot plans, drawings, or maps.
- b. Establish specific objectives for the control of toxic and hazardous pollutants.
 - (1) Each facility component or system shall be examined for its potential for causing a release of "BMP pollutants" due to equipment failure, improper operation, natural phenomena such as rain or snowfall, etc.

(2) Where experience indicates a reasonable potential for equipment failure (e.g., a tank overflow or leakage), natural condition (e.g., precipitation), or other circumstances which could result in a release of "BMP pollutants," the plan should include a prediction of the direction, rate of flow, and total quantity of the pollutants which could be released from the facility as result of each condition or circumstance.

- c. Establish specific Best Management Practices to meet the objectives identified under paragraph b of this section, addressing each component or system capable of causing a release of "BMP pollutants."
- d. Include any special conditions established in part b of this section.
- e. Be reviewed by plant engineering staff and the plant manager.

5. Specific Requirements

The plan shall be consistent with the general guidance contained in the publication entitled "NPDES Best Management Practices Guidance Document," and shall include the following baseline BMPs as a minimum.

- a. BMP Committee
- b. Reporting of BMP Incidents
- c. Risk Identification and Assessment
- d. Employee Training
- e. Inspections and Records
- f. Preventive Maintenance
- g. Good Housekeeping
- h. Materials Compatibility
- i. Security
- j. Materials Inventory

6. SPCC Plans

The BMP plan may reflect requirements for Spill Prevention Control and Countermeasure (SPCC) plans under Section 311 of the Act and 40 CFR Part 151, and may incorporate any part of such plans into the BMP plan by reference.

7. Hazardous Waste Management

The permittee shall assure the proper management of solid and hazardous waste in accordance with the regulations promulgated under the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act of 1978 (RCRA) (40 U.S.C. 6901 et seq.) Management practices required under RCRA regulations shall be referenced in the BMP plan.

8. Documentation

The permittee shall maintain a description of the BMP plan at the facility and shall make the plan available upon request to NREPC personnel. Initial copies and modifications thereof shall be sent to the following addresses when required by Section 3:

Division of Water
Morehead Regional Office
200 Christy Creek Road, Suite 2
Morehead, Kentucky 40351
ATTN: Supervisor

Kentucky Natural Resources and
Environmental Protection Cabinet
Dept. for Environmental Protection
Division of Water/KPDES Branch
14 Reilly Road, Frankfort Office Park
Frankfort, Kentucky 40601

9. BMP Plan Modification

The permittee shall amend the BMP plan whenever there is a change in the facility or change in the operation of the facility which materially increases the potential for the ancillary activities to result in the release of "BMP pollutants."

10. Modification for Ineffectiveness

If the BMP plan proves to be ineffective in achieving the general objective of preventing the release of "BMP pollutants," then the specific objectives and requirements under paragraphs b and c of Section 4, the permit, and/or the BMP plan shall be subject to modification to incorporate revised BMP requirements. If at any time following the issuance of this permit the BMP plan is found to be inadequate pursuant to a state or federal site inspection or plan review, the plan shall be modified to incorporate such changes necessary to resolve the concerns.

SECTION B. SPECIFIC CONDITIONS

Periodically Discharged Wastewaters Not Specifically Covered by Effluent Conditions

The permittee shall include in this BMP plan procedures and controls necessary for the handling of periodically discharged wastewaters such as intake screen backwash, meter calibration, fire protection, hydrostatic testing water, water associated with demolition projects, etc.

DISCLAIMER

The full text of certain NPDES permits and the associated fact sheets has been made available to provide online access to this public information. EPA is making permits and fact sheets available electronically to provide convenient access for interested public parties and as a reference for permit writers. The ownership of these documents lies with the permitting authority, typically a State with an authorized NPDES program.

While EPA makes every effort to ensure that this web site remains current and contains the final version of the active permit, we cannot guarantee it is so. For example, there may be some delay in posting modifications made after a permit is issued. Also note that not all active permits are currently available electronically. Only permits and fact sheets for which the full text has been provided to Headquarters by the permitting authority may be made available. Headquarters has requested the full text only for permits as they are issued or reissued, beginning November 1, 2002.

Please contact the appropriate permitting authority (either a State or EPA Regional office) prior to acting on this information to ensure you have the most up-to-date permit and/or fact sheet. EPA recognizes the official version of a permit or fact sheet to be the version designated as such and appropriately stored by the respective permitting authority.

The documents are gathered from all permitting authorities, and all documents thus obtained are made available electronically, with no screening for completeness or quality. Thus, availability on the website does not constitute endorsement by EPA.
