COMMONWEALTH OF KENTUCKY BEFORE THE PUBLIC SERVICE COMMISSION

In the matter of:

THE APPLICATION OF EAST KENTUCKY NETWORK,)
LLC FOR THE ISSUANCE OF A CERTIFICATE OF)
PUBLIC CONVENIENCE AND NECESSITY TO) CASE NO. 2021-00447
CONSTRUCT A TOWER IN MAGOFFIN COUNTY,)
KENTUCKY)

East Kentucky Network, LLC d/b/a Appalachian Wireless, was granted authorization to provide cellular service in the KY-9 Cellular Market Area (CMA451) by the Federal Communications Commission (FCC). The FCC license is included as Exhibit 1. East Kentucky Network, LLC merger documents were filed with the Commission on February 2, 2001 in Case No. 2001-022. East Kentucky Network, LLC is a Kentucky Limited Liability Company that was organized on June 16, 1998. East Kentucky Network, LLC is in good standing with the state of Kentucky.

In an effort to improve service in Magoffin County, pursuant to KRS 278.020 Subsection 1 and 807 KAR 5:001, East Kentucky Network, LLC is seeking the Commission's approval to construct a 300-foot self-supporting tower on a tract of land located at 2627 New Paintsville Road, Salyersville, Magoffin County, Kentucky (37°45'47.34" N 82°59'26.62" W). A map and detailed directions to the site can be found in Exhibit 7.

Construction of the proposed tower is required by public convenience and necessity. Due to increasing demand for telecommunications service, the proposed tower is necessary to provide adequate coverage. The proposed tower will improve service in Magoffin County by providing an interconnection between East Kentucky Network, LLC's other sites thereby forming a cohesive network.

Exhibit 2 is a list of all Property owners according to the Property Valuation Administrator's record who own property within 500 feet of the proposed Tower and all property owners who own property contiguous to the property upon which construction is proposed in accordance with the Property Valuation Administrator's record.

Pursuant to 807 KAR 5:063 Section 1(1)(1), Section 1(m) and Section 2, all affected property owners according to the Property Valuation Administrator's record who own property within 500 feet of the proposed Tower or contiguous to the property upon which construction is proposed were notified by certified mail return receipt requested of East Kentucky Network, LLC's proposed construction and informed of their right to intervene. They were given the docket number under which this application is filed. Enclosed in Exhibit 2 is a copy of that notification.

Magoffin County has no formal local planning unit. In absence of this unit, the Magoffin County Judge Executive's office was notified by certified mail, return receipt requested, of East Kentucky Network, LLC's proposal and informed of their right to intervene. The Magoffin County Judge Executive's office was also given the docket number under which this application is filed. Enclosed in Exhibit 3 is a copy of that notification.

Notice of the location of the proposed construction was published in the Salyersville Independent, December 9, 2021 edition. Enclosed is a copy of that notice in Exhibit 3. The News Journal is the newspaper with the largest circulation in Magoffin County.

A geologist was employed to determine soil and rock types and to ascertain the distance to solid bedrock. The geotechnical report is enclosed as Exhibit 4.

A copy of the tower design information is enclosed as Exhibit 5. The proposed tower has been designed by engineers at Allstate Tower Company and will be constructed under their supervision. Their qualifications are evidenced in Exhibit 5 by the seal and signature of the registered professional engineer responsible for this project.

The tower will be erected by S & S Tower Services of St. Albans, West Virginia. S & S Tower Services has vast experience in the erection of communications towers. Their qualifications are described in Exhibit 13.

FAA and Kentucky Airport Zoning Commission determinations are included as Exhibit 6.

No Federal Communications Commission approval is required prior to construction of this facility. Once service is established from this tower we must immediately notify the Federal Communications Commission of its operation. Prior approval is needed only if the proposed facility increases the size of the cellular geographic service area. This cell site will not expand the cellular geographic service area.

Two notice signs meeting the requirements prescribed by 807 KAR 5:063, Section 1(2), measuring at least two (2) feet in height and four (4) feet in width and containing all required language in letters of required height, have been posted, one at a visible location on the proposed site and one on the nearest public road. The two signs were posted on December 2, 2021, and will remain posted for at least two weeks after filing of this application as specified.

Enclosed in Exhibit 8 is a copy of East Kentucky Network, LLC's Deed for the site location along with a lot description.

The proposed construction site is on a very rugged mountain top some feet from the nearest structure. Prior to construction, the site was wooded.

East Kentucky Network, LLC's operation will not affect the use of nearby land nor its value. No more suitable site exists in the area. A copy of the search area map is enclosed in Exhibit 7. No other tower capable of supporting East Kentucky Network, LLC's load exists in the general area; therefore, there is no opportunity for co-location of our facilities with anyone else.

Enclosed, and filed as Exhibit 9 is a survey of the proposed tower site signed by a Kentucky registered professional engineer.

Exhibit 10 is a map in one (1) inch equals 200 feet scale identifying every structure and every owner of real estate within 500 feet of the proposed tower and all property owners who own contiguous property to the property upon which construction is proposed.

Exhibit 11 contains a vertical sketch of the tower supplied by James W. Caudill, Kentucky registered professional engineer.

Enclosed as Exhibit 12 is a list of utilities, corporations, or persons with whom the tower is likely to compete.

[THE REMAINDER OF THIS PAGE INTENTIONALLY LEFT BLANK.]

WHEREFORE, Applicant, having met the requirements of KRS 278.020(1), 278.650, 278.665, and all applicable rules and regulations of the PSC, respectfully requests that the PSC accept the foregoing Application for filing and grant a Certificate of Public Convenience and Necessity to construct and operate the proposed tower.

The foregoing document was prepared by Krystal Branham, Regulatory Compliance Attorney for East Kentucky Network, LLC d/b/a Appalachian Wireless. All related questions or correspondence concerning this filing should be mailed to East Kentucky Network, LLC d/b/a/ Appalachian Wireless, 101 Technology Trail, Ivel, KY 41642.

Lynn Haney, Regulatory Compliance Director DATE: 12/3/2021

DATE: 12/3/2021

APPROVED BY:

W.A. Gillum, General Manager

ATTORNEY:

CONTACT INFORMATION:

W.A. Gillum, General Manager Phone: (606) 477-2355, Ext. 111 Email: wagillum@ekn.com

Lynn Haney, Regulatory Compliance Director

Phone: (606) 477-2355, Ext. 1007

Email: lhaney@ekn.com

Krystal Branham, Attorney Phone: (606) 477-2355, Ext. 1009 Email: kbranham@ekn.com

Mailing Address:

East Kentucky Network, LLC d/b/a Appalachian Wireless 101 Technology Trail Ivel, KY 41642

1	FCC License
2	Copies of Cell Site Notice to Land Owners
3	Notifications of County Judge Executive and Newspaper
4	Universal Soil Bearing Analysis
5	Tower Design
6	FAA and KAZC Determination
7	Driving Directions from County Court House and Map to SUitable Scale
8	Deed for Proposed Site with Legal Description
9	Survey of Site Signed/Sealed by Professional Engineer Registered in State of Kentucky
10	Site Survey Map with Property Owners Identified in Accordance with PVA of County
11	Vertical Profile Sketch of Proposed Tower
12	List of Competitors
13	Qualifications
14	
15	



Exhibit 1

ULS License

Cellular License - KNKN880 - East Kentucky Network, LLC d/b/a Appalachian Wireless

Call Sign KNKN880 Radio Service CL - Cellular Status Active Auth Type Regular

Market

Market CMA451 - Kentucky 9 - Elliott Channel Block B Submarket 0 Phase 2

Dates

Grant 08/30/2011 Expiration 10/01/2021

Effective 09/04/2014 Cancellation

Five Year Buildout Date

10/23/1996

Control Points

U.S. 23, HAROLD, KY

Licensee

FRN 0001786607 Type Limited Liability Company

Licensee

East Kentucky Network, LLC d/b/a Appalachian P:(606)477-2355

Wireless

101 Technology Trail Ivel, KY 41642

ATTN W.A. Gillum, General Manager / CEO

Contact

Lukas, Nace, Gutierrez & Sachs, LLPP:(703)584-8665Pamela L Gist EsqF:(703)584-86968300 Greensboro DriveE:pgist@fcclaw.com

McLean, VA 22102

Ownership and Qualifications

Radio Service Type Mobile

Regulatory Status Common Carrier Interconnected Yes

Alien Ownership

The Applicant answered "No" to each of the Alien Ownership questions.

Basic Qualifications

The Applicant answered "No" to each of the Basic Qualification questions.

3/6/18, 3:31 PM

Demographics

Race

Ethnicity Gender

Exhibit 2

EXHIBIT 2 - LIST OF PROPERTY OWNERS

Statement Pursuant to Section 1 (1) (I) 807 KAR 5:063

Section 1 (1)(I) 1. The following is a list of every property owner who according to property valuation administrator's records, owns property within 500 feet of the proposed tower and each have been: notified by certified mail, return receipt requested, of the proposed construction,

Section 1 (1)(I) 2. Every person listed below who, according to the property valuation administrator's records, owns property within 500 feet of the proposed tower has been: Given the Commission docket number under which the application will be processed: and

Section 1 (1)(I) 3. Every person listed below who, according to property valuation administrator's records owns property within 500 feet of the proposed tower has been: Informed of his right to request intervention.

Section 2. If the construction is proposed for an area outside the incorporated boundaries of a city, the application shall state that public notices required by Section 1(1)(L) have been sent to every person who, according to the property valuation administrator, owns property contiguous to the property upon which the construction is proposed

LIST OF PROPERTY OWNERS

Kenneth and Ruth Gambill 2678 New Paintsville Road Salyersville, KY 41465

Ernest and Christine Williamson 2481 New Paintsville Road Salyersville, KY 41465

> James B. Conley, Jr. C/O Robert Conley 555 Nature's Pointe Somerset, KY 42503

Ted Conley 4004 Brookwater Ct. Lexington, KY 40515

Gloria J. Nelson and Kenneth E. Conley P.O. Box 751 Acton, CA 93510-0751 Karen Sue Ramirez 902 Pear Tree Lane Houston, TX 77073-1234





VIA: <u>U.S. CERTIFIED MAIL</u> PUBLIC NOTICE

December 6, 2021

Karen Sue Ramirez 902 Pear Tree Lane Houston, TX 77073-1234

RE: Public Notice-Public Service Commission of Kentucky (Case No. 2021-00447)

East Kentucky Network, LLC d/b/a Appalachian Wireless has applied to the Public Service Commission of Kentucky for a Certificate of Public Convenience and Necessity to construct and operate a new facility to provide cellular telecommunications service in Magoffin County. The facility will include a 300'-foot self-supporting tower with attached antennas extending upwards, and an equipment shelter located on a tract of land near 2627 New Paintsville Road, Salyersville, Magoffin County. A map showing the location of the proposed new facility is enclosed. This notice is being sent to you because you may own property within a 500' radius of the proposed tower or own property contiguous to the property upon which construction is proposed.

The Commission invites your comments regarding the proposed construction. You also have the right to intervene in this matter. The Commission must receive your initial communication within 20 days of the date of this letter as shown above.

Your comments and request for intervention should be addressed to: Executive Director's Office, Public Service Commission of Kentucky, P.O. Box 615, Frankfort, KY 40602. Please refer to Case No. 2021-00447 in your correspondence.

If you have any questions for East Kentucky Network, LLC, please direct them to my attention at the following address: East Kentucky Network, LLC, 101 Technology Trail, Ivel, KY 41642 or call me at 606-477-2355, Ext. 1007.

Sincerely,

Lynn Haney, CPA

Regulatory Compliance Director

Legur Haney





VIA: <u>U.S. CERTIFIED MAIL</u> PUBLIC NOTICE

December 6, 2021

Kenneth and Ruth Gambill 2678 New Paintsville Road Salyersville, KY 41465

RE: Public Notice-Public Service Commission of Kentucky (Case No. 2021-00447)

East Kentucky Network, LLC d/b/a Appalachian Wireless has applied to the Public Service Commission of Kentucky for a Certificate of Public Convenience and Necessity to construct and operate a new facility to provide cellular telecommunications service in Magoffin County. The facility will include a 300'-foot self-supporting tower with attached antennas extending upwards, and an equipment shelter located on a tract of land near 2627 New Paintsville Road, Salyersville, Magoffin County. A map showing the location of the proposed new facility is enclosed. This notice is being sent to you because you may own property within a 500' radius of the proposed tower or own property contiguous to the property upon which construction is proposed.

The Commission invites your comments regarding the proposed construction. You also have the right to intervene in this matter. The Commission must receive your initial communication within 20 days of the date of this letter as shown above.

Your comments and request for intervention should be addressed to: Executive Director's Office, Public Service Commission of Kentucky, P.O. Box 615, Frankfort, KY 40602. Please refer to Case No. 2021-00447 in your correspondence.

If you have any questions for East Kentucky Network, LLC, please direct them to my attention at the following address: East Kentucky Network, LLC, 101 Technology Trail, Ivel, KY 41642 or call me at 606-477-2355, Ext. 1007.

Sincerely,

Lynn Haney, CPA

Regulatory Compliance Director





PUBLIC NOTICE

December 6, 2021

Ernest and Christine Williamson 2481 New Paintsville Road Salyersville, KY 41465

RE: Public Notice-Public Service Commission of Kentucky (Case No. 2021-00447)

East Kentucky Network, LLC d/b/a Appalachian Wireless has applied to the Public Service Commission of Kentucky for a Certificate of Public Convenience and Necessity to construct and operate a new facility to provide cellular telecommunications service in Magoffin County. The facility will include a 300'-foot self-supporting tower with attached antennas extending upwards, and an equipment shelter located on a tract of land near 2627 New Paintsville Road, Salyersville, Magoffin County. A map showing the location of the proposed new facility is enclosed. This notice is being sent to you because you may own property within a 500' radius of the proposed tower or own property contiguous to the property upon which construction is proposed.

The Commission invites your comments regarding the proposed construction. You also have the right to intervene in this matter. The Commission must receive your initial communication within 20 days of the date of this letter as shown above.

Your comments and request for intervention should be addressed to: Executive Director's Office, Public Service Commission of Kentucky, P.O. Box 615, Frankfort, KY 40602. Please refer to Case No. 2021-00447 in your correspondence.

If you have any questions for East Kentucky Network, LLC, please direct them to my attention at the following address: East Kentucky Network, LLC, 101 Technology Trail, Ivel, KY 41642 or call me at 606-477-2355, Ext. 1007.

Sincerely,

Lynn Haney, CPA

Regulatory Compliance Director





PUBLIC NOTICE

December 6, 2021

James B. Conley, Jr. C/O Robert Conley 555 Nature's Pointe Somerset, KY 42503

RE: Public Notice-Public Service Commission of Kentucky (Case No. 2021-00447)

East Kentucky Network, LLC d/b/a Appalachian Wireless has applied to the Public Service Commission of Kentucky for a Certificate of Public Convenience and Necessity to construct and operate a new facility to provide cellular telecommunications service in Magoffin County. The facility will include a 300'-foot self-supporting tower with attached antennas extending upwards, and an equipment shelter located on a tract of land near 2627 New Paintsville Road, Salyersville, Magoffin County. A map showing the location of the proposed new facility is enclosed. This notice is being sent to you because you may own property within a 500' radius of the proposed tower or own property contiguous to the property upon which construction is proposed.

The Commission invites your comments regarding the proposed construction. You also have the right to intervene in this matter. The Commission must receive your initial communication within 20 days of the date of this letter as shown above.

Your comments and request for intervention should be addressed to: Executive Director's Office, Public Service Commission of Kentucky, P.O. Box 615, Frankfort, KY 40602. Please refer to Case No. 2021-00447 in your correspondence.

If you have any questions for East Kentucky Network, LLC, please direct them to my attention at the following address: East Kentucky Network, LLC, 101 Technology Trail, Ivel, KY 41642 or call me at 606-477-2355, Ext. 1007.

Sincerely,

Lynn Haney, CPA

Regulatory Compliance Director

Legur Heurey





PUBLIC NOTICE

December 6, 2021

Ted Conley 4004 Brookwater Ct. Lexington, KY 40515

RE: Public Notice-Public Service Commission of Kentucky (Case No. 2021-00447)

East Kentucky Network, LLC d/b/a Appalachian Wireless has applied to the Public Service Commission of Kentucky for a Certificate of Public Convenience and Necessity to construct and operate a new facility to provide cellular telecommunications service in Magoffin County. The facility will include a 300'-foot self-supporting tower with attached antennas extending upwards, and an equipment shelter located on a tract of land near 2627 New Paintsville Road, Salyersville, Magoffin County. A map showing the location of the proposed new facility is enclosed. This notice is being sent to you because you may own property within a 500' radius of the proposed tower or own property contiguous to the property upon which construction is proposed.

The Commission invites your comments regarding the proposed construction. You also have the right to intervene in this matter. The Commission must receive your initial communication within 20 days of the date of this letter as shown above.

Your comments and request for intervention should be addressed to: Executive Director's Office, Public Service Commission of Kentucky, P.O. Box 615, Frankfort, KY 40602. Please refer to Case No. 2021-00447 in your correspondence.

If you have any questions for East Kentucky Network, LLC, please direct them to my attention at the following address: East Kentucky Network, LLC, 101 Technology Trail, Ivel, KY 41642 or call me at 606-477-2355, Ext. 1007.

Sincerely,

Lynn Haney, CPA

Regulatory Compliance Director





PUBLIC NOTICE

December 6, 2021

Gloria J. Nelson and Kenneth E. Conley P.O. Box 751 Acton, CA 93510-0751

RE: Public Notice-Public Service Commission of Kentucky (Case No. 2021-00447)

East Kentucky Network, LLC d/b/a Appalachian Wireless has applied to the Public Service Commission of Kentucky for a Certificate of Public Convenience and Necessity to construct and operate a new facility to provide cellular telecommunications service in Magoffin County. The facility will include a 300'-foot self-supporting tower with attached antennas extending upwards, and an equipment shelter located on a tract of land near 2627 New Paintsville Road, Salyersville, Magoffin County. A map showing the location of the proposed new facility is enclosed. This notice is being sent to you because you may own property within a 500' radius of the proposed tower or own property contiguous to the property upon which construction is proposed.

The Commission invites your comments regarding the proposed construction. You also have the right to intervene in this matter. The Commission must receive your initial communication within 20 days of the date of this letter as shown above.

Your comments and request for intervention should be addressed to: Executive Director's Office, Public Service Commission of Kentucky, P.O. Box 615, Frankfort, KY 40602. Please refer to Case No. 2021-00447 in your correspondence.

If you have any questions for East Kentucky Network, LLC, please direct them to my attention at the following address: East Kentucky Network, LLC, 101 Technology Trail, Ivel, KY 41642 or call me at 606-477-2355, Ext. 1007.

Sincerely,

Lynn Haney, CPA

Regulatory Compliance Director

Legur Haney



Exhibit 3

dba Appalachian Wireless 101 Technology Trail Ivel, KY 41642

Phone: 606-477-2355 Fax: 606-791-2225



To: Salyersville Independent From: Raina Helton
Attn: Classifieds Regulatory Compliance Assistant

Email: jo@salyersvilleindependent.com Date: December 1, 2021

Re: PUBLIC NOTICE ADVERTISEMENT Pages: 1

Please place the following Public Notice Advertisement in the Salyersville Independent to be ran on December 9, 2021.

PUBLIC NOTICE:

RE: Public Service Commission of Kentucky (CASE NO. 2021-00447)

Public Notice is hereby given that East Kentucky Network, LLC, dba Appalachian Wireless has applied to the Kentucky Public Service Commission to construct a cellular telecommunications tower on a tract of land located at 2627 New Paintsville Road, Salyersville, Magoffin County, Kentucky. The proposed tower will be a 300 foot self-supporting tower with attached antennas. If you would like to respond to this notice, please contact the Executive Director, Public Service Commission, 211 Sower Boulevard, PO Box 615, Frankfort, Kentucky 40602. Please refer to Case No. 2021-00447.

If you have any questions about the placement of the above mentioned notice, please call me at 606-477-2375, ext. 1005.

Thank you,

Raina Helton, CKP Regulatory Compliance Paralegal

The message above and the information contained in the documents transmitted are confidential and intended only for the person(s) named above. Dissemination, distribution or copying of this communication by anyone other than the person(s) named above is prohibited. If you have received this communication in error, please notify us immediately by telephone and return the original message to us at the address listed above via regular mail. Thank you.





VIA: <u>U.S. CERTIFIED MAIL</u>

December 6, 2021

Matthew C. Wireman P. O. Box 430 Salversville, KY 41465

RE: Public Notice-Public Service Commission of Kentucky (Case No. 2021-00447)

East Kentucky Network, LLC d/b/a Appalachian Wireless has applied to the Public Service Commission of Kentucky for a Certificate of Public Convenience and Necessity to construct and operate a new facility to provide cellular telecommunications service in Magoffin County. The facility will include a 300 foot self-supporting tower with attached antennas extending upwards, and an equipment shelter located on a tract of land located at 2627 New Paintsville Road, Salyersville, Magoffin County. A map showing the location of the proposed new facility is enclosed. This notice is being sent to you because you are the County Judge Executive of Magoffin County.

The Commission invites your comments regarding the proposed construction. You also have the right to intervene in this matter. The Commission must receive your initial communication within 20 days of the date of this letter as shown above.

Your comments and request for intervention should be addressed to: Executive Director's Office, Public Service Commission of Kentucky, P.O. Box 615, Frankfort, KY 40602. Please refer to Case No. 2021-00447 in your correspondence.

If you have any questions for East Kentucky Network, LLC, please direct them to my attention at the following address: East Kentucky Network, LLC, 101 Technology Trail, Ivel, KY 41642 or call me at 606-477-2355, Ext. 1007.

Sincerely,

Lynn Haney, CPA

Regulatory Compliance Director

Lynn Haney



Exhibit 4

APPALACHIAN WIRELESS
Geotechnical Investigation on the
Mash Fork Tower Site
Magoffin County, Kentucky
EKYENG Project No. 165-000-0123

PREPARED FOR: Appalachian Wireless. 101 Technology Trail Ivel, Kentucky 41642

PREPARED BY:
Richard Dirk Smith PE, PLS
President
East Kentucky Engineering
230 Swartz Drive
Hazard, Kentucky 41701

, <u>20215</u>, September 20th, 2021



EXECUTIVE SUMMARY

- 1.0 INTRODUCTION
- 2.0 PROJECT DESCRIPTION

3.0 SITE DESCRIPTION & HISTORICAL MINING

- 3.1 GENERAL INFORMATION
- 3.2 SURFACE MINING
- 3.3 UNDERGROUND MINING
- 3.4 FLOOD HAZARD

4.0 FIELD EXPLORATION

- 4.1 SITE INFORMATION
- 4.2 TRENCHING
- **4.3 GROUNDWATER**
- 4.4 SEISMIC SITE CLASSIFICATION

5.0 DISCUSSION AND RECOMMENDATIONS

- 5.1 GENERAL
- 5.2 SHALLOW MAT FOUNDATIONS RECOMMENDATIONS
- **5.3 BURIED UTILITIES**

6.0 WARRANTY

- 6.1 SUBSURFACE EXPLORATION
- 6.2 LABORATORY AND FIELD TEST
- 6.3 ANALYSIS AND RECOMMENDATIONS
- **6.4 CONSTRUCTION MONITORING**
- 6.5 GENERAL

SPECIFICATIONS

- I GENERAL
- II ENGINEERED FILL BENEATH STRUCTURES CLEARING AND GRADING SPECIFICATIONS
- III GUIDELINES FOR EXCAVATIONS AND TRENCHING
- IV GENERAL CONCRETE SPECIFICATIONS

APPENDIX A - PHOTOGRAPHS

APPENDIX B - BORING LOGS

APPENDIX C - SEISMIC DATA

APPENDIX D- MAPS

EKY

EAST KENTUCKY ENGINEERING, LLC.

EXECUTIVE SUMMARY

A geotechnical investigation has been performed on the Mash Fork Tower Site, located in Magoffin County, Kentucky. This site is not readily accessible. A location map is shown in Figure 1 of this report. Field inspections were completed by trenching with an excavator. The following geotechnical considerations were identified:

- Trenching utilized for this study encountered soils and sandstone.
- Elevations were taken from aerial DEM mapping available at ArcGIS Kentucky Elevation Data, and Static GPS Surveying.
- · The current ground elevation is 1242.0 ft.
- This site is on a forested ridgeline.
- The allowable bearing capacities are estimated at 6 TSF for the sandstone rock foundations, with a maximum base of mat elevation 1232.6 ft..
- The 2018 Kentucky Building Code seismic site classification for this site is "A."
- If during the foundation design it becomes necessary to lower or raise the footer, alternate design recommendations can be provided by EKYENG.
- Close monitoring of the construction operations discussed herein will be critical in achieving the design subgrade support. We, therefore, recommend that EKYENG is retained to monitor this portion of the work.

This executive summary is included to provide a general overview of the project and should not be relied upon except for the purpose it was prepared. Please rely on the complete report for the information on the findings, recommendations, and all other concerns.



1. INTRODUCTION

East Kentucky Engineering (EKYENG) was retained by Mr. Stanton Neece of Appalachian Wireless to prepare a geotechnical engineering report for the proposed tower site located on the Mash Fork Property, in Magoffin County, Kentucky. A site location map is shown in Figure No. 1.


Pits were opened by trenching. The purpose of these services is to provide information and geotechnical engineering recommendations about subsurface conditions, earthwork, seismic considerations, groundwater conditions, and foundation design.

2.0 PROJECT DESCRIPTION

The proposed communication facility will consist of a self-supporting tower of undetermined height and ancillary support areas. The footing area is estimated to be 43.5 ft. X 43.5 ft. with an estimated maximum base of the tower footer elevation at 1230.0 ft. Based on the information provided, we estimate the structural loads will be like the following conditions.

CONDITION	LOAD	
Total Shear	40 Kips	
Axial Load	50 Kips	

We anticipate that overturning will govern the structural design. If the loading is significantly different than these expected values, EKYENG should be notified to re-evaluate the recommendations provided in this report.

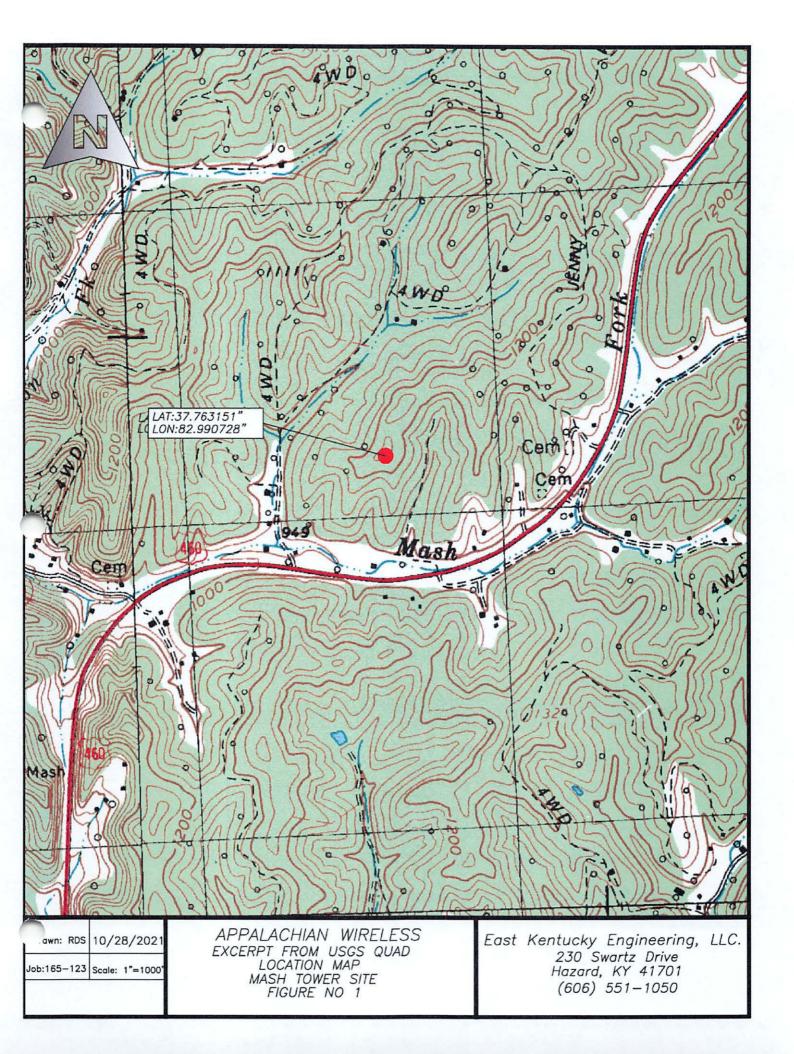



3.0 SITE DESCRIPTION & HISTORICAL MINING

3.1 GENERAL INFORMATION

The site location is on a forested ridgeline in Magoffin County, Kentucky. The current surface elevation is approximately 1240.0 ft. Research on the historical mining was conducted by obtaining previous mine license maps from the "Kentucky Mine Mapping Information System" (KMMIS).

3.2 SURFACE MINING

No issues from surface mining activities are expected at this site location.

3.3 UNDERGROUND MINING

No underground mines were found within the vicinity of this site. Therefore, no subsidence issues are anticipated.

3.4 FLOOD HAZARD

A potential flood determination was conducted by EKYENG. For this determination, the FEMA Flood Map Service was reviewed for this location. The flood map for the selected area is number 21153C0140E-210158. The flood zone for this area is Zone X and is an area of minimal flood hazard. A FIRMette map is included.

4.0 FIELD EXPLORATION

4.1 SITE INFORMATION

The proposed site is located on a forested ridgeline in Magoffin County, Kentucky. The site lies within the Oil Springs Quadrangle. The site is not readily accessible by conventional exploratory equipment. An estimated pad location was determined based on the information provided. Foundation dimensions were estimated to be a 43.5 ft X 43.5 ft footer for this report.



4.2 TRENCHING

This investigation was conducted by trenching with an excavator to determine subsurface information. The combinations of trenching and visual inspections were used to evaluate the site lithology and type of materials immediately below the proposed tower site. The following soils and rock properties were found.

TABLE 2

Test Pit	DEPTH INCREMENT, (FT.) TO REFUSAL	SOILS TYPE
TR	0.0 / 4.0	Soils
TR	4.0 / 20.6	Sandstone


Note: A cross-section of this information is in Appendix D of this report

4.3 GROUNDWATER

Groundwater in Eastern Kentucky is characterized by water flowing through a system of internal fractures that lead to an alluvial aquifer near the bottom of valley floors. Large, defined aquifers other than the alluvium is not common, especially in higher elevations such as where this tower site is proposed. Therefore, groundwater should not be a concern in this area. During field test activities, no groundwater resources were observed.

4.4 SEISMIC SITE CLASSIFICATION

Based on the encountered soil conditions at the project site, the site classification was determined to be "Site Class A" per the 2019 Kentucky Building Code. In addition, an S_{DS} coefficient of 0.096 g was calculated, and an S_{D1} coefficient of 0.044 g was also calculated for design based on the aforementioned building code.

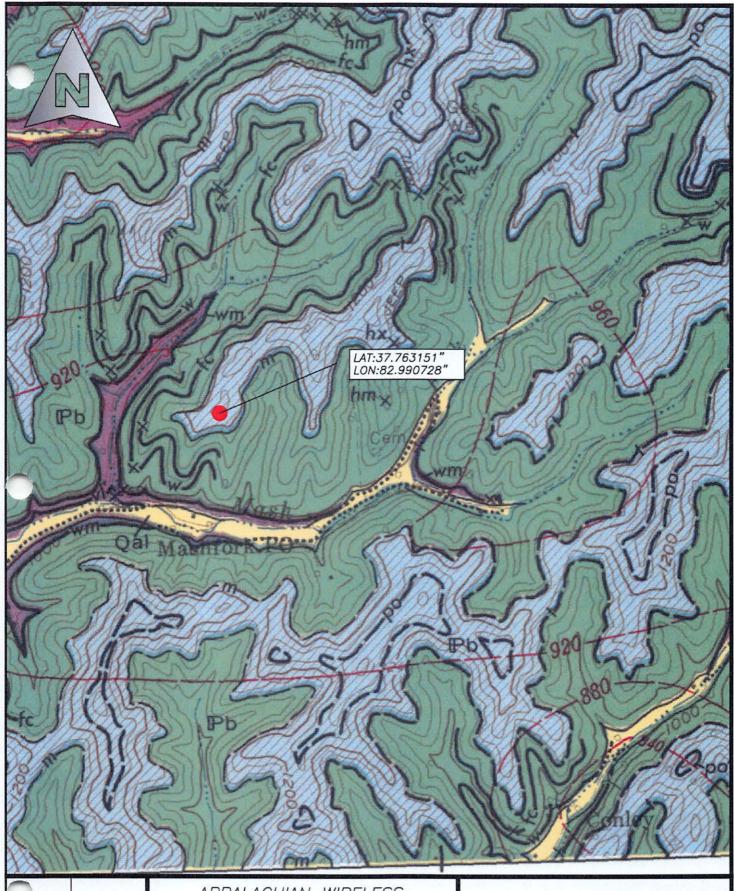

wn: RDS 10/28/2021

Job:165-123 Scale: 1"=1000"

APPALACHIAN WIRELESS
EXCERPT FROM GEOLOGIC QUAD
LOCATION MAP
MASH TOWER SITE
FIGURE NO 2

East Kentucky Engineering, LLC. 230 Swartz Drive Hazard, KY 41701 (606) 551—1050



5.0 DISCUSSION AND RECOMMENDATIONS

5.1 GENERAL

The structure will be a self-supporting free-standing tri-pole tower with a mat foundation. Due to wind loading, lattice tower foundations can experience both vertical loads and horizontal loads. The vertical loads act in both an upward and downward direction as the tower attempts to overturn and can act in any directions.

5.2 SHALLOW MAT FOUNDATIONS RECOMMENDATIONS

We are recommending shallow foundations. It should be noted that the material type and bearing capacity can vary significantly due to the inconsistency of the underlying material. Based on the laboratory and field testing, visual inspection of the materials, and practical experience we have estimated that the allowable bearing capacity of the sandstone strata at this site will be 6 TSF at the estimated mat base elevation of 1232.6 ft The sandstone unit is present from the range 1232.6' ft to 1225.0 ft and will provide the necessary cut width to support the proposed mat without overhanging outside the rock outcrop line.

It is furthermore recommended that the slabs-on-grade be supported on a 4 to 6-inch layer of relatively clean granular material such as sand and gravel or crushed stone. This is to help distribute concentrated loads and equalize moisture conditions beneath the slab. Proper drainage must be incorporated into this granular layer to preclude future wet areas in the finished slab-on-grade. However, all topsoil and/or other deleterious materials encountered during site preparation must be removed and replaced with 4000 psi concrete below the foundation base. Provided that a minimum of 4 inches of granular material is placed below the new slab-on-grade, a modulus of subgrade reaction (k30) of 100 lbs/cu in can be used for the design of the slabs.



The support structure for this tower can be placed as needed. It is recommended that test pits are examined to ensure that any of these structures are on the competent materials. If pockets of soft, loose, or otherwise unsuitable material are encountered in the footing excavations, and it is inconvenient to lower the footings, the proposed footing elevations may be re-established by backfilling after the undesirable material has been removed. The undercut excavation beneath each footing should extend to suitable bearing soils, and the dimensions of the excavation base should be determined by imaginary planes extending outward and down on a 1 (vertical) to 1 (horizontal) slope from the base perimeter of the The entire excavation should then be refilled with a well-compacted engineered fill, or lean concrete (Please note that the width of the lean concrete zone should be equal or wider than the width of the overlying footing element). Special care should be exercised to remove any sloughed, loose or soft materials near the base of the excavation slopes. In addition, special care should be taken to "tie-in" the compacted fill with the excavation slopes, with benches as necessary, to ensure that no pockets of loose or soft materials will be left in place along the excavation slopes below the foundation bearing level. All Federal, State, and Local regulations should be strictly adhered to relative to excavation side-slope geometry.

5.3 BURIED UTILITIES

Excavations for buried utility pipelines should follow the guidelines outlined in this report. Depending on the pipeline material, a minimum thickness of at least 0.5 feet of select fine-grained granular bedding material should be used beneath all below-grade pipes, with a minimum cover thickness of at least 3 feet to afford an "arching" effect and reduce stresses on the pipe. The cover thickness may be reduced if the external loading condition on the pipe is relatively light or if the pipe is designed to withstand the external loading condition. It is not recommended that "pea-gravel" or other "open-work" aggregates be used for trench backfill since these materials are nearly impossible to compact and tend to pond water within their interstices.



6.0 WARRANTY

Our professional services have been performed, our findings obtained, and our recommendations prepared in accordance with generally accepted geotechnical engineering principles and practices. No other warranty, express or implied, is made.

While the services of EKYENG are a valuable and integral part of the design and construction teams, we do not warrant, guarantee, or ensure the quality or completeness of services provided by other members of those teams, the quality, completeness, or satisfactory performance of construction plans and specifications which we have not prepared, nor the ultimate performance of building site materials.

6.1 SUBSURFACE EXPLORATION

Subsurface exploration is normally accomplished by test borings, although test pits are sometimes employed. The location and elevation of the test locations should be considered accurate only to the degree inherent with the method used.

The boring log includes sampling information, description of the materials recovered, approximate depth of boundaries between soil and rock strata, and groundwater data. The boring log represents conditions specifically at the location and time the testing was conducted. The boundaries between different soil strata are indicated at specific depths; however, these depths are in fact approximate and are somewhat dependent upon the frequency of sampling (The transition between soil strata is often gradual). Free groundwater level readings are made at the times and under conditions stated on the boring logs (Groundwater levels change with time and season). The trenches and pits do not always remain open sufficiently long enough for the measured water level to coincide with the groundwater table.



6.2 LABORATORY AND FIELD TESTS

Laboratory and field tests are performed by specific ASTM standards unless otherwise indicated. All determinations included in each ASTM standard are not always required and performed. Each test report indicates the measurements and determinations made.

6.3 ANALYSIS AND RECOMMENDATIONS

The geotechnical report is prepared primarily to aid in the engineering design of site work and structural foundations. Although the information in the report is expected to be sufficient for these purposes, it is not intended to determine the cost of construction or to stand alone as a construction specification.

Our engineering report recommendations are based primarily on data from test borings or other methods made at the locations shown on the attached drawings. Soil variations may exist between test sites, and these variations may not become evident until construction. If significant variations are then noted, the geotechnical engineer should be contacted so that field conditions can be examined and recommendations revised if necessary.

The geotechnical engineering report states our understanding as to the location, dimensions, and structural features proposed for the site. Any significant changes in the nature, design, or location of the site improvements MUST be communicated to the geotechnical engineer such that the geotechnical analysis, conclusions, and recommendations can be appropriately adjusted. The geotechnical engineer should be given the opportunity to review all drawings that have been prepared based on their recommendations.



6.4 CONSTRUCTION MONITORING

Construction monitoring is a vital element of complete geotechnical services. The field engineer/inspector is the owner's "representative" observing the work of the contractor, performing tests as required in the specifications, and reporting data developed from such tests and observations. The field engineer or inspector does not direct the contractor's construction means, methods, operations or personnel. The field inspector/engineer does not interfere with the relationship between the owner and the contractor and, except as an observer, does not become a substitute owner on site. The field inspector/engineer is responsible for his own safety but has no responsibility for the safety of other personnel at the site. The field inspector/engineer is an important member of a team whose responsibility is to watch and test the work being done and report to the owner whether that work is being carried out in general conformance with the plans and specifications.

6.5 GENERAL

The scope of our services did not include an environmental assessment for the presence or absence of hazardous or toxic materials in the soil, surface water, groundwater or air, on, within or beyond the site studied. Any statements in the report or on the boring logs regarding odors, staining of soils or other unusual items or conditions observed are strictly for the information of our client.

To evaluate the site for possible environmental liabilities, we recommend an environmental assessment, consisting of a detailed site reconnaissance, a record review, and report of findings. Additional subsurface drilling and samplings, including groundwater sampling, may be required.

This report has been prepared for the exclusive use of Appalachian Wireless, for specific application to the proposed cellular tower located on the Mash Fork Property located in Magoffin County, Kentucky. Specific design and construction recommendations have been provided in the various sections of the report. The report shall, therefore, be used in its entirety. This report is not a bidding



document and shall not be used for that purpose. Anyone reviewing this report must interpret and draw their conclusions regarding the specific construction techniques and methods that were chosen. EKYENG is not responsible for the independent conclusions, opinions or recommendations made by others based on the field exploratory and laboratory test data presented in this report.



SPECIFICATIONS

I - GENERAL

1.0 STANDARDS AND DEFINITIONS

- **1.1 STANDARDS -** All standards refer to latest edition unless otherwise noted.
 - 1.1.1 ASTM D-698-70 (Method C) "Standard Test Methods for Moisture. Density Relations of Soils and Soil-Aggregate Mixtures Using 5.5-lb (2.5 kg.) Rammer and 12-inch (305-mm) Drop".
 - 1.1.2 ASTM D-2922 "Standard Test Method for Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)."
 - 1.1.3 ASTM D-1556 "Standard Test Method for Density of Soil in place by the Sand-Cone Method."

1.2 **DEFINITIONS**

- **1.2.1** Owner In these specifications, the word "Owner" shall mean Appalachian Wireless.
- **1.2.2** Engineer In these specifications, the word "Engineer" shall mean the Owner designated engineer.
- **1.2.3** Design Engineer In these specifications, the words "Design Engineer" shall mean the Owner designated design engineer.
- 1.2.4 Contractor In these specifications, the word "Contractor" shall mean the firm or corporation undertaking the execution of any work under the terms of these specifications.
- 1.2.5 Approved In these specifications the word "approved" shall refer to the approval of the Engineer or his designated representative.
- 1.2.6 As Directed In these specifications the words "as directed" shall refer to the directions to the Contractor from the Owner or his designated representative.



2.0 GENERAL CONDITIONS

2.1 The Contractor shall furnish all labor, material, and equipment and perform all work and services except those set-out and furnished by the Owner, necessary to complete in a satisfactory manner the site preparation, excavation, filling, compaction, grading as shown on the plans and as described therein.

This work shall consist of all mobilization clearing and grading, grubbing, stripping, removal of existing material unless otherwise stated, preparation of the land to be filled, filling of the land, spreading and compaction of the fill, and all subsidiary work necessary to complete the grading of the cut and fill areas to conform with the lines, grades, slopes, and specifications.

This work is to be accomplished under the observation of the Owner or his designated representative.

2.2 Prior to bidding the work, the Contractor shall examine, investigate and inspect the construction site as to the nature and location of the work, and the general and local conditions at the construction site, including, without limitation, the character of surface or subsurface conditions and obstacles to be encountered on and around the construction site; and shall make such additional investigation as he may deem necessary for the planning and proper execution of the work.

If conditions other than those indicated are discovered by the Contractor, the Owner should be notified immediately. The material which the Contractor believes to be a changed condition should not be disturbed so that the owner can investigate the condition.

2.3 The construction shall be performed under the direction of an experienced engineer who is familiar with the design plan.



II - ENGINEERED FILL BENEATH STRUCTURES CLEARING AND GRADING SPECIFICATIONS

1.0 GENERAL CONDITIONS

The Contractor shall furnish all labor, materials, and equipment, and perform all work and services necessary to complete in a satisfactory manner the site preparation, excavation, filling, compaction and grading as shown on the plans and as described therein.

This work shall consist of all clearing and grading, removal of existing structures unless otherwise stated, preparation of the land to be filled, filling of the land, spreading and compaction of the fill, and all subsidiary work necessary to complete the grading of the cut and fill areas to conform with the lines, grades, slopes, and specifications.

This work is to be accomplished under the constant and continuous supervision of the Owner or his designated representative.

In these specifications, the terms "approved" and "as directed" shall refer to directions to the Contractor from the Owner or his designated representative.

2.0 SUBSURFACE CONDITIONS

Prior to bidding the work, the Contractor shall examine, investigate and inspect the construction site as to the nature and location of the work, and the general and local conditions at the construction site, including without limitation, the character of surface or subsurface conditions and obstacles to be encountered on and around the construction site; and shall make such additional investigation as he may deem necessary for the planning and proper execution of the work. Borings and/or soil investigations shall have been made. Results of these borings and studies will be made available by the Owner to the Contractor upon his request, but the Owner is not responsible for any interpretations or conclusions with respect thereto made by the Contractor based on such information, and the



Owner further has no responsibility for the accuracy of the borings and the soil investigations.

If conditions other than those indicated are discovered by the Contractor, the Owner should be notified immediately. The material which the Contractor believes to be a changed condition should not be disturbed so that the Owner can investigate the condition.

3.0 SITE PREPARATION

Within the specified areas, all trees, brush, stumps, logs, tree roots, and structures scheduled for demolition shall be removed and disposed of.

All cut, and fill areas shall be properly stripped. Topsoil will be removed to its full depth and stockpiled for use in finish grading. Any rubbish, organic and other objectionable soils, and other deleterious material shall be disposed of off the site, or as directed by the Owner or his designated representative if on-site disposal is provided. In no case shall such objectionable material be allowed in or under the fill unless specifically authorized in writing.

Prior to the addition of fill, the original ground shall be compacted to job specifications as outlined below. Special notice shall be given to the proposed fill area now. If wet spots, spongy conditions, or groundwater seepage is found, corrective measures must be taken before the placement of fill.

4.0 FORMATION OF FILL AREAS

Fills shall be formed of satisfactory materials placed in successive horizontal layers of not more than eight (8) inches in loose depth for the full width of the cross-section. The depth of lift may be increased if the Contractor can demonstrate the ability to compact a larger lift. If compaction is accomplished using hand-tamping equipment, lifts will be limited to 4-inch loose lifts. Engineered fill placed below the structure bearing elevation shall be compacted to at least 95% of the maximum dry unit weight with a moisture content within 2% of the optimum moisture content as determined by the modified Proctor test. The top size of the material placed shall not exceed 4 inches.



All material entering the fill shall be free of organic matter such as leaves, grass, roots, and other objectionable material.

The operations on earthwork shall be suspended at any time when satisfactory results cannot be obtained because of rain, freezing weather, or other unsatisfactory conditions. The Contractor shall keep the work areas graded to provide the drainage always.

The fill material shall be of the proper moisture content before compaction efforts are started. Wetting or drying of the material and manipulation to secure a uniform moisture content throughout the layer shall be required. Should the material be too wet to permit proper compaction or rolling, all work thus affected shall be delayed until the material has dried to the required moisture content. The moisture content of the fill material should be no more than two (2) percentage points higher or lower than optimum unless otherwise authorized. Sprinkling shall be done with equipment that will satisfactorily distribute the water over the disced area. Any areas inaccessible to a roller shall be consolidated and compacted by mechanical tampers. The equipment shall be operated in such a manner that hardpan, cemented gravel, clay or other chunky soil material will be broken up into small particles and become incorporated with the other material in the layer. In the construction of filled areas, starting layers shall be placed in the deepest portion of the fill, and as placement progresses, additional layers shall be constructed in horizontal planes. Original slopes shall be continuous, vertically benched to provide horizontal fill planes. The size of the benches shall be formed so that the base of the bench is horizontal, and the back of the bench is vertical. As many benches as are necessary to bring the site to final grade shall be constructed. Filling operations shall begin on the lowest bench, with the fill being placed in horizontal eight (8) inch thick loose lifts unless otherwise authorized. The filling shall progress in this manner until the entire first bench has been filled, before any fill is placed on the succeeding benches. Proper drainage shall always be maintained during benching and filling of the benches, to ensure that all water is drained away from the fill area.



Frozen material shall not be placed in the fill nor shall the fill be placed upon frozen material.

The Contractor shall be responsible for the stability of all fills made under the contract and shall replace any portion, which in the opinion of the Owner or his designated representative, has become displaced due to carelessness or negligence on the part of the Contractor. Fill damaged by inclement weather shall be repaired at the Contractor's expense.

5.0 SLOPE RATIO AND STORM WATER RUN-OFF

Slopes shall not be greater than 2 (horizontal) to 1 (vertical) in both cut and fill, or as illustrated on the construction drawings. Excavations shall be constructed in accordance with all Federal, State and local codes relative to slope geometry.

6.0 GRADING

The Contractor shall furnish, operate, and maintain such equipment as is necessary to construct uniform layers and control smoothness of grade for maximum compaction and drainage.

7.0 COMPACTING

The compaction equipment shall be approved equipment of such design, weight, and quantity to obtain the required density in accordance with these specifications.

8.0 TESTING AND INSPECTION SERVICES

Testing and inspection services will be provided by the Owner.

EKY

EAST KENTUCKY ENGINEERING, LLC.

GUIDELINES FOR EXCAVATIONS AND TRENCHES

The following represents some general guidelines relative to the design and construction of excavations and trenches. It must be emphasized that these guidelines are not intended to represent a "safety plan," but rather are presented herein to provide general guidance regarding the design characteristics and safety measures for excavations and trenches.

- 1. Check with the following utilities prior to breaking ground:
 - Sewer
 - Telephone
 - Fuel
 - Electric
 - Water
 - Gas
 - Cable

When utility companies or owners do not respond to your request within 48 hours, the contractor may only then proceed provided the contractor does so with caution by using detection equipment or other acceptable means to locate utility installations.

Once the excavation is open, the contractor should protect and support the exposed underground utilities or remove installations to safeguard workers and prevent damage to exposed utilities.

- 2. Access and egress ramps must be designed by a "competent person" and structural ramps used for equipment must be designed by a "competent person" with qualified knowledge in structural design. In addition:
 - · Ramps must be secured to prevent displacement;
 - · Ramps used in lieu of steps must have cleats to prevent slipping; and



- Trenching excavations four feet or greater in depth must have a stairway, ladder, ramps or other safe means to egress with lateral travel no more than 25 feet.
- Workers must be provided with reflector garments, such as warning orange or red vests, when exposed to vehicular traffic.
- Contractors must not allow workers to work under or near equipment when there is danger of falling debris, spillage or equipment-related injuries.
- 5. Mobile equipment, operating adjacent to an open excavation or approaching the edge of an excavation, must have one of the following when the operator's view is obstructed:
 - Warning System
 - Mechanical Signals
 - Barricades
 - Stop Logs
 - Hand Signals
- 6. The contractor must check the atmosphere for hazardous gases and oxygen deficiencies when excavating four feet or greater around landfills, or when hazardous substances are stored nearby, and when the contractor expects there could be any exposure to the workers.
- 7. When hazardous atmospheric conditions exist, or when conditions could change, the contractor must make emergency rescue equipment readily available including breathing apparatus, safety harnesses with lifelines and a basket stretcher.
- 8. When workers enter bell-bottom pier holes or other deep and confined excavations, the worker must wear (always while performing work in the confined space) a separate lifeline attached to a harness. The line must be



attended by someone above while work is being performed. The worker must check for hazardous atmospheric conditions prior to entry.

- 9. The contractor must ensure that water does not accumulate in open excavations and must inspect the excavation prior to allowing workers to re-enter after heavy rains.
- 10. Adjacent structures (buildings, walls, etc.) must be supported or secured to prevent worker exposure to unsafe conditions and damage to existing structures.
- 11. A registered professional engineer must approve operations when a contractor underpins existing structures to ensure worker safety and prevent damage to existing structures.
- 12. Workers must not be exposed to loose soil and rock or materials in and around excavations. Materials, such as removed soil and rock, must not be stored closer than two feet from the edge of the excavation.
- 13. Daily inspections of the excavation, the adjacent areas, and protective systems must be made by a "competent person" for evidence of possible cave-ins, indications of failure of protective systems, hazardous atmospheres or other hazardous conditions. The "competent person" must stop work immediately and remove workers from the excavation when conditions change and pose a threat to their safety.
- 14. Workers must not be exposed to fall hazards associated with excavations.
 Protective walkways or bridges with standard guardrails must be provided.
- 15. All wells, pits, shafts etc. must be barricaded or covered. After completion of work, all wells, pits, shafts etc. must be backfilled.



IV - GENERAL CONCRETE SPECIFICATIONS

1.0 GENERAL

It is the intent of this specification to secure, for every part of the work, concrete of homogenous structure which, when hardened, will have the required strength and resistance to weathering. To this end, the limiting values of concrete and the requirements hereinafter specified must be met. Standard tests of the cement, aggregates, concrete and reinforcement will be made by the Owner as it sees fit. The Contractor shall furnish the material for all required samples plus such labor as required to obtain samples. The Contractor shall provide to authorized representatives of the Owner, convenient access to all parts of the work of all concreting operations for sampling and inspection.

2.0 SCOPE

Contractor shall furnish all materials, labor, services, transportation, tools, equipment, and related items required to complete work indicated on the drawings and/or specified.

Unless otherwise noted or as modified by more stringent requirements specified herein, all plain and reinforced concrete work shall be performed in full compliance with applicable requirements of the Building Code Requirements for Reinforced Concrete ACI 318.

Contractor shall obtain Owner's approval of all subgrades, footing bottoms, forms, and reinforcement just prior to placing concrete.

Contractor shall coordinate the work specified in this section with that specified in other sections so that all anchors, pipes and other embedded items are properly installed before concrete is placed.

Contractor shall clean all exposed concrete surfaces and obtain approval of Owner for method of cleaning.

FRIG

EAST KENTUCKY ENGINEERING, LLC.

3.0 MATERIALS

All materials shall be of the respective quality specified herein, delivered, stored, and handled as to prevent inclusion of foreign matter and damage by dampness or breakage. Packaged material shall be stored in original container until ready for use. Materials showing evidence of dampness or other damage may be rejected.

- A. <u>Fine and Coarse Aggregates:</u> Coarse and fine aggregates shall conform to ASTM Specification C33. The maximum size of aggregate shall not be larger than one-fifth (1/5) of the narrowest dimensions between forms, or larger than three fourths (3/4) of the minimum clear spacing between reinforcement.
 - 1. <u>Fine Aggregate:</u> Sand shall be composed essentially of clean, hard, strong, durable grains free of structurally weak grains, organic matter, loam, clay, silt, salt, mica or other fine materials that may affect bonding of the cement paste.
 - 2. <u>Coarse Aggregate:</u> Cement concrete shall consist of crushed rock or screened gravel and shall be composed essentially of clean, hard, strong and impermeable particles, resistant to wear and frost and free from deleterious amounts of organic matter, loam, clay, salts, mica, and soft, thin, elongated, laminated or disintegrated stone, and shall be inert to water and cement.
- B. <u>Portland Cement:</u> Portland cement shall conform to ASTM Specification C150. Type I or Type II Portland Cement shall be used if they are not intermixed during any one batch. Type II Portland Cement shall not be used unless indicated on the plans.
- C. <u>Water:</u> Water for mixing and curing shall be clean, fresh, and free from deleterious materials.
- D. <u>Metal Reinforcement:</u> Rebar shall be Grade 60 and with deformations conforming to ASTH Specification A305. Welded wire mesh shall conform to W4 x W4 size and be of Grade 60 steel.



- E. Admixtures: Except as herein noted, admixtures shall not be used.
 - Under adverse weather conditions only retarding or accelerating agents containing no chloride may be used.
 - Air-Entraining Agent shall be used for all concrete will give an entrained air range of not less than 4 percent but no greater than 8 percent in the finished product. Under no circumstances shall the air-entraining be interground with cement.
 - Approval in writing shall be required from Owner prior to the use of any admixture.

4.0 FORM

Forms shall be constructed with proper shoring and cross-bracing, safeguarding the total structure and specifically lateral stability and sufficiently strong to stand vibrations of concrete and to carry, without appreciable deflection or displacement, all dead and live loads to which they may be subjected.

5.0 INSERTS, ETC.

Anchors, bolts, dowels, conduit, water stops, vent pipes and other similar built-in or concreted-in items shall be properly located, accurately positioned and secured. The Contractor shall cooperate in placing of such items with other contractors who require a fastening device for their work and he shall maintain them in proper location during the progress of his work.

6.0 REINFORCEMENT

Reinforcement at the time concrete is placed shall be free from rust, scale or other coatings that will destroy or reduce the bond.



Reinforcement shall be accurately placed and securely tied at intersections and shall be securely held in position during the placing of concrete by pacers, chairs, or other approved supports.

The reinforcement of foundations, footings and other principal structural members in which the concrete is deposited against the ground shall not have less than three (3) inches of concrete between it and the ground contact surface. If concrete surfaces after removal of the forms are to be exposed to the weather or to be in contact with the ground or rock, reinforcement shall be protected with not less than two (2) inches of concrete,

7.0 CONCRETE

Concrete for the various parts of the work shall be of 4000 pounds per square inch compressive strength with a minimum 28-day cure. Contractor is responsible to provide a mix of not less than 6 bags of cement per yard of concrete and not more than 7 gallons of water per bag of cement, producing a minimum slump of 2-1/2 inches and a maximum slump of 4-1/2 inches. Concrete that exceeds the above range of maximum or minimum slump requirements may be rejected by the Owner. All concrete shall be air-entrained. Contractors are required to furnish the name or names of the company(s) that will be providing the mix. The Owner reserves the right to disapprove any concrete supplier that has been known to supply an undesirable material to the Owner on previous occasions.

8.0 DEPOSITING CONCRETE

- 4.1. <u>Preparation for Placing Concrete:</u> Before depositing concrete, the Contractor shall:
- Remove from space to be occupied by concrete all debris, including snow, ice, and water unless otherwise permitted by Owner.
 - Provide diversion, satisfactory to Owner, of any flow of water to an excavation to avoid washing the freshly deposited concrete.



- Coal the forms prior to placing of reinforcing steel as required in form work.
- Secure firmly in correct position, all reinforcement and other items to be encased and remove therefrom all coating including ice and frost.
- B. Transportation of Concrete from Batch Plant: The concrete shall be delivered to the site of the work and discharge shall be completed within 90 minutes after addition of the cement and water to the aggregates. Each batch of concrete delivered at the job site shall be accompanied by a time slip issued at the batching plant, bearing the time of charging of the mixer drum with the cement and aggregates.
- C. Transporting of Concrete from Mixer to Place of Final Deposit:

 Transportation shall be done as rapidly as practical by means which shall prevent the separation or loss of the ingredients. If chutes are used, they shall be at a slope not flatter than one vertical to two horizontal. Buggies or carts shall be equipped with pneumatic rubber tires or surfaces of runways shall be sufficiently smooth or both so as not to cause separation or segregation of concrete ingredients. Concrete shall not be allowed to drop freely more than 4 feet. Where greater drops are required, canvas "elephant trunks" or galvanized iron chutes equipped with suitable hopper heads shall be employed and a sufficient number placed to ensure that the concrete may be effectively compacted into horizontal layers not exceeding 12 inches in thickness with minimum lateral movements.
- D. <u>Depositing of Concrete</u>: Depositing of concrete shall:



- Proceed continuously after once starting until reaching the end of a section of construction joint location shown on the drawings, or as approved by the Owner. The operations shall be conducted so that no concrete is deposited on concrete sufficiently hardened to cause formation of seams, and planes of weakness.
- Be as near as practical to its final position in the forms.
- Proceed to maintain constantly a top surface which is approximately level.
- Be placed before initial set has occurred, and in no event after it has contained its water content for more than 90 minutes.
- 5. Be thoroughly worked and compacted by means of suitable tools to provide impermeability, durability and strength and shall be thoroughly worked around reinforcements and embedded items and into corners of forms and to be free from voids, pockets or honeycombing. Care shall be taken to provide impermeability.
- E. <u>Vibration Equipment:</u> Vibration equipment shall be of the appropriate type and shall, always, be adequate in number of units and power of each unit to properly consolidate all concrete.
- F. <u>Monolithic Pours:</u> Proper delivery of concrete shall be the Contractor's responsibility to make a mono-lithic pour without delays and changes of cold joints.



9.0 CURING

All concrete work shall be protected from injurious action by the sun, rain, flowing water, frost and other injury and shall be covered with plastic after application of curing compound for three (3) days on pours located above ground.

Contractor shall not remove any formwork for a minimum period of 24 hours after a concrete pour without written approval of the Owner.

10.0 CONCRETE FINISHES

Finishes of all exposed concrete shall be free of defects which impair its durability or adversely affect is appearance. All such surfaces when stripped, shall be uniform in appearance and any surfaces displaying any deviations from adjacent uniform surfaces shall be rejected and subject to removal.

Finished work shall be level and plumb, true to lines, and dimensions. Finished plane surfaces shall be smooth, and as nearly perfect as practical; however, deviations from a true plane shall not exceed 1/8 inch when measured from a 6-foot straight edge placed against the surface to any point on the surface and under the straight edge.

All exposed surfaces shall have defects corrects, protrusions removed, and holes filled.



APPENDIX A PHOTOGRAPHS



Trench Photograph






Trench Photograph



APPENDIX B BORING LOG

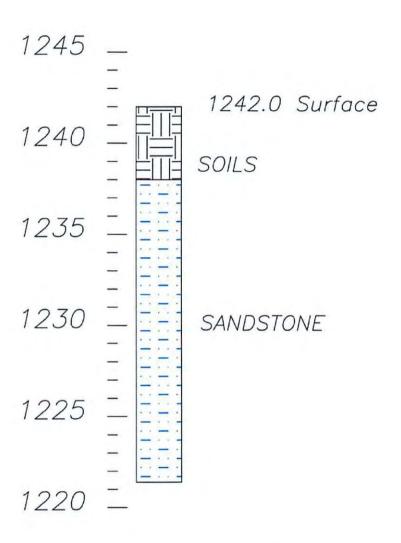

BORING LOG 1" = 5'

Drawn:	Date:10/28/21
Job:	Scale1"= 5'
Drawina:	•

APPALACHIAN WIRELESS
BORING LOG
MASH FORK TOWER SITE
MAGOFFIN COUNTY KENTUCKY



East Kentucky Engineering, LLC
230 Swortz Drive
Hazard, KY 41701
6666 551-1050



A	D	D	I		11	,	C	C	10		AI	-
M		г	M	u	1/	١	C	0	IS	n	/11	u





Latitude, Longitude: 37.763151, -82.990728





Map data ©2021

Date	10/28/2021, 2:22:12 PM
Design Code Reference Document	IBC-2015
Risk Category	IV
Site Class	A - Hard Rock

Туре	Value	Description
SS	0.18	MCE _R ground motion. (for 0.2 second period)
S ₁	0.083	MCE _R ground motion. (for 1.0s period)
S _{MS}	0.144	Site-modified spectral acceleration value
S _{M1}	0.066	Site-modified spectral acceleration value
S _{DS}	0.096	Numeric seismic design value at 0.2 second SA
S _{D1}	0.044	Numeric seismic design value at 1.0 second SA

Type	Value	Description
SDC	Α	Seismic design category
Fa	8.0	Site amplification factor at 0.2 second
F _v	8.0	Site amplification factor at 1.0 second
PGA	0.086	MCE _G peak ground acceleration
F _{PGA}	8.0	Site amplification factor at PGA
PGA _M	0.069	Site modified peak ground acceleration
r _L	12	Long-period transition period in seconds
SsRT	0.18	Probabilistic risk-targeted ground motion. (0.2 second)
SsUH	0.196	Factored uniform-hazard (2% probability of exceedance in 50 years) spectral acceleration
SsD	1.5	Factored deterministic acceleration value. (0.2 second)
SIRT	0.083	Probabilistic risk-targeted ground motion. (1.0 second)
S1UH	0.092	Factored uniform-hazard (2% probability of exceedance in 50 years) spectral acceleration.
S1D	0.6	Factored deterministic acceleration value. (1.0 second)
PGAd	0.6	Factored deterministic acceleration value. (Peak Ground Acceleration)
C _{RS}	0.922	Mapped value of the risk coefficient at short periods
C _{R1}	0.905	Mapped value of the risk coefficient at a period of 1 s

https://seismicmaps.org

DISCLAIMER

While the information presented on this website is believed to be correct, SEAOC /OSHPD and its sponsors and contributors assume no responsibility or liability for its accuracy. The material presented in this web application should not be used or relied upon for any specific application without competent examination and verification of its accuracy, suitability and applicability by engineers or other licensed professionals. SEAOC / OSHPD do not intend that the use of this information replace the sound judgment of such competent professionals, having experience and knowledge in the field of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the results of the seismic data provided by this website. Users of the information from this website assume all liability arising from such use. Use of the output of this website does not imply approval by the governing building code bodies responsible for building code approval and interpretation for the building site described by latitude/longitude location in the search results of this website.

https://seismicmaps.org



Δ	D	D	F	N	n	IX	D	1	M	۸	P	C
	1		_	w	_	\mathbf{I}				~		


Nationa Flood Hazard Layer FIRMette





Legend

SEE FIS REPORT FOR DETAILED LEGEND AND INDEX MAP FOR FIRM PANEL LAYOUT

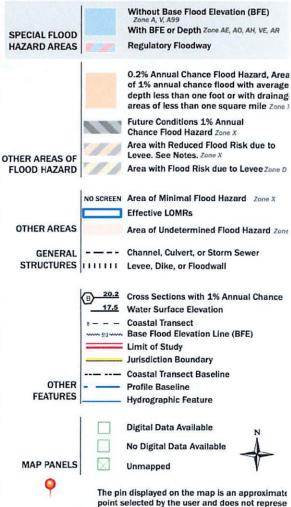


This map complies with FEMA's standards for the use of digital flood maps if it is not void as described below. The basemap shown complies with FEMA's basemap accuracy standards

The flood hazard information is derived directly from the authoritative NFHL web services provided by FEMA. This map was exported on 8/27/2021 at 9:06 AM and does not reflect changes or amendments subsequent to this date and time. The NFHL and effective information may change or become superseded by new data over time.

an authoritative property location.

This map image is void if the one or more of the following map elements do not appear: basemap imagery, flood zone labels, legend, scale bar, map creation date, community identifiers, FIRM panel number, and FIRM effective date. Map images for unmapped and unmodernized areas cannot be used for regulatory purposes.

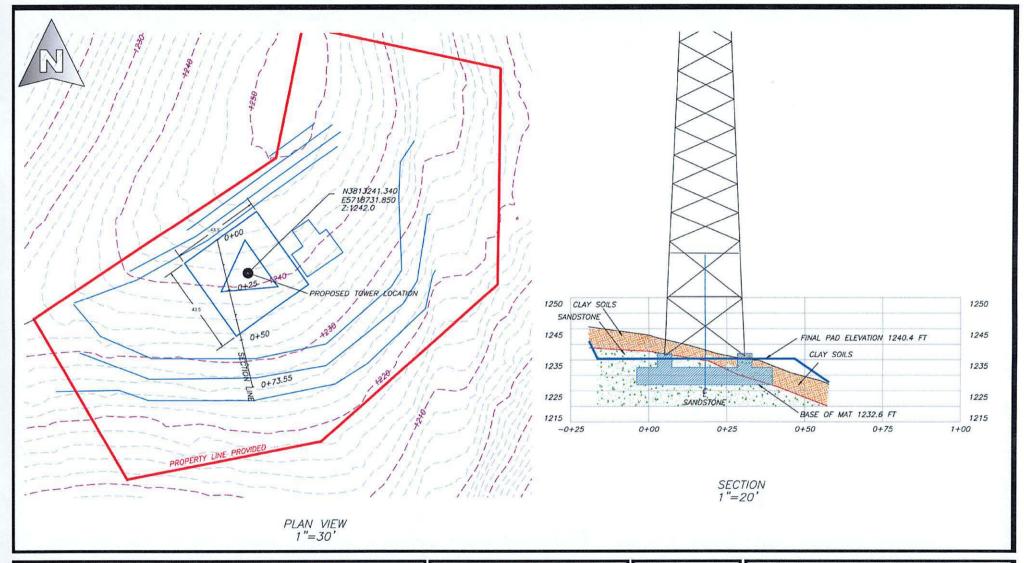

East Kentucky Engineering, LLC

230 Swartz Hazard, KY 41701 (606) 551-1050

Email: ekyeng@ekyeng.net




0'	20' 40'
Drawn by:RDS	10/16/2021
Job #:165-000-0123 File Location:	Scale:1" = AS NOTED

APPALACHIAN WIRELESS
PROPOSED MASH TOWER LOCATION
MAGOFFIN COUNTY
KENTUCKY

Exhibit 5

MEMBER INFORMATION INNER - 4'-6' SECTION ELEVATION FACE SIZE DIAGONALS HORIZONTALS RED. HORZ/DIAGS. **GIRTS** # OF BAYS LEG DIA. BRACING 0' - 20' 24'-0" Ø5" 2L 3" x 3/16" 2L 2 1/2" x 3/16" 2L 2" x 1/8" 2L 2" x 3/16" N/A 4 - MOD X 2 20' - 40' 22'-6" Ø5" 2L 3" x 3/16" 2L 2 1/2" x 3/16" 2L 2" x 1/8" 2L 2" x 3/16" N/A 4 - MOD X 3 - X 3 40' - 60' 21'-0" Ø5" L 4" x 1/4" N/A N/A N/A N/A 60' - 80' 19'-6" Ø4 3/4' L 4" x 1/4" N/A N/A N/A N/A 3 - X 4 80' - 100' 18'-0" Ø4 3/4" L 3 1/2" x 1/4" N/A N/A N/A N/A 3 - X 5 N/A N/A N/A 3 - X 6 100' - 120' 16'-6" Ø4 1/2' L 3 1/2" x 1/4" N/A 4'-6" N/A N/A N/A N/A 120' - 140' 15'-0" Ø4 1/2' L 3" x 1/4" 3 - X 8 140' - 160' 13'-6" Ø4 1/4" L 3" x 3/16" N/A N/A N/A N/A 3 - X 3 - X 9 160' - 180' 12'-0" Ø4" L 3" x 3/16" N/A N/A N/A N/A 10 180' - 200' 10'-6' Ø3 3/4" L 2 1/2" x 3/16" N/A N/A N/A N/A 3 - X 6'-0" 11 200' - 220 9'-0" Ø3 1/4' L 2" x 3/16" N/A N/A N/A N/A 4 - X 12 220' - 240' 7'-6" Ø3" L 2" x 1/8" N/A N/A N/A N/A 4 - X N/A N/A 13 240' - 260' 6'-0" Ø2 3/4" L 2" x 1/8" N/A N/A 4 - X 14 260' - 280 4'-6" Ø2 1/2' L 2" x 1/8" N/A N/A N/A N/A 4 - X 15 280' - 300' 4'-6" Ø1 3/4" L 1 1/2" x 1/8" N/A N/A N/A L1 1/2" x 1/8" 4 - X ANTENNA INFORMATION ELEVATION ANTENNA LINE (6) 1-5/8" HELIAX + (4) 7/8" HYBRID (12) NN-65A-M 295 295 (12) ERICSSON-2212 (BEHIND ANTENNA) N/A (12) NN-65A-M (6) 1-5/8" HELIAX + (4) 7/8" HYBRID 285 285 (12) ERICSSON-2212 (BEHIND ANTENNA) 275 (12) NN-65A-M (4) 7/8" HYBRID 275 (12) ERICSSON-2212 (BEHIND ANTENNA) N/A (12) NN-65A-M (4) 1-5/8" HELIAX + (4) 7/8" HYBRID 265 265 (12) ERICSSON-2212 (BEHIND ANTENNA) N/A (2) EW63 240' (2) 6' HP DISH (4) 7/8" HYBRID 200 (12) NN-65A-M (12) ERICSSON-2212 (BEHIND ANTENNA) 200 N/A (12) NN-65A-M (4) 7/8" HYBRID 190 120 (12) ERICSSON-2212 (BEHIND ANTENNA) 190' N/A (2) EW63 (2) 8' HP DISH 180' KEITH M. Z PLAN VIEW **DESIGN NOTES:** TOWER LEGS ARE CONSTRUCTED OF SOLID ROUND BAR MATERIAL. SOLID ROUND 0.75" AND LARGER ASTM A-572 GRADE: 50 KSI MIN. PLAN VIEW REF: SOLID ROUND 0.625" AND SMALLER IS ASTM A-36 GRADE: 36 KSI MIN. 1 5/8" HELIAX 4) ALL ANGLE MATERIAL IS ASTM A-529: 50 KSI MIN. 7/8" HYBRID ALL BRACE AND FLANGE BOLTS ARE A325-X **EW63** THIS TOWER IS DESIGNED FOR STEP BOLTS UP ONE LEG FOR CLIMBING STEP BOLTS WITH SAFETY CLIMB DEVICE. (6) Ø2" x 6'-6" LONG (F1554-GR.105) ANCHOR BOLTS PER LEG. THIS TOWER IS DESIGNED FOR A 90 M.P.H. WIND SPEED WITH NO ICE AND A 30 ALL REACTIONS ARE FACTORED M.P.H. WIND SPEED WITH 0.75" IN ICE IN ACCORDANCE WITH THE TIA/EIA-222-G MAX CORNER REACTIONS AT BASE! STANDARD, ICE IS CONSIDERED TO INCREASE IN THICKNESS WITH HEIGHT. DOWN: 722 K DEFLECTIONS BASED ON A 60 M.P.H. WIND. SHEAR: 52 K TOWER DESIGNED TO EXPOSURE C; STRUCTURE CLASS II; TOPO. CAT 1. UPLIFT: -629 K Digitally signed by Keith Eaton SHEAR: 46 K ALLSTATE TOWER INC. P.O. BOX 25 HENDERSON, KY 42419 PHONE: (270) 830-8512 FAX: (270) 830-8475 WWW.PITG.COM APPROX. WEIGHT AXIAL Date: 2021.11.16 14:56:15 -05'00' 251 K 65.3 KIPS PROPRIETARY STATEMENT: THIS DRAWING IS THE PROPERTY OF ALLSTATE TOWER INC. IT IS NOT TO BE REPRODUCED OR COPIED IN ANYWAY WITHOUT PRIOR WRITTEN CONSENT OF ALLSTATE TOWER INC. TANK TOWER STORE 1919 MOMENT 10 K 1759 kip-ft DATE BY UNLESS OTHERWISE NOTED TOROUF 4 kin-ft DESCRIPTION REV # DIMENSIONS ARE IN TOWER OVERVIEW 30 mph WIND - 0.7500 in ICE INCHES APPALACHIAN WIRELESS TOLERANCE BAND 109 K 300' SELF SUPPORT TOWER +3/32"/-0 ANGLES +/- 2" XX +3/32*/-0 "MASH FORK" MAGOFFIN., KY SHEAR MOMENT XXX +1/16"/-0 HOLES +@1/16"/-0 14254 kip-ft DRAWN BY: JLW FILE NAME: FT-096826-A TORQUE 31 kip-ft SCALE DATE: 11/15/2021 A REACTIONS - 90 mph WIND NTS DESIGN: FT-096826

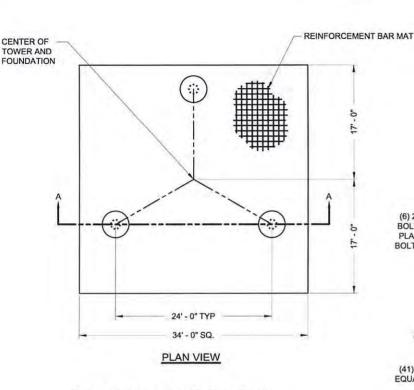

24' - 0" C-C OF LEGS SEE DETAIL "A" LEVEL GRADE IS A MINIMUM OF 3 **BEYOND PAD EDGE** FINAL FINISHED GRADE **ELEVATION IS 1240.4**' BOTTOM OF MAT **ELEVATION IS 1232.6** 34' - 0"

SECTION A-A

(6) 2" X 6' - 6" OVERALL LENGTH ANCHOR BOLTS (F1554-GR105) W/ 1" THK BEARING PLATE AT THE BOTTOM OF THE ANCHOR BOLT CLUSTER (5' - 6" MIN. ANCHOR BOLT EMBEDMENT)

> USE EPOXY BONDING AGENT WHEN POURED SEPARATELY

(12) #9 VERTICAL BARS W/ #5 TIES AT 16" ON CENTER

(41) #9 HORIZONTAL BARS x 33' - 6" LONG EQUALLY SPACED EACH WAY AT BOTTOM OF MAT (TOTAL = 82) (34) #6 HORIZONTAL BARS x 33' - 6" LONG EQUALLY SPACED EACH WAY AT TOP OF MAT (TOTAL = 68)

DETAIL "A"

12" -VERTICAL BAR DETAIL

TOTAL VOLUME OF CONCRETE = 92.4 CY


FOUNDATION INSTALLATION/DESIGN NOTES:

- THIS FOUNDATION IS DESIGNED TO MEET ALL STANDARDS SET FORTH BY ACI 318: AMERICAN CONCRETE INSTITUTE, BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE, ANSI/TIA/EIA 222-G: STRUCTURAL STANDARDS FOR STEEL ANTENNA TOWERS AND ANTENNA SUPPORTING STRUCTURES.
- THIS FOUNDATION IS DESIGNED UTILIZING THE GEOTECHNICAL REPORT PREPARED BY EAST KY ENGINEERING, LLC, PROJECT NO. 165-000-0123, DATED 9-20-2021. THE FOUNDATION CONTRACTOR SHALL INSTALL THE FOUNDATIONS IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE GEOTECHNICAL REPORT.
- 3. ALL WORK PERFORMED FROM THESE DRAWINGS SHOULD BE BY QUALIFIED CONTRACTORS EXPERIENCED IN TOWER FOUNDATION CONSTRUCTION.
- 4. ALL FOOTING EXCAVATIONS SHALL BE MANUALLY CLEANED PRIOR TO PLACING CONCRETE. COMPACT THE EXPOSED SOIL SURFACE AND ANY GRANULAR FILL UNDER THE FOUNDATION TO 90% OF THE MODIFIED PROCTOR DENSITY.
- 5. ALL CONCRETE SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 4000 PSI AFTER 28 DAYS. COPIES OF THE CONCRETE CYLINDER TEST REPORTS SHALL BE SENT TO THE RESIDENT ENGINEER / INSPECTOR.
- CONCRETE COVER FOR REINFORCING BARS SHALL BE 2" UNLESS OTHERWISE NOTED. ALL REINFORCING BARS SHALL BE GRADE 60 REBAR (MIN YIELD = 60KSI).
- FIELD BENDING OR WELDING OF REINFORCEMENT BARS IS NOT PERMITTED.
- PROVIDE CHAMFERS AT ALL EXPOSED CORNERS OF CONCRETE.
- BACKFILL NEAR AND AROUND THE FOUNDATIONS SHALL BE A WELL GRADED FILL MATERIAL PLACED IN 8" THICK LAYERS THAT HAS BEEN COMPACTED TO 90% OF THE MODIFIED PROCTOR DENSITY PER ASTM D1557.
- 10. SOME DETAIL HAS BEEN PURPOSELY OMITTED TO CLARIFY ILLUSTRATION.

REINFORCEMENT BAR SPLICING: 1. ALL LAP SPLICES SHALL CONFORM

TO ACI 318 REQUIREMENTS. 2. REFER TO CHART BELOW WHEN REINFORCMENT BAR SPLICING IS NECESSARY

REINFORCING	LAP SPLICE
BAR SIZE	LENGTH
3	-·-15"
4	19°
5	24"
6	28"
7	41"
8	47"
9	-·- 53"
10	- · 60"
44	66"



Digitally signed by Keith Eaton Date: 2021.11.16

14:57:28 -05'00'

DESIGN:

PHONE: (270) 830-8512 FAX: (270) 830-8475

PROPRIETARY STATEMENT: THIS DRAWING IS THE PROPERTY OF ALLSTATE TOWER INC. IT IS NOT TO BE REPRODUCED OR COPIED IN ANYWAY WITHOUT PRIOR WRITTEN CONSENT OF ALLSTATE TOWER INC.

REV#	DESCRIPTION	DATE	BY	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN: INCHES
				TOLERANCE BANDS: X +3/32*1-0 ANGLES +/- 2* .XX +3/32*1-0 .XXX +1/16*1-0 HOLES + Ø1/16*1-0
SCALE:				DRAWN BY: RF
SCALE.	NTC			DATE: 10/20/2021

PAD & PIER FOUNDATION DESIGN APPALACHIAN WIRELESS 300' SELF SUPPORT TOWER MASH FORK, MAGOFFIN CO, KY

FT-096826

FT-096826 - B

В

Exhibit 6



Mail Processing Center
Federal Aviation Administration
Southwest Regional Office
Obstruction Evaluation Group
10101 Hillwood Parkway
Fort Worth, TX 76177

Issued Date: 10/18/2021

Cindy D. McCarty
East Kentucky Network, LLC
101 Technology Trail
Ivel, KY 41642

** DETERMINATION OF NO HAZARD TO AIR NAVIGATION **

The Federal Aviation Administration has conducted an aeronautical study under the provisions of 49 U.S.C., Section 44718 and if applicable Title 14 of the Code of Federal Regulations, part 77, concerning:

Structure: Antenna Tower Mash Fork

Location: Saylersville, KY

Latitude: 37-45-47.34N NAD 83

Longitude: 82-59-26.62W

Heights: 1236 feet site elevation (SE)

310 feet above ground level (AGL) 1546 feet above mean sea level (AMSL)

This aeronautical study revealed that the structure does not exceed obstruction standards and would not be a hazard to air navigation provided the following condition(s), if any, is(are) met:

As a condition to this Determination, the structure is to be marked/lighted in accordance with FAA Advisory circular 70/7460-1 M, Obstruction Marking and Lighting, 24-hr med strobes-Chapters 4,6(MIWOL),&15.

Any failure or malfunction that lasts more than thirty (30) minutes and affects a top light or flashing obstruction light, regardless of its position, should be reported immediately to (877) 487-6867 so a Notice to Airmen (NOTAM) can be issued. As soon as the normal operation is restored, notify the same number.

It is required that FAA Form 7460-2, Notice of Actual Construction or Alteration, be e-filed any time the project is abandoned or:

____ At least 10 days prior to start of construction (7460-2, Part 1)
__X_ Within 5 days after the construction reaches its greatest height (7460-2, Part 2)

This determination expires on 04/18/2023 unless:

- (a) the construction is started (not necessarily completed) and FAA Form 7460-2, Notice of Actual Construction or Alteration, is received by this office.
- (b) extended, revised, or terminated by the issuing office.
- (c) the construction is subject to the licensing authority of the Federal Communications Commission (FCC) and an application for a construction permit has been filed, as required by the FCC, within

6 months of the date of this determination. In such case, the determination expires on the date prescribed by the FCC for completion of construction, or the date the FCC denies the application.

NOTE: REQUEST FOR EXTENSION OF THE EFFECTIVE PERIOD OF THIS DETERMINATION MUST
BE E-FILED AT LEAST 15 DAYS PRIOR TO THE EXPIRATION DATE. AFTER RE-EVALUATION
OF CURRENT OPERATIONS IN THE AREA OF THE STRUCTURE TO DETERMINE THAT NO
SIGNIFICANT AERONAUTICAL CHANGES HAVE OCCURRED, YOUR DETERMINATION MAY BE
ELIGIBLE FOR ONE EXTENSION OF THE EFFECTIVE PERIOD.

This determination is based, in part, on the foregoing description which includes specific coordinates, heights, frequency(ies) and power. Any changes in coordinates, heights, and frequencies or use of greater power, except those frequencies specified in the Colo Void Clause Coalition; Antenna System Co-Location; Voluntary Best Practices, effective 21 Nov 2007, will void this determination. Any future construction or alteration, including increase to heights, power, or the addition of other transmitters, requires separate notice to the FAA. This determination includes all previously filed frequencies and power for this structure.

If construction or alteration is dismantled or destroyed, you must submit notice to the FAA within 5 days after the construction or alteration is dismantled or destroyed.

This determination does include temporary construction equipment such as cranes, derricks, etc., which may be used during actual construction of the structure. However, this equipment shall not exceed the overall heights as indicated above. Equipment which has a height greater than the studied structure requires separate notice to the FAA.

This determination concerns the effect of this structure on the safe and efficient use of navigable airspace by aircraft and does not relieve the sponsor of compliance responsibilities relating to any law, ordinance, or regulation of any Federal, State, or local government body.

A copy of this determination will be forwarded to the Federal Communications Commission (FCC) because the structure is subject to their licensing authority.

If we can be of further assistance, please contact our office at (817) 222-5928, or chris.smith@faa.gov. On any future correspondence concerning this matter, please refer to Aeronautical Study Number 2021-ASO-30125-OE.

Signature Control No: 489601167-497805446

(DNE)

Chris Smith Specialist


Attachment(s) Frequency Data Map(s)

cc: FCC


Frequency Data for ASN 2021-ASO-30125-OE

	LOW FREQUENCY	HIGH FREQUENCY	FREQUENCY UNIT	ERP	ERP UNIT
	6	7	GHz	55	dBW
	6	7	GHz	42	dBW
	10	11.7	GHz	55	dBW
	10	11.7	GHz	42	dBW
	17.7	19.7	GHz	55	dBW
	17.7	19.7	GHz	42	dBW
	21.2	23.6	GHz	55	dBW
	21.2	23.6	GHz	42	dBW
	614	698	MHz	1000	W
	614	698	MHz	2000	W
	698	806	MHz	1000	W
	806	901	MHz	500	W
	806	824	MHz	500	W
	824	849	MHz	500	W
	851	866	MHz	500	W
	869	894	MHz	500	W
	896	901	MHz	500	W
	901	902	MHz	7	W
	929	932	MHz	3500	W
	930	931	MHz	3500	W
, 1	931	932	MHz	3500	W
	932	932.5	MHz	17	dBW
	935	940	MHz	1000	W
	940	941	MHz	3500	W
	1670	1675	MHz	500	W
	1710	1755	MHz	500	W
	1850	1910	MHz	1640	W
	1850	1990	MHz	1640	W
	1930	1990	MHz	1640	\mathbf{W}
	1990	2025	MHz	500	W
	2110	2200	MHz	500	\mathbf{W}
	2305	2360	MHz	2000	W
	2305	2310	MHz	2000	\mathbf{W}
	2345	2360	MHz	2000	W
	2496	2690	MHz	500	\mathbf{W}

TOPO Map for ASN 2021-ASO-30125-OE

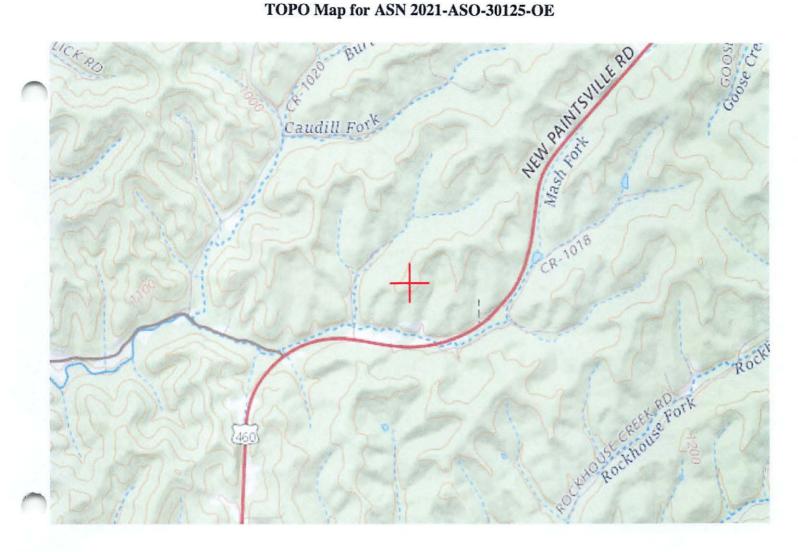

Sectional Map for ASN 2021-ASO-30125-OE

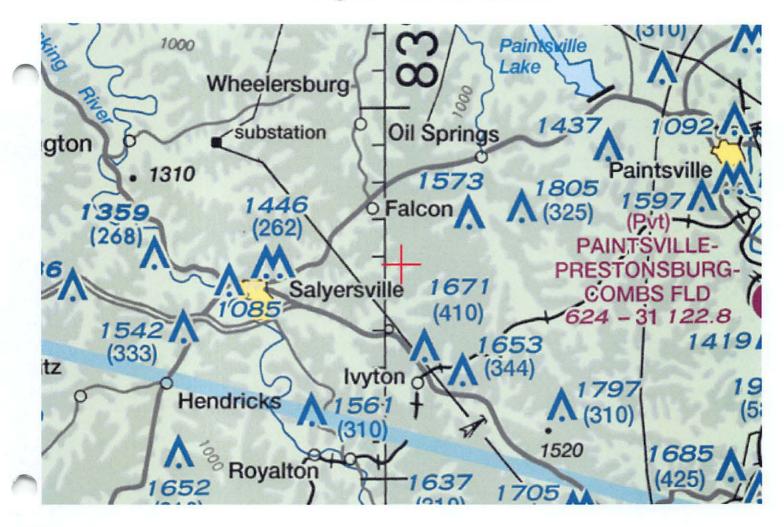



KENTUCKY AIRPORT ZONING COMMISSION

ANDY BESHEAR Governor Office of Audits, 200 Mero Street, 4th floor Frankfort, KY 40622 www.transportation.ky.gov 502-782-4043

JIM GRAY Secretary

APPROVAL OF APPLICATION

October 26, 2021

APPLICANT
East Kentucky Network, LLC
Cindy McCarty
101 Technology Trail
Ivel, KY 41642

SUBJECT: AS-MAGOFFIN-9KY9-2021-104

STRUCTURE: Antenna Tower LOCATION: Salyersville, KY

COORDINATES: 37° 45' 47.34" N / 82° 59' 26.62" W

HEIGHT: 310' AGL/1546' AMSL

The Kentucky Airport Zoning Commission has approved your application for a permit to construct 310' AGL/1546' AMSL Antenna Tower near Salyersville, KY 37° 45' 47.34" N / 82° 59' 26.62" W.

This permit is valid for a period of 18 Month(s) from its date of issuance. If construction is not completed within said 18-Month period, this permit shall lapse and be void, and no work shall be performed without the issuance of a new permit.

No Hazard, MIWOL Obstruction Lighting Required.

Randall S. Royer


Randall S. Royer, Executive Director Office of Audits Acting Administrator Randall.Royer@ky.gov Jason.Salazar-Munoz@ky.gov



Driving Directions for Mashfork

- 1) Beginning at the Magoffin County Court House at 100 Maple Street, Salyersville, KY.
- 2) Take Court Square to S Church Street and head North toward E Maple Street.
- 3) Turn left onto E Maple Street.
- 4) Turn left at the red light onto S Church Street/US-460 and drive 0.3 miles.
- 5) Continue onto Parkway Drive/US-460 for 1 mile.
- 6) Continue straight to stay on Parkway Drive.
- 7) Turn left onto Mountain Parkway.
- 8) Continue straight onto US-460 E/Mountain Parkway for 2.1 miles.
- 9) Turn left onto US-460 E.
- 10) Continue for 2.6 miles on US-460 E for 2.6 miles
- 11)Turn left onto a gravel road (sign posted).
- 12) Staying to the left drive approximately 0.6 miles following the flagging to the site (sign posted).

Prepared By: Daryl Bartley Appalachian Wireless 606-477-2355

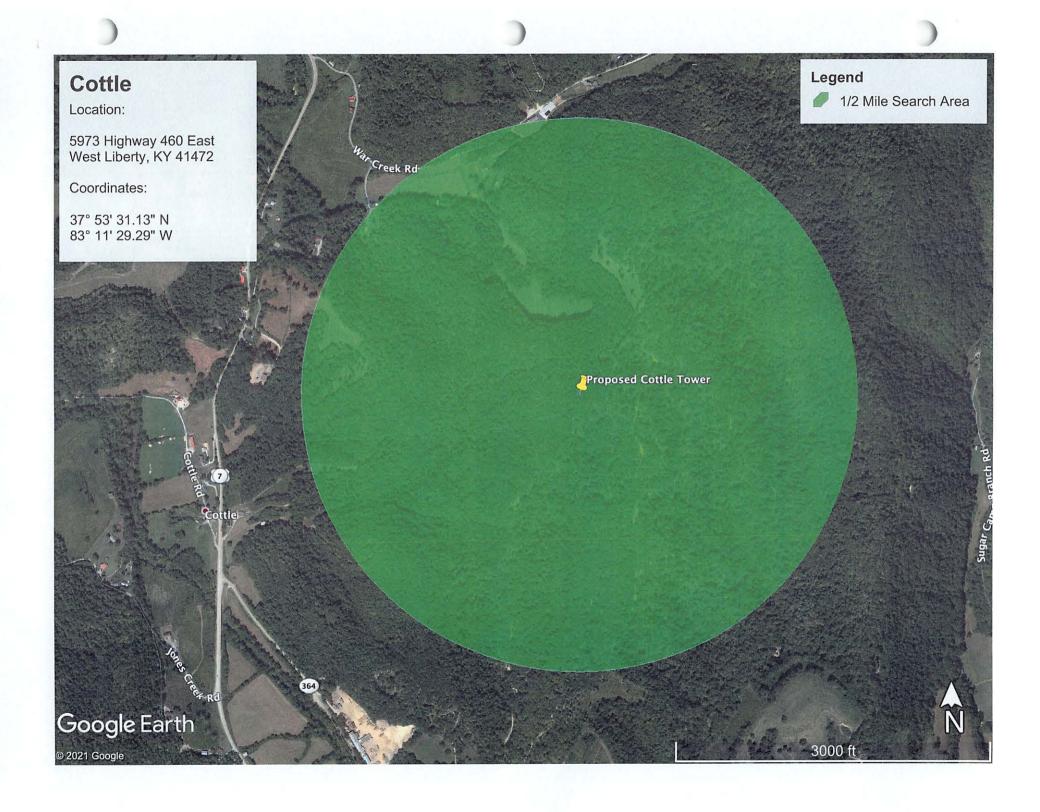

DEED

THIS DEED OF CONVEYANCE is made and entered into this the day of July and between KENNETH GAMBILL and RUTH GAMBILL, a married couple, whose address is 2678 New Paintsville Road, Salyersville, KY 41465 (hereinafter referred to as "Grantors"), and EAST KENTUCKY NETWORK, LLC D/B/A APPALACHIAN WIRELESS, a Kentucky limited liability company (hereinafter referred to as "Grantee"), whose address is 101 Technology Trail, Ivel, Kentucky 41642, which is also the "in care of" address to which the property tax bill for 2021 should be sent.

WITNESSETH

That for and in consideration of the sum of Forty Thousand and 00/100 Dollars (\$40,000.00), cash in hand paid, the receipt and sufficiency of which are hereby acknowledged, Grantor does hereby GRANT, SELL, and CONVEY to the Grantee, its successors and assigns, that certain real property on Mashfork in Salyersville, Magoffin County, Kentucky, which is more particularly described in the Lot Description **attached** hereto and made a part herein as **Exhibit A** and depicted on the plat **attached** hereto and made a part herein as **Exhibit B**, prepared by James W. Caudill, Licensed Professional Land Surveyor (hereinafter referred to as the "Property").

Grantors further grant unto Grantee full and complete rights of ingress, egress, and regress over roads located upon any property owned or controlled by Grantors to and from the Property. Grantors further grant Grantee permission to construct and maintain a new road to be used exclusively by Grantee. Grantors also grant to the Grantee a right of way and easement to construct, maintain, and operate telephone, fiber, and/or power transmission lines and poles over Grantors' property, said lines and poles to be located where feasible along the access road to the Property. Grantors shall execute instruments granting any easements requested by any utility

company to provide utilities services to the Property. Grantee shall have the right, but not the obligation, to trim or remove trees, limbs, or underbrush which may interfere with its roads or power/telephone/fiber lines, wherever such roads and lines are located. Grantee shall have the absolute right to convey, assign, or otherwise transfer, in whole or in part, the easements and rights of way herein granted to Grantee.

Being a part of the same property conveyed to Grantors by Kenneth Gambill and Ruth Gambill, by Deed dated September 23, 2014, and recorded in the Magoffin County Clerk's Office in Deed Book 208, Page 702.

TO HAVE AND TO HOLD the same with all appurtenances and privileges thereunto belonging unto the Grantee, its successors and assigns forever, with covenant of GENERAL WARRANTY.

CONSIDERATION CERTIFICATE

The parties to this deed certify that the consideration reflected in this deed is the full consideration paid for the property and understand that falsification of the stated consideration is a class D felony, subject to one to five years imprisonment and fines up to \$10,000.00.

[REMAINDER OF PAGE INTENTIONALLY LEFT BLANK.]

IN TESTIMONY WHEREOF, the parties have hereunto subscribed their names as of the date set forth herein.

GRANTORS:
Hernath, Manlell

Kenneth Gambill

Ruth Gambill

COMMONWEALTH OF KENTUCKY
COUNTY OF Mayoffin

The foregoing instrument was acknowledged before me this Utay of Suly

2021, by Kenneth Gambill and Ruth Gambill, Grantors.

Notary Public

Commission No.: MNP375

My Commission Expires: 2-6-224.

[SIGNATURES CONTINUE ON NEXT PAGE.]

GRANTEE:

EAST KENTUCKY NETWORK, LLC D/B/A APPALACHIAN WIRELESS

By: W.A. Gillum

Its: CEO/General Manager

COMMONWEALTH OF KENTUCKY
COUNTY OF FLOYD

The foregoing instrument was acknowledged before me this 19th day of _______, 2021, by W.A. Gillum, CEO/General Manager of East Kentucky Network, LLC d/b/a Appalachian Wireless, Grantee.

Notary Public

Commission No.:

KYNP375

My Commission Expires: 2-6-2021

This is to certify that this instrument was prepared by:

Krystal Branham, Attorney 101 Technology Trail Ivel, Kentucky 41642

COC 177 2255

Book: 225 Pages: 460-465

Name: DEED

RENEE ARNETT-SHEPHERD

MAGOFFIN COUNTY

7/27/2021

396023

STATE OF KENTUCKY

COUNTY OF MAGOFFIN

I, RENEE ARNETT-SHEPHERD, County Clerk for the County and State aforesaid, certify that the foregoing DEED was on July 27, 2021 4:02 PM lodged for record, whereupon the same with the foregoing and this certificate have been duly recorded in my office.

WITNESS my hand this July 27, 2021

RENEE ARNETT-SHEPHERD, CLERK

BY: Welisse Williams D.C

THIS THE DAY OF DAY OF COLLECTED

RENEE ARNETT- SHEPHERD

CLERK

BY

CLERK

DC

COLLECTED

COLLECTED

COLLECTED

COLLECTED

COLLECTED

COLLECTED

CLERK

DC

CLERK

4

LOT DESCRIPTION

Property of Kenneth and Ruth Gambill Off of Highway 460 Near Mash Fork In Magoffin County, KY June 29, 2021

A certain tract or parcel of land lying and being in Magoffin County, Kentucky, and being a portion of the property conveyed to Kenneth Gambill and Ruth L. Gambill, husband and wife, from Kenneth Gambill and Ruth L. Gambill, by Deed of Conveyance dated September 23, 2014, and of record in Deed Book 208, Page 702, in the records of the Magoffin County Clerk's Office. Said property being more particularly bounded and described as follows:

Lot 1A

Beginning at a set iron pin with cap marked LS#2259 on a ridge west of Mash Fork and Highway 460, and on the property line dividing the lands of Kenneth and Ruth Gambill (Deed Book 208 Page 702), and James B. Conley, Ted Conley, Gloria J. Nelson and Kenneth E. Conley (Deed Book 6 Page 132), and Karen Sue Ramirez (All 1/4 undivided interest in farm adjoining lot); thence continuing with the ridge and said property line North 56 deg 43 min 24 sec East, a distance of 141.58 to a set iron pin with cap marked LS#2259 on ridge; thence still with ridge and property line North 11 deg 34 min 55 sec East, a distance of 66.01 feet to a set iron pin with cap marked LS#2259 on ridge; thence leaving the ridge and severing the Gambill property South 76 deg 57 min 38 sec East, a distance of 96.56 feet to a set iron pin with cap marked LS#2259 on hillside; thence around the hillside South 00 deg 04 min 30 sec West, a distance of 102.58 feet to a set iron pin with cap marked LS#2259 on hillside; thence still around the hillside South 48 deg 08 min 15 sec West, a distance 115.05 feet to a set iron pin with cap marked LS#2259 on hillside; thence still around the hillside South 81 deg 22 min 06 sec West, a distance of 98.51 feet to a set iron pin with cap marked LS#2259 on hillside; thence up the hillside North 29 deg 29 min 46 sec West, a distance of 84.28 feet to the ridge and point of beginning. Containing a calculated area of 27970.0 square feet, or 0.64 acres.

Also to be included is an access road from the public highway # 460 to Lot 1A. This access road being a portion of Kenneth Gambill and Ruth L. Gambill property in deed book 208 page 702. Also to be included is a right to install fiber and utility lines in or along said access road and/or such other location to be agreed upon by the parties.


Unless stated otherwise, any monument referred to herein as "set iron pin with cap" is a set ½" diameter rebar, at least eighteen (18") in length, with a plastic cap stamped "LS-2259". All bearings stated herein are referred to NAD83, KY single zone of the Kentucky state plane system.


This survey was performed on June 29, 2021 by James W. Caudill, a Kentucky Licensed Professional Land Surveyor No. 2259.


James W. Caudill, PLS #2259


JAMES W.
CAUDILL
2259
LICENSED
PROFESSIONAL
LAND SURVEYOR

EXHIBIT

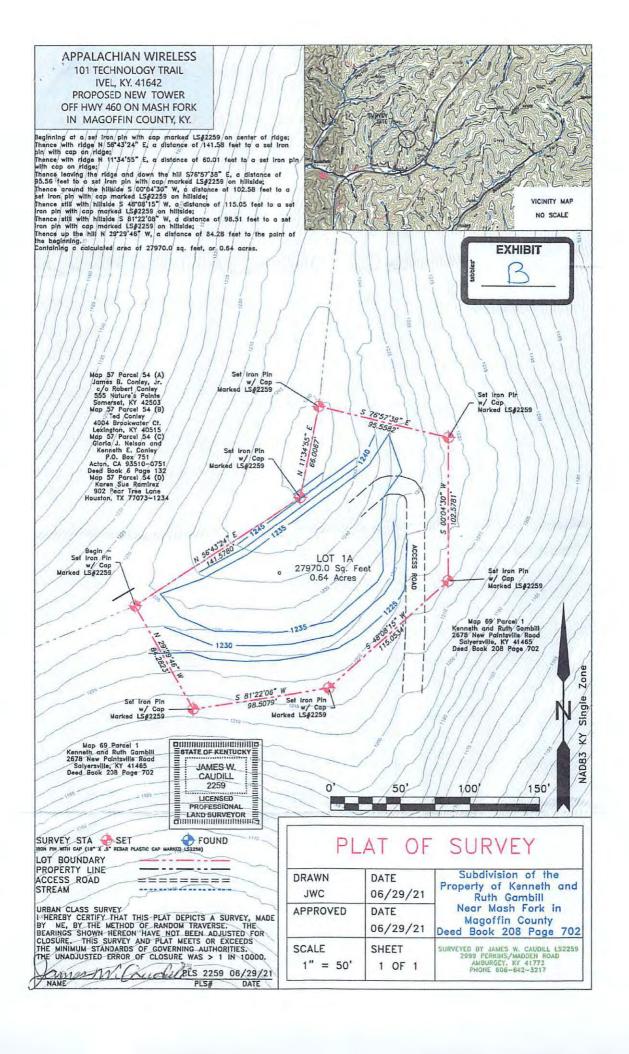

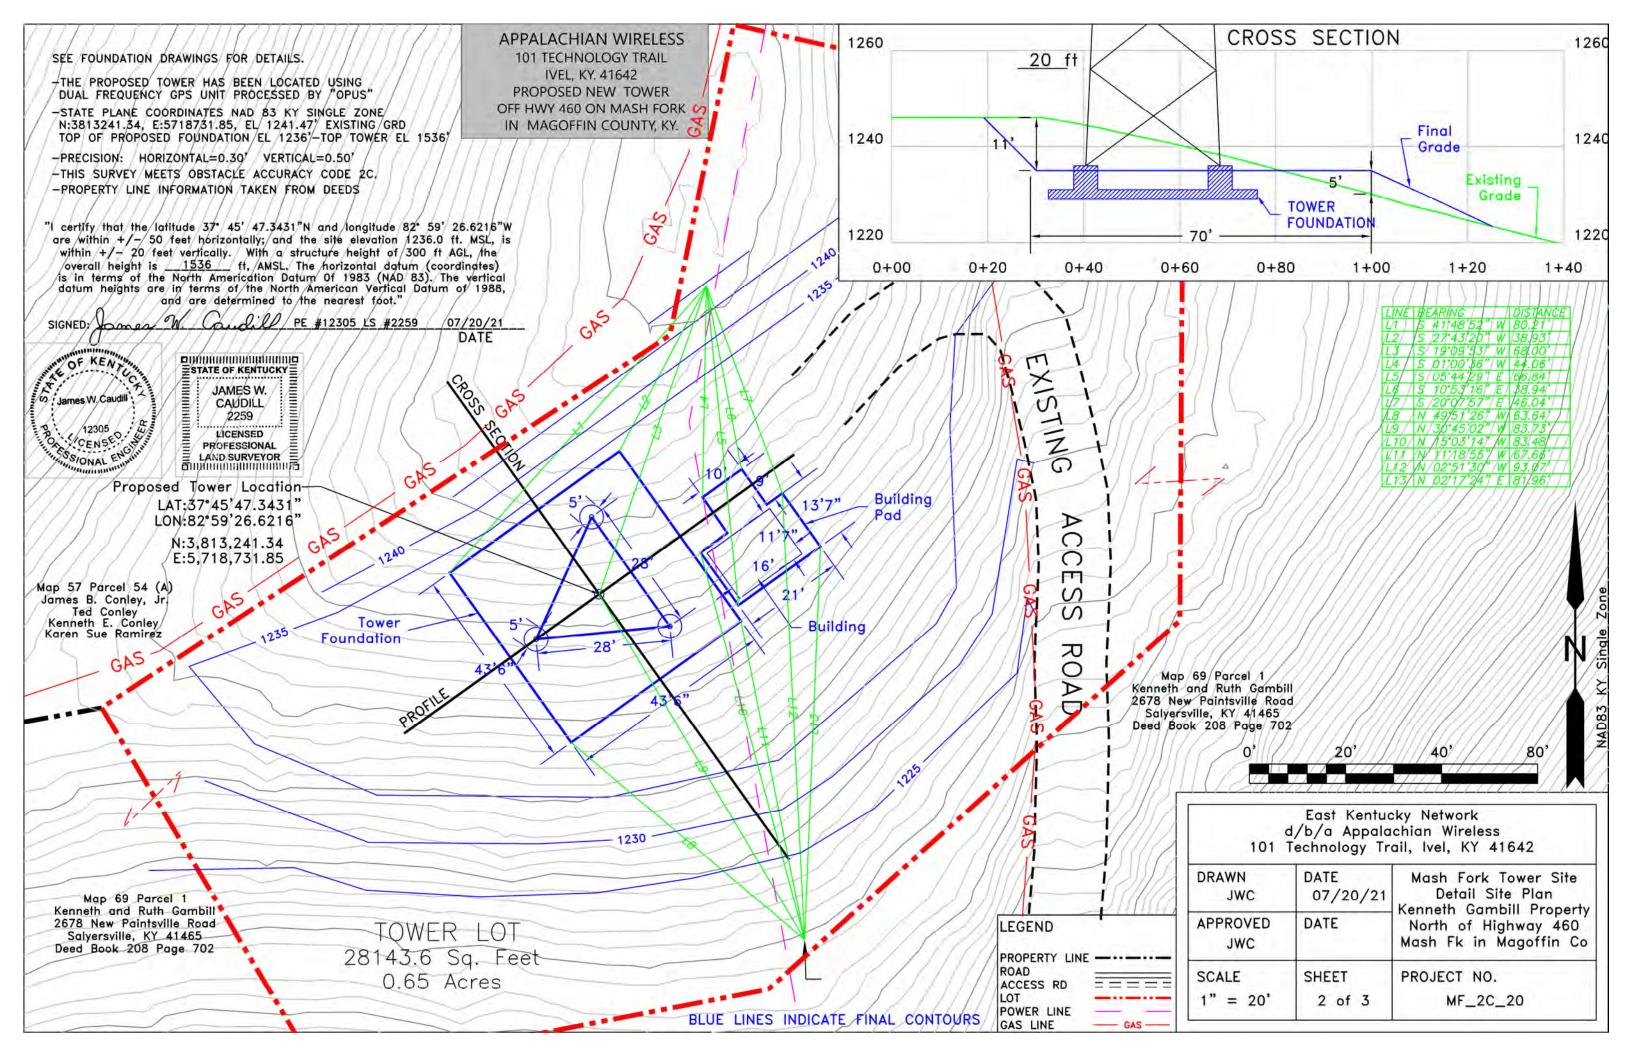

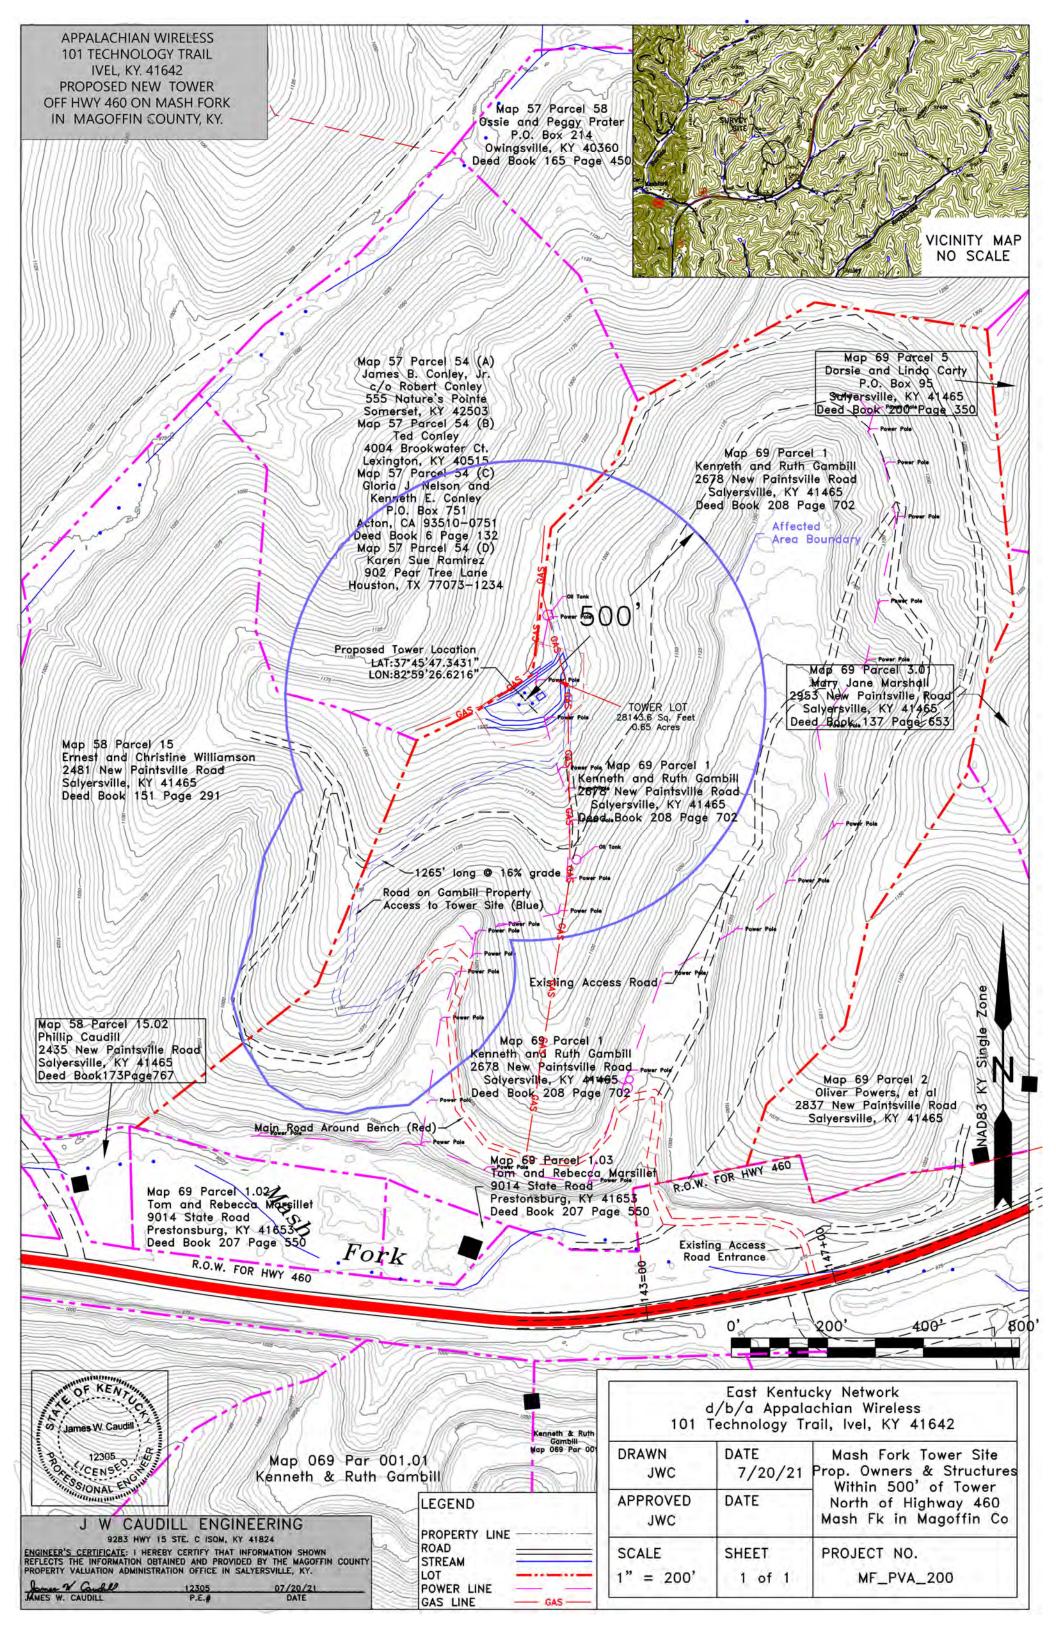

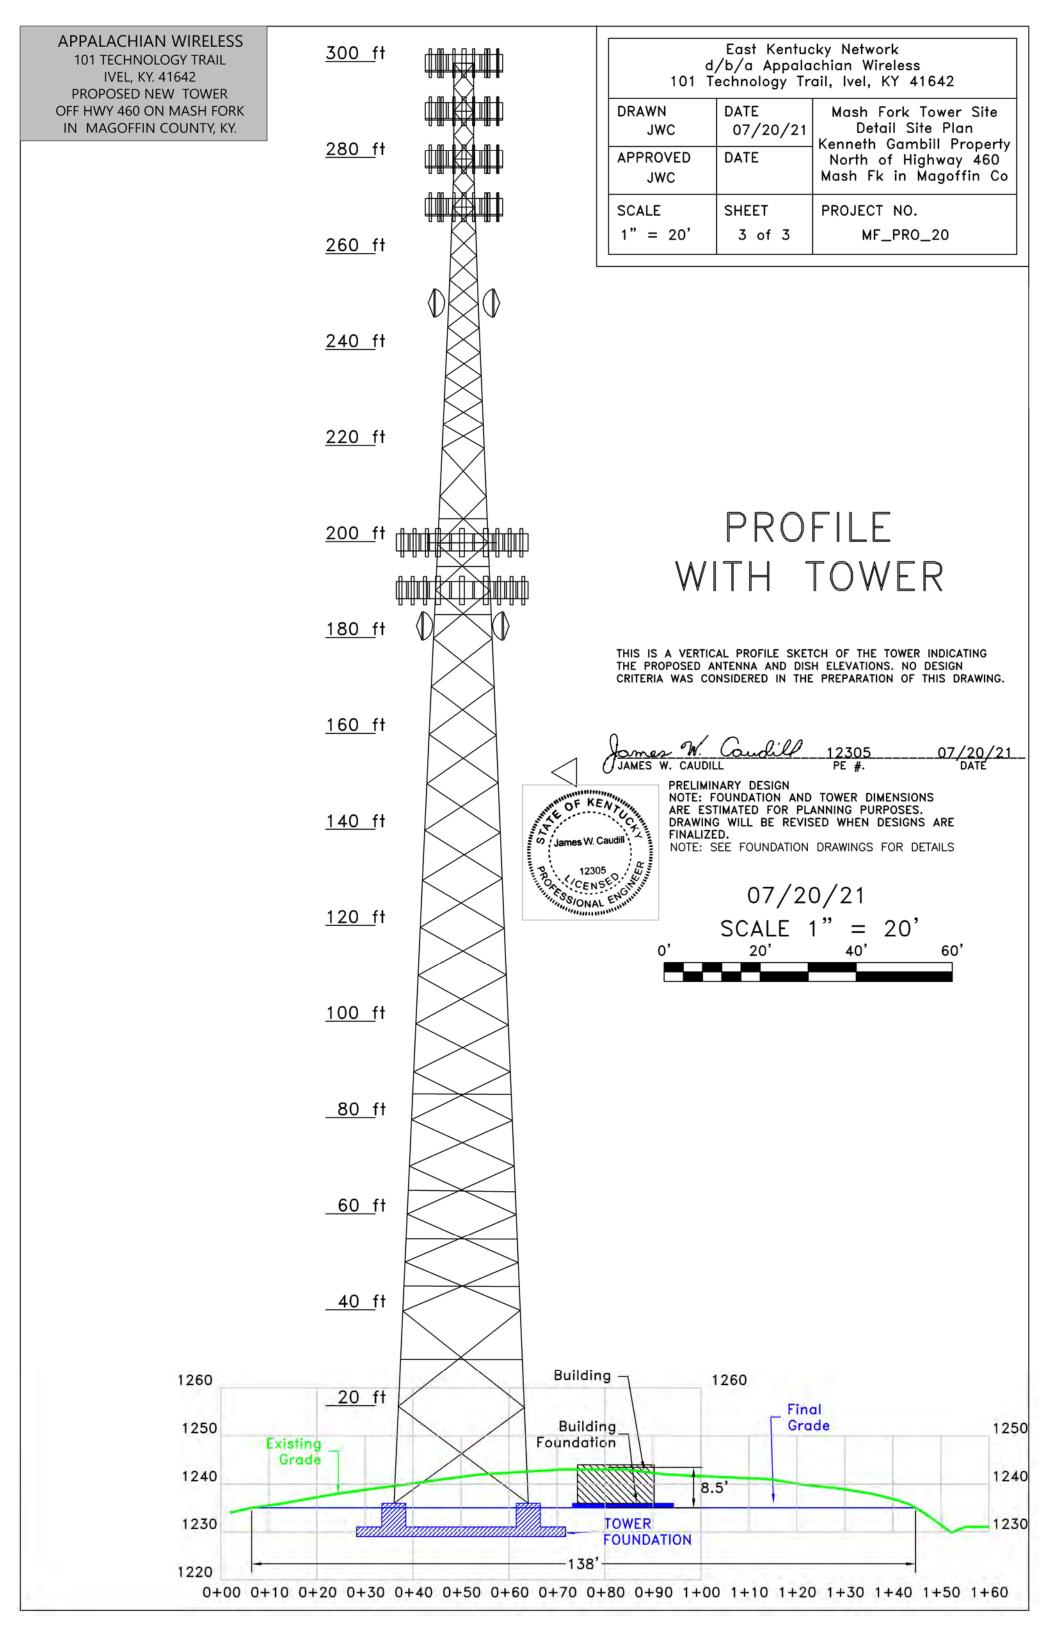

Utility ID	Utility Name	Utility Type			State
	365 Wireless, LLC	Cellular	D	Atlanta	GA
4109300	Access Point, Inc.	Cellular	٥		NC
	Air Voice Wireless, LLC	Cellular	Α		MI
4110650	Alliant Technologies of KY, L.L.C.	Cellular	С		NJ
44451184	Alltel Communications, LLC	Celluiar	Α		NJ
4110850	AltaWorx, LLC	Cellular	C	Fairhope	AL
4107800	American Broadband and Telecommunications Company	Cellular	С	Toledo	ОН
4108650	AmeriMex Communications Corp.	Cellular	D	Dunedin	FL
4105100	AmeriVision Communications, Inc. d/b/a Affinity 4	Cellular	D	Virginia Beach	VA
4110700	Andrew David Balholm dba Norcell	Cellular	C	Clayton	WA
4108600	BCN Telecom, Inc.	Cellular	D	Morristown	NJ
4110550	Blue Casa Mobile, LLC	Cellular	D	Santa Barbara	CA
4108750	Blue Jay Wireless, LLC	Cellular	С	Carroliton	TX
	BlueBird Communications, LLC	Cellular	С	New York	NY
	Bluegrass Wireless, LLC	Cellular	Α	Elizabethtown	KY
	Boomerang Wireless, LLC	Cellular	В	Hiawatha	IA
	BullsEye Telecom, Inc.	Cellular	D	Southfield	МІ
	CampusSims, Inc.	Cellular	D	Boston	MA
	Cellco Partnership dba Verizon Wireless	Cellular	Α	Basking Ridge	NJ
	Cintex Wireless, LLC	Cellular	D	Rockville	MD
	ComApp Technologies LLC	Cellular	c	Melrose	MA
	Consumer Cellular, Incorporated	Cellular	Ā	Portland	OR
	Credo Mobile, Inc.	Cellular	A	San Francisco	CA
	Cricket Wireless, LLC	Cellular	A	San Antonio	TX
	CTC Communications Corp. d/b/a EarthLink Business I	Cellular	D	Grand Rapids	МІ
	Cumberland Cellular Partnership	Cellular	Ā		KY
	East Kentucky Network, LLC dba Appalachian Wireless	Cellular	Ā	ivel	KY
	Easy Telephone Service Company dba Easy Wireless	Cellular	D	Ocala	FL
	Enhanced Communications Group, LLC	Cellular	<u> </u>	Bartlesville	ОК
	Excellus Communications, LLC	Cellular	<u> </u>	Chattanooga	TN
	Flash Wireless, LLC	Cellular	c	Concord	NC
	France Telecom Corporate Solutions L.L.C.	Cellular	D	Oak Hill	VA
	Global Connection Inc. of America	Cellular	D	Norcross	GA
	Globalstar USA, LLC	Cellular	В	Covington	LA
	Google North America Inc.	Cellular	Ā	Mountain View	
	Granite Telecommunications, LLC	Cellular	D	Quincy	MA
	GreatCall, Inc. d/b/a Jitterbug	Cellular	A	San Diego	CA
	GTE Wireless of the Midwest dba Verizon Wireless	Cellular	A		N)
	Horizon River Technologies, LLC	Cellular	c	Atlanta	GA
	i-Wireless, LLC	Cellular	Ā	Newport	KY
	IM Telecom, LLC d/b/a Infiniti Mobile	Cellular	D	Tulsa	OK
	KDDI America, Inc.	Cellular	D	New York	NY
	Kentucky RSA #1 Partnership	Celiular	Ā	Basking Ridge	NJ
	Kentucky RSA #3 Cellular General	Cellular	Ā	Elizabethtown	KY
	Kentucky RSA #4 Cellular General	Cellular	Ā	Elizabethtown	KY
	Konatel, Inc. dba telecom.mobi	Cellular	D	Johnstown	PA
	Lunar Labs, Inc.	Cellular	c	Detroit	Mi
	Lycamobile USA, Inc.	Cellular	D	Newark	NJ
		_I Cenulai	שו		
4107300		Collular	A	Rallouse	11W/V
4107300 4108800	MetroPCS Michigan, LLC	Cellular	A	Bellevue Mosa	WA AZ
4107300 4108800 4109650	MetroPCS Michigan, LLC Mitel Cloud Services, Inc.	Cellular	D	Mesa	AZ
4107300 4108800 4109650 4202400	MetroPCS Michigan, LLC Mitel Cloud Services, Inc. New Cingular Wireless PCS, LLC dba AT&T Mobility, PCS	Cellular Cellular	D A	Mesa San Antonio	AZ TX
4107300 4108800 4109650 4202400 10900	MetroPCS Michigan, LLC Mitel Cloud Services, Inc.	Cellular	D	Mesa	AZ

4001800	OnStar, LLC	Cellular	Α	Detroit	МІ
	Onvoy Spectrum, LLC	Cellular	С	Plymouth	MN
4109050	Patriot Mobile LLC	Cellular	D	Southlake	TX
4110250	Plintron Technologies USA LLC	Cellular	D	Bellevue	WA
33351182	PNG Telecommunications, Inc. dba PowerNet Global Communications	Ceilular	D	Cincinnati	ОН
4202100	Powertel/Memphis, Inc. dba T-Mobile	Cellular	Α	Bellevue	WA
4107700	Puretalk Holdings, LLC	Cellular	Α	Covington	GA
4106700	Q Link Wireless, LLC	Cellular	Α	Dania	FL
4108700	Ready Wireless, LLC	Cellular	В	Hiawatha	IA
4110500	Republic Wireless, Inc.	Cellular	D	Raleigh	NC
	ROK Mobile, Inc.	Cellular	C	Culver City	CA
4106200	Rural Cellular Corporation	Cellular	Α	Basking Ridge	NJ
4108550	Sage Telecom Communications, LLC dba TruConnect	Cellular	D	Los Angeles	CA
4109150	SelecTel, Inc. d/b/a SelecTel Wireless	Cellular	D	Freemont	NE
4106300	SI Wireless, LLC	Cellular	Α	Carbondale	IL
4110150	Spectrotel, Inc. d/b/a Touch Base Communications	Cellular	D	Neptune	NJ
	Sprint Spectrum, L.P.	Cellular	Α	Atlanta	GA
4200500	SprintCom, Inc.	Cellular	Α	Atlanta	GA
4109550	Stream Communications, LLC	Cellular	D	Dallas	TX
4110200	T C Telephone LLC d/b/a Horizon Cellular	Cellular	D	Red Bluff	CA
4202200	T-Mobile Central, LLC dba T-Mobile	Cellular	Α	Bellevue	WA
4002500	TAG Mobile, LLC	Cellular	D	Carroliton	TX
4109700	Telecom Management, Inc. dba Pioneer Telephone	Cellular	D	South Portland	ME
4107200	Telefonica USA, Inc.	Cellular	D	Miami	FL
4108900	Telrite Corporation dba Life Wireless	Cellular	D	Covington	GA
4108450	Tempo Telecom, LLC	Cellular	D	Kansas City	MO
4109950	The People's Operator USA, LLC	Cellular	D	New York	NY
4109000	Ting, Inc.	Cellular	Α	Toronto	ON
4110400	Torch Wireless Corp.	Cellular	D	Jacksonville	FL
4103300	Touchtone Communications, Inc.	Cellular	D	Whippany	NJ
4104200	TracFone Wireless, Inc.	Cellular_	D	Miami	FL
	Truphone, Inc.	Cellular	D	Durham	NC
4110300	UVNV, Inc.	Cellular	D	Costa Mesa	CA
4105700	Virgin Mobile USA, L.P.	Cellular	Ā	Atlanta	GA
	Visible Service LLC	Cellular	С	Lone Tree	œ
4106500	WiMacTel, Inc.	Cellular	D	Palo Alto	CA
4110950	Wing Tel Inc.	Cellular	С	New York	NY
4109900	Wireless Telecom Cooperative, Inc. dba theWirelessFreeway	Cellular	D	Louisville	KY

S & S Tower Services 120 Branden Dr. Mousie, KY 41839

Kentucky Public Service Commission 211 Sower Blvd. P.O. Box 615 Frankfort, KY 40602-0615

Dear Commissioners:

The Construction Manager for the proposed communications facility will be Dave Strausbaugh. His contact information is (606) 497-6730 or dstrausbaugh010@gmail.com.

Dave has been in the industry completing civil construction and constructing towers since 1991. He has worked for S&S Tower Services since 2015 as Construction Manager overseeing the construction of telecommunications towers and sites.

Thank you,

Chris Strausbaugh

Owner

S&S Tower Services (606) 497-5798