

**BULLITT COUNTY ENCROACHMENT PERMIT  
FOR TILE PLACEMENT ON COUNTY MAINTAINED ROADS**

Issued by  
**BULLITT COUNTY ROAD DEPARTMENT  
1679 SOUTH PRESTON HWY.  
P.O. BOX 768  
SHEPHERDSVILLE, KY 40165  
PHONE: 502-543-2510 FAX PHONE: 502-543-6889**


Date: 21 NOV. 23 Permit No. 1739

Applicants Name: LOUISVILLE GAS AND ELECTRIC COMPANY

Applicants Address: 6900 Enterprise Drive, Louisville, KY 40214

Applicants Phone Number: 502-398-0107 Cell#: \_\_\_\_\_

Location of Installation: Temporary Entrance at Grigsby Lane (CR-1112) Mile Post: 0.625  
LONG: -85.52442941 LAT: 37.98267200 (TAR-4)

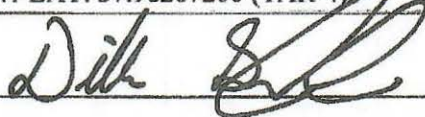Signature of Applicant: Dillon Graff 

*By signing above, I hereby certify and affirm that I am the wonder or legal occupant of the above-referenced property pursuant to Ordinance No.86-24*  
NOTIFICATION DATE FOR SIZES WAS 21 NOV. 23

Size of tile to be installed with approval of the Bullitt County Road Department.

Diameter: N/A LENGTH N/A


No tile to be installed less than fifteen (15) inches in diameter and twenty (20) feet in length unless approval is given by the Road Dept. No plastic PVC tiles are to be installed, only galvanized, concrete, or steel will be approved.

ON SITE \_\_\_\_\_

Date Tile Installed: \_\_\_\_\_

INSTALLED BY \_\_\_\_\_



METAL OR CONCRETE \_\_\_\_\_

COUNTY ROAD SUPERINTENDENT 

**LG&E Bullitt County Pipeline Project**  
**Access Road**





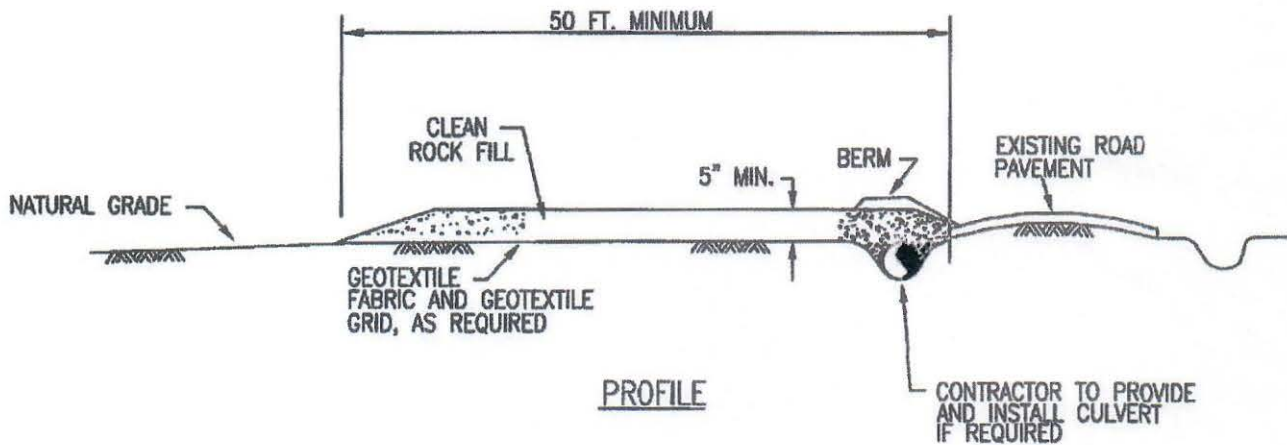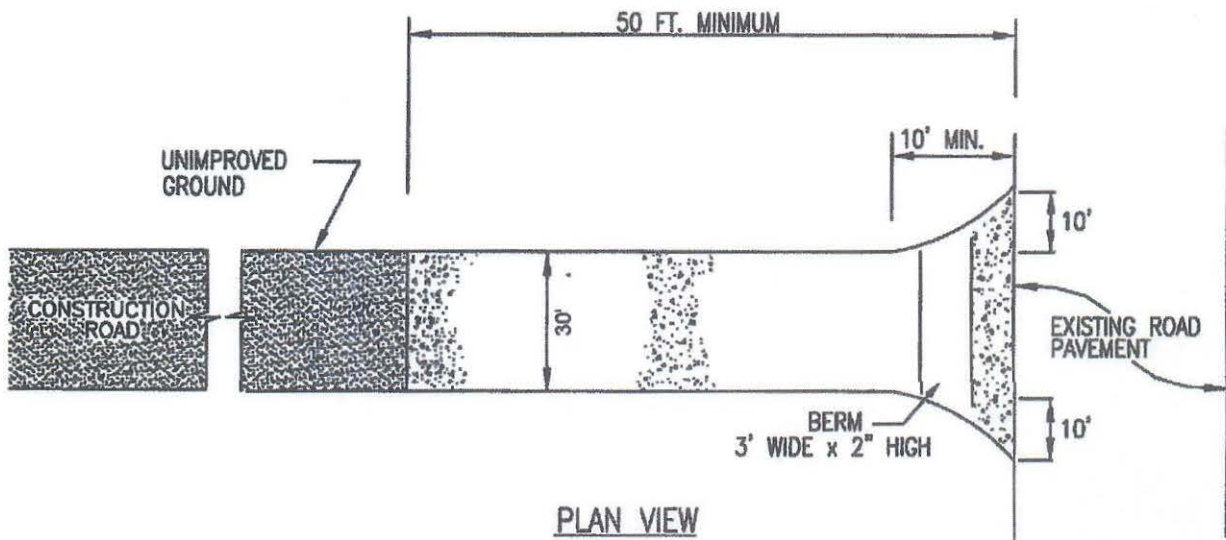

**NOTES:**

1. ACCESS PADS, AS ILLUSTRATED ABOVE, ARE TO BE INSTALLED ADJACENT TO EXISTING PAVED ROADS AT LOCATIONS IDENTIFIED ON THE CONSTRUCTION DRAWINGS OR AS DIRECTED BY THE COMPANY'S INSPECTOR.
2. IF USED IN AGRICULTURAL LAND, ROCK SHALL BE PLACED ON A GEOTEXTILE FABRIC TO FACILITATE ROCK REMOVAL.
3. SHOULD THE ROCK PAD BECOME INEFFECTIVE FOR REDUCING THE BUILDUP OF MUD AND DIRT AND MINIMIZING TRACKING ONTO THE PAVED ROAD, THE CONTRACTOR SHALL WASH THE EXISTING ROCK FILL SURFACE OR ADD A ROCK FILL LAYER TO THE ACCESS PAD.
4. CONTRACTOR SHALL KEEP PAVED ROAD SURFACES CLEAR OF MUD AND DEBRIS.
5. PRIOR TO PERMANENT SEEDING, CONTRACTOR SHALL REMOVE ALL IMPORTED ROCK FILL MATERIAL, GEOTEXTILE FABRIC AND CULVERT (IF INSTALLED) AND RESTORE THE GROUND TO NATURAL CONTOURS UNLESS OTHERWISE DIRECTED BY COMPANY'S INSPECTOR.

**ENEngineering**  
 28100 TORCH PARKWAY  
 WARRENVILLE, IL. 60555  
 TEL. 630-353-4000  
 FAX 630-353-7777  
 WWW.ENENGINEERING.COM

DRAWN BY	BK (ENE)
CHECKED BY	MDW (ENE)
PROJECT ENG.	MDW (ENE)
APPROVED BY	DAD (ENE)
DATE	09-05-16
SCALE	N.T.S.

**TYPICAL STABILIZED  
 CONSTRUCTION ENTRANCE**



DRAWING:  
**EXHIBIT-04**