



Big Sandy Plant Unit 2
ORDER-OF-MAGNITUDE FGD COST ESTIMATE

Prepared for:
Kentucky Power Company (Owner)
and American Electric Power Service Corporation

Project No. 12721-000
September 10, 2010

Draft Report for WFGD, DFGD, IAQCS
and NID Technologies

Volume 5 – NID Technology



55 East Monroe Street
Chicago, IL 60603-5780 USA



Issue Summary Page

Revision Number	Date	Purpose	Prepared By	Reviewed By	Approved By	Pages Affected
A	7/29/10	Review (Wet & Dry)	D. Anderson J. Hughes K. Nomanbhoy M. Ozan C. Woods	D. F. Franczak W. J. Staehlin P. Fisher	S. R. Bertheau	All
B	8/11/10	Review (IAQCS & NID)	D. Anderson J. Hughes K. Nomanbhoy M. Ozan C. Woods	D. F. Franczak W. J. Staehlin P. Fisher	S. R. Bertheau	All



Issue Summary Page Cont.

C	9/10/10	Review NID - Volume 5	D. Anderson J. Hughes <i>J. Hughes</i> K. Nomanphoy <i>K. Nomanphoy</i> M. Ozan <i>Mattoran</i> C. Woods <i>C. Woods</i>	D. F. Franczak W. J. Staehlin <i>W. J. Staehlin</i> P. Fisher <i>P. Fisher</i>	S. R. Bertheau	All



VOLUME 5 TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
1 INTRODUCTION	1

<u>EXHIBIT</u>	<u>DESCRIPTION</u>
5-1	NID Project Deliverable Index
5-2	NID Capital Cost Estimate Outline
5-3	NID Contingency Analysis
5-4	Capital Cost Estimate Comparison Summary - NID FGD Options
5-5	NID O&M Cost Estimate Summary
5-6	NID Project Cash Flow

<u>ATTACHMENT</u>	<u>DESCRIPTION</u>
5-1	NID Process Flow Diagrams
5-2	NID Site Plan and General Arrangement Drawings
5-3	NID Mass Balances
5-4	NID Water Balances
5-5	NID Electrical One-Lines
5-6	NID Detailed Capital Cost Estimate No. 30723 Base Est-1A ESP in Service (3.0 lb SO ₂ /MMbtu)
5-7	NID Detailed Capital Cost Estimate No. 30727 Base Est-1B ESP not in Service (3.0 lb SO ₂ /MMbtu)
5-8	NID Detailed Capital Cost Estimate No. 30722 Est-2A ESP in Service (1.7 lb SO ₂ /MMbtu)*
5-9	NID Detailed Capital Cost Estimate No. 30726 Est-2B ESP not in Service (1.7 lb SO ₂ /MMbtu)*
5-10	NID Detailed Capital Cost Estimate No. 30724 Est-3A ESP in Service (4.5 lb SO ₂ /MMbtu)*
5-11	NID Detailed Capital Cost Estimate No. 30728 Est-3B ESP not in Service (4.5 lb SO ₂ /MMbtu)*

5-12	NID Detailed Capital Cost Estimate No. 30725 Est-4A ESP in Service (7.5 lb SO ₂ /MMbtu)*
5-13	NID Detailed Capital Cost Estimate No. 30729 Est-4B ESP not in Service (7.5 lb SO ₂ /MMbtu)*
5-14	NID Summary Capital Cost Estimate No. 30723 Base Est-1A ESP in Service (3.0 lb SO ₂ /MMbtu)
5-15	NID Summary Capital Cost Estimate No. 30727 Base Est-1B ESP not in Service (3.0 lb SO ₂ /MMbtu)
5-16	NID Summary Capital Cost Estimate No. 30722 Est-2A ESP in Service (1.7 lb SO ₂ /MMbtu)*
5-17	NID Summary Capital Cost Estimate No. 30726 Est-2B ESP not in Service (1.7 lb SO ₂ /MMbtu)*
5-18	NID Summary Capital Cost Estimate No. 30724 Est-3A ESP in Service (4.5 lb SO ₂ /MMbtu)*
5-19	NID Summary Capital Cost Estimate No. 30728 Est-3B ESP not in Service (4.5 lb SO ₂ /MMbtu)*
5-20	NID Summary Capital Cost Estimate No. 30725 Est-4A ESP in Service (7.5 lb SO ₂ /MMbtu)*
5-21	NID Summary Capital Cost Estimate No. 30729 Est-4B ESP not in Service (7.5 lb SO ₂ /MMbtu)*
5-22	O&M Costs – Fixed and Variable (NID)
5-23	Project Schedule (NID – ESP out of Service)

* - Estimates 2A, 2B, 3A, 3B, 4A and 4B contain only accounts whose costs are different from the corresponding base estimates 1A and 1B.

1.0 INTRODUCTION

The purpose of this document is to establish the Basis of the Order-of-Magnitude NID FGD (NID) Cost Estimate to assist American Electric Power (AEP) with the selection of an FGD technology for Big Sandy Plant Unit 2. It is also intended to organize and present the deliverables for the NID technology that were used to develop the Order-of-Magnitude FGD Cost Estimates. This document will define the project scope of work for the NID technology and the organization of the capital cost estimate structure. The technical and commercial basis used to develop the Capital and O&M Cost Estimates and the assumptions used in preparing them are defined in Volume 1, Summary Report.

The Order-of-Magnitude FGD Cost Estimate Report is comprised of five (5) volumes as follows:

<u>Volume</u>	<u>Description</u>
1	Summary Report
2	WFGD Technology
3	DFGD Technology
4	IAQCS Technology
5	NID Technology

Order-of-Magnitude FGD Cost Estimates were prepared for the following four FGD Technologies:

- **Wet (WFGD):** Wet FGD Spray Tower and Integrated Wet ESP
- **Dry (DFGD):** Dry FGD Spray Dryer Absorber (SDA) and Fabric Filter (FF)
- **IAQCS:** Integrated Air Quality Control System (IAQCS) Dry SDA/FF and Wet FGD Spray Tower
- **NID:** Dry FGD NID and Fabric Filter

For the NID technology, cost estimates were prepared considering fuel specifications with sulfur content of 1.7, 3.0, 4.5 and 7.5 lb SO₂/MMBtu. A base fuel was selected and a capital cost estimate was prepared for each assuming an Engineer, Procure, Construct (EPC) contracting approach. Adjustments were then made to the base cost estimate to develop the remaining fuel estimates for that specific technology. The cost estimates also consider both the existing ESP in and removed from service.

The estimates were based upon conceptual design deliverables prepared by S&L for each technology and the AEP Order of Magnitude/Relative Capital Installed Cost Estimate Specification (BS2-FGDSCE-

052010, Rev. 1) which provided design basis and performance requirements. The conceptual deliverables, consisting of project general arrangements, process flow diagrams, mass balances, water balances and single lines, formed the basis for development of preliminary major equipment sizes and commodity estimates. Attention was focused on the significant elements that changed from one fuel to another, such as storage, handling and disposal of reagent and byproduct materials. The OEM equipment costs were taken from recent vendor quotes and adjusted for Big Sandy specifications, unit capacity, and escalated to 2010 dollars.

Table 1-1 illustrates the total of eight (8) cost estimates that were prepared for the NID.

Table 1-1
EPC COST ESTIMATES

Technology	1.7 lb SO ₂ /MMbtu	3.0 lb SO ₂ /MMbtu	4.5 lb SO ₂ /MMbtu	7.5 lb SO ₂ /MMbtu
NID (ESP)	NID Est-2A	NID Base Est-1A	NID Est-3A	NID Est-4A
NID (N/ESP)	NID Est-2B	NID Base Est-1B	NID Est-3B	NID Est-4B

ESP= ESP In Service

N/ESP = ESP Out of Service

For details of the Technical and Commercial Basis of the entire study and the various technology cost comparisons, see Volume 1, Summary Report.



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

EXHIBIT 5-1

NID Project Deliverable Index

VOLUME 5 - EXHIBIT 5-1
Project Deliverable Index
NID Technology

Document No.	Description	Attachment No.
MSK-NID-PFD-001_C	NID FGD Process Flow Diagram – Sheet 1	5-1
MSK-NID-PFD-002_C	NID FGD Process Flow Diagram – Sheet 2	5-1
MSK-NID-GA-001_C	NID FGD Site Plan	5-2
MSK-NID-GA-002_B	NID FGD General Arrangement – Plan	5-2
MSK-NID-GA-003_B	NID FGD General Arrangement – Ductwork Elevations	5-2
MSK-NID-MB-001_B	NID FGD Mass Balance Diagram – (1.75 lb/MMBtu Coal w/o ESP)	5-3
MSK-NID-MB-002_B	NID FGD Mass Balance Diagram – (3.0 lb/MMBtu Coal w/o ESP)	5-3
MSK-NID-MB-003_B	NID FGD Mass Balance Diagram – (4.5 lb/MMBtu Coal w/o ESP)	5-3
MSK-NID-MB-004_B	NID FGD Mass Balance Diagram – (7.5 lb/MMBtu Coal w/o ESP)	5-3
MSK-NID-MB-005_B	NID FGD Mass Balance Diagram – (1.75 lb/MMBtu Coal w/ESP)	5-3
MSK-NID-MB-006_B	NID FGD Mass Balance Diagram – (3.0 lb/MMBtu Coal w/ESP)	5-3
MSK-NID-MB-007_B	NID FGD Mass Balance Diagram – (4.5 lb/MMBtu Coal w/ESP)	5-3
MSK-NID-MB-008_B	NID FGD Mass Balance Diagram – (7.5 lb/MMBtu Coal w/ESP)	5-3
MSK-NID-WB-NOTES-001_C	NID Water Balance Assumptions	5-4
MSK-NID-WB-001_C	NID FGD Water Balance Diagram – (1.75 lb/MMBtu Coal w/o ESP)	5-4
MSK-NID-WB-002_C	NID FGD Water Balance Diagram – (3.0 lb/MMBtu Coal w/o ESP)	5-4
MSK-NID-WB-003_C	NID FGD Water Balance Diagram – (4.5 lb/MMBtu Coal w/o ESP)	5-4
MSK-NID-WB-004_C	NID FGD Water Balance Diagram – (7.5 lb/MMBtu Coal w/o ESP)	5-4
MSK-NID-WB-005_C	NID FGD Water Balance Diagram – (1.75 lb/MMBtu Coal w/ESP)	5-4
MSK-NID-WB-006_C	NID FGD Water Balance Diagram – (3.0 lb/MMBtu Coal w/ESP)	5-4
MSK-NID-WB-007_C	NID FGD Water Balance Diagram – (4.5 lb/MMBtu Coal w/ESP)	5-4
MSK-NID-WB-008_C	NID FGD Water Balance Diagram – (7.5 lb/MMBtu Coal w/ESP)	5-4

VOLUME 5 - EXHIBIT 5-1
Project Deliverable Index
NID Technology

	Coal w/ESP)	
ESK-NID-NOTES-001_B	Basic Description of One Lines - NID	5-5
ESK-NID-SL-001_B	NID FGD Single Line Diagram – ESP Out	5-5
ESK-NID-SL-002_B	NID FGD Single Line Diagram – ESP In	5-5
	Project Schedule (NID – ESP not in Service)	5-23



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

EXHIBIT 5-2

NID Capital Cost Estimate Outline

EXHIBIT 5-2

NID CAPITAL COST ESTIMATE OUTLINE

DIRECT COSTS

PROJECT DIRECT COSTS					
ACCT	COST ESTIMATE CATEGORY	EQUIPMENT/MATERIAL COST RESPONSIBILITY	CONSTRUCTION/ERECTION COST RESPONSIBILITY	ESTIMATE BASIS	NOTES
1.0	ID FANS	S&L	S&L	Previous OEM proposals and S&L Estimates	1
2.0	NID MODULES	S&L	S&L	Previous OEM proposals and S&L Estimates	
3.0	NEW STACK	AEP	AEP		
4.0	LIME HANDLING SYSTEM	S&L	S&L	Previous OEM proposals and S&L Estimates	
5.0	LIME SLAKER BUILDER BUILDING	S&L	S&L	Previous OEM proposals and S&L Estimates	
6.0	BYPRODUCT WASTE & FLY ASH HANDLING	S&L	S&L	Previous OEM proposals and S&L Estimate	
7.0	ABSORBER ISLAND	S&L	S&L	Previous OEM proposals and S&L Estimates	1, 2
8.0	ACTIVATED CARBON INJECTION SYSTEM	S&L	S&L	AEP	
9.0	COMPRESSED AIR SYSTEM	S&L	S&L	Past & Current S&L Projects	

EXHIBIT 5-2
NID CAPITAL COST ESTIMATE OUTLINE
DIRECT COSTS

PROJECT DIRECT COSTS					
ACCT	COST ESTIMATE CATEGORY	EQUIPMENT/MATERIAL COST RESPONSIBILITY	CONSTRUCTION/ERECTION COST RESPONSIBILITY	ESTIMATE BASIS	NOTES
10.0	SERVICE WATER SYSTEM	S&L	S&L	Past & Current S&L Projects	
11.0	POTABLE WATER SYSTEM	S&L	S&L	Past & Current S&L Projects	
12.0	FGD SUBSTATION	S&L	S&L	Past & Current S&L Projects	
13.0	FGD DCS SYSTEM	S&L	S&L	Past S&L Projects Adjusted to Meet AEP Design Criteria	
14.0	CEM SYSTEM	AEP	AEP		
15.0	RAIL INFRASTRUCTURE	S&L	S&L		
16.0	SITE IMPROVEMENTS - CIVIL WORK	S&L	S&L		
17.0	BOP ITEMS	S&L	S&L		
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE	S&L	S&L	Site Plans	
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT	AEP	AEP		

Notes: 1) Noise Mitigation costs were considered for ID fan insulation and lagging and blower bldg construction.
2) Ductwork costs are based upon general arrangement layouts.

EXHIBIT 5-2

[illegible]



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

EXHIBIT 5-3

NID Contingency Analysis



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

EXHIBIT 5-4
Capital Cost Estimate Comparison Summary - NID FGD Options

AEP

Order-of-Magnitude EPC Cost Estimate
Big Sandy Station – Unit 2

Project No. 12721-000
September 10, 2010
Revision A

Exhibit 5-4. NID OEM Cost Summary

	1.7 w/o ESP	3.0 w/o ESP	4.5 w/o ESP	7.5 w/o ESP	Comments
NID System	\$ 49,600,000	\$ 50,231,000	\$ 53,973,000	\$ 67,447,500	Vendor scope: - Lime day silos and piping to the lime hydrators - Lime hydrators and recycle mixers - J-duct reactors and fabric filter modules - All internal fabric filter elements such as bags, cages, ash hoppers, 2 broken bag detectors per compartment - Ash recycle system including air slides and ash discharge pipe - All internal piping and ductwork for the various modules. - Structural steel integral to the support of the vendor's equipment - Piping inside buildings to terminal point - All all motors required by vendor scope of supply - Process instruments and control logic - Trolleys and Hoists By others: - Piping from terminal points out to the plant - Conduit, cables, etc... to vendor's motors - Site grading, roads, foundations, etc... - Lime unloading, storage silo, etc... - Byproduct conveying, storage, etc... - Air compressors for the pulse-jet cleaning system - New ID fans - Duct from fabric filter to new ID fans - All required DCS upgrades
	1.7 w/ ESP	3.0 w/ ESP	4.5 w/ ESP	7.5 w/ ESP	Comments
NID System	\$ 48,579,000	\$ 49,311,000	\$ 53,053,000	\$ 66,387,200	Vendor scope: - Lime day silos and piping to the lime hydrators - Lime hydrators and recycle mixers - J-duct reactors and fabric filter modules - All internal fabric filter elements such as bags, cages, ash hoppers, 2 broken bag detectors per compartment - Ash recycle system including air slides and ash discharge pipe - All internal piping and ductwork for the various modules. - Structural steel integral to the support of the vendor's equipment - Piping inside buildings to terminal point - All all motors required by vendor scope of supply - Process instruments and control logic - Trolleys and Hoists By others: - Piping from terminal points out to the plant - Conduit, cables, etc... to vendor's motors - Site grading, roads, foundations, etc... - Lime unloading, storage silo, etc... - Byproduct conveying, storage, etc... - Air compressors for the pulse-jet cleaning system - New ID fans - Duct from fabric filter to new ID fans - All required DCS upgrades

Costs for the NID system are based on a 2009 quote from Alstom. The previous quote was factored for the AEP Big Sandy Unit 2 capacity (865 MW) and adjusted for each sulfur and ESP operation.

EXHIBIT 5-4
Capital Cost Estimate Comparison Summary
NID System Options

Attached are the capital cost estimate comparison summaries for the NID system options. The differences between these options are related to the following issues:

- The sulfur content of the coal impacts the following equipment and processes:
 - Based on just the sulfur content of the fuel, an increase in sulfur results in a corresponding increase in lime required for sulfur removal. In addition, for a given removal efficiency, the lime stoichiometric ratio increases with increasing sulfur. Therefore, the lime reagent rates increase quickly with increases in fuel sulfur. The higher lime reagent rates correlate to increases in lime handling equipment costs.
 - A higher byproduct rate results from an increase in fuel sulfur because the mass of sulfur released and the mass of unreacted reagent increases. As more byproduct is produced, the costs for transport, storage and disposal are increased.
- The ESP in-service case versus without ESP in-service will result in the following:

ESP In

- Added cost for flyash transport, storage and blending system to stabilize the FGD byproduct.

ESP Out

- Added cost for ESP and booster fan demolition.
- Added cost for the economizer ash handling system.
- Slightly larger NID module costs based on an increase in fabric filter area.
- Slightly higher electrical capital costs due to higher ID fan motor HP.

[illegible]



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

EXHIBIT 5-5

NID O&M Cost Estimate Summary

Exhibit 5-5. NID O&M Cost Estimate Summary

Fuel	NID							
	1.7 w/o ESP	3.0 w/o ESP	4.5 w/o ESP	7.5 w/o ESP	1.7 w/ ESP	3.0 w/ ESP	4.5 w/ ESP	7.5 w/ ESP
Fixed O&M (\$/year)								
Operating Labor	1,040,000	1,040,000	1,040,000	1,040,000	1,040,000	1,040,000	1,040,000	1,040,000
Maintenance Material	2,284,000	2,350,000	2,416,000	2,548,000	2,284,000	2,350,000	2,416,000	2,548,000
Maintenance Labor	1,522,000	1,566,000	1,610,000	1,698,000	1,522,000	1,566,000	1,610,000	1,698,000
Total Fixed O&M (\$/year)	4,846,000	4,956,000	5,066,000	5,286,000	4,846,000	4,956,000	5,066,000	5,286,000
Variable O&M (\$/year)								
Reagent Cost	10,189,000	20,462,000	30,160,000	44,782,000	10,189,000	20,462,000	30,160,000	44,782,000
Activated Carbon	2,344,000	2,319,000	2,315,000	2,293,000	2,267,000	2,243,000	2,239,000	2,218,000
FGD Byproduct Disposal Cost	4,393,000	5,860,000	7,246,000	9,806,000	1,902,000	3,668,000	5,290,000	7,806,000
Makeup Water Cost	523,000	533,000	550,000	572,000	517,000	530,000	547,000	570,000
Wastewater Treatment Chemicals	NA	NA	NA	NA	NA	NA	NA	NA
Bags and Cages Replacement	690,000	690,000	690,000	690,000	690,000	690,000	690,000	690,000
Total Variable O&M excluding Auxiliary Power (\$/year)	18,139,000	29,864,000	40,961,000	58,143,000	15,565,000	27,593,000	38,926,000	56,066,000
Auxiliary Power at Full Load (MW)								
Overall Draft (Furnace to Stack)	23	23	23	23	27	27	27	27
FGD Draft Only	10	10	10	10	10	10	10	10
FGD Equipment Load	4	5	6	6	4	5	6	6
Existing ESP	0	0	0	0	4	4	4	4
WESP	NA	NA	NA	NA	NA	NA	NA	NA
Total Auxiliary Power at Full Load (MW)	27	28	29	29	35	36	37	37

Note: NA = Not Applicable



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010


EXHIBIT 5-6

NID Project Cash Flow

Kentucky Power Company & American Electric Power Service Corporation
 Big Sandy Unit 2
 NID Base (N/ESP - 3.0 Lb/MMBtu)
 Cash Flows - Cumulative Total and Monthly Totals

Sargent & Lundy
 Date: 9/12/2010
 Rev: A

CASH FLOW - BIG SANDY UNIT 2 NID

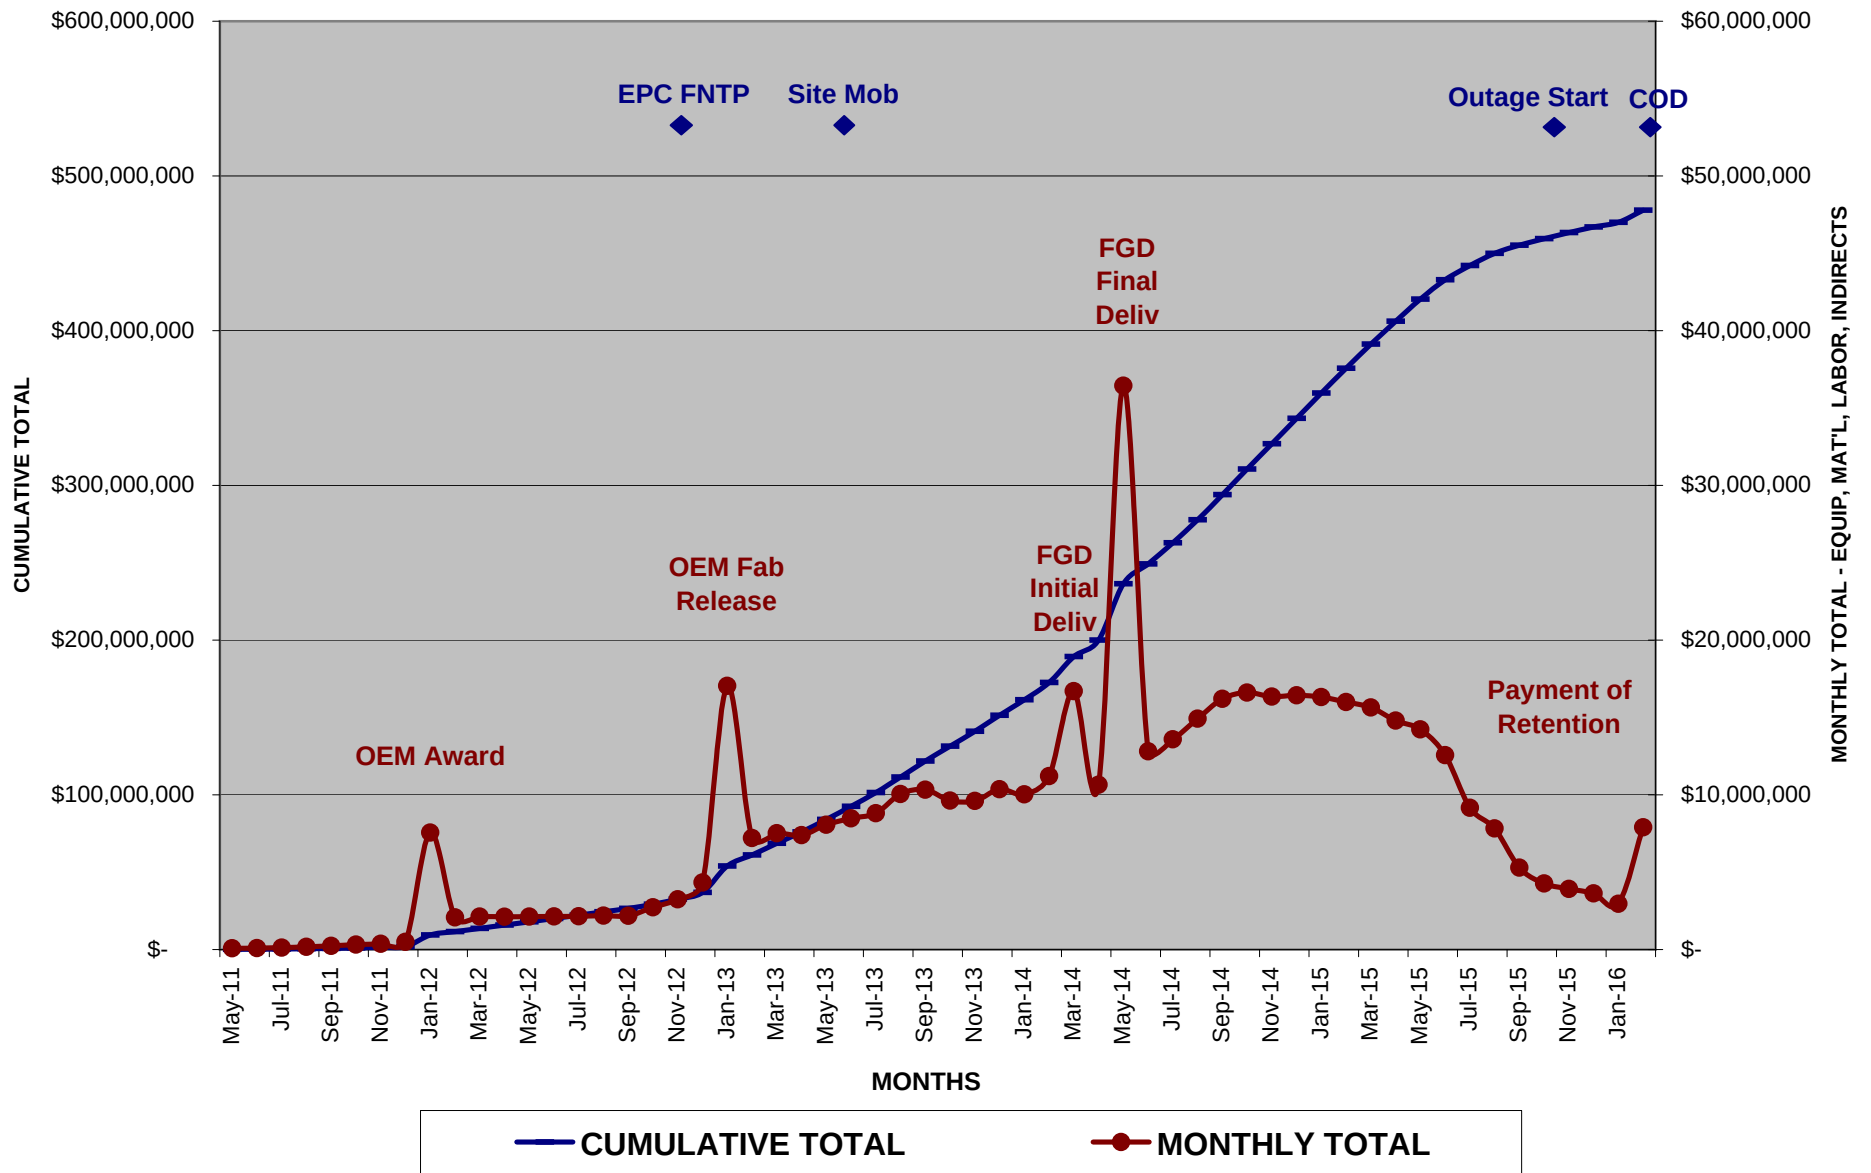




Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010


ATTACHMENT 5-1

NID Process Flow Diagrams

8-Z00-01d-01N-KSM ON 3MO

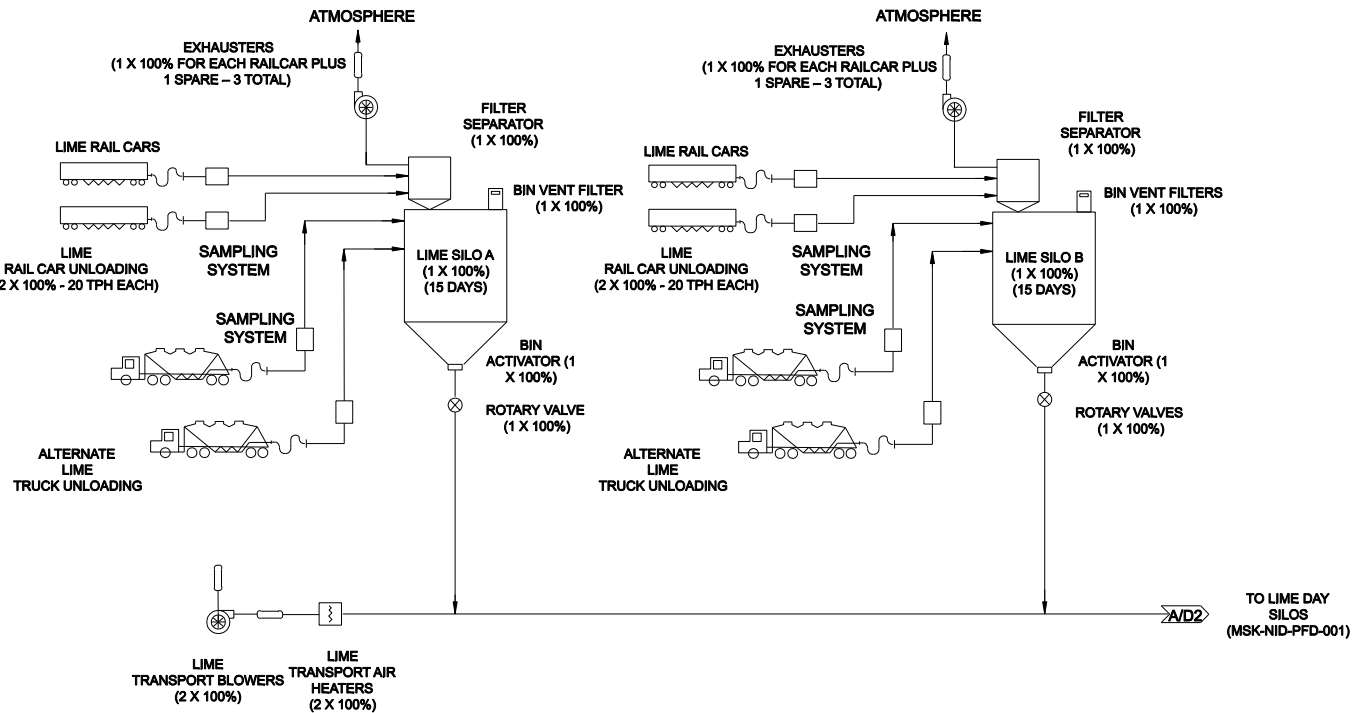

CRUSHED LIME UNLOADING & STORAGE

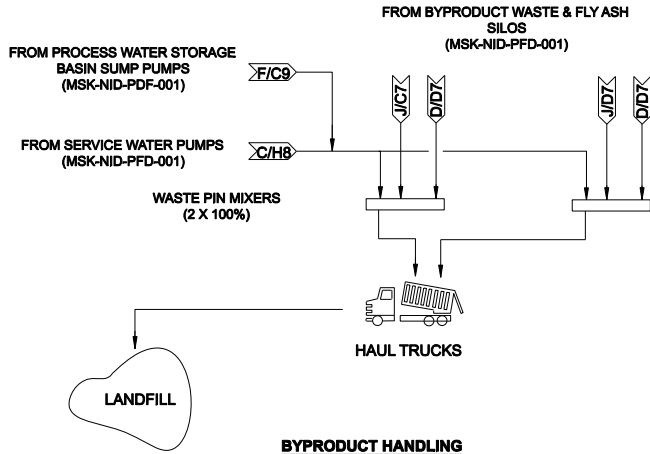

**AMERICAN ELECTRIC POWER
BIG SANDY PLANT FGD PROJECT
ORDER-OF-MAGNITUDE COST ESTIMATE
NID SYSTEM (NID) TECHNOLOGY**

C	09/10/2010	ISSUED FOR USE
B	08/09/2010	ISSUED FOR USE
A	07/06/2010	ISSUED FOR REVIEW
REV	DATE	PURPOSE

CONTRACTOR/INSTALLER SHALL TAKE ALL APPROPRIATE
PRECAUTIONS TO ENSURE THE SAFETY OF ALL PEOPLE
LOCATED ON THE WORK SITE, INCLUDING CONTRACTORS,
INSTALLERS, PERSONNEL, OR THAT OF ITS SUBCONTRACTORS,
PERFORMING THE WORK.

FILE NAME: MSK-NID-PFD-002.DGN

PROFESSIONAL ENGINEER'S STAMP

KENTUCKY POWER CO. BIG SANDY PLANT UNIT 2	
BIG SANDY KENTUCKY	
BIG SANDY FGD PROJECT PROCESS FLOW DIAGRAM NID SYSTEM (NID)	
DWG. NO. MSK-NID-PFD-002_C	
SCALE: NONE	DATE:
OR:	APPROVED BY:
OR:	DATE:
AEP SERVICE CORP. 1 RIVERSIDE PLAZA COLUMBUS, OH 43215	


SYSTEM DATE- DD-MMM-YY
SYSTEM TIME- HOUR:MINUTE



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-2
NID Site Plan and General Arrangement Drawings

A			B			C			D			E			F			G			H			J			K			L			M			N			O		
0100-V9-01N-XSW 'ON '9MD									FACILITIES LEGEND																																
1			EXISTING UNIT 1 & 2 CHIMNEY			14			LIME STORAGE SILOS (100' DIAM)			27			EXISTING WAREHOUSE BUILDING (RELOCATED)																										
2			BOOSTER FAN OUTLET			15			138 kV FGD SUBSTATION			28			HVAC UNITS																										
3			PRECIPITATOR OUTLET DUCT			16			BYPRODUCT WASTE SILO (65' DIAM)			29			TRANSFORMERS																										
4			NOT USED			17			FLY ASH SILO			30			FLY ASH BLOWER BUILDING W/EE ROOM (20'x110')																										
5			NID SYSTEM (14 MODULES) (160'x185')			18			BYPRODUCT TRANSPORT BLOWER BUILDING (30'x90')			31			TRANSFORMER PDC (35'x65')																										
6			NID CONTROL/SWGR BUILDING (52'-6"x150')			19			AIR COMPRESSOR BUILDING (60'x120')			32			CEMS																										
7			I.D. FAN W/ AUX. EQUIPMENT			20			SERVICE WATER TANKS			33			RELOCATED HARZARDOUS WASTE STORAGE BLDG. (30'x60')																										
8			I.D. FAN OUTLET DUCT			21			ALTERNATE DUCT ARRANGEMENT W/O ESP			34			HAUL ROAD TERMINAL POINT																										
9			CHIMNEY W/280 FT. DIA. CONSTRUCTION EXCLUSION ZONE			22			STORMWATER POND			35			RAIL SCALE																										
10			NOT USED			23			PROCESS WATER STORAGE BASIN			36			TRUCK SCALE																										
11			LIME TRUCK UNLOADING PAD			24			PIPE RACK			37			STORMWATER POND PUMP STRUCTURE																										
12			LIME UNLOADING BLOWER/ELECTRICAL BUILDING(30'x130')			25			138 kV TRANSMISSION LINE EXCLUSION ZONE (35 FT.)			38			PROCESS WATER STORAGE BASIN SUMP																										
13			LIME RAILCAR UNLOADING PAD			26			HYDROGEN STORAGE (RELOCATED) WITH EXCLUSION ZONE			39			LOADOUT AREA PDC (15'x30')																										

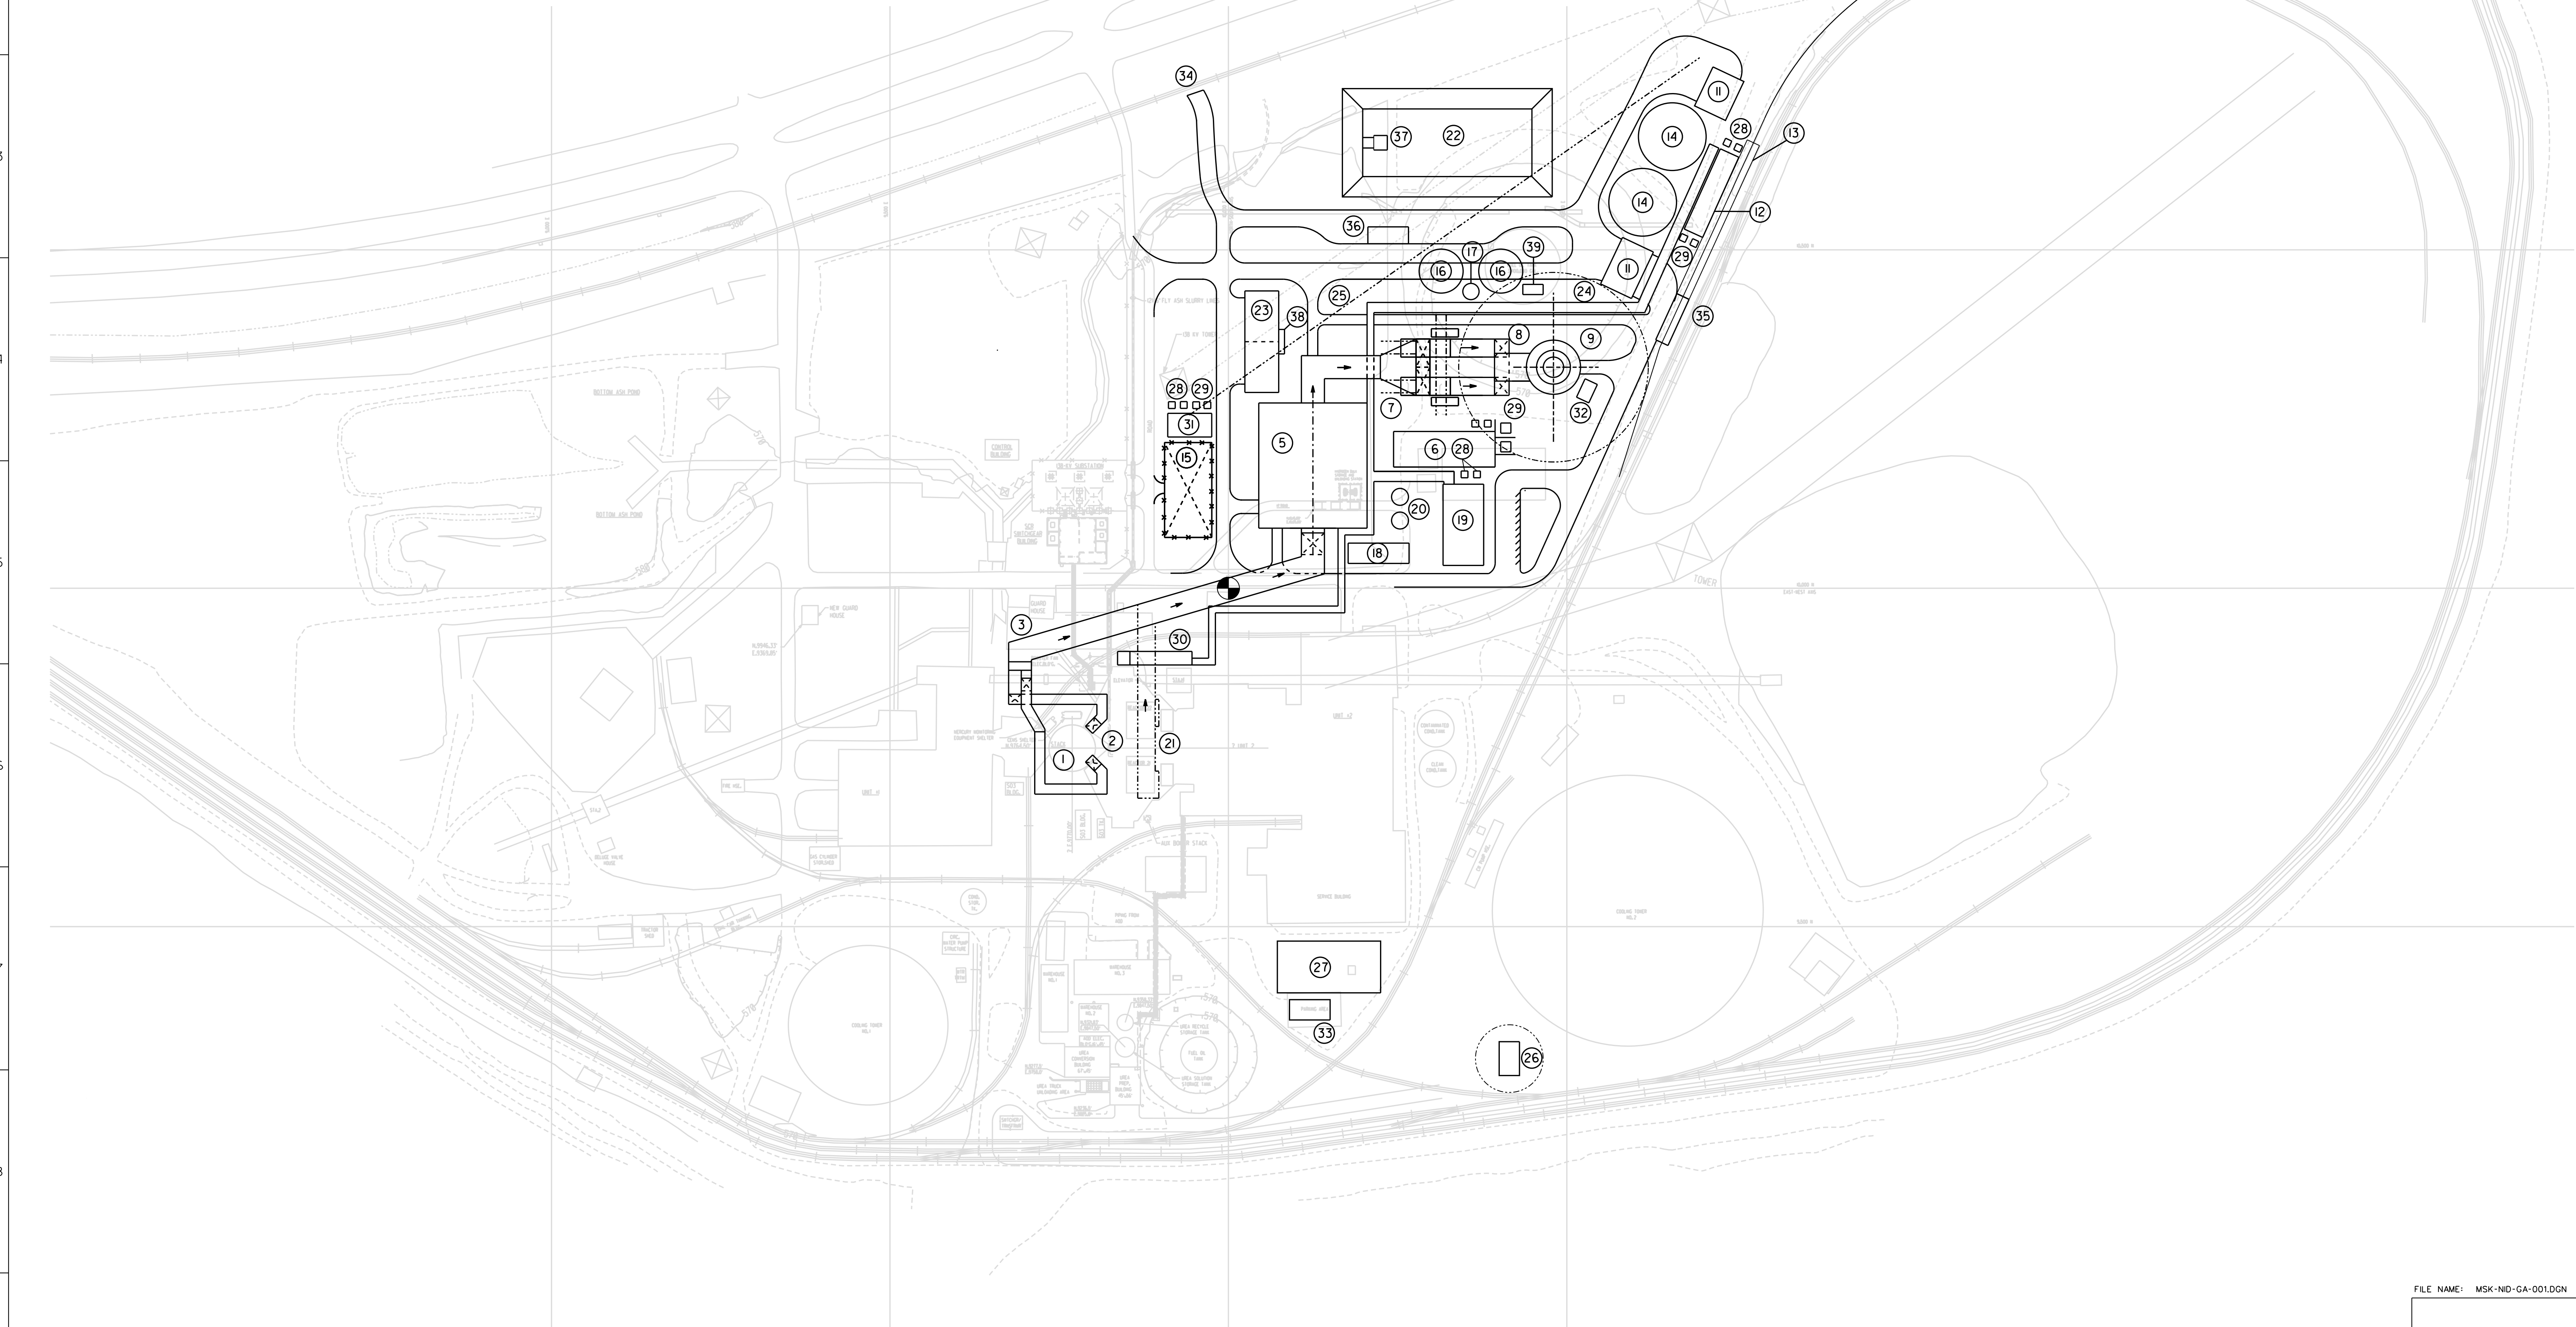

- NOTES
- EQUIPMENT SHOWN ON GA HAS BEEN SIZED FOR WORST CASE COAL 7.5 LBS SO2/MMBTU.
 - FOR OPTION W/O ESP DUCT SEGMENT 2/US ADDED AND ITEMS 2, 30 AND 17 ARE REMOVED.

DATE	NO.	DESCRIPTION	APPD.
REVISIONS			

"THIS DRAWING IS THE PROPERTY OF THE AMERICAN ELECTRIC POWER SERVICE CORP., AND IS LOANED UPON CONDITION THAT IT IS NOT TO BE REPRODUCED OR COPIED, IN WHOLE OR IN PART, OR USED FOR FURNISHING INFORMATION TO ANY PERSON WITHOUT THE WRITTEN CONSENT OF THE AEP SERVICE CORP., OR FOR ANY PURPOSE DETRIMENTAL TO THEIR INTEREST, AND IS TO BE RETURNED UPON REQUEST"

KENTUCKY POWER CO.
BIG SANDY PLANT
UNIT 2
BIG SANDY KENTUCKY
BIG SANDY FGD PROJECT
NID SITE PLAN


DWG. NO. MSK-NID-GA-001_C

SCALE: 1"=100'-0"
DR: CH
APPROVED BY: DATE:

PROFESSIONAL ENGINEER'S STAMP
George A. Lundy, Inc.
AEP AMERICAN ELECTRIC POWER
AEP SERVICE CORP.
1 RIVERSIDE PLAZA
COLUMBUS, OH 43215

THIS SYMBOL DENOTES THE BASE COORDINATE OF THE PLANT GRID SYSTEM.

GRAPHIC SCALE: 1"= 100'-0"





REV	DATE RELEASED	PURPOSE	PREPARED	REVIEWED	APPROVED
C	09/10/2010	ISSUED FOR USE			
B	08/09/2010	ISSUED FOR USE			
A	07/14/2010	ISSUED FOR REVIEW			

FILE NAME: MSK-NID-GA-001.DGN

CONTRACTOR/INSTALLER SHALL TAKE ALL APPROPRIATE PRECAUTIONS TO ENSURE THE SAFETY OF ALL PEOPLE LOCATED ON THE WORK SITE, INCLUDING CONTRACTOR'S, INSTALLER'S PERSONNEL AND THAT OF ALL SUBCONTRACTORS' PERSONNEL ON THE WORK.

DRAWING RELEASE RECORD

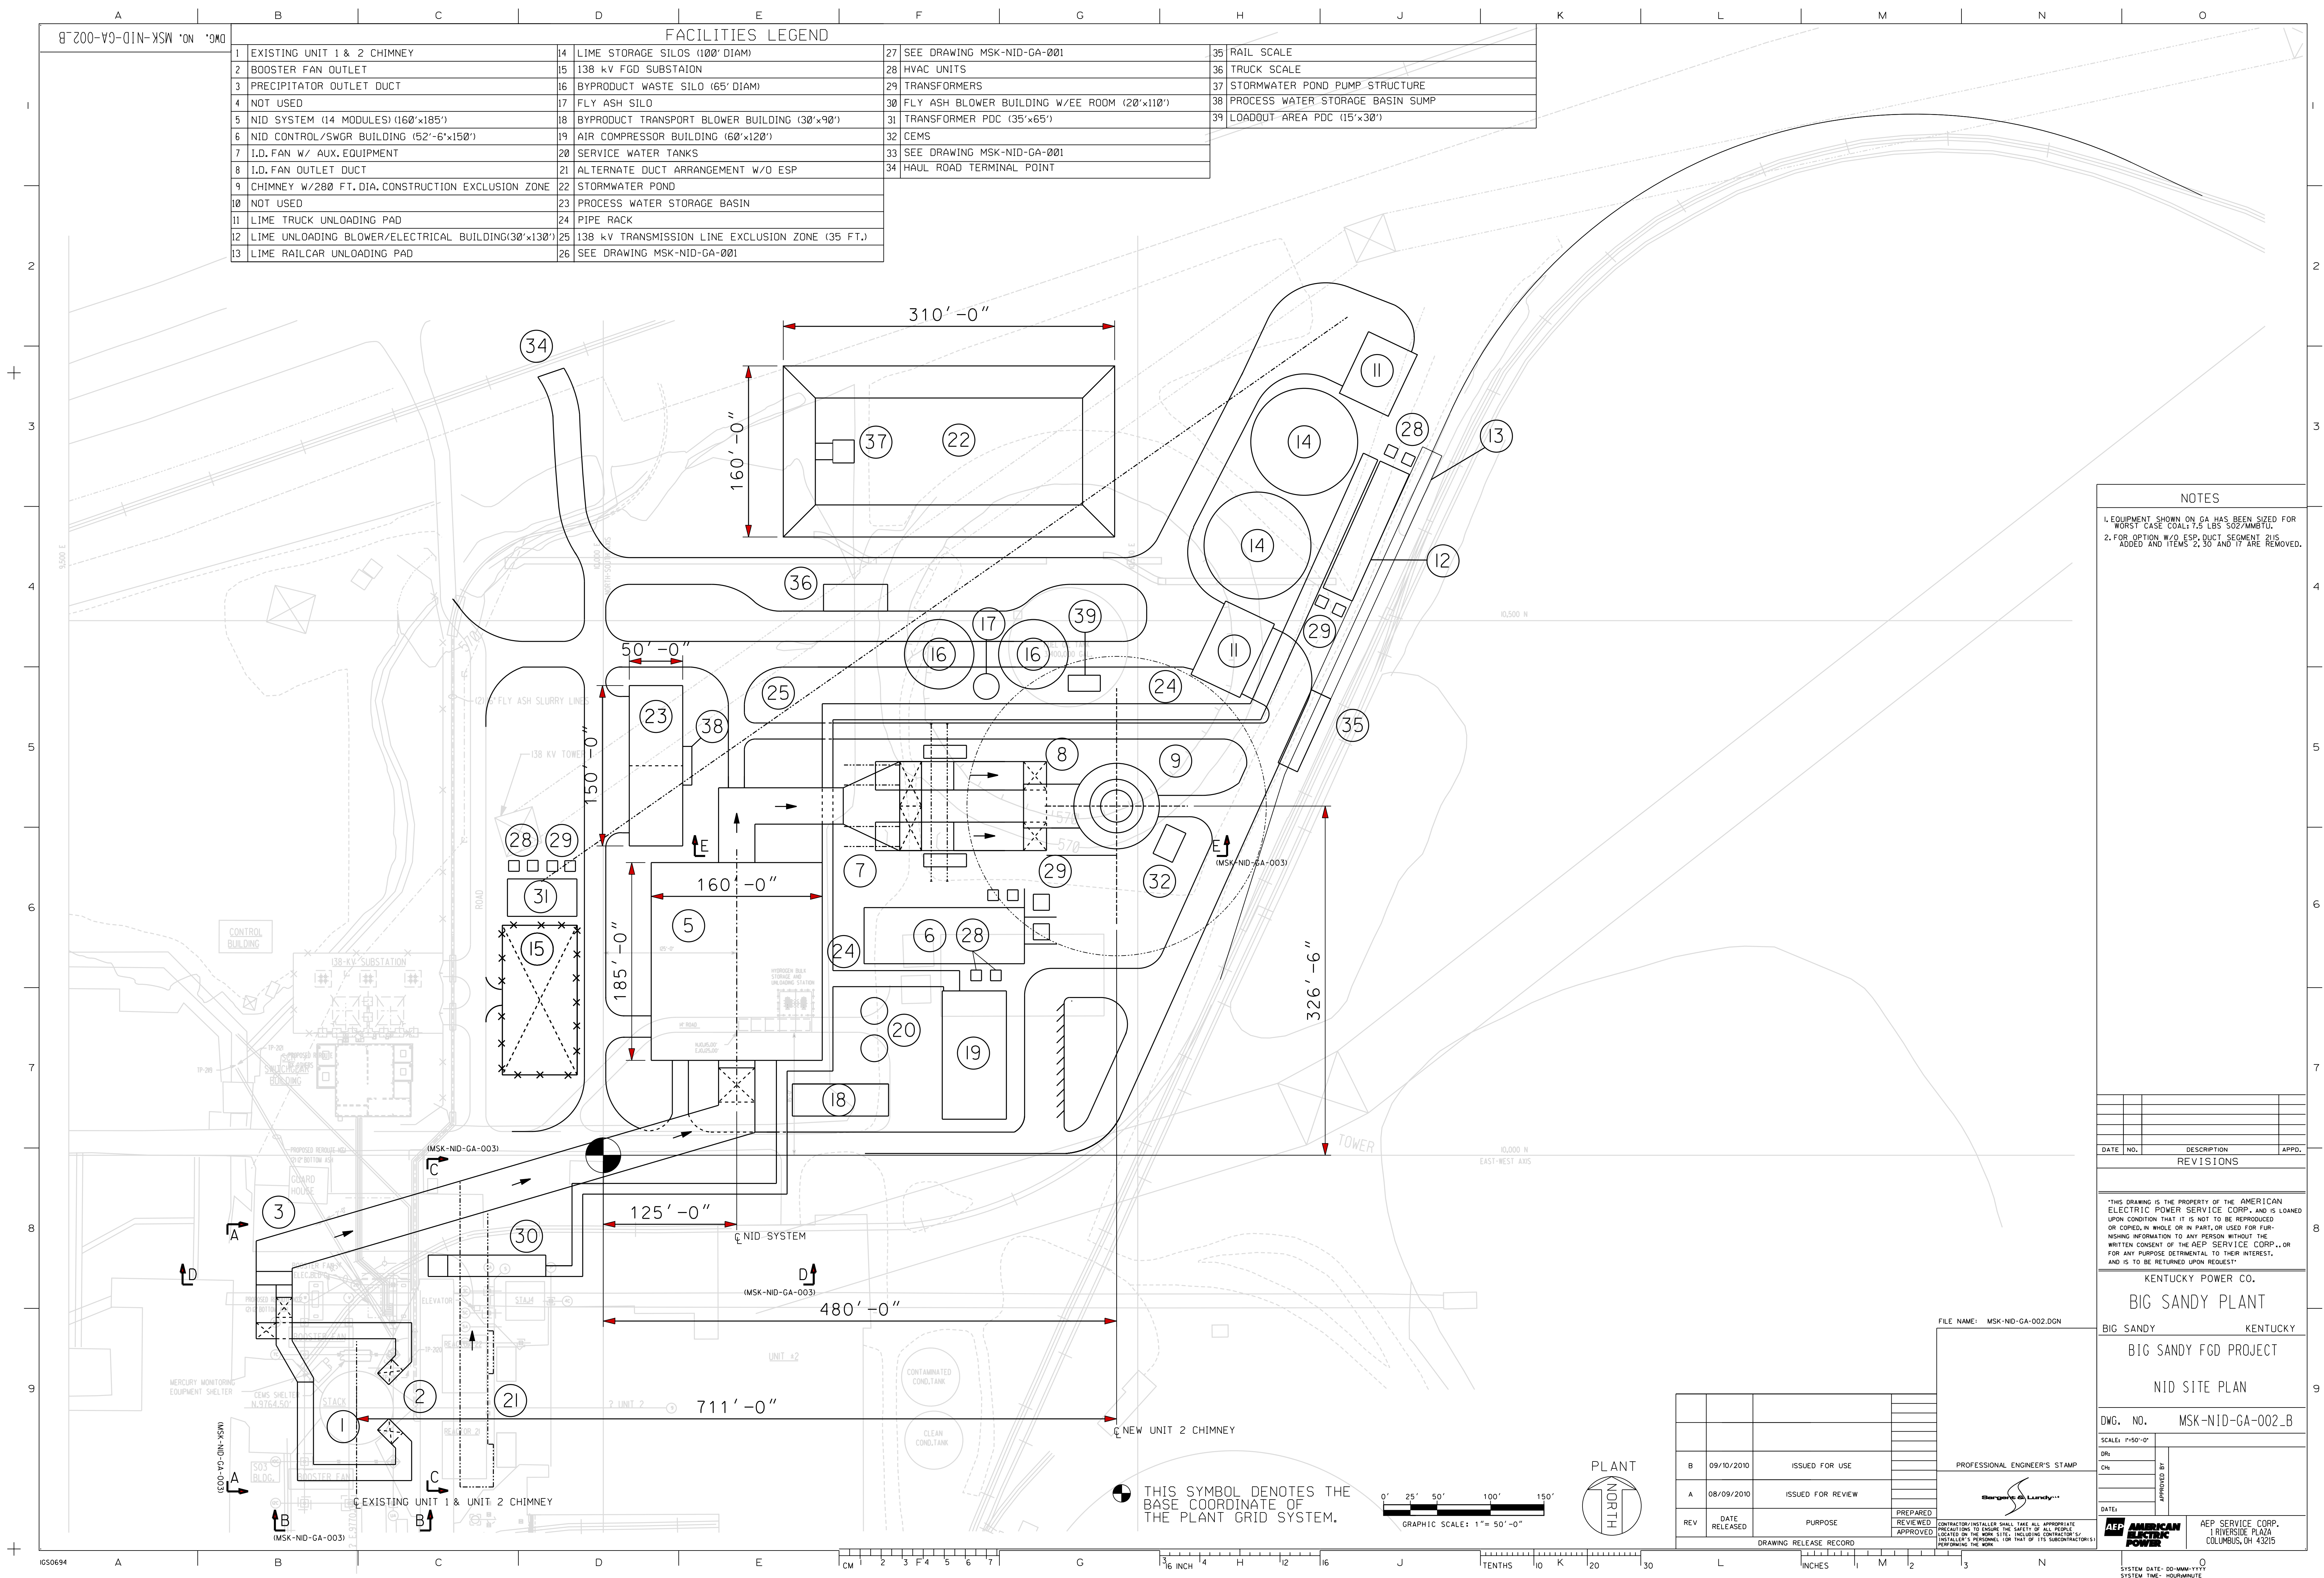

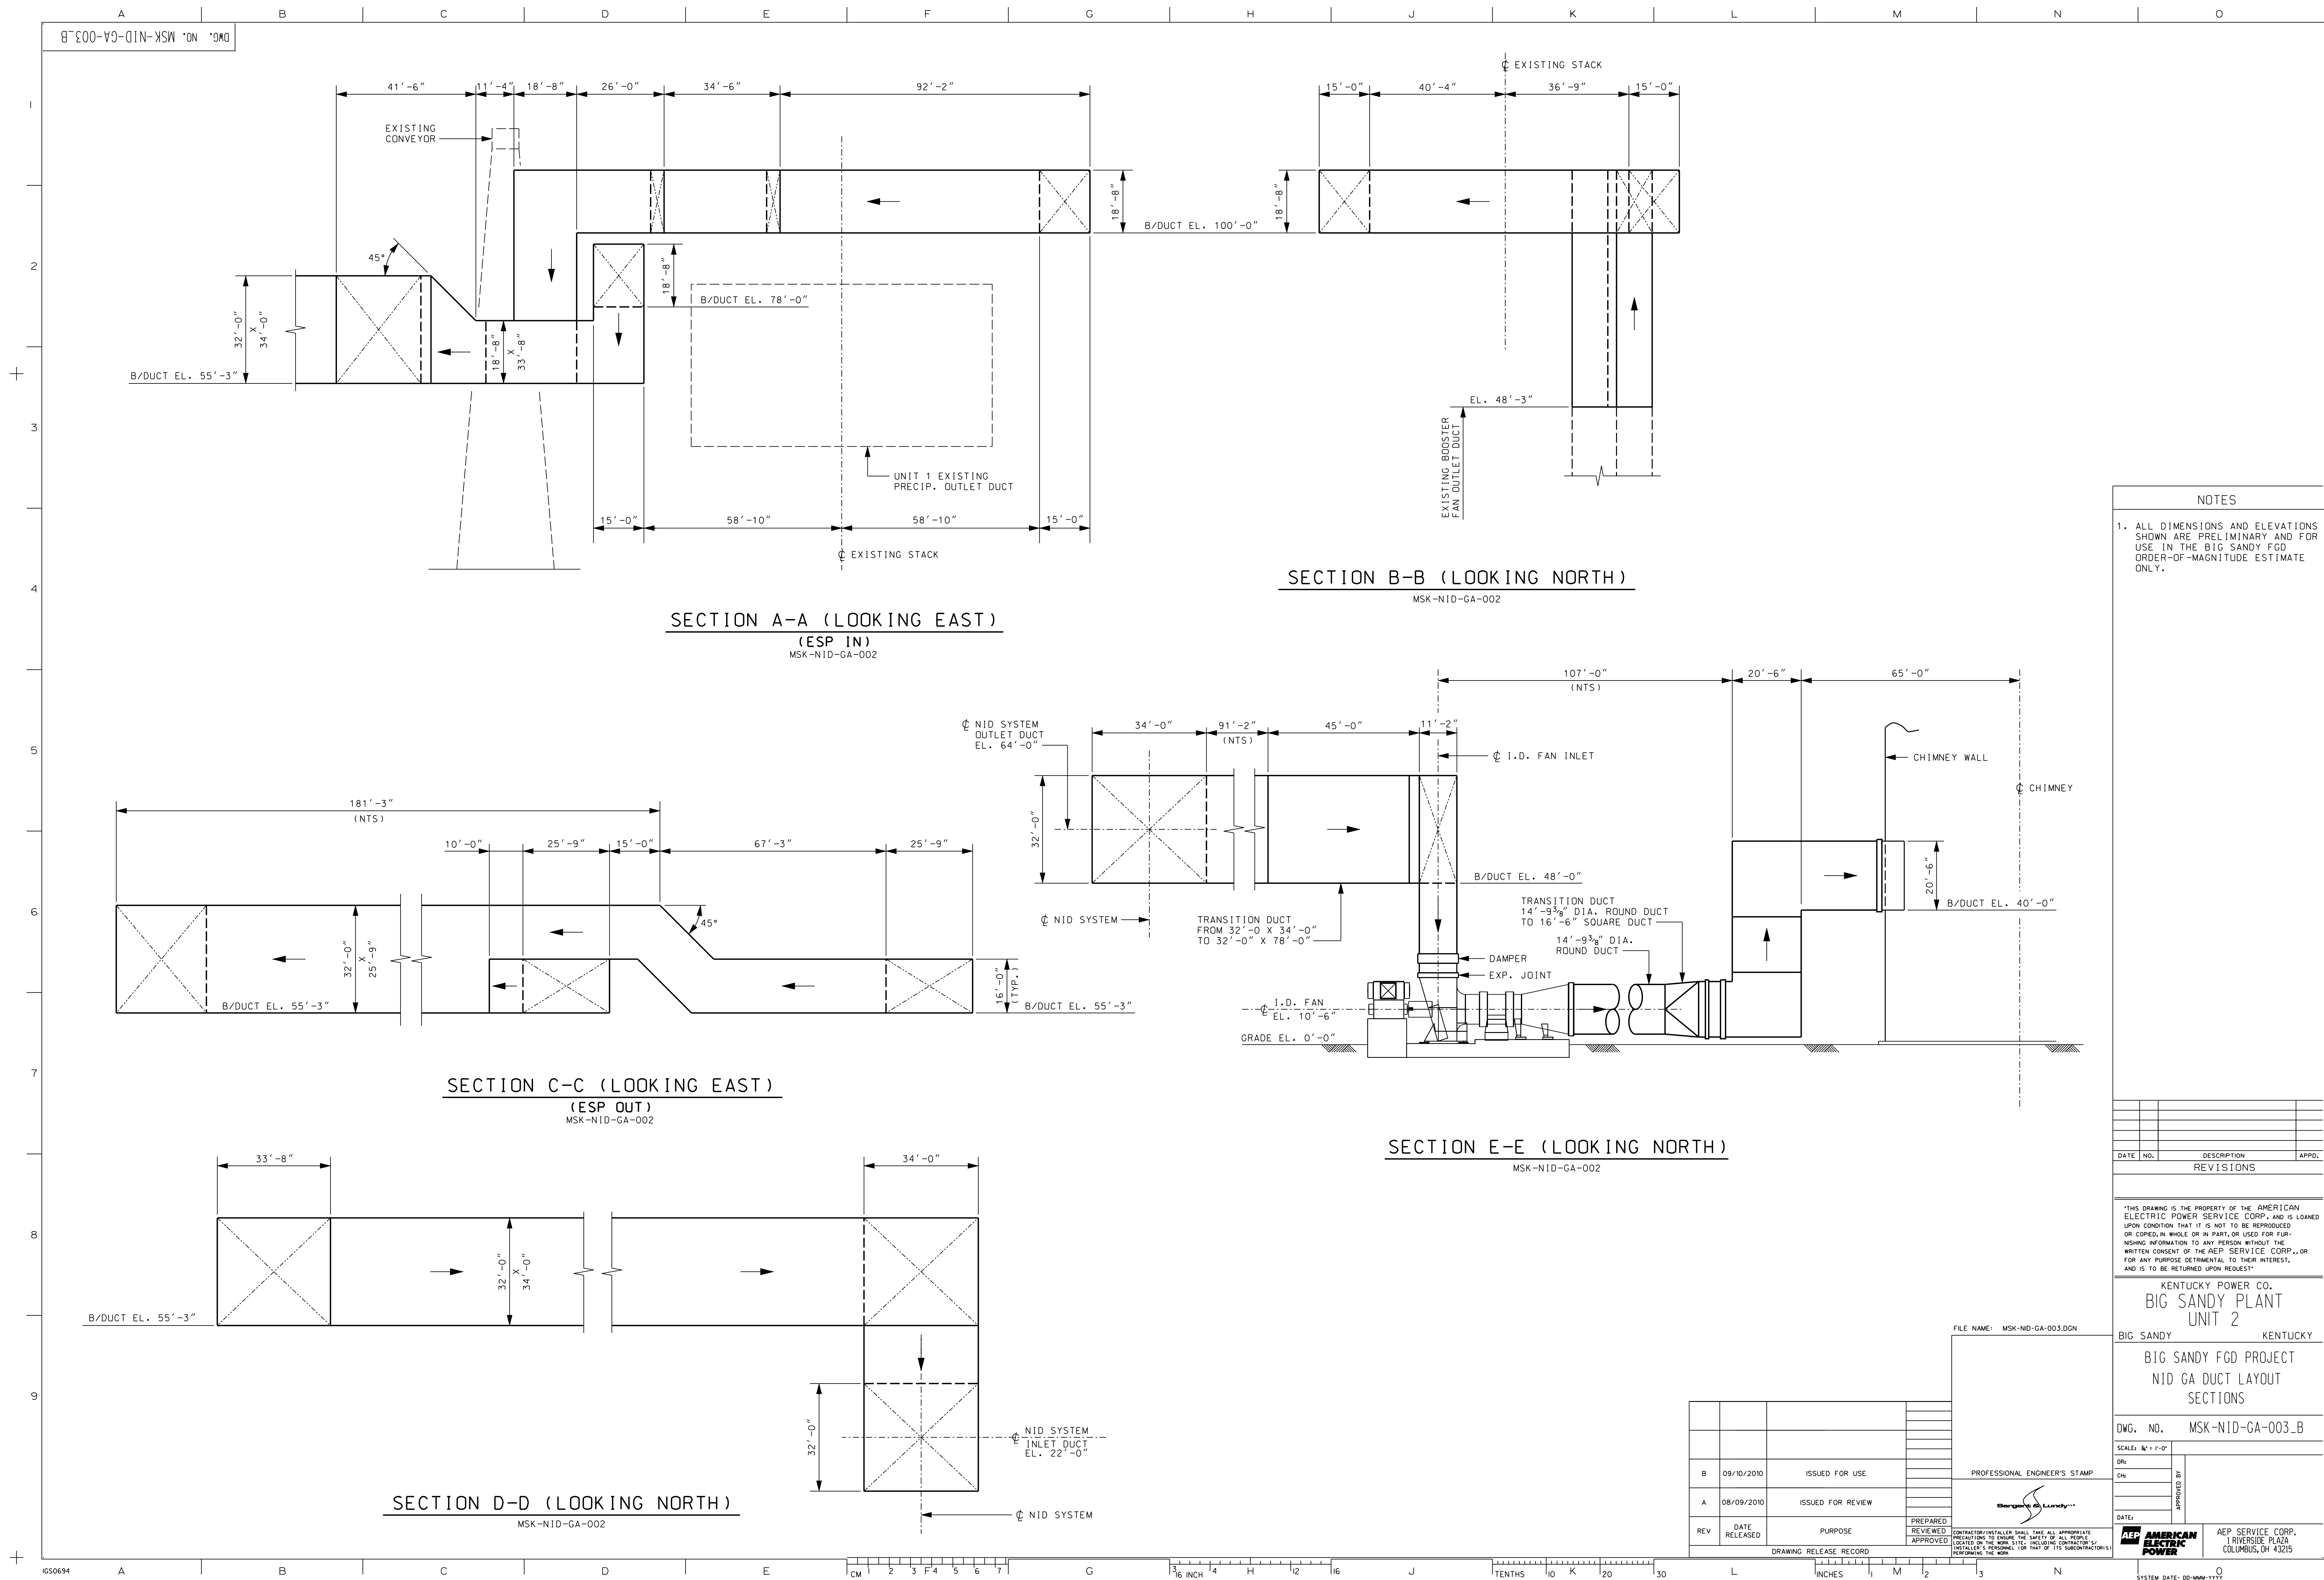



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-3 NID Mass Balances

Mass Balance NID System -
1.7 lb SO₂/MMBtu Coal

Plant Production		
MCR Output	MW	865
Heat Input	MMBtu/hr	8180
Fuel Flow	lb/hr	668,191
Coal Analysis		
Component	Units	As Received
Carbon	wt%	69.41
Hydrogen	wt%	4.69
Nitrogen	wt%	1.31
Sulfur	wt%	0.94
Oxygen	wt%	5.66
Chlorine	wt%	0.19
Moisture	wt%	6.20
Ash	wt%	11.60
Calc. HHV	Btu/lb	12,242


Lime Analysis		
Component	Units	As Received
Size		1/8" x 0"
CaO	dry wt%	93.0
MgO	dry wt%	3.0
Inert Solids	dry wt%	4.0

Stream Characteristics		Air Heater Outlet	
		A	
Temperature	°F	350	
Pressure	psia	13.718	
N ₂	lb/hr-vol%	7,113,954	73.61
O ₂	lb/hr-vol%	684,611	6.20
H ₂ O	lb/hr-vol%	554,288	8.92
CO ₂	lb/hr-vol%	1,700,570	11.20
SO ₂	lb/hr-ppmv	12,267	555
SO ₃	lb/hr-ppmv	221	8
HCl	lb/hr-ppmv	1,305	104
HF	lb/hr-ppmv	0	0
Total Flow	lb/hr-acfm	10,067,216	3,643,280
MW - Moist.	lb/lbmol-lb/lb	29.169	0.058
Ash	lb/hr-gr/acf	62,008	1.986


Stream Characteristics		Fresh Lime
		01
Inert Solids	lb/hr	788
CaO	lb/hr	18,311
Ca(OH) ₂	lb/hr	0
MgO	lb/hr	591
CaSO ₃ *0.5H ₂ O	lb/hr	0
CaSO ₄ *2H ₂ O	lb/hr	0
CaCO ₃	lb/hr	0
CaCl ₂ + CaF ₂	lb/hr	0
Total Solids	lb/hr	19,689
Water	lb/hr	0
Total Flow	lb/hr	19,689
Total Flow	gpm	---
Solids	wt%	100

Baghouse Outlet /Duct Loss		Stack Inlet	
C		D	
153		172	
13.069		14.438	
7,113,954	67.82	7,113,954	67.82
683,397	5.70	683,397	5.70
1,090,461	16.17	1,090,461	16.17
1,698,108	10.30	1,698,108	10.30
328	14	328	14
15	1	15	1
0	0	0	0
0	0	0	0
10,586,262	3,142,016	10,586,262	2,932,146
28.260	0.115	28.260	0.111
114	0.004	114	0.005

Sat. H2O	Recycle	Waste Solids	Dust Control	Landfill	Total Water
04	05	06	07	08	09
0	6,268,177	62,682	0	62,682	0
0	0	0	0	0	0
0	473,768	4,738	0	4,738	0
0	59,067	591	0	591	0
0	1,463,862	14,639	0	14,639	0
0	1,301,210	13,012	0	13,012	0
0	559,422	5,594	0	5,594	0
0	198,481	1,985	0	1,985	0
0	10,323,986	103,240	0	103,240	0
552,541	1,147,110	11,471	32,775	44,246	585,316
552,541	11,471,095	114,711	32,775	147,486	585,316
1,104	---	---	65	---	1,170
0	90	90	0	70	0

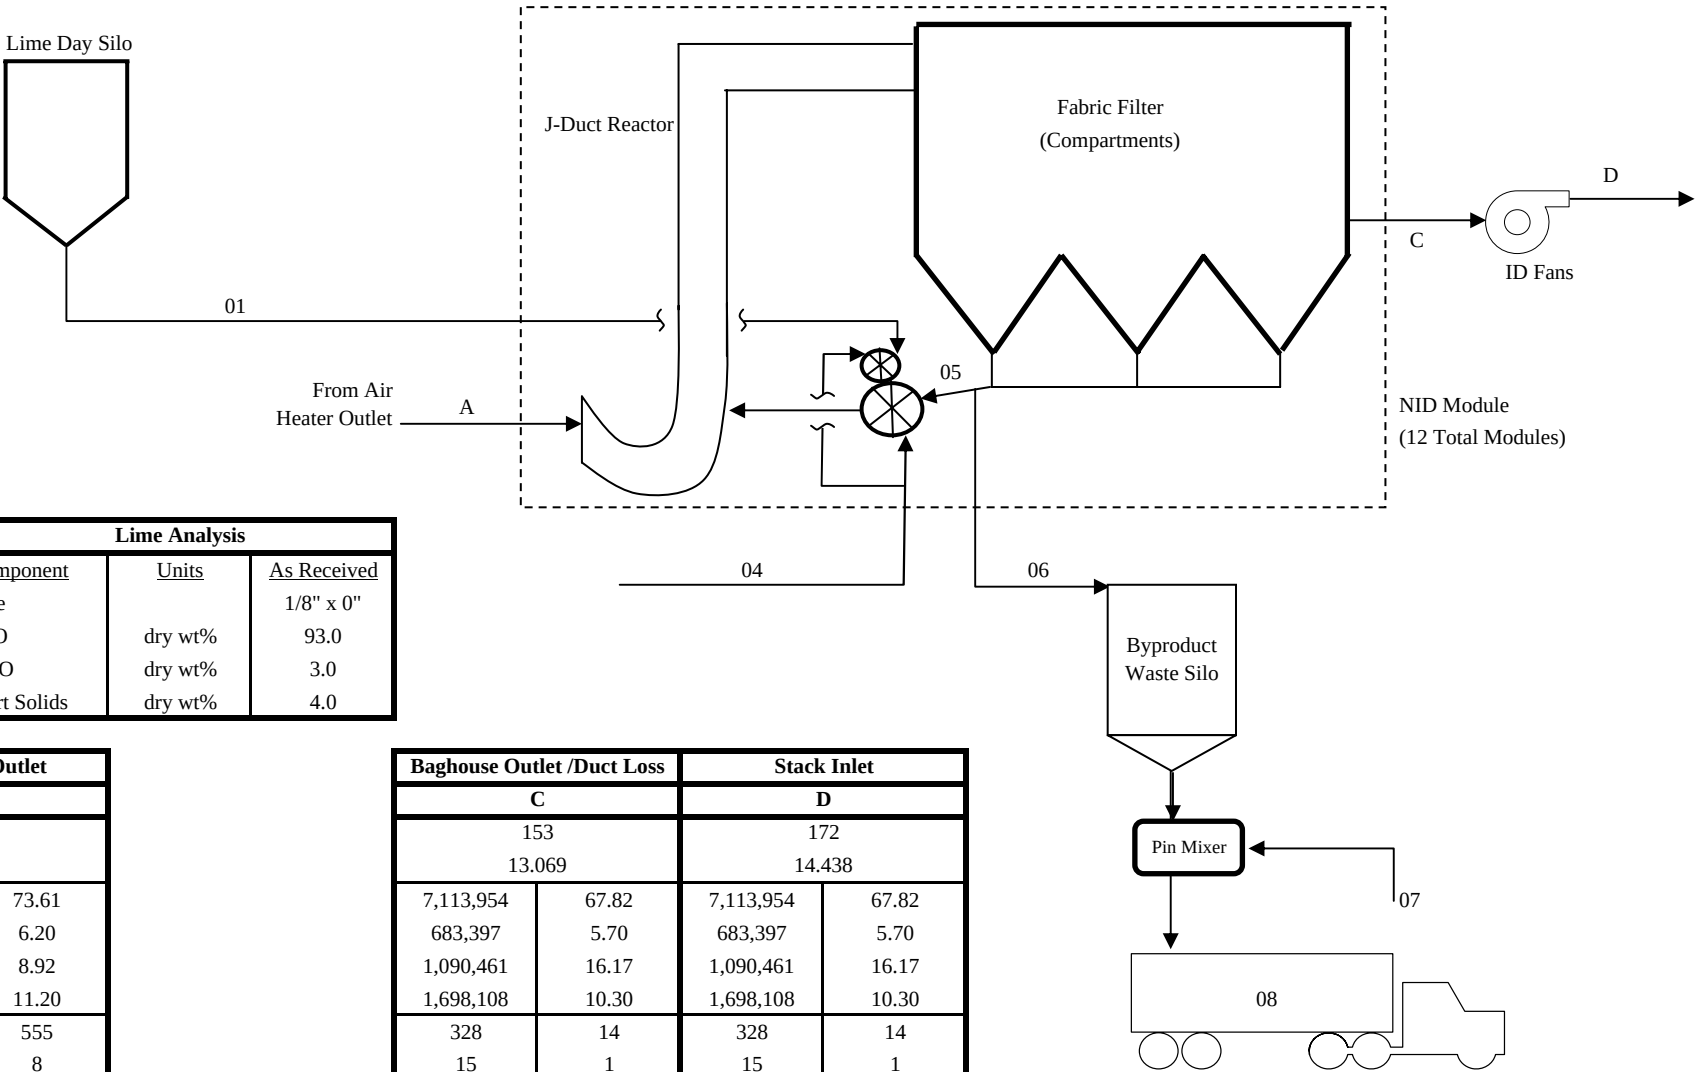

FGD Process Parameters		
Inlet Stoich.	Ca:S Inlet	1.5
Internal Stoich.	Ca:S Inlet	31
Approach to Saturation	°F	25
Saturation Temperature	°F	128
Saturation Humidity	lb/lb dry air	0.118
Outlet Particulates	lb/MMBtu	0.014
Sulfur Levels		
SO ₂ In	lb/MMBtu	1.500
SO ₂ Out	lb/MMBtu	0.040
SO ₃ In	lb/MMBtu	0.027
SO ₃ Out	lb/MMBtu	0.002



Mass Balance NID System -
4.5 lb SO₂/MMBtu Coal (w/o ESP)

Plant Production		
MCR Output	MW	865
Heat Input	MMBtu/hr	8180
Firing Rate	lb/hr	654,924
Coal Analysis		
Component	Units	As Received
Carbon	wt%	69.33
Hydrogen	wt%	4.67
Nitrogen	wt%	1.34
Sulfur	wt%	2.69
Oxygen	wt%	5.41
Chlorine	wt%	0.05
Moisture	wt%	6.63
Ash	wt%	9.89
Calc. HHV	Btu/lb	12,490


Lime Analysis		
Component	Units	As Received
Size		1/8" x 0"
CaO	dry wt%	93.0
MgO	dry wt%	3.0
Inert Solids	dry wt%	4.0

Stream Characteristics		Air Heater Outlet	
		A	
Temperature	°F	350	
Pressure	psia	13.718	
N ₂	lb/hr-vol%	7,027,209	73.62
O ₂	lb/hr-vol%	676,381	6.20
H ₂ O	lb/hr-vol%	546,919	8.91
CO ₂	lb/hr-vol%	1,664,882	11.10
SO ₂	lb/hr-ppmv	34,399	1,577
SO ₃	lb/hr-ppmv	627	23
HCl	lb/hr-ppmv	337	27
HF	lb/hr-ppmv	0	0
Total Flow	lb/hr-acfm	9,950,754	3,598,402
MW - Moist.	lb/lbmol-lb/lb	29.191	0.058
Ash	lb/hr-gr/acf	51,818	1.680


Stream Characteristics		Fresh Lime
		01
Inert Solids	lb/hr	2,331
CaO	lb/hr	54,201
Ca(OH) ₂	lb/hr	0
MgO	lb/hr	1,748
CaSO ₃ *0.5H ₂ O	lb/hr	0
CaSO ₄ *2H ₂ O	lb/hr	0
CaCO ₃	lb/hr	0
CaCl ₂ + CaF ₂	lb/hr	0
Total Solids	lb/hr	58,281
Water	lb/hr	0
Total Flow	lb/hr	58,281
Total Flow	gpm	---
Solids	wt%	100

Baghouse Outlet /Duct Loss		Stack Inlet	
C		D	
153		172	
13.069		14.438	
7,027,209	67.95	7,027,209	67.95
672,952	5.69	672,952	5.69
1,073,880	16.15	1,073,880	16.15
1,657,826	10.20	1,657,826	10.20
688	29	688	29
44	1	44	1
0	0	0	0
0	0	0	0
10,432,598	3,097,758	10,432,598	2,890,849
28.246	0.115	28.246	0.111
115	0.004	115	0.005

Sat. H2O	Recycle	Waste Solids	Dust Control	Landfill	Total Water
04	05	06	07	08	09
0	5,403,421	54,034	0	54,034	0
0	0	0	0	0	0
0	1,989,684	19,897	0	19,897	0
0	174,842	1,748	0	1,748	0
0	4,133,316	41,333	0	41,333	0
0	3,674,058	36,741	0	36,741	0
0	1,603,695	16,037	0	16,037	0
0	51,195	512	0	512	0
0	17,030,211	170,302	0	170,302	0
561,297	1,892,246	18,922	54,064	72,987	615,361
561,297	18,922,456	189,225	54,064	243,289	615,361
1,122	---	---	108	---	1,230
0	90	90	0	70	0

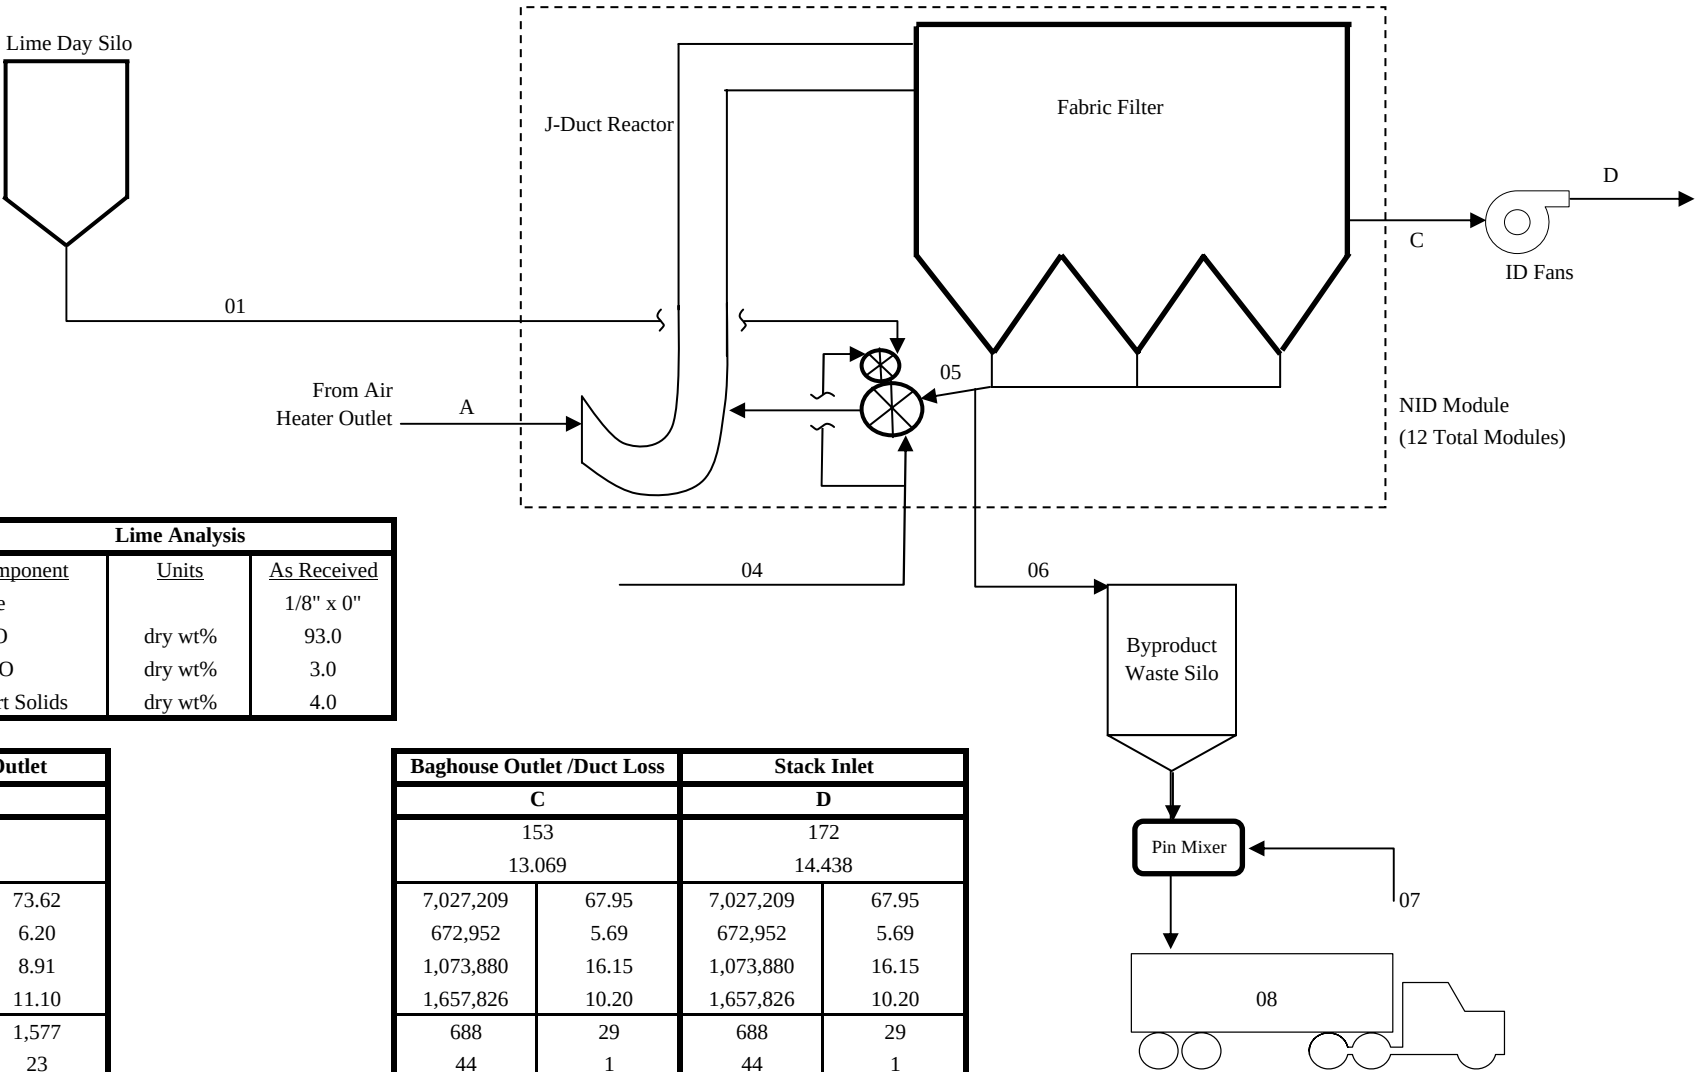

FGD Process Parameters		
Inlet Stoich.	Ca:S Inlet	1.8
Internal Stoich.	Ca:S Inlet	45
Approach to Saturation	°F	25
Saturation Temperature	°F	128
Saturation Humidity	lb/lb dry air	0.118
Outlet Particulates	lb/MMBtu	0.014
Sulfur Levels		
SO ₂ In	lb/MMBtu	4.205
SO ₂ Out	lb/MMBtu	0.084
SO ₃ In	lb/MMBtu	0.077
SO ₃ Out	lb/MMBtu	0.005



Mass Balance NID System -
7.5 lb SO₂/MMBtu Coal (w/o ESP)

Plant Production		
MCR Output	MW	865
Heat Input	MMBtu/hr	8180
Firing Rate	lb/hr	660,210
Coal Analysis		
Component	Units	As Received
Carbon	wt%	67.15
Hydrogen	wt%	4.76
Nitrogen	wt%	1.16
Sulfur	wt%	4.02
Oxygen	wt%	5.74
Chlorine	wt%	0.05
Moisture	wt%	6.73
Ash	wt%	10.40
Calc. HHV	Btu/lb	12,390


Lime Analysis		
Component	Units	As Received
Size		1/8" x 0"
CaO	dry wt%	93.0
MgO	dry wt%	3.0
Inert Solids	dry wt%	4.0

Stream Characteristics		Air Heater Outlet	
		A	
Temperature	°F	350	
Pressure	psia	13.718	
N ₂	lb/hr-vol%	6,952,181	73.52
O ₂	lb/hr-vol%	669,424	6.19
H ₂ O	lb/hr-vol%	553,094	9.10
CO ₂	lb/hr-vol%	1,625,547	10.94
SO ₂	lb/hr-ppmv	51,784	2,396
SO ₃	lb/hr-ppmv	973	36
HCl	lb/hr-ppmv	339	28
HF	lb/hr-ppmv	0	0
Total Flow	lb/hr-acfm	9,853,342	3,564,920
MW - Moist.	lb/lbmol-lb/lb	29.177	0.059
Ash	lb/hr-gr/acf	54,929	1.798


Stream Characteristics		Fresh Lime
		01
Inert Solids	lb/hr	3,461
CaO	lb/hr	80,479
Ca(OH) ₂	lb/hr	0
MgO	lb/hr	2,596
CaSO ₃ *0.5H ₂ O	lb/hr	0
CaSO ₄ *2H ₂ O	lb/hr	0
CaCO ₃	lb/hr	0
CaCl ₂ + CaF ₂	lb/hr	0
Total Solids	lb/hr	86,536
Water	lb/hr	0
Total Flow	lb/hr	86,536
Total Flow	gpm	---
Solids	wt%	100

Baghouse Outlet /Duct Loss		Stack Inlet	
C		D	
154		173	
13.069		14.438	
6,952,181	67.96	6,952,181	67.96
664,362	5.68	664,362	5.68
1,072,420	16.31	1,072,420	16.31
1,615,097	10.05	1,615,097	10.05
2,071	89	2,071	89
68	2	68	2
0	0	0	0
0	0	0	0
10,306,200	3,066,569	10,306,200	2,861,683
28.207	0.116	28.207	0.113
118	0.004	118	0.005

Sat. H2O	Recycle	Waste Solids	Dust Control	Landfill	Total Water
04	05	06	07	08	09
0	5,827,321	58,273	0	58,273	0
0	0	0	0	0	0
0	3,011,094	30,111	0	30,111	0
0	259,609	2,596	0	2,596	0
0	6,099,641	60,996	0	60,996	0
0	5,421,903	54,219	0	54,219	0
0	2,375,017	23,750	0	23,750	0
0	51,608	516	0	516	0
0	23,046,194	230,462	0	230,462	0
567,861	2,560,688	25,607	73,163	98,769	641,024
567,861	25,606,882	256,069	73,163	329,231	641,024
1,135	---	---	146	---	1,281
0	90	90	0	70	0

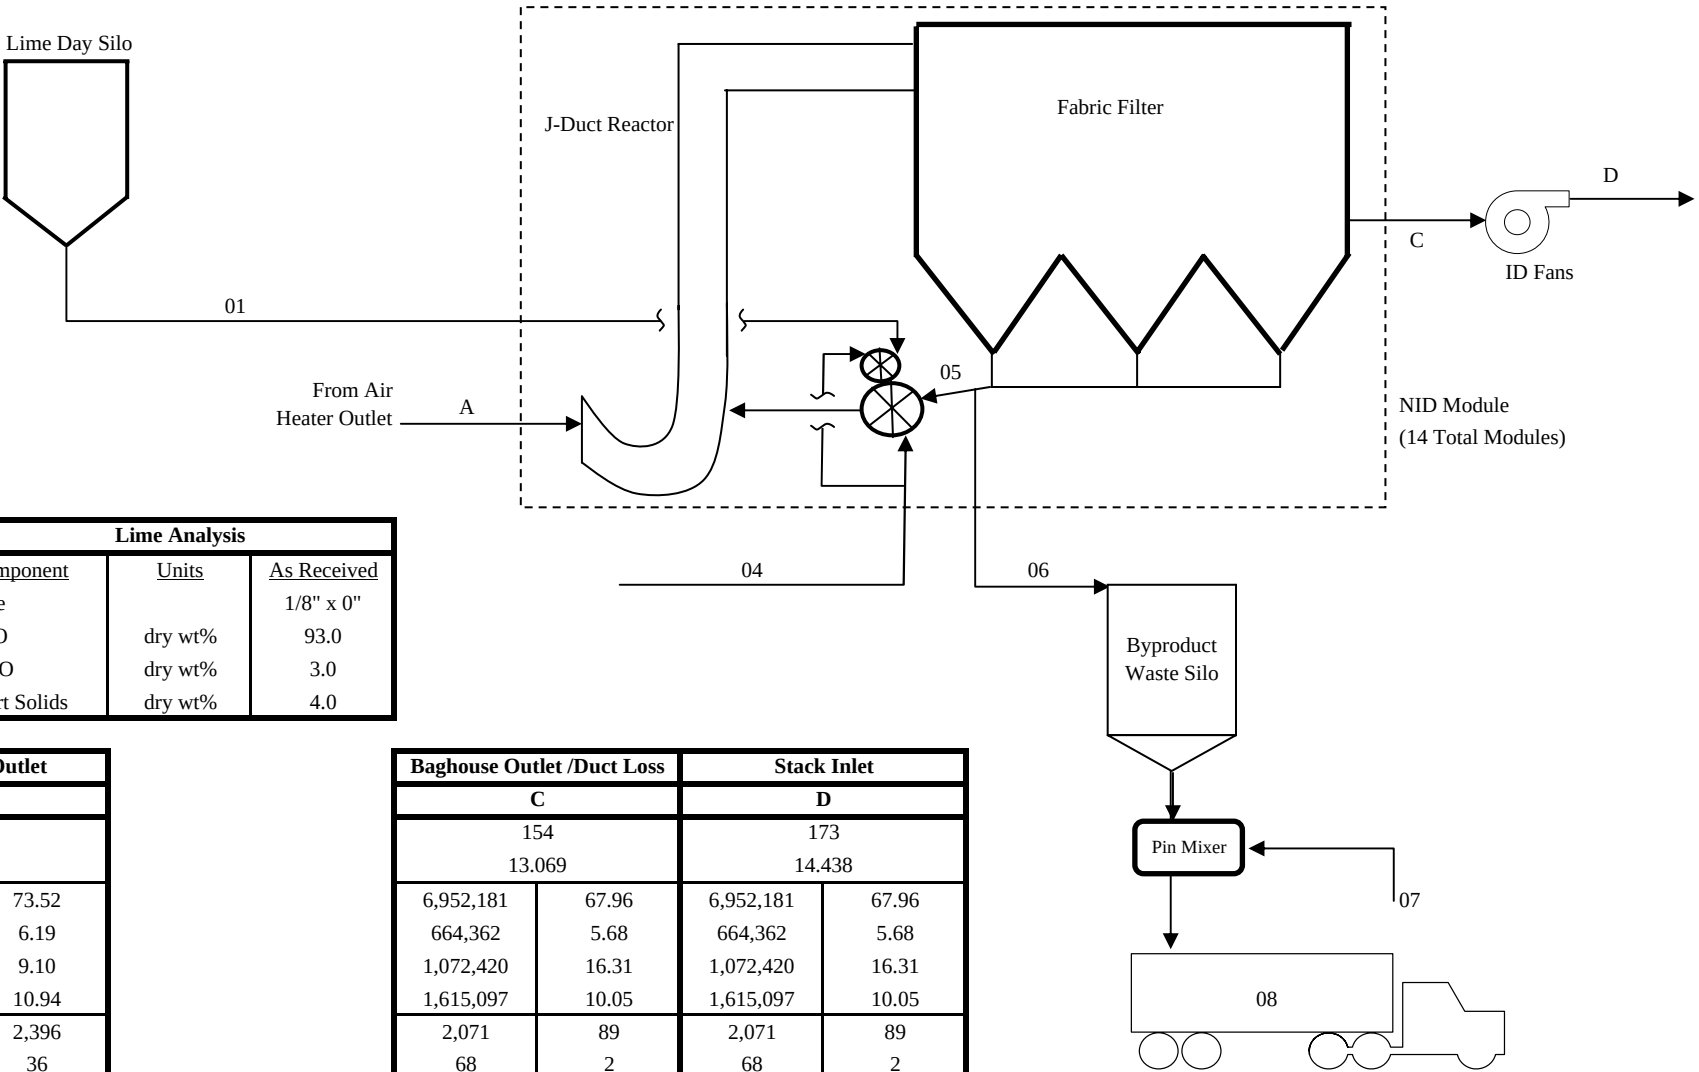

FGD Process Parameters		
Inlet Stoich.	Ca:S Inlet	1.7
Internal Stoich.	Ca:S Inlet	46
Approach to Saturation	°F	25
Saturation Temperature	°F	129
Saturation Humidity	lb/lb dry air	0.119
Outlet Particulates	lb/MMBtu	0.014
Sulfur Levels		
SO ₂ In	lb/MMBtu	6.331
SO ₂ Out	lb/MMBtu	0.253
SO ₃ In	lb/MMBtu	0.119
SO ₃ Out	lb/MMBtu	0.008




Mass Balance NID System -
1.7 lb SO₂/MMBtu Coal

Plant Production		
MCR Output	MW	865
Heat Input	MMBtu/hr	8180
Fuel Flow	lb/hr	668,191
Coal Analysis		
Component	Units	As Received
Carbon	wt%	69.41
Hydrogen	wt%	4.69
Nitrogen	wt%	1.31
Sulfur	wt%	0.94
Oxygen	wt%	5.66
Chlorine	wt%	0.19
Moisture	wt%	6.20
Ash	wt%	11.60
Calc. HHV	Btu/lb	12,242

Lime Analysis		
Component	Units	As Received
Size		1/8" x 0"
CaO	dry wt%	93.0
MgO	dry wt%	3.0
Inert Solids	dry wt%	4.0

Stream Characteristics		Booster Fan Outlet	
		A	
Temperature	°F	361	
Pressure	psia	14.366	
N ₂	lb/hr-vol%	7,113,954	73.61
O ₂	lb/hr-vol%	684,611	6.20
H ₂ O	lb/hr-vol%	554,288	8.92
CO ₂	lb/hr-vol%	1,700,570	11.20
SO ₂	lb/hr-ppmv	12,267	555
SO ₃	lb/hr-ppmv	221	8
HCl	lb/hr-ppmv	1,305	104
HF	lb/hr-ppmv	0	0
Total Flow	lb/hr-acfm	10,067,216	3,523,878
MW - Moist.	lb/lbmol-lb/lb	29.169	0.058
Ash	lb/hr-gr/acf	1,930	0.064

Stream Characteristics		Fresh Lime
		01
Inert Solids	lb/hr	788
CaO	lb/hr	18,311
Ca(OH) ₂	lb/hr	0
MgO	lb/hr	591
CaSO ₃ *0.5H ₂ O	lb/hr	0
CaSO ₄ *2H ₂ O	lb/hr	0
CaCO ₃	lb/hr	0
CaCl ₂ + CaF ₂	lb/hr	0
Total Solids	lb/hr	19,689
Water	lb/hr	0
Total Flow	lb/hr	19,689
Total Flow	gpm	---
Solids	wt%	100

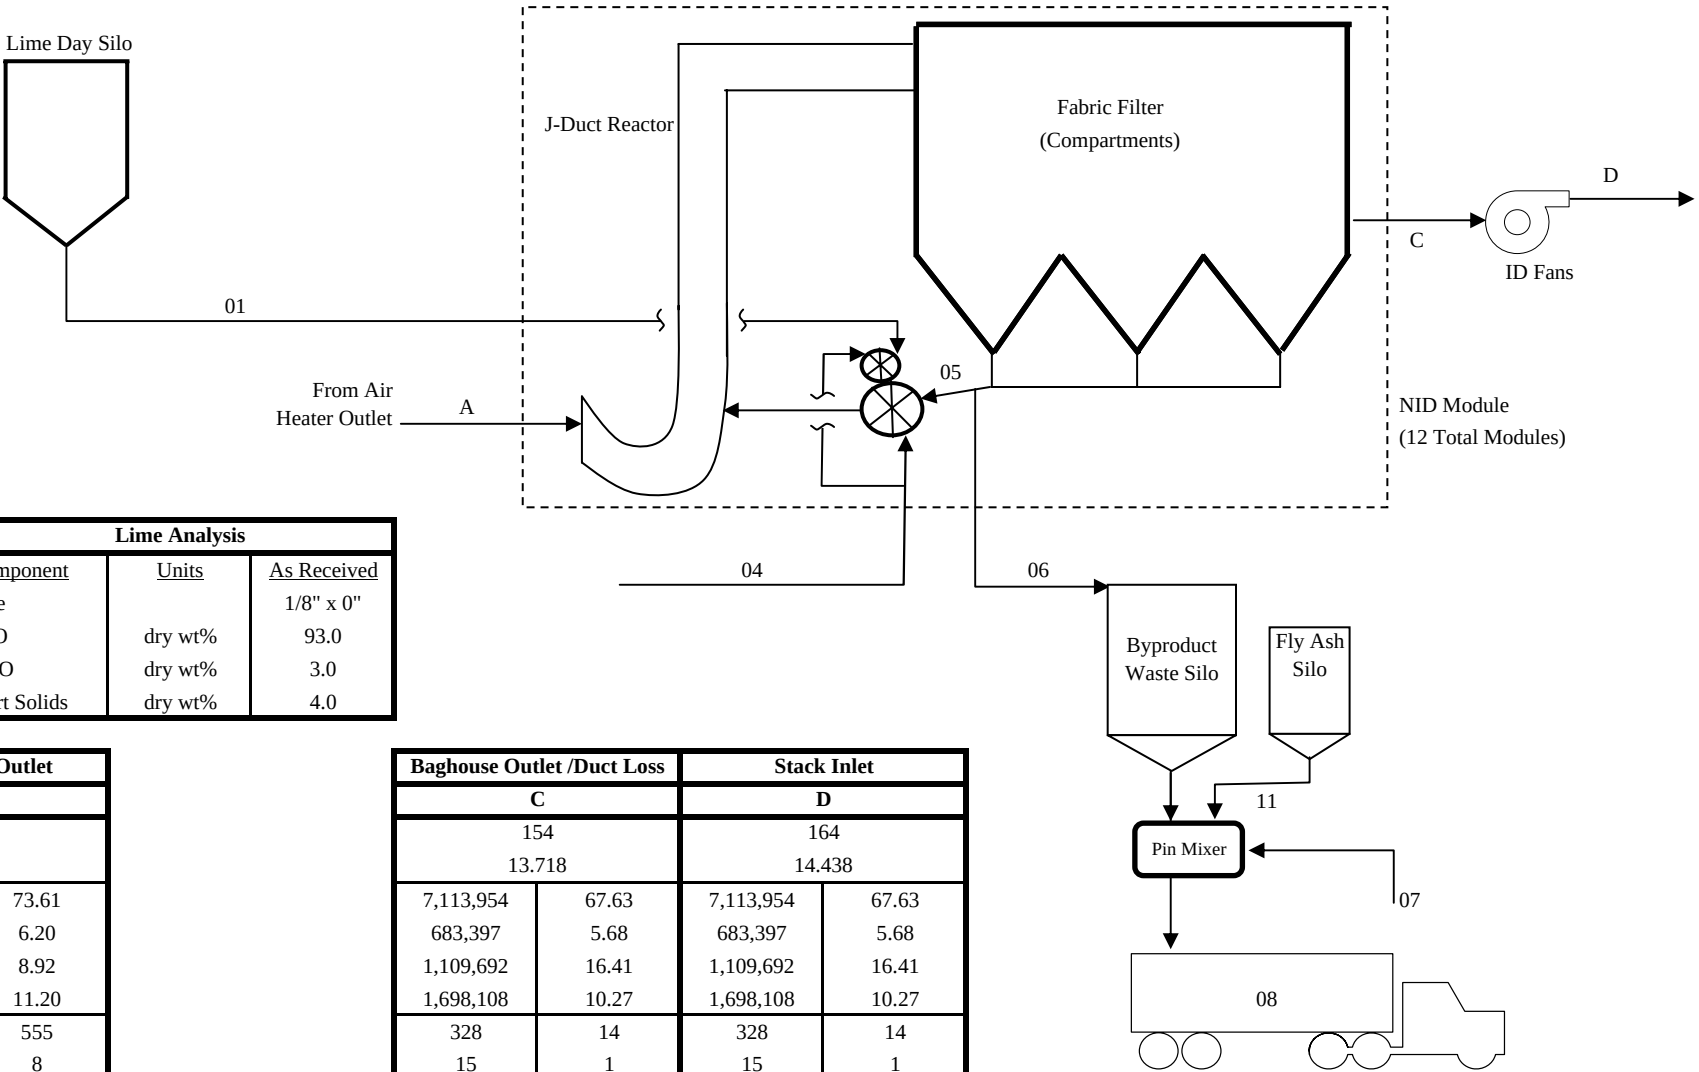


FGD Process Parameters		
Inlet Stoich.	Ca:S Inlet	1.5
Internal Stoich.	Ca:S Inlet	26
Approach to Saturation	°F	25
Saturation Temperature	°F	129
Saturation Humidity	lb/lb dry air	0.120
Outlet Particulates	lb/MMBtu	0.012
Sulfur Levels		
SO ₂ In	lb/MMBtu	1.500
SO ₂ Out	lb/MMBtu	0.040
SO ₃ In	lb/MMBtu	0.027
SO ₃ Out	lb/MMBtu	0.002

Baghouse Outlet /Duct Loss		Stack Inlet	
C		D	
154		164	
13.718		14.438	
7,113,954	67.63	7,113,954	67.63
683,397	5.68	683,397	5.68
1,109,692	16.41	1,109,692	16.41
1,698,108	10.27	1,698,108	10.27
328	14	328	14
15	1	15	1
0	0	0	0
0	0	0	0
10,605,493	3,005,626	10,605,493	2,902,109
28.231	0.117	28.231	0.113
95	0.004	95	0.004

Sat. H2O	Recycle	Waste Solids	Pin Mixer H2O	Landfill	Total Water
04	05	06	07	08	09
0	222,979	2,623	0	4,782	0
0	0	0	0	0	0
0	402,702	4,738	0	4,738	0
0	50,207	591	0	591	0
0	1,244,282	14,639	0	14,639	0
0	1,106,029	13,012	0	13,012	0
0	475,509	5,594	0	5,594	0
0	168,709	1,985	0	1,985	0
0	3,670,416	43,181	0	45,340	0
565,099	407,824	4,798	13,708	18,506	578,807
565,099	4,078,240	47,979	13,708	63,847	578,807
1,129	---	---	27	---	1,157
0	90	90	0	71	0

Stabilization
11
2,159
0
0
0
0
0
0
0
2,159
0
2,159

100




Mass Balance NID System -
4.5 lb SO₂/MMBtu Coal (w/ESP)

Plant Production		
MCR Output	MW	865
Heat Input	MMBtu/hr	8180
Firing Rate	lb/hr	654,924
Coal Analysis		
Component	Units	As Received
Carbon	wt%	69.33
Hydrogen	wt%	4.67
Nitrogen	wt%	1.34
Sulfur	wt%	2.69
Oxygen	wt%	5.41
Chlorine	wt%	0.05
Moisture	wt%	6.63
Ash	wt%	9.89
Calc. HHV	Btu/lb	12,490

Lime Analysis		
Component	Units	As Received
Size		1/8" x 0"
CaO	dry wt%	93.0
MgO	dry wt%	3.0
Inert Solids	dry wt%	4.0

Stream Characteristics		Booster Fan Outlet	
		A	
Temperature	°F	361	
Pressure	psia	14.366	
N ₂	lb/hr-vol%	7,027,209	73.62
O ₂	lb/hr-vol%	676,381	6.20
H ₂ O	lb/hr-vol%	546,919	8.91
CO ₂	lb/hr-vol%	1,664,882	11.10
SO ₂	lb/hr-ppmv	34,399	1,577
SO ₃	lb/hr-ppmv	627	23
HCl	lb/hr-ppmv	337	27
HF	lb/hr-ppmv	0	0
Total Flow	lb/hr-acfm	9,950,754	3,480,472
MW - Moist.	lb/lbmol-lb/lb	29.191	0.058
Ash	lb/hr-gr/acf	1,613	0.054

Stream Characteristics		Fresh Lime
		01
Inert Solids	lb/hr	2,331
CaO	lb/hr	54,201
Ca(OH) ₂	lb/hr	0
MgO	lb/hr	1,748
CaSO ₃ *0.5H ₂ O	lb/hr	0
CaSO ₄ *2H ₂ O	lb/hr	0
CaCO ₃	lb/hr	0
CaCl ₂ + CaF ₂	lb/hr	0
Total Solids	lb/hr	58,281
Water	lb/hr	0
Total Flow	lb/hr	58,281
Total Flow	gpm	---
Solids	wt%	100

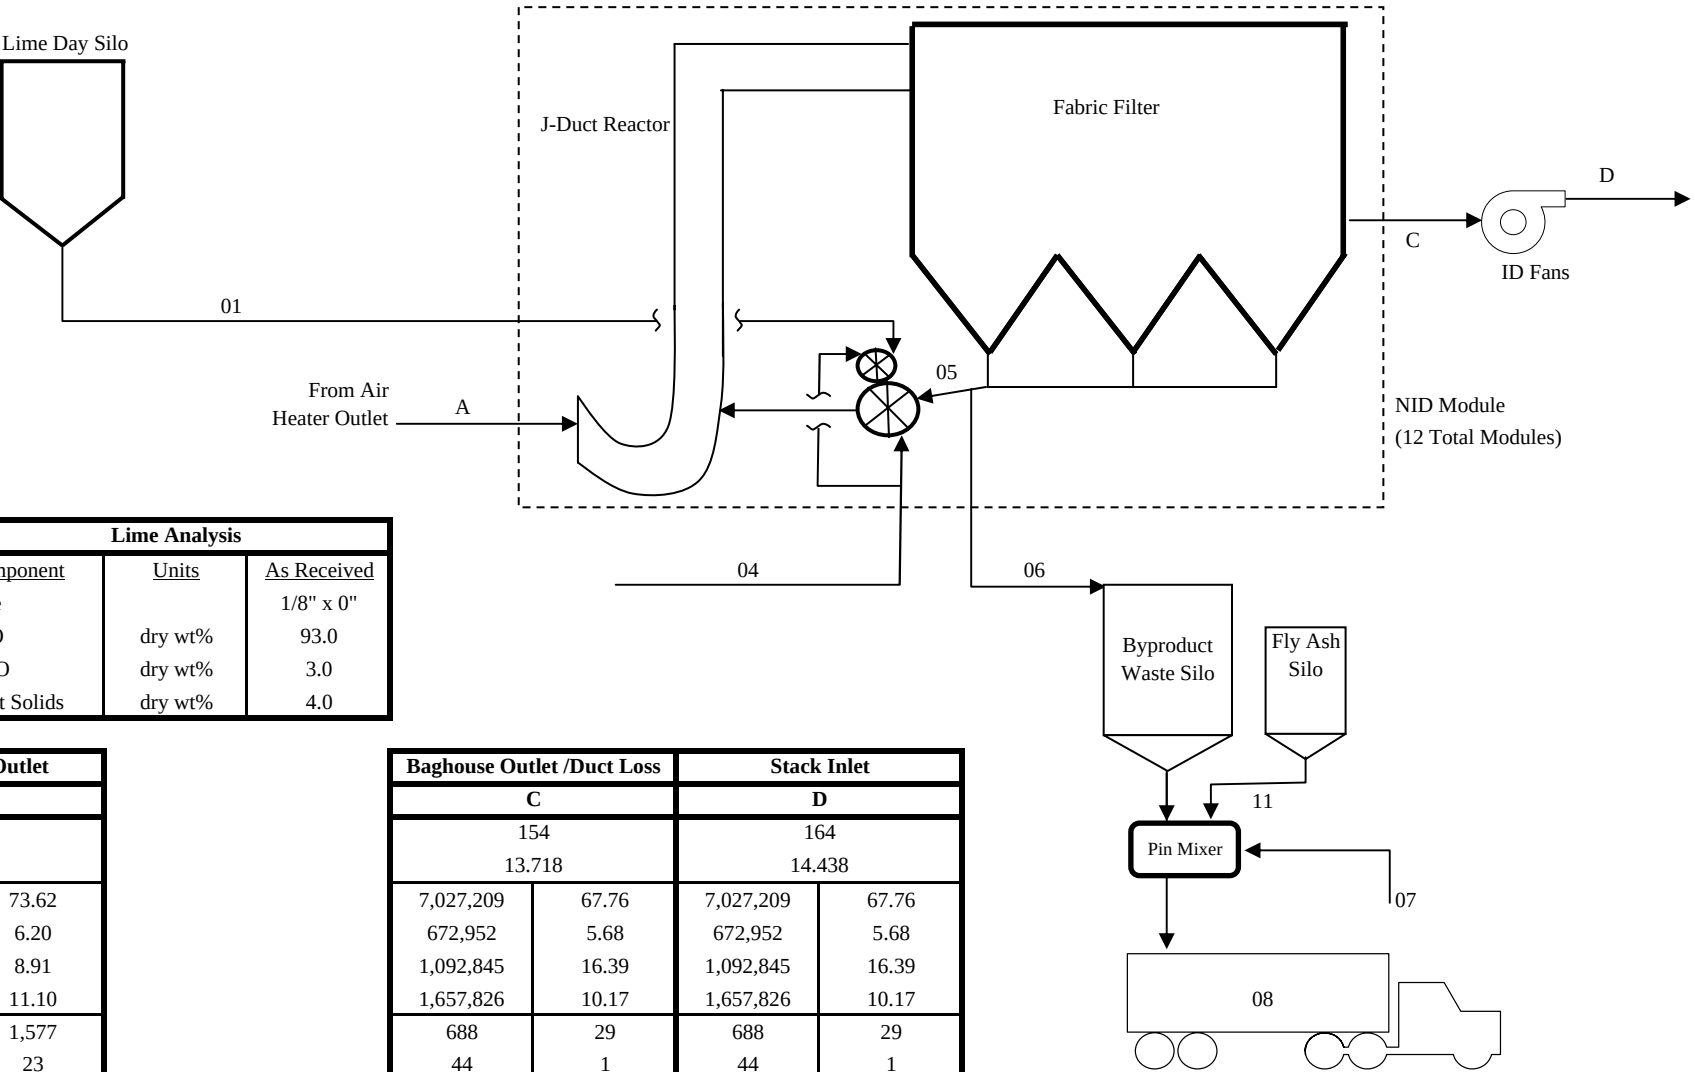


FGD Process Parameters		
Inlet Stoich.	Ca:S Inlet	1.8
Internal Stoich.	Ca:S Inlet	39
Approach to Saturation	°F	25
Saturation Temperature	°F	129
Saturation Humidity	lb/lb dry air	0.120
Outlet Particulates	lb/MMBtu	0.012
Sulfur Levels		
SO ₂ In	lb/MMBtu	4.205
SO ₂ Out	lb/MMBtu	0.084
SO ₃ In	lb/MMBtu	0.077
SO ₃ Out	lb/MMBtu	0.005

Baghouse Outlet /Duct Loss		Stack Inlet	
C		D	
154		164	
13.718		14.438	
7,027,209	67.76	7,027,209	67.76
672,952	5.68	672,952	5.68
1,092,845	16.39	1,092,845	16.39
1,657,826	10.17	1,657,826	10.17
688	29	688	29
44	1	44	1
0	0	0	0
0	0	0	0
10,451,564	2,963,291	10,451,564	2,861,235
28.217	0.117	28.217	0.113
99	0.004	99	0.004

Sat. H2O	Recycle	Waste Solids	Pin Mixer H2O	Landfill	Total Water
04	05	06	07	08	09
0	326,846	3,845	0	9,851	0
0	0	0	0	0	0
0	1,691,231	19,897	0	19,897	0
0	148,616	1,748	0	1,748	0
0	3,513,318	41,333	0	41,333	0
0	3,122,950	36,741	0	36,741	0
0	1,363,141	16,037	0	16,037	0
0	43,516	512	0	512	0
0	10,209,617	120,113	0	126,119	0
574,686	1,134,402	13,346	38,131	51,477	612,817
574,686	11,344,019	133,459	38,131	177,596	612,817
1,148	---	---	76	---	1,224
0	90	90	0	71	0

Stabilization
11
6,006
0
0
0
0
0
0
0
6,006
0
6,006

100




Mass Balance NID System -
7.5 lb SO₂/MMBtu Coal (w/ESP)

Plant Production		
MCR Output	MW	865
Heat Input	MMBtu/hr	8180
Firing Rate	lb/hr	660,210
Coal Analysis		
Component	Units	As Received
Carbon	wt%	67.15
Hydrogen	wt%	4.76
Nitrogen	wt%	1.16
Sulfur	wt%	4.02
Oxygen	wt%	5.74
Chlorine	wt%	0.05
Moisture	wt%	6.73
Ash	wt%	10.40
Calc. HHV	Btu/lb	12,390

Lime Analysis		
Component	Units	As Received
Size		1/8" x 0"
CaO	dry wt%	93.0
MgO	dry wt%	3.0
Inert Solids	dry wt%	4.0

Stream Characteristics		Booster Fan Outlet	
		A	
Temperature	°F	361	
Pressure	psia	14.366	
N ₂	lb/hr-vol%	6,952,181	73.52
O ₂	lb/hr-vol%	669,424	6.19
H ₂ O	lb/hr-vol%	553,094	9.10
CO ₂	lb/hr-vol%	1,625,547	10.94
SO ₂	lb/hr-ppmv	51,784	2,396
SO ₃	lb/hr-ppmv	973	36
HCl	lb/hr-ppmv	339	28
HF	lb/hr-ppmv	0	0
Total Flow	lb/hr-acfm	9,853,342	3,448,087
MW - Moist.	lb/lbmol-lb/lb	29.177	0.059
Ash	lb/hr-gr/acf	1,710	0.058

Stream Characteristics		Fresh Lime
		01
Inert Solids	lb/hr	3,461
CaO	lb/hr	80,479
Ca(OH) ₂	lb/hr	0
MgO	lb/hr	2,596
CaSO ₃ *0.5H ₂ O	lb/hr	0
CaSO ₄ *2H ₂ O	lb/hr	0
CaCO ₃	lb/hr	0
CaCl ₂ + CaF ₂	lb/hr	0
Total Solids	lb/hr	86,536
Water	lb/hr	0
Total Flow	lb/hr	86,536
Total Flow	gpm	---
Solids	wt%	100

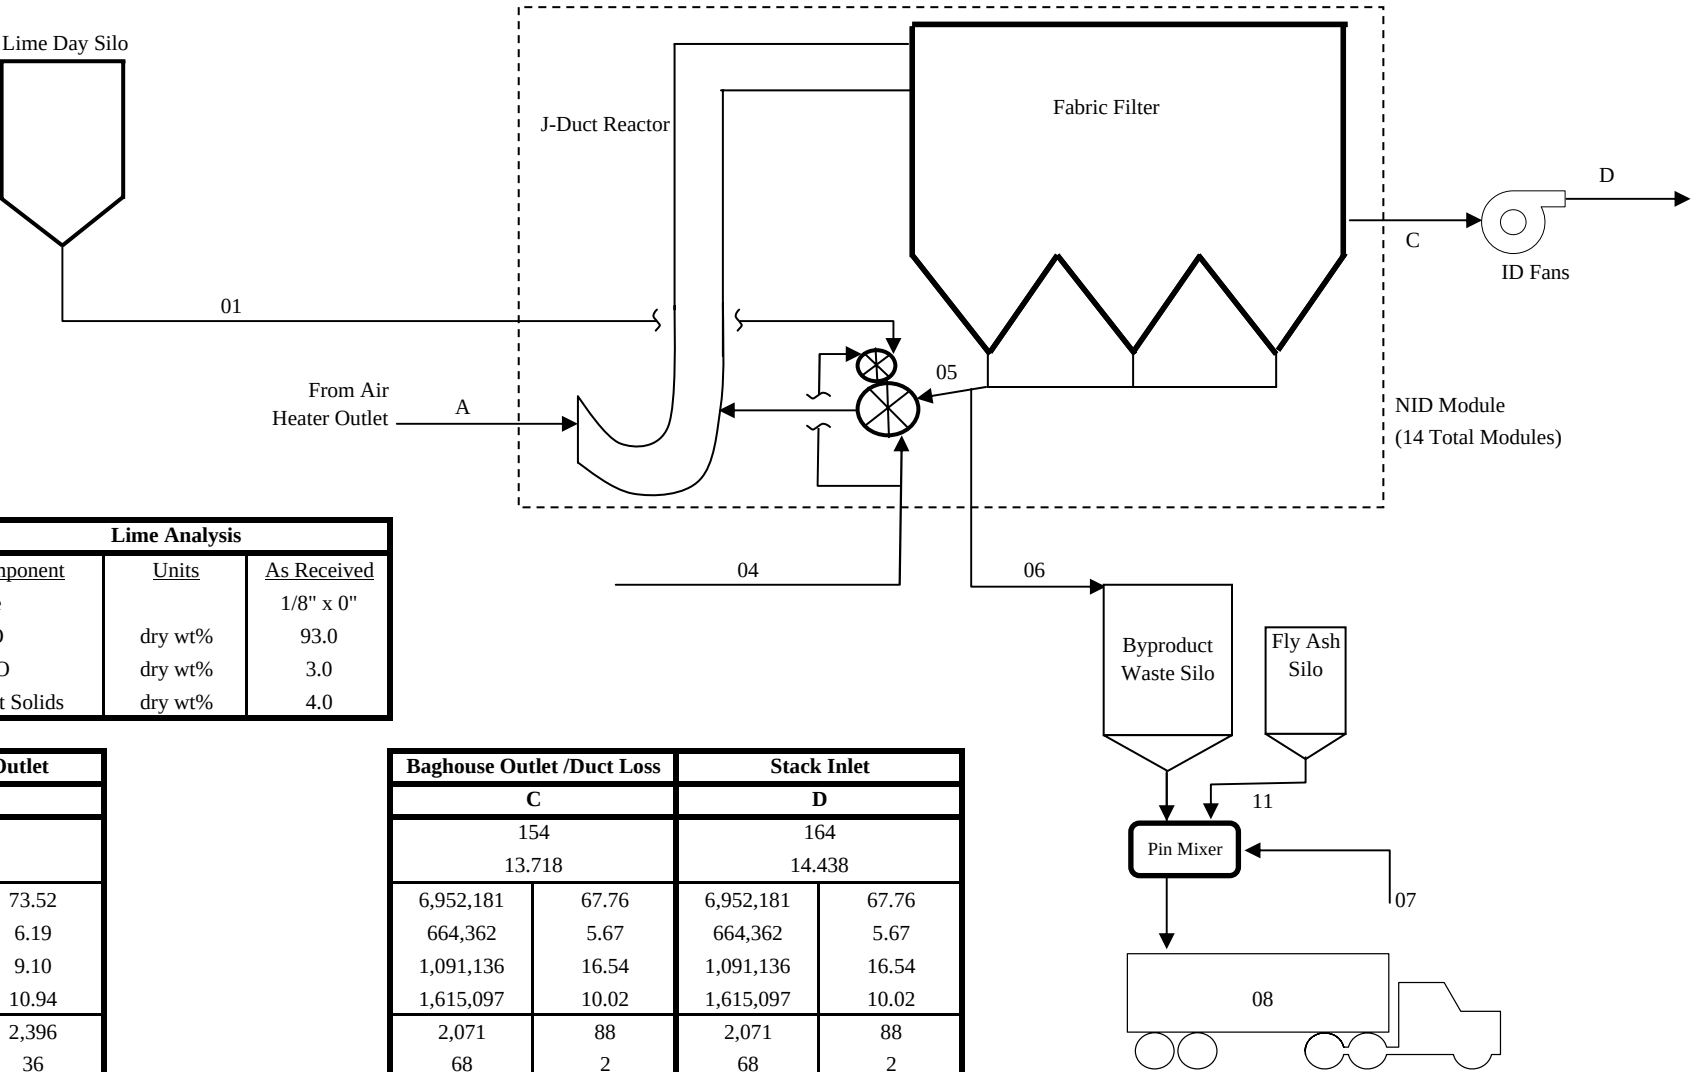


FGD Process Parameters		
Inlet Stoich.	Ca:S Inlet	1.7
Internal Stoich.	Ca:S Inlet	39
Approach to Saturation	°F	25
Saturation Temperature	°F	129
Saturation Humidity	lb/lb dry air	0.122
Outlet Particulates	lb/MMBtu	0.012
Sulfur Levels		
SO ₂ In	lb/MMBtu	6.331
SO ₂ Out	lb/MMBtu	0.253
SO ₃ In	lb/MMBtu	0.119
SO ₃ Out	lb/MMBtu	0.008

Baghouse Outlet /Duct Loss		Stack Inlet	
C		D	
154		164	
13.718		14.438	
6,952,181	67.76	6,952,181	67.76
664,362	5.67	664,362	5.67
1,091,136	16.54	1,091,136	16.54
1,615,097	10.02	1,615,097	10.02
2,071	88	2,071	88
68	2	68	2
0	0	0	0
0	0	0	0
10,324,915	2,933,434	10,324,915	2,832,373
28.178	0.118	28.178	0.115
100	0.004	100	0.004

Sat. H2O	Recycle	Waste Solids	Pin Mixer H2O	Landfill	Total Water
04	05	06	07	08	09
0	431,056	5,071	0	13,934	0
0	0	0	0	0	0
0	2,559,430	30,111	0	30,111	0
0	220,668	2,596	0	2,596	0
0	5,184,695	60,996	0	60,996	0
0	4,608,618	54,219	0	54,219	0
0	2,018,764	23,750	0	23,750	0
0	43,867	516	0	516	0
0	15,067,098	177,260	0	186,123	0
580,665	1,674,122	19,696	56,273	75,969	636,938
580,665	16,741,221	196,956	56,273	262,092	636,938
1,160	---	---	112	---	1,273
0	90	90	0	71	0

Stabilization
11
8,863
0
0
0
0
0
0
0
8,863
0
8,863

100





Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-4 NID Water Balances


NID Water Balance Assumptions

1. Service Water within the NID Island (to waste pin mixers and lime hydrators and mixers) are from Mass Balances dated 9/10/2010.
2. Water for wash-down and flushes are based on assumed instantaneous flow rates and usages of 288 GPM seven times a week for 15 minutes and will be drained/pumped to the process water storage basin.
3. Water from the process water storage basin will be used in the waste pin mixers as an alternative to using service water. A filtering system will be in place in the basin to limit particle size to 1/32".
4. 10% of the water sprayed for dust suppression is lost to evaporation

Steady State vs. Instantaneous Service Water Requirements

The average service water required is a steady state (or average) amount over the course of a year. Actual operation will occur in more of a batch mode, and as such, higher demands of service water will be needed over the course of a day.

Big Sandy NID Water Balance
1.75 lb/mmbtu Sulfur Coal wo/ESP

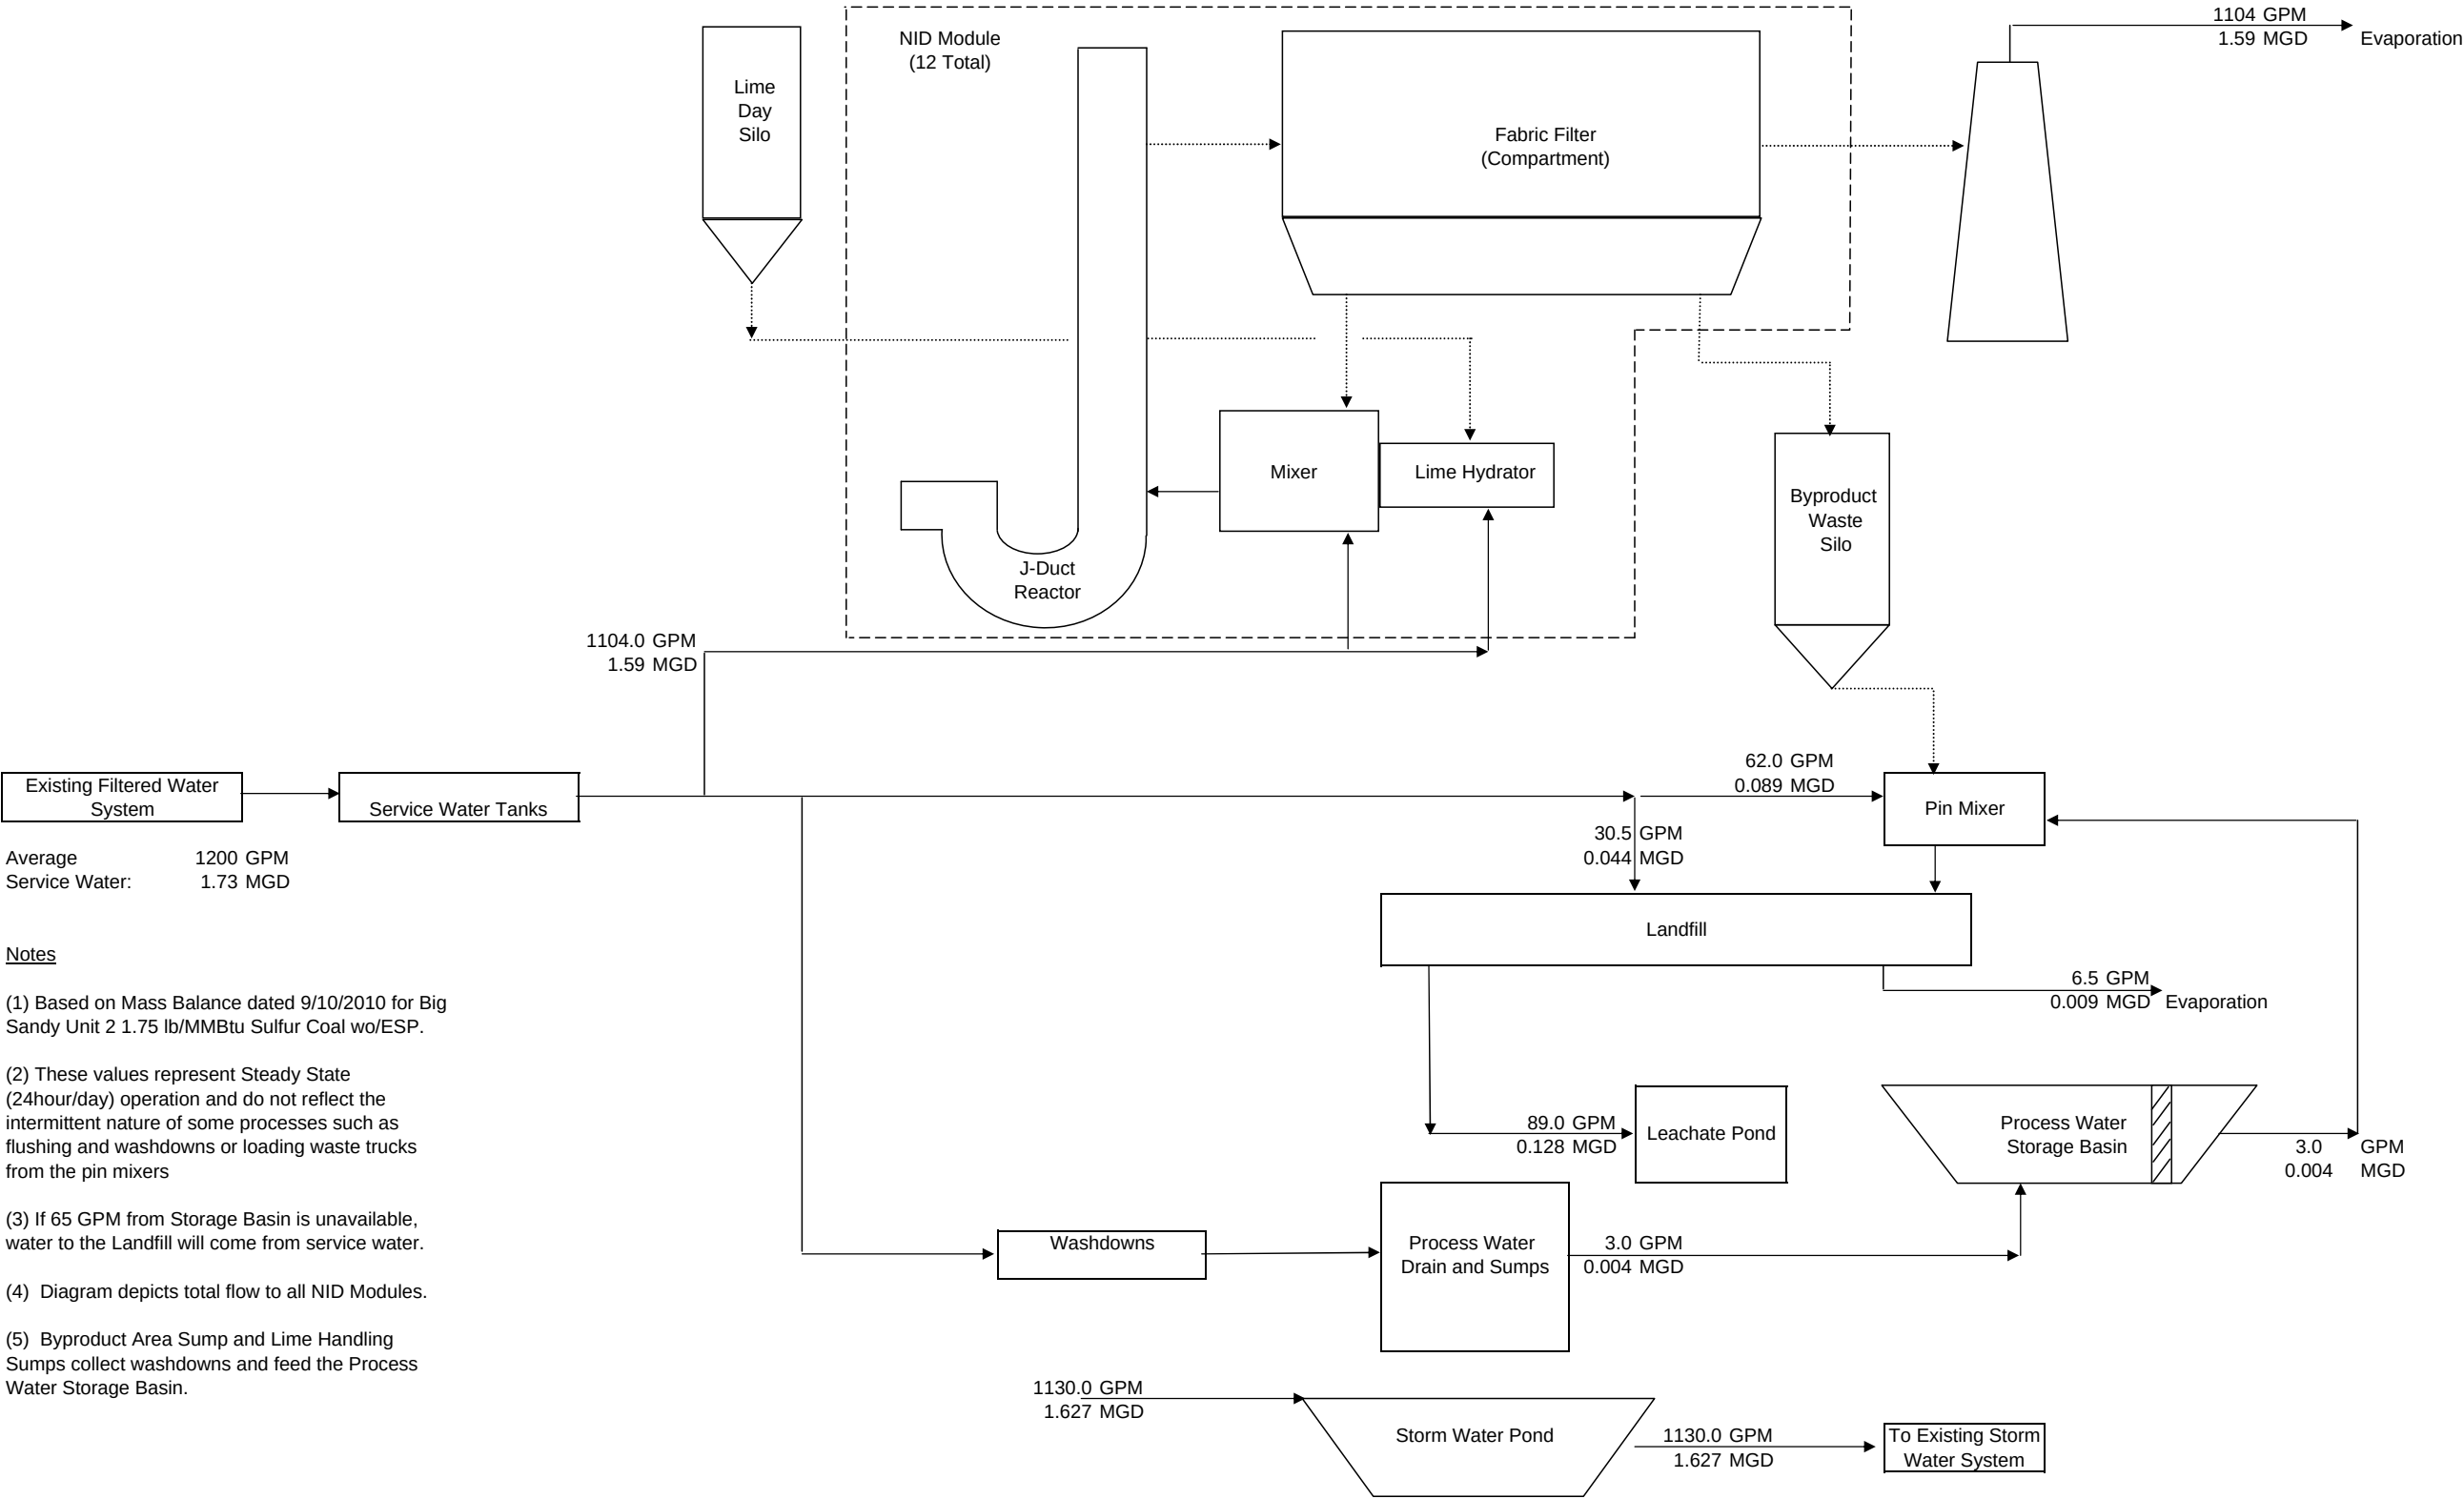

Notes

(1) Based on Mass Balance dated 9/10/2010 for Big Sandy Unit 2 1.75 lb/MMBtu Sulfur Coal wo/ESP.


(2) These values represent Steady State (24hour/day) operation and do not reflect the intermittent nature of some processes such as flushing and washdowns or loading waste trucks from the pin mixers

(3) If 65 GPM from Storage Basin is unavailable, water to the Landfill will come from service water.

(4) Diagram depicts total flow to all NID Modules.


(5) Byproduct Area Sump and Lime Handling Sumps collect washdowns and feed the Process Water Storage Basin.

Big Sandy NID Water Balance
3 lb/mmbtu Sulfur Coal wo/ESP

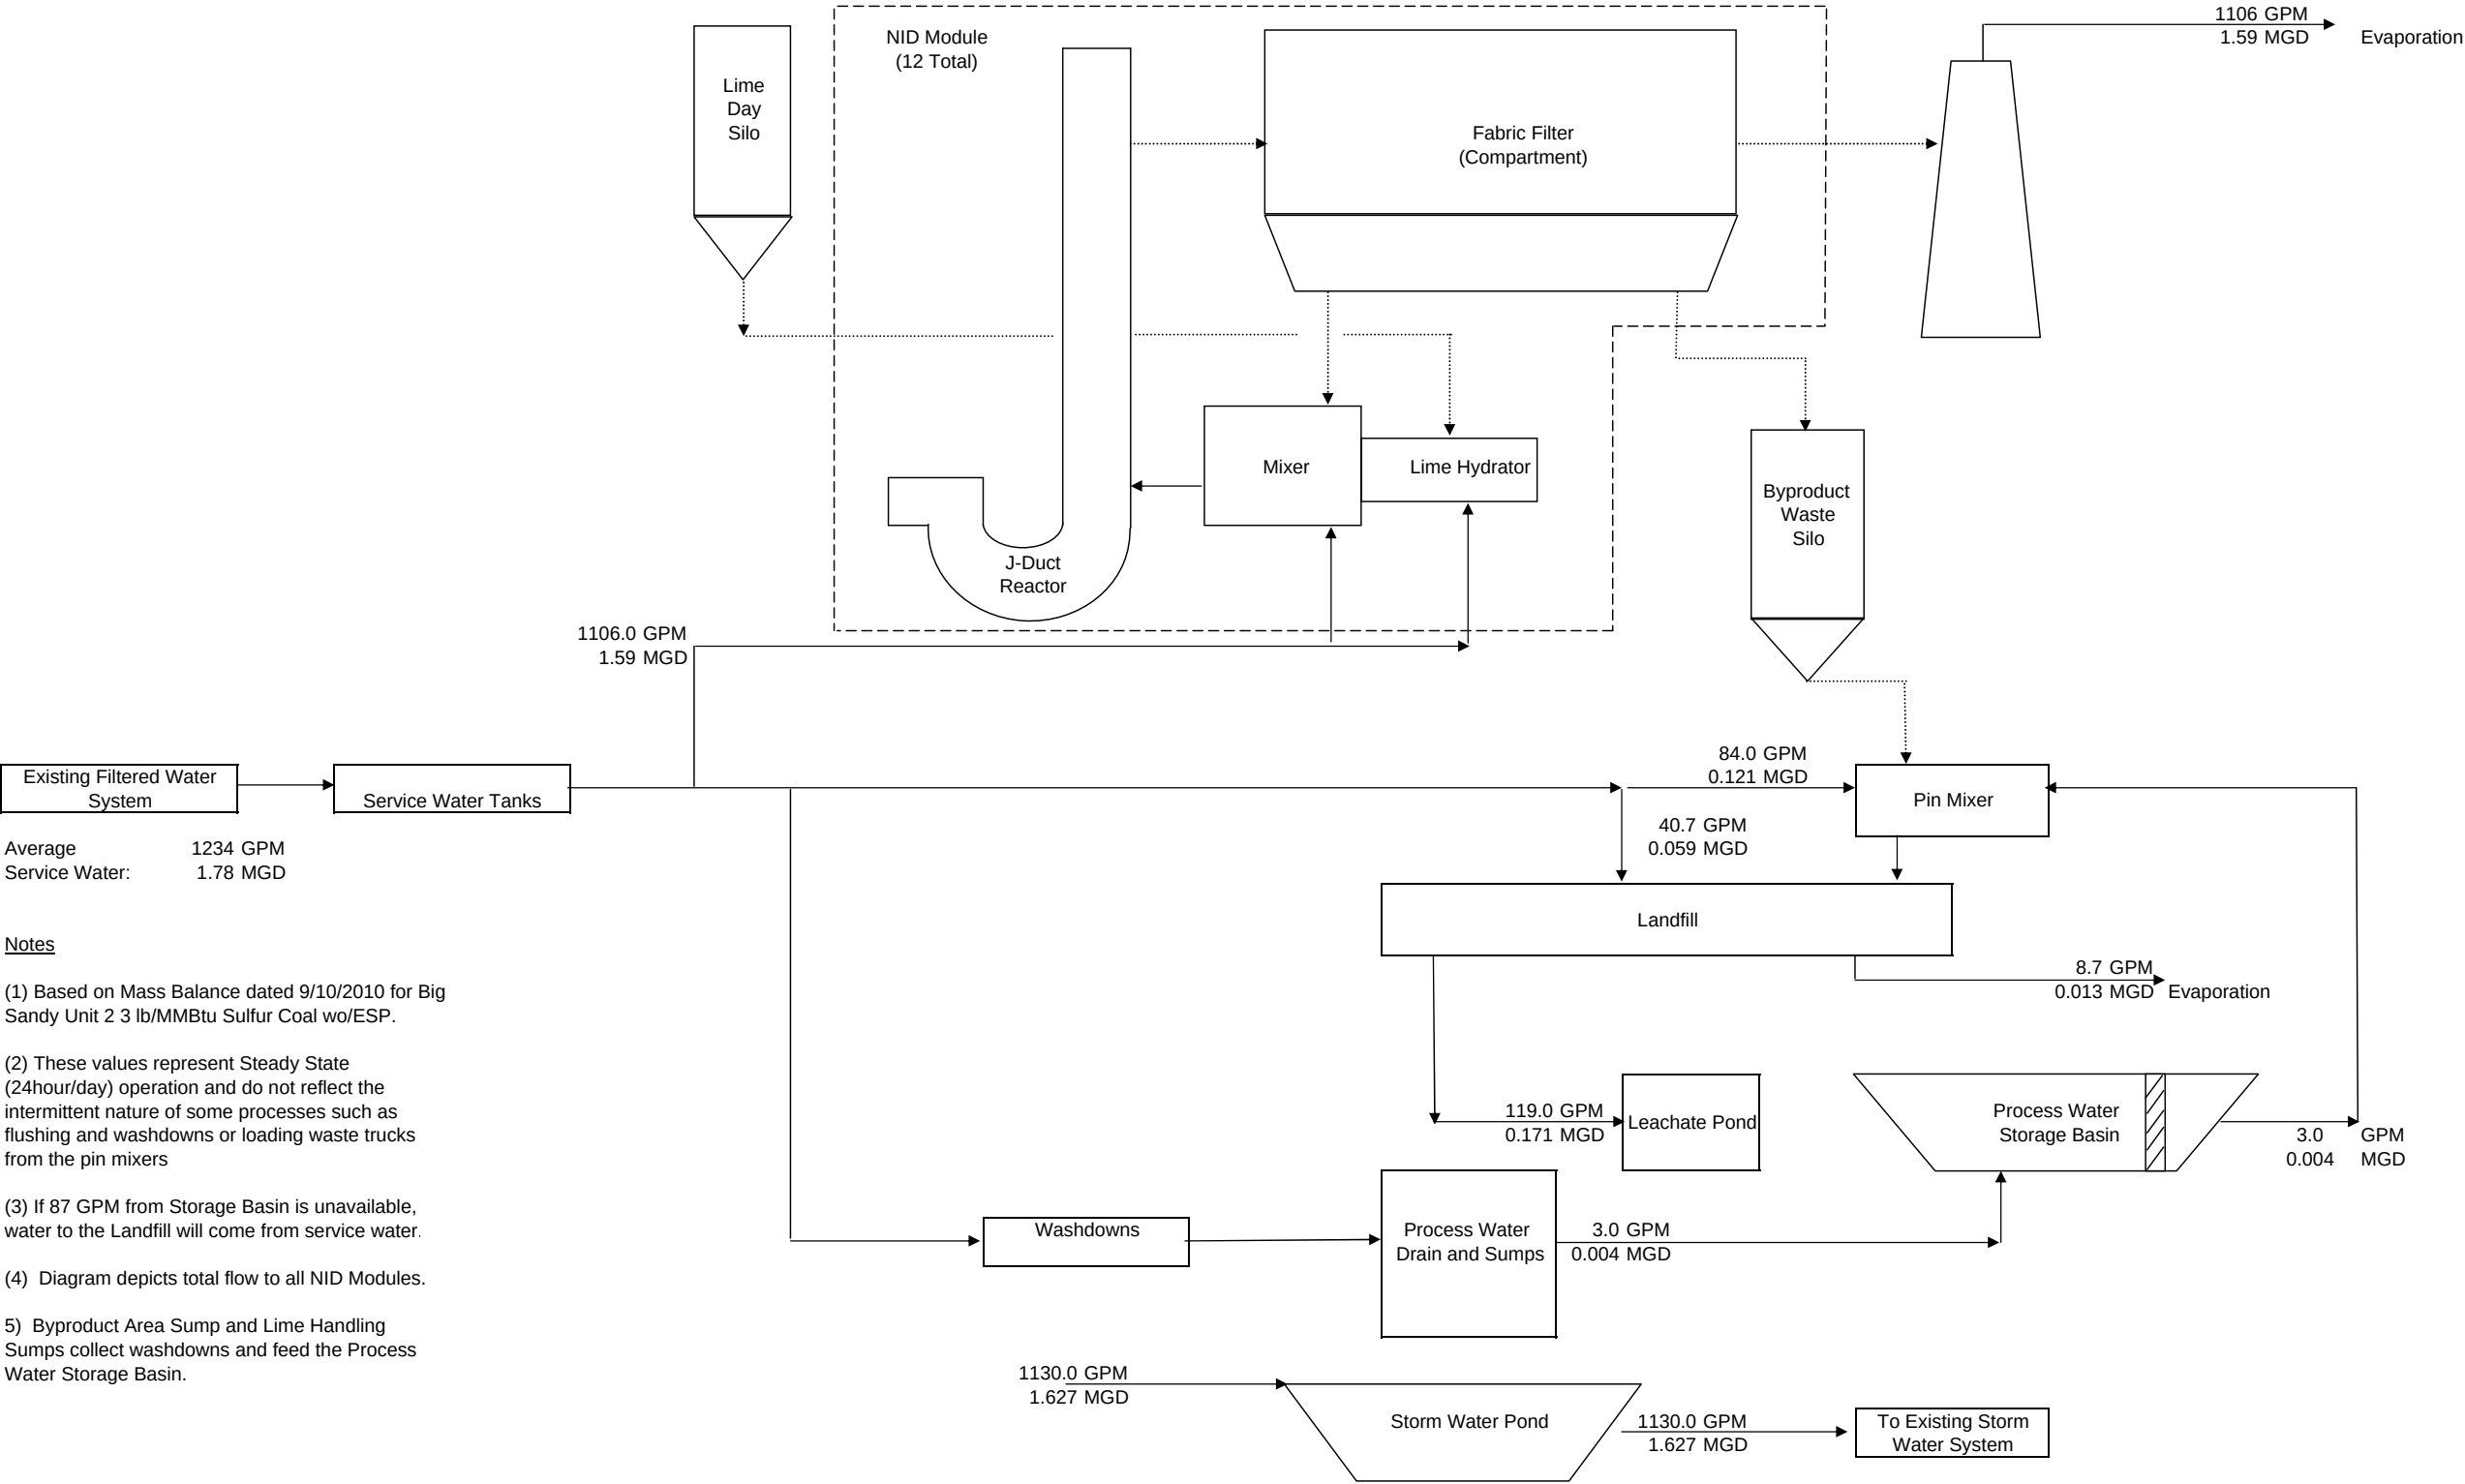


- Notes
- (1) Based on Mass Balance dated 9/10/2010 for Big Sandy Unit 2 3 lb/MMBtu Sulfur Coal wo/ESP.
 - (2) These values represent Steady State (24hour/day) operation and do not reflect the intermittent nature of some processes such as flushing and washdowns or loading waste trucks from the pin mixers
 - (3) If 87 GPM from Storage Basin is unavailable, water to the Landfill will come from service water.
 - (4) Diagram depicts total flow to all NID Modules.
 - (5) Byproduct Area Sump and Lime Handling Sumps collect washdowns and feed the Process Water Storage Basin.

Big Sandy NID Water Balance
4.5 lb/mmmbtu Sulfur Coal wo/ESP

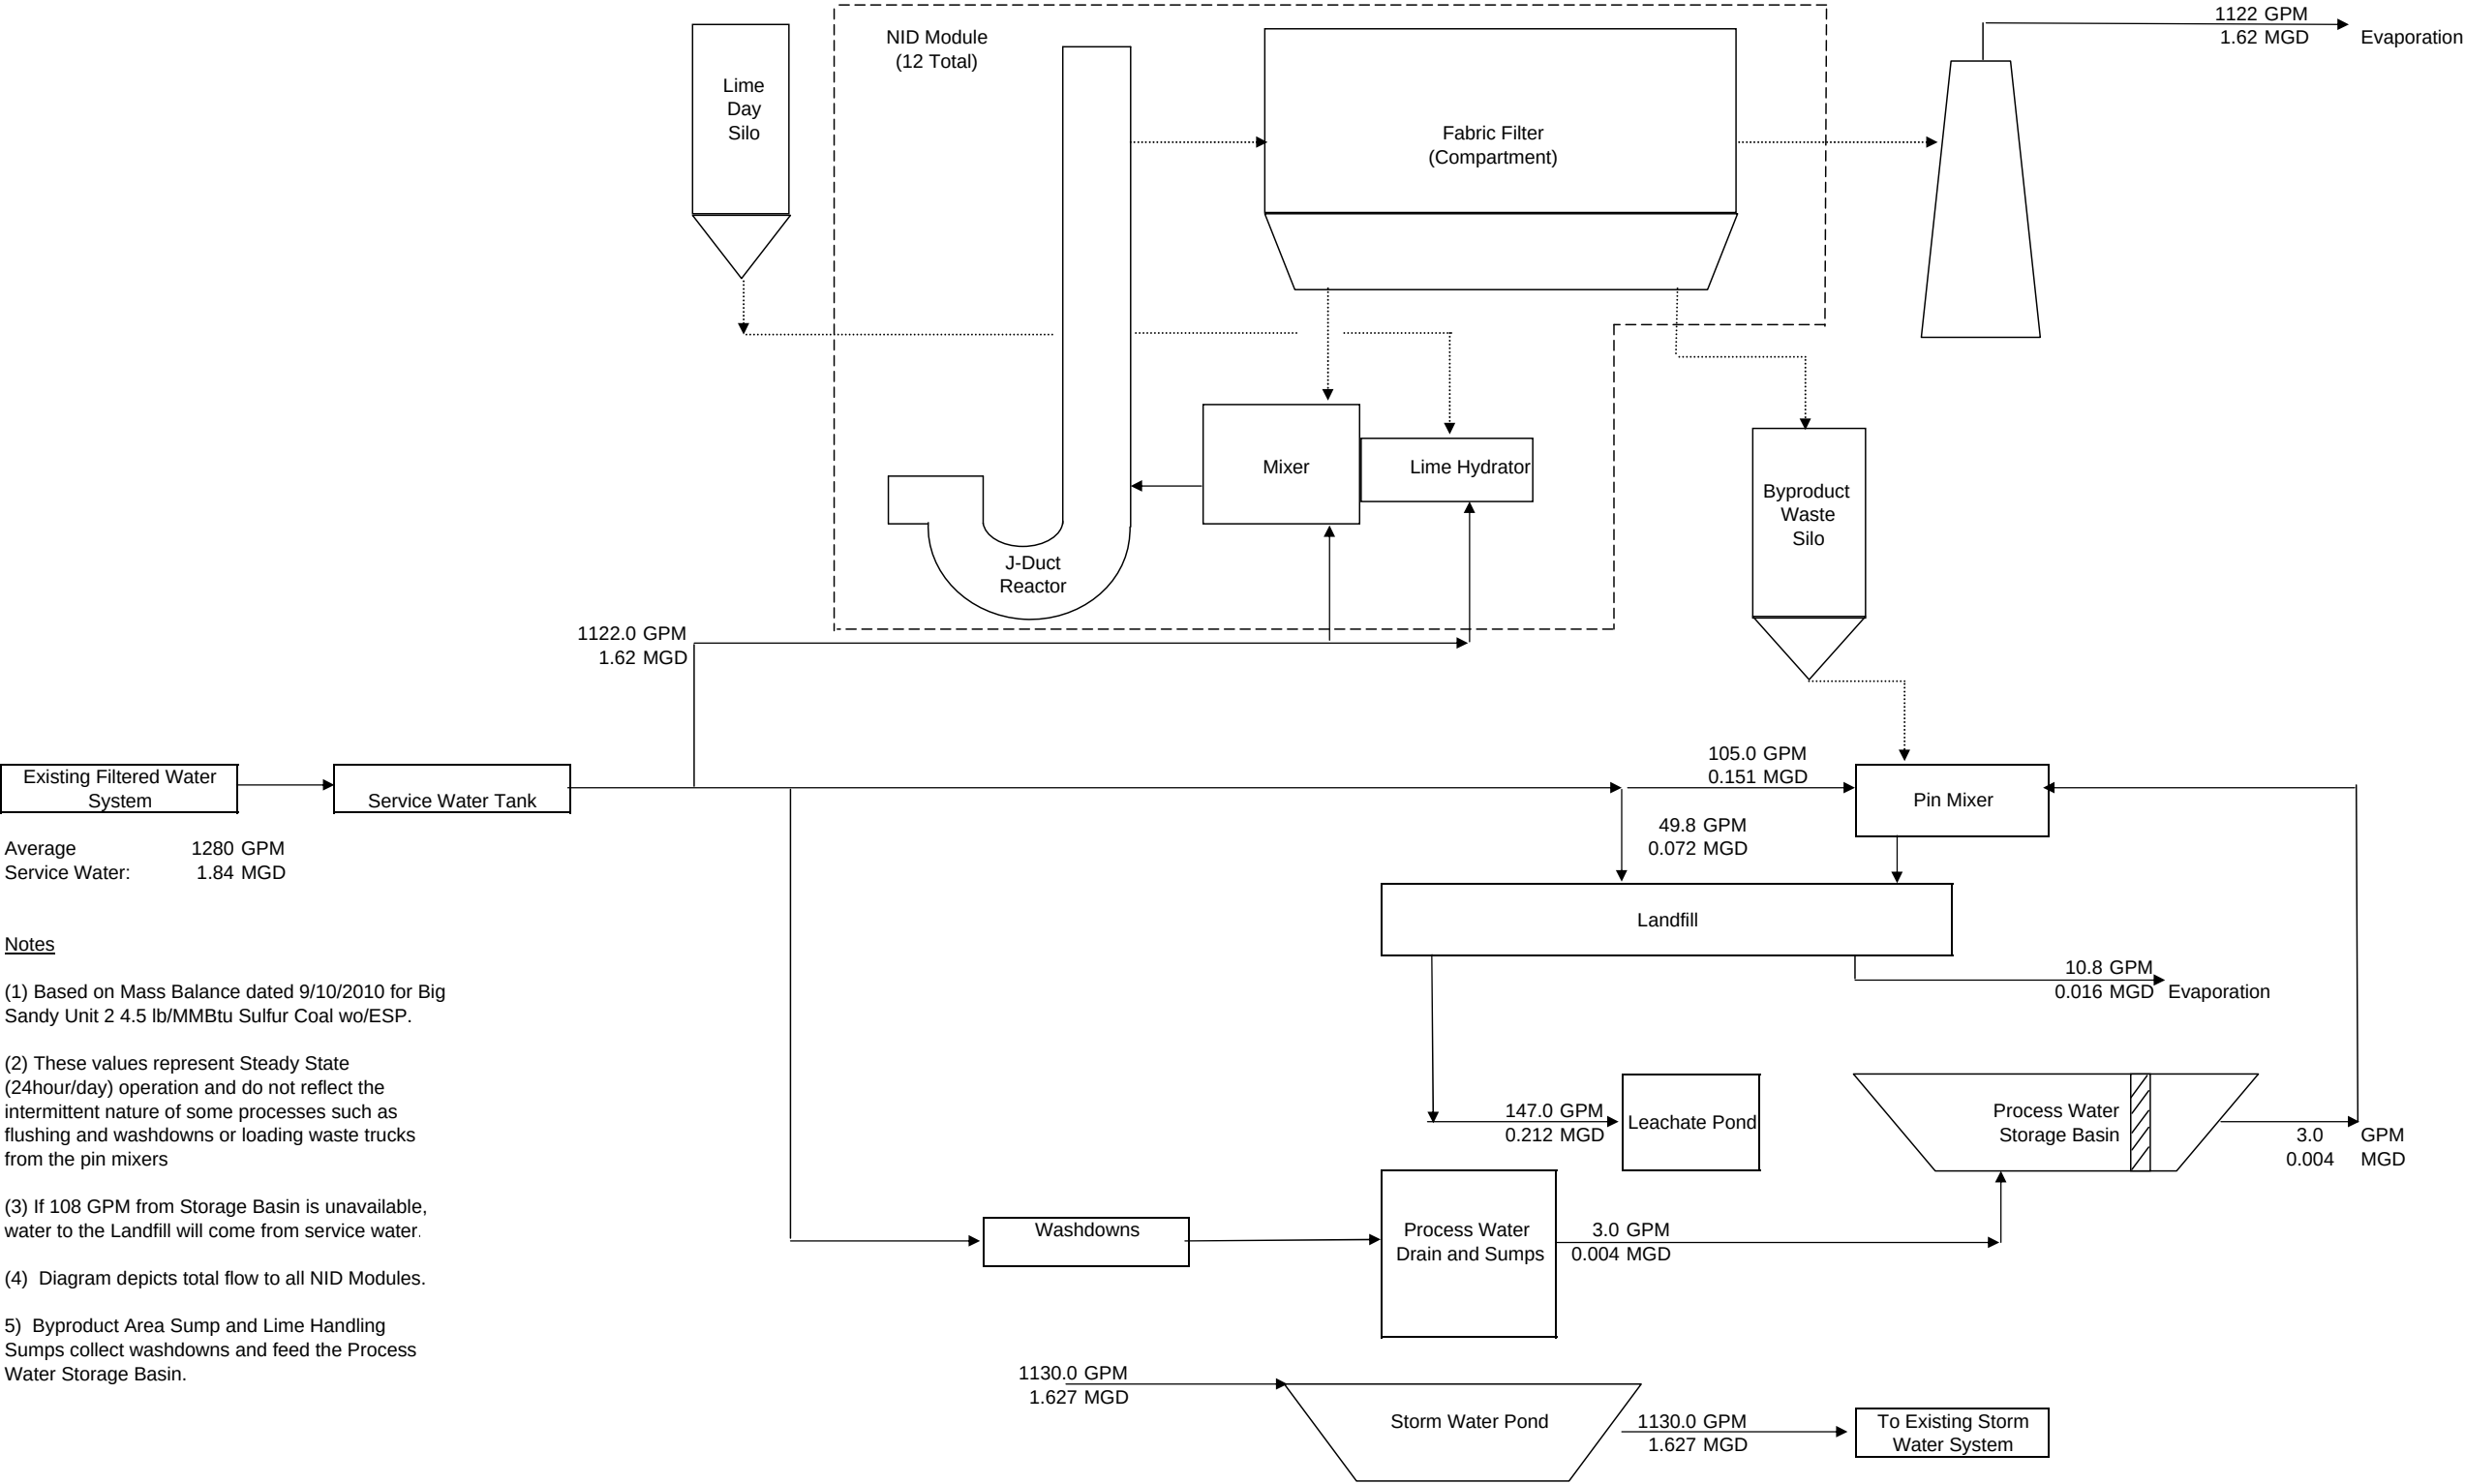


Big Sandy NID Water Balance
7.5 lb/mmbtu Sulfur Coal wo/ESP

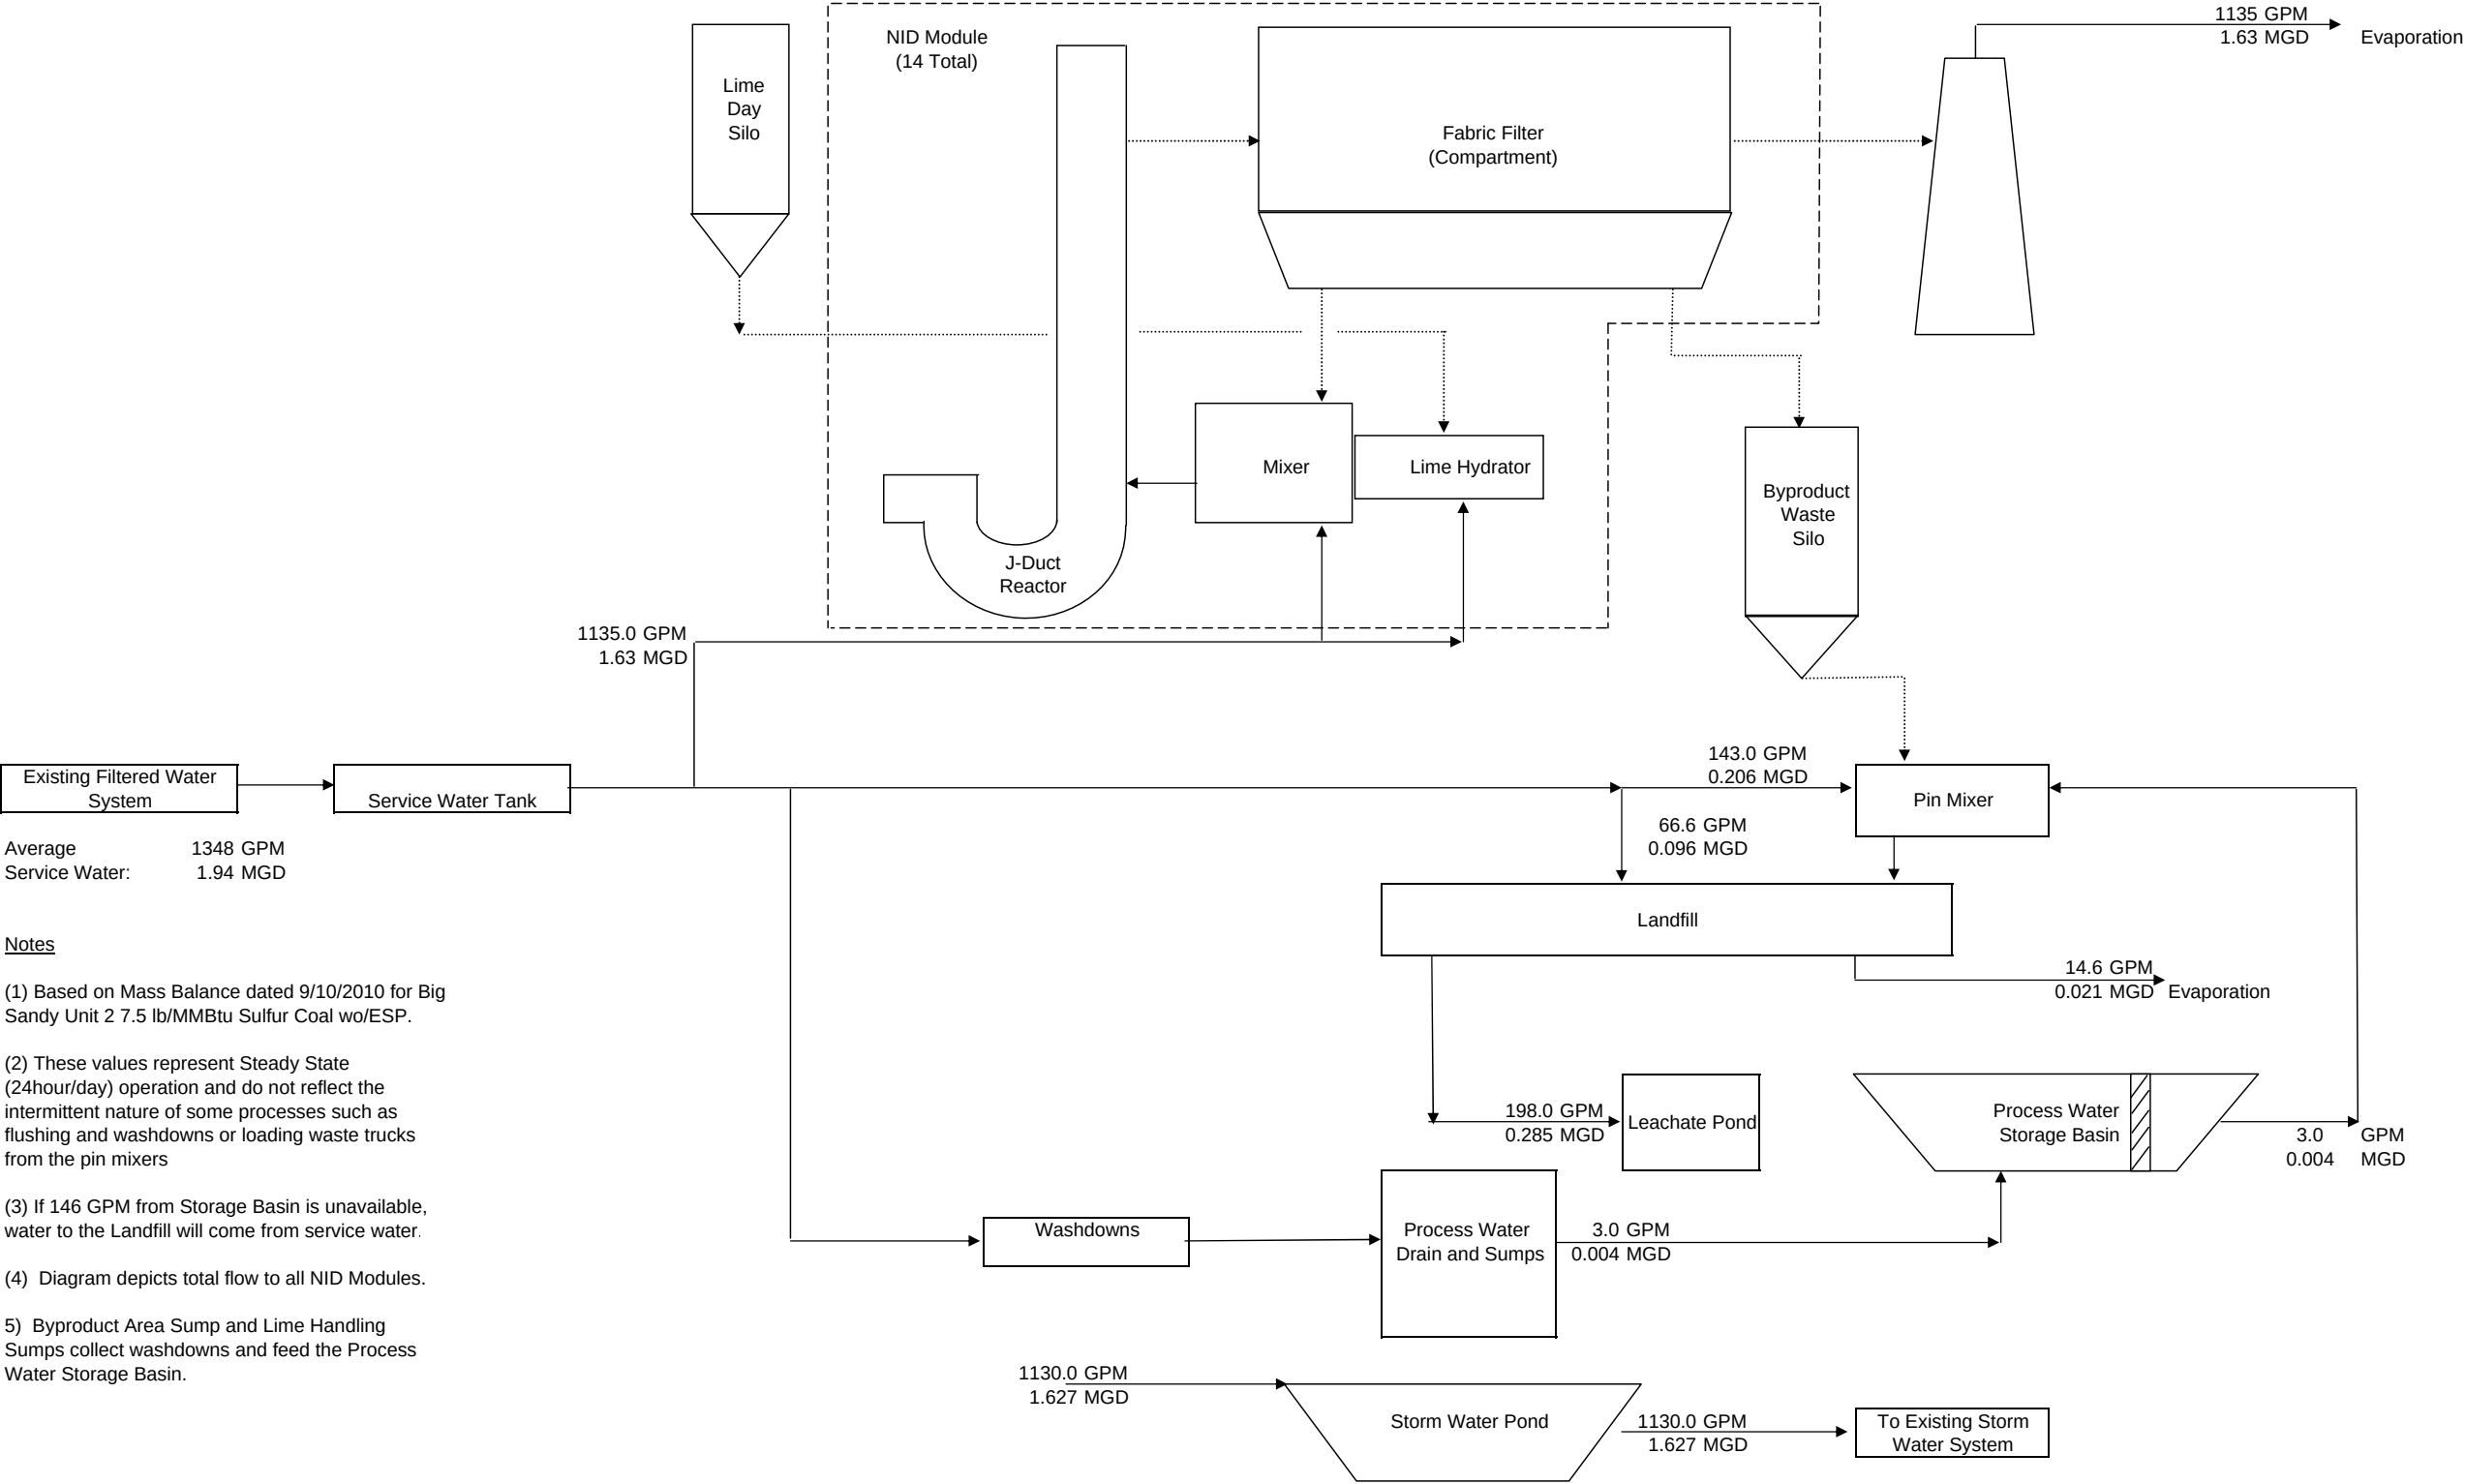


- Notes
- (1) Based on Mass Balance dated 9/10/2010 for Big Sandy Unit 2 7.5 lb/MMBtu Sulfur Coal wo/ESP.
 - (2) These values represent Steady State (24hour/day) operation and do not reflect the intermittent nature of some processes such as flushing and washdowns or loading waste trucks from the pin mixers
 - (3) If 146 GPM from Storage Basin is unavailable, water to the Landfill will come from service water.
 - (4) Diagram depicts total flow to all NID Modules.
 - (5) Byproduct Area Sump and Lime Handling Sumps collect washdowns and feed the Process Water Storage Basin.

Big Sandy NID Water Balance
1.75 lb/mmbtu Sulfur Coal w/ESP

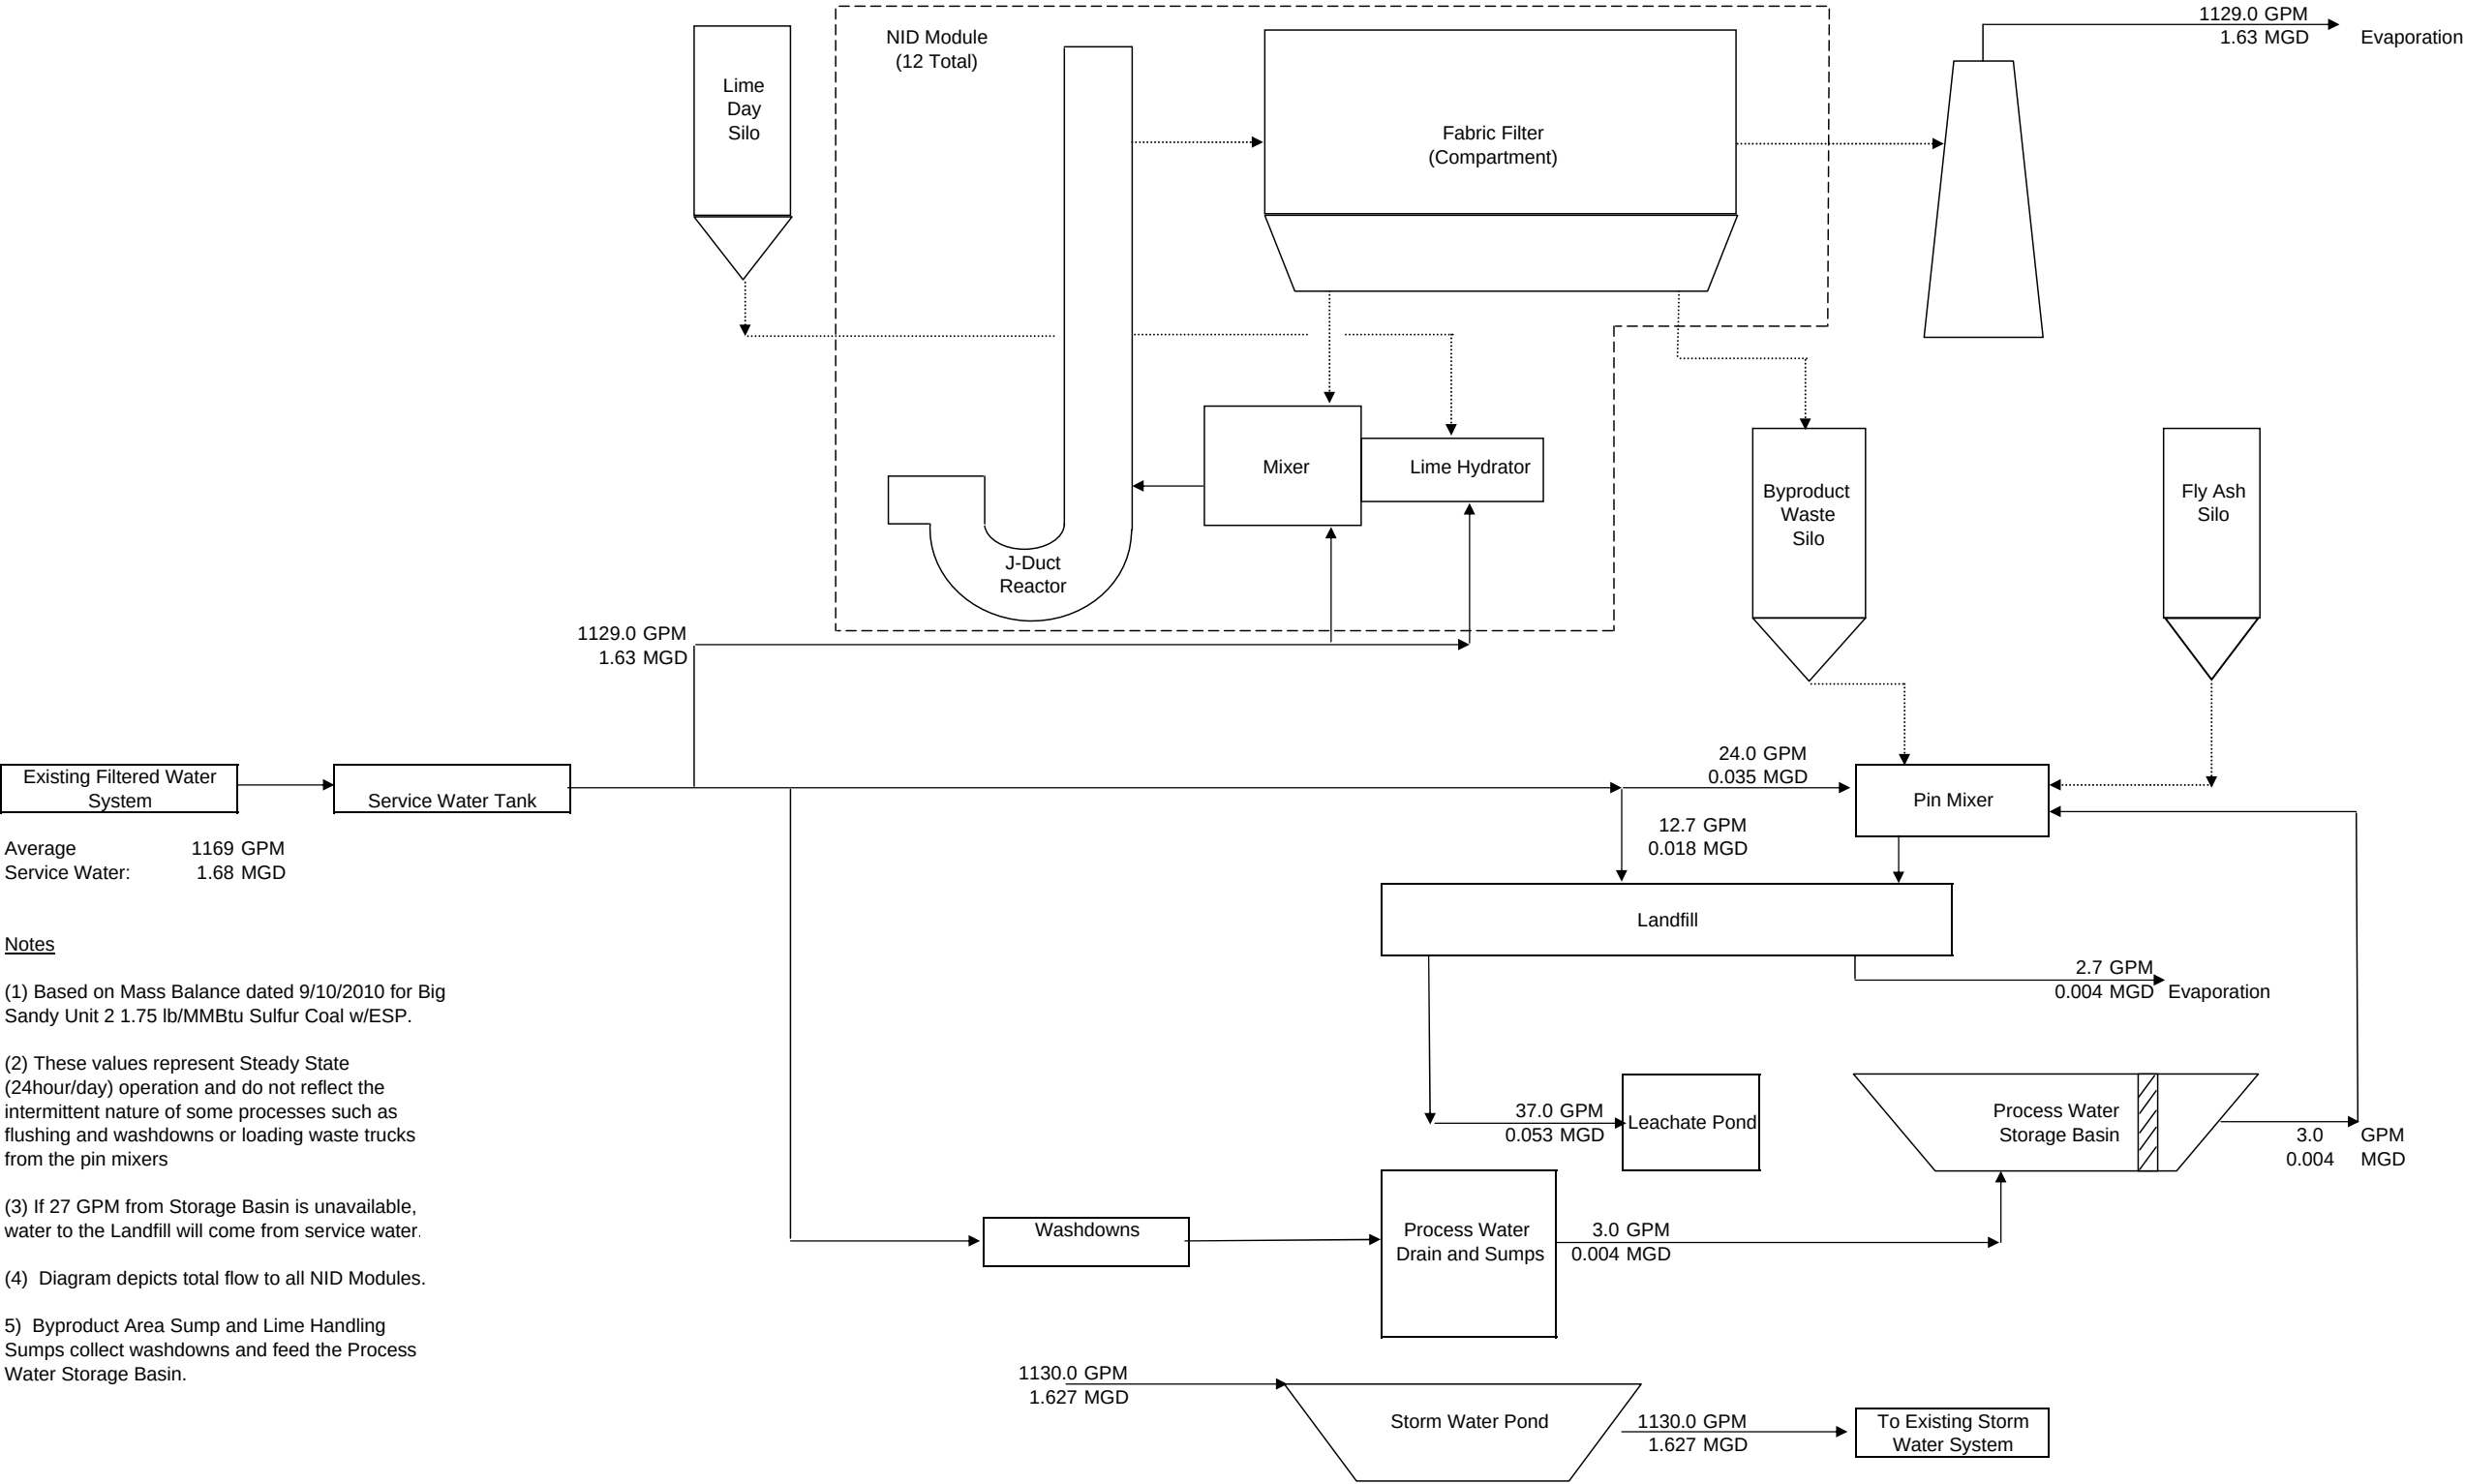


- Notes
- (1) Based on Mass Balance dated 9/10/2010 for Big Sandy Unit 2 1.75 lb/MMBtu Sulfur Coal w/ESP.
 - (2) These values represent Steady State (24hour/day) operation and do not reflect the intermittent nature of some processes such as flushing and washdowns or loading waste trucks from the pin mixers
 - (3) If 27 GPM from Storage Basin is unavailable, water to the Landfill will come from service water.
 - (4) Diagram depicts total flow to all NID Modules.
 - (5) Byproduct Area Sump and Lime Handling Sumps collect washdowns and feed the Process Water Storage Basin.

Big Sandy NID Water Balance
3 lb/MMBtu Sulfur Coal w/ESP

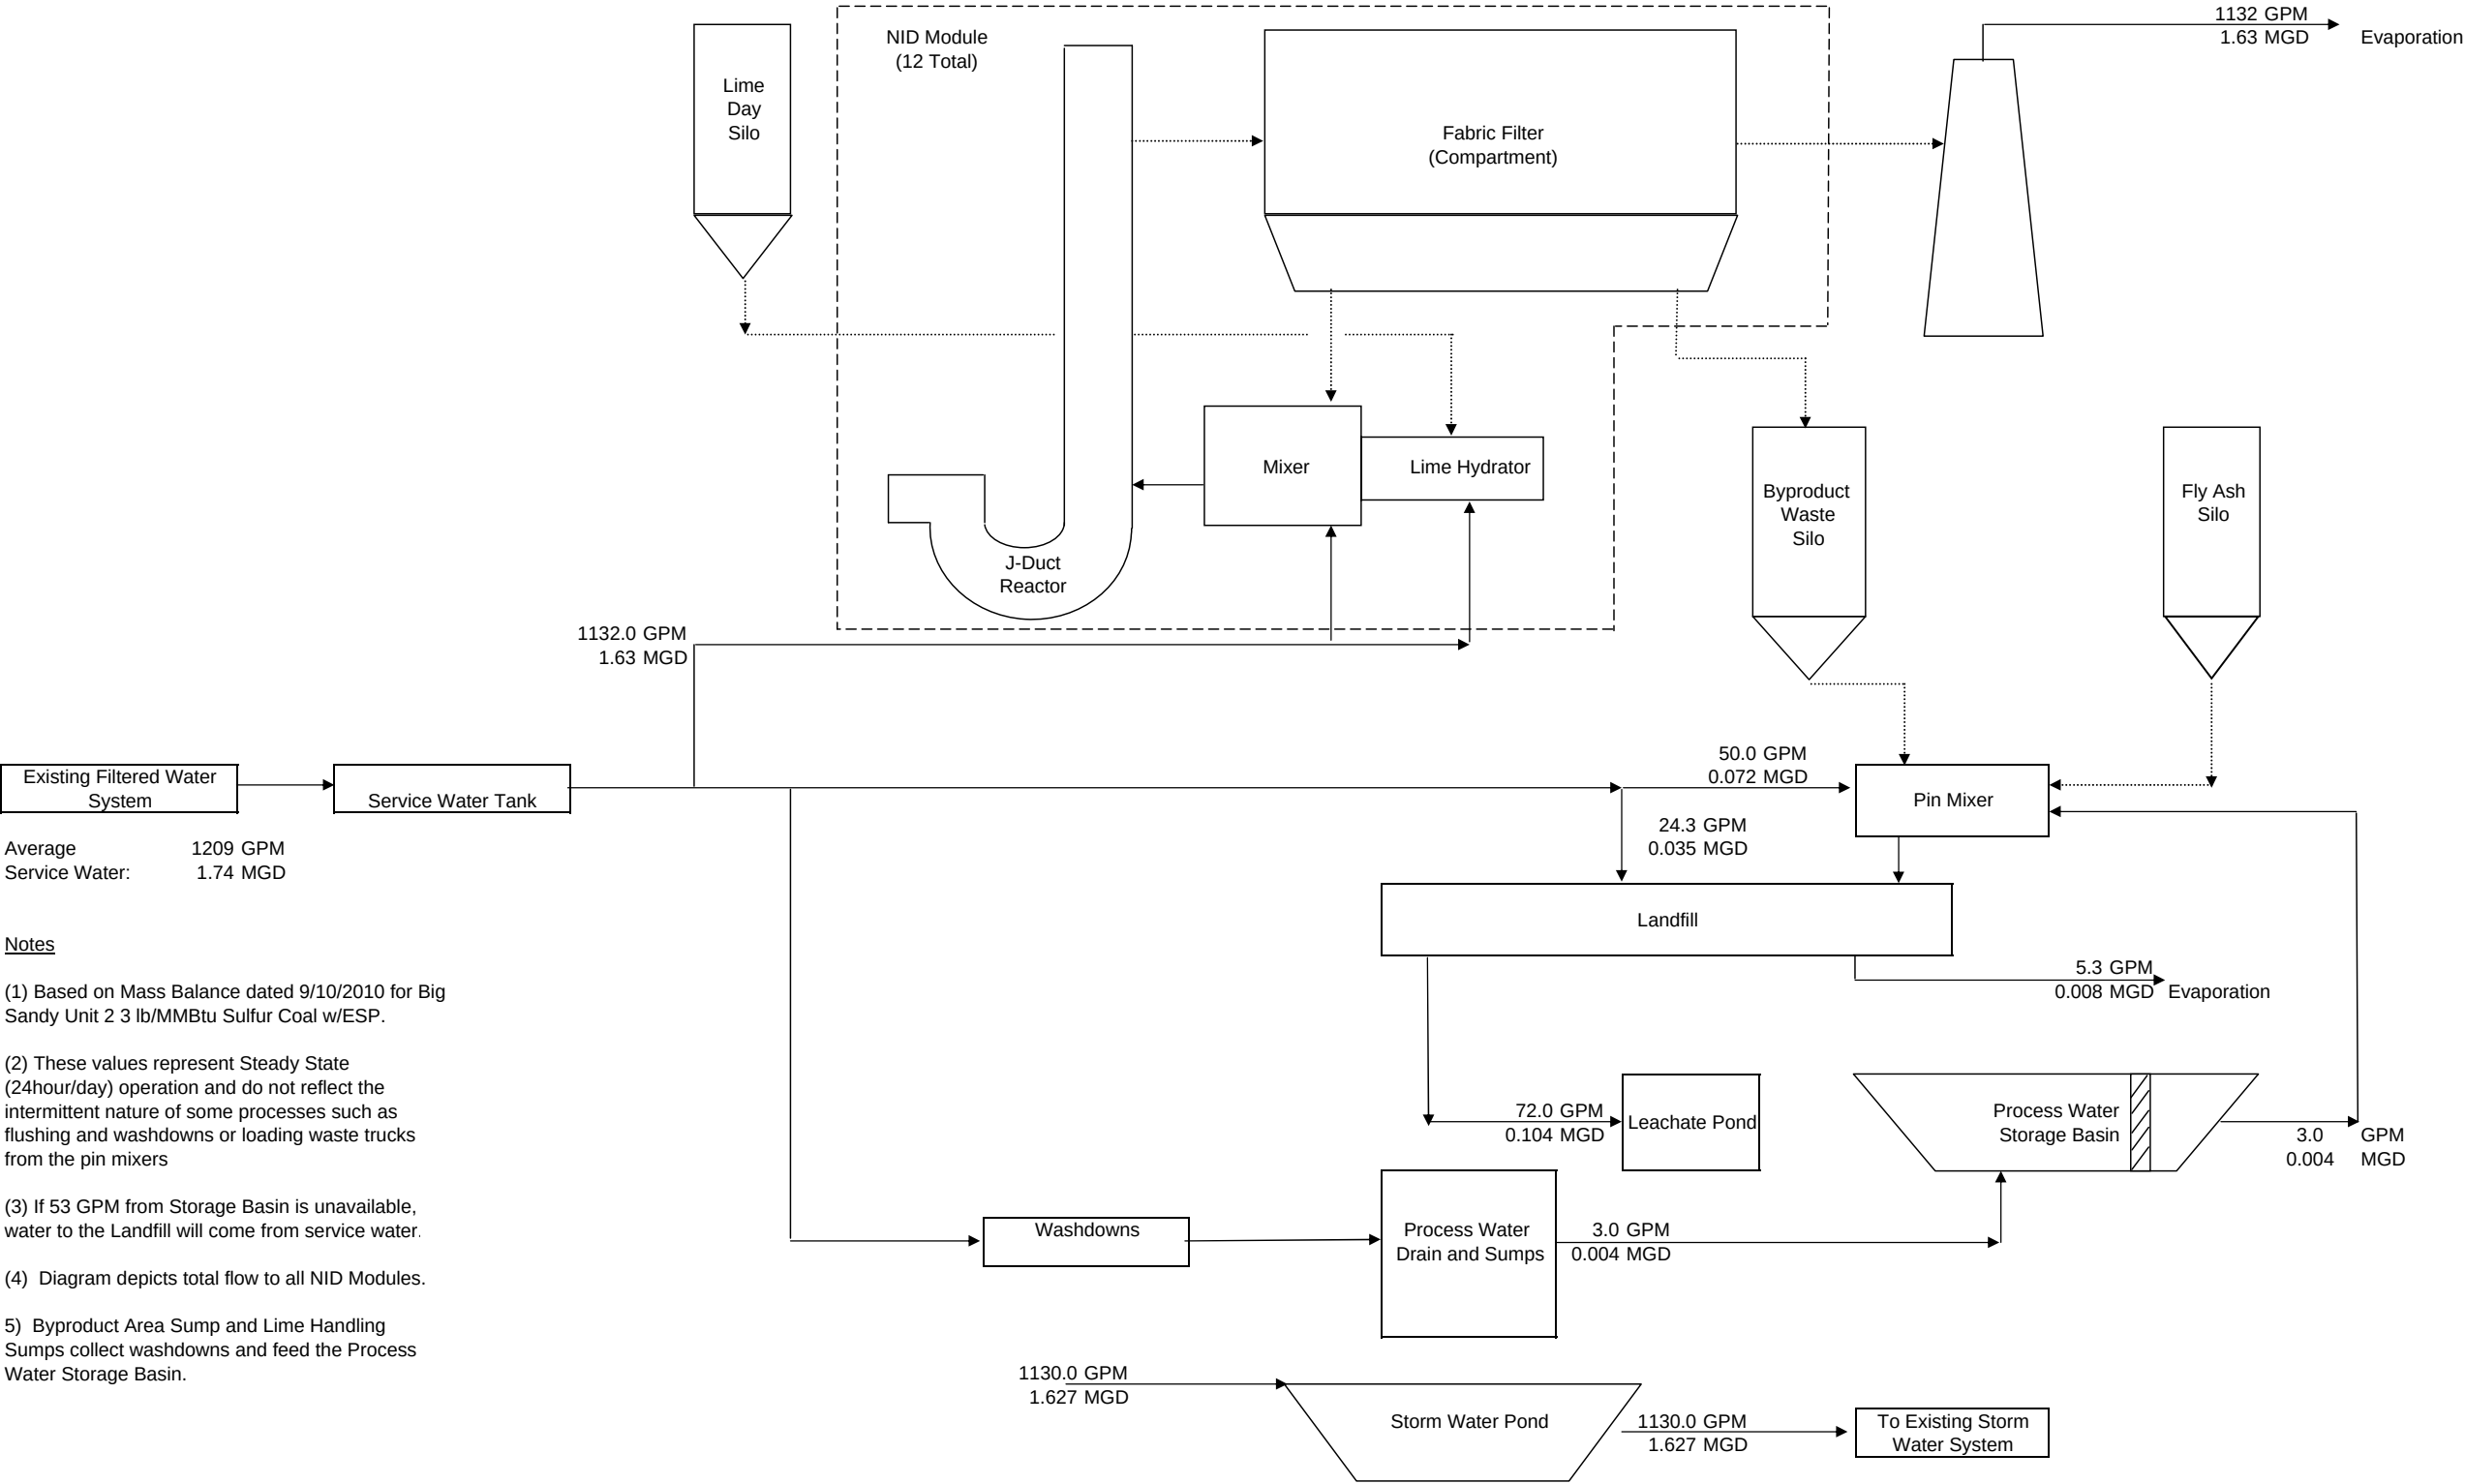


- Notes
- (1) Based on Mass Balance dated 9/10/2010 for Big Sandy Unit 2 3 lb/MMBtu Sulfur Coal w/ESP.
 - (2) These values represent Steady State (24hour/day) operation and do not reflect the intermittent nature of some processes such as flushing and washdowns or loading waste trucks from the pin mixers
 - (3) If 53 GPM from Storage Basin is unavailable, water to the Landfill will come from service water.
 - (4) Diagram depicts total flow to all NID Modules.
 - (5) Byproduct Area Sump and Lime Handling Sumps collect washdowns and feed the Process Water Storage Basin.

Big Sandy NID Water Balance
4.5 lb/mmbtu Sulfur Coal w/ESP

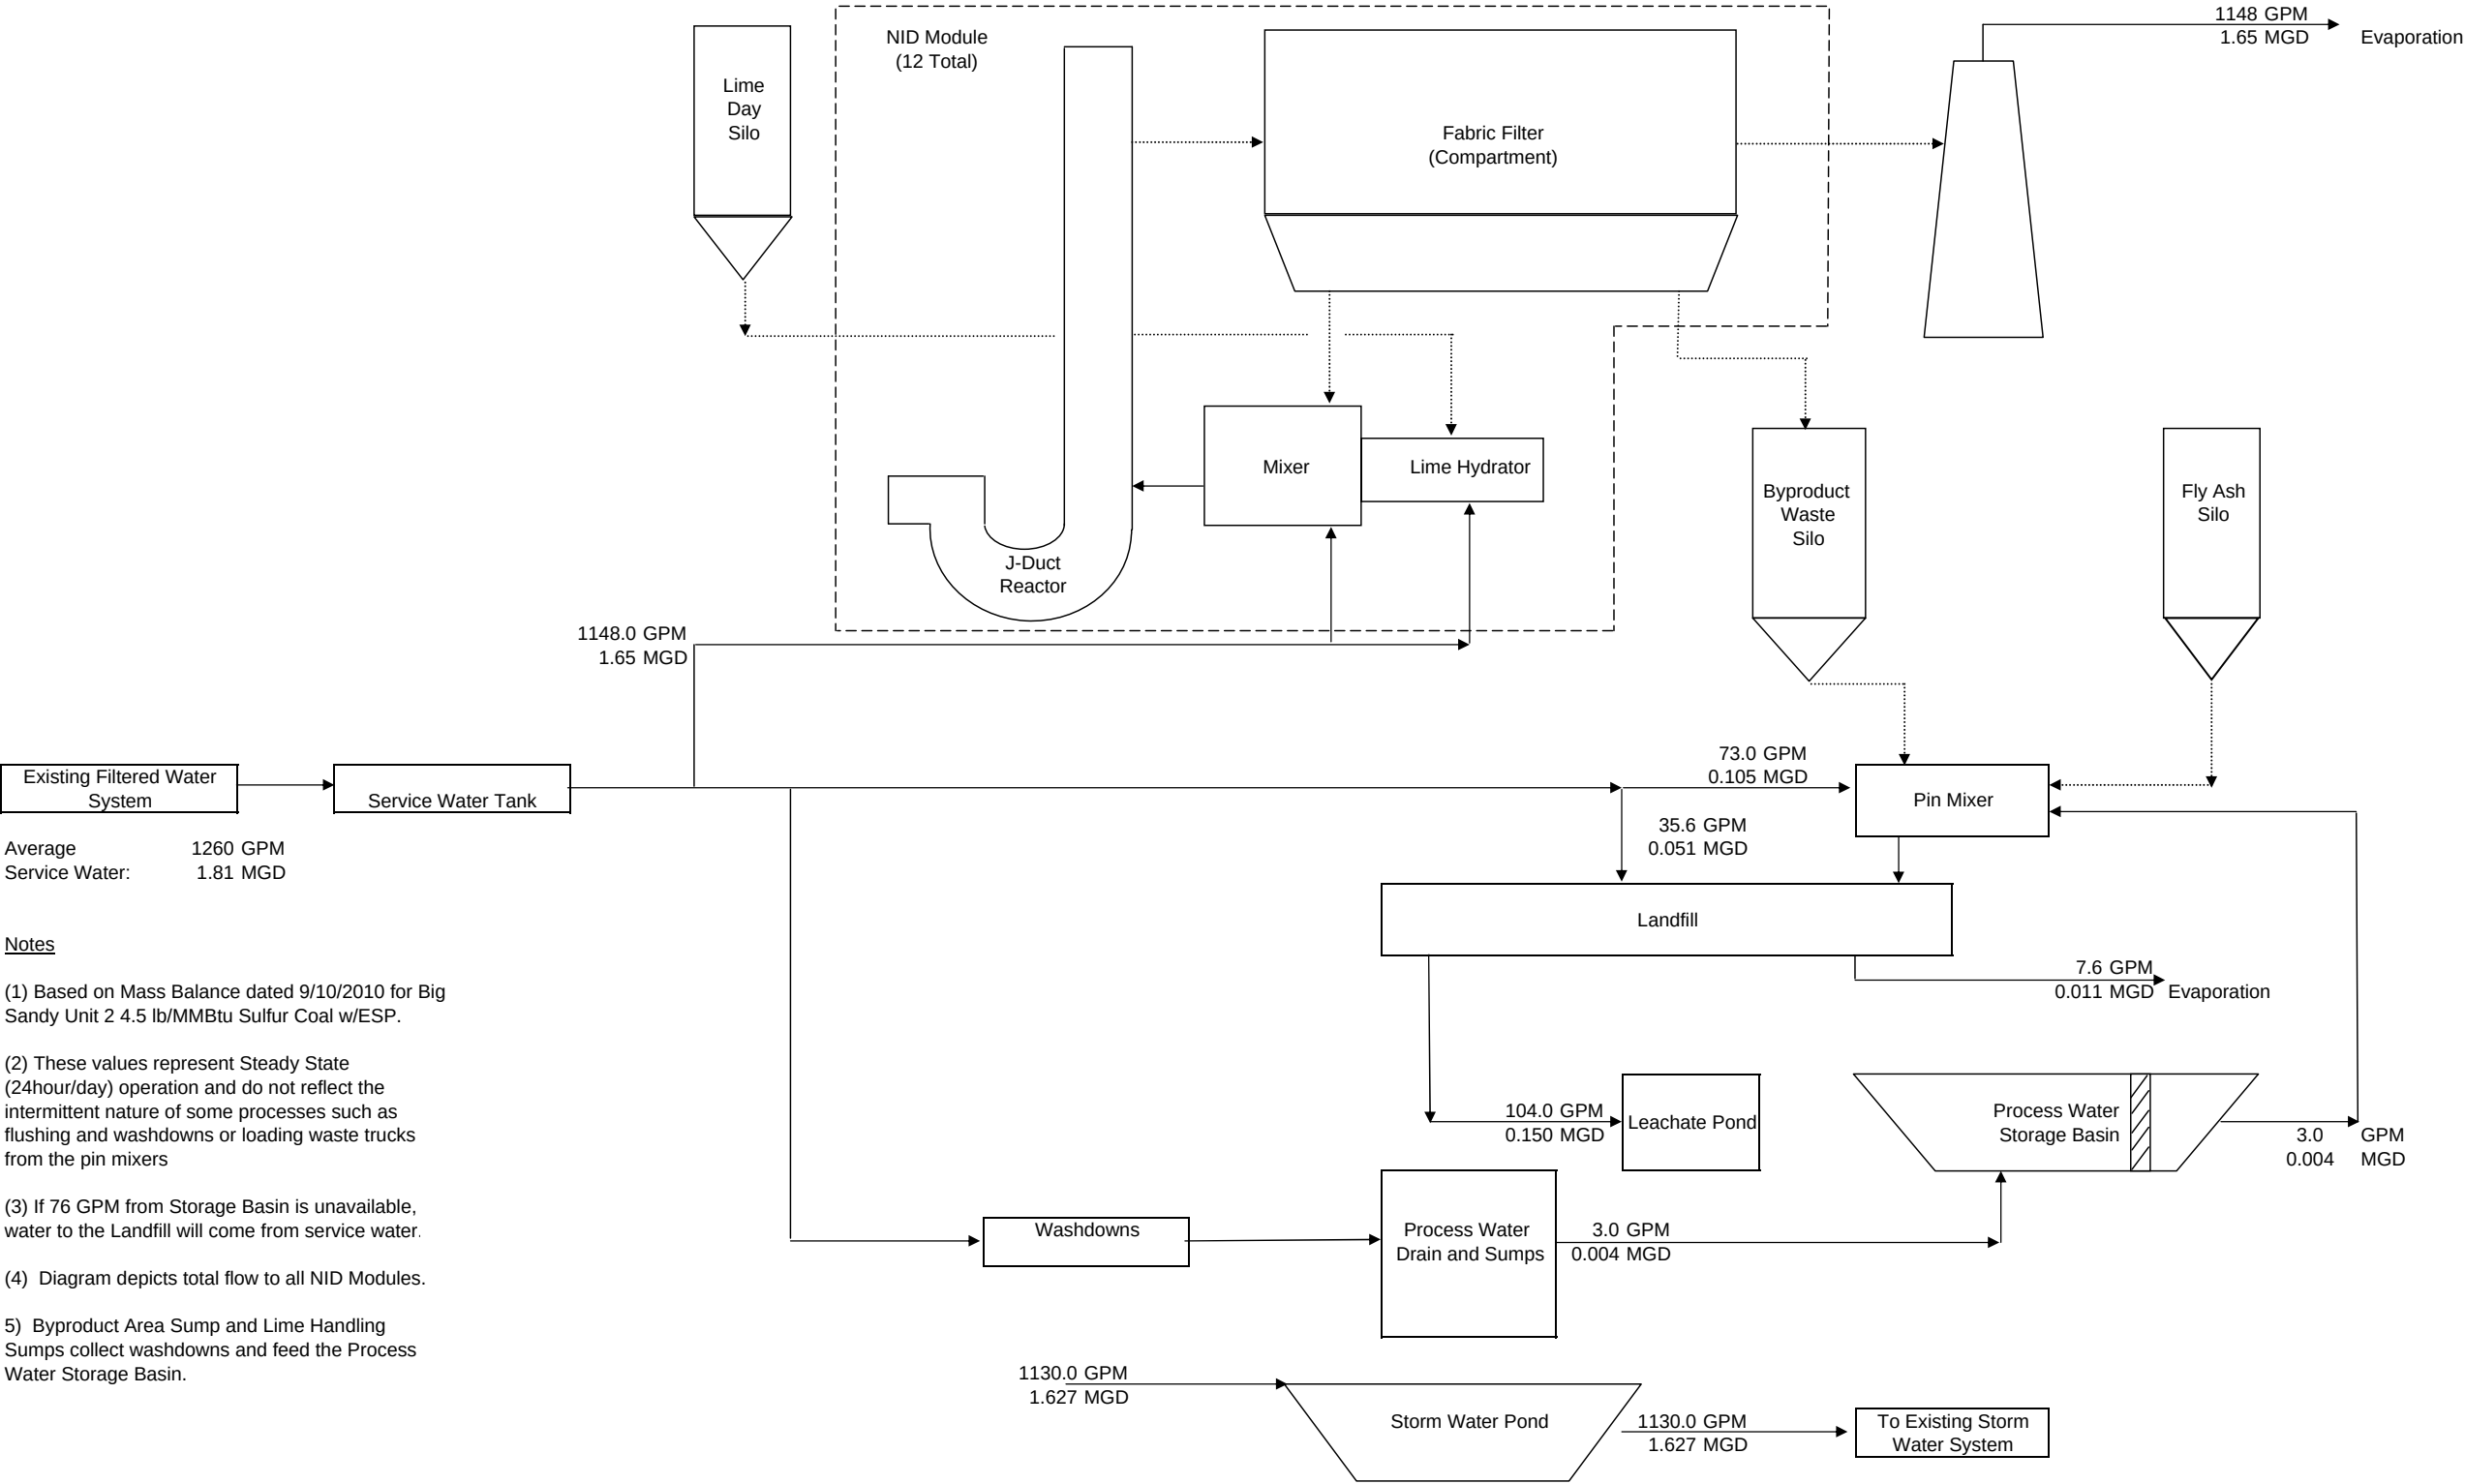

- Notes
- (1) Based on Mass Balance dated 9/10/2010 for Big Sandy Unit 2 4.5 lb/MMBtu Sulfur Coal w/ESP.
 - (2) These values represent Steady State (24hour/day) operation and do not reflect the intermittent nature of some processes such as flushing and washdowns or loading waste trucks from the pin mixers
 - (3) If 76 GPM from Storage Basin is unavailable, water to the Landfill will come from service water.
 - (4) Diagram depicts total flow to all NID Modules.
 - (5) Byproduct Area Sump and Lime Handling Sumps collect washdowns and feed the Process Water Storage Basin.

Big Sandy NID Water Balance
7.5 lb/MMBtu Sulfur Coal w/ESP

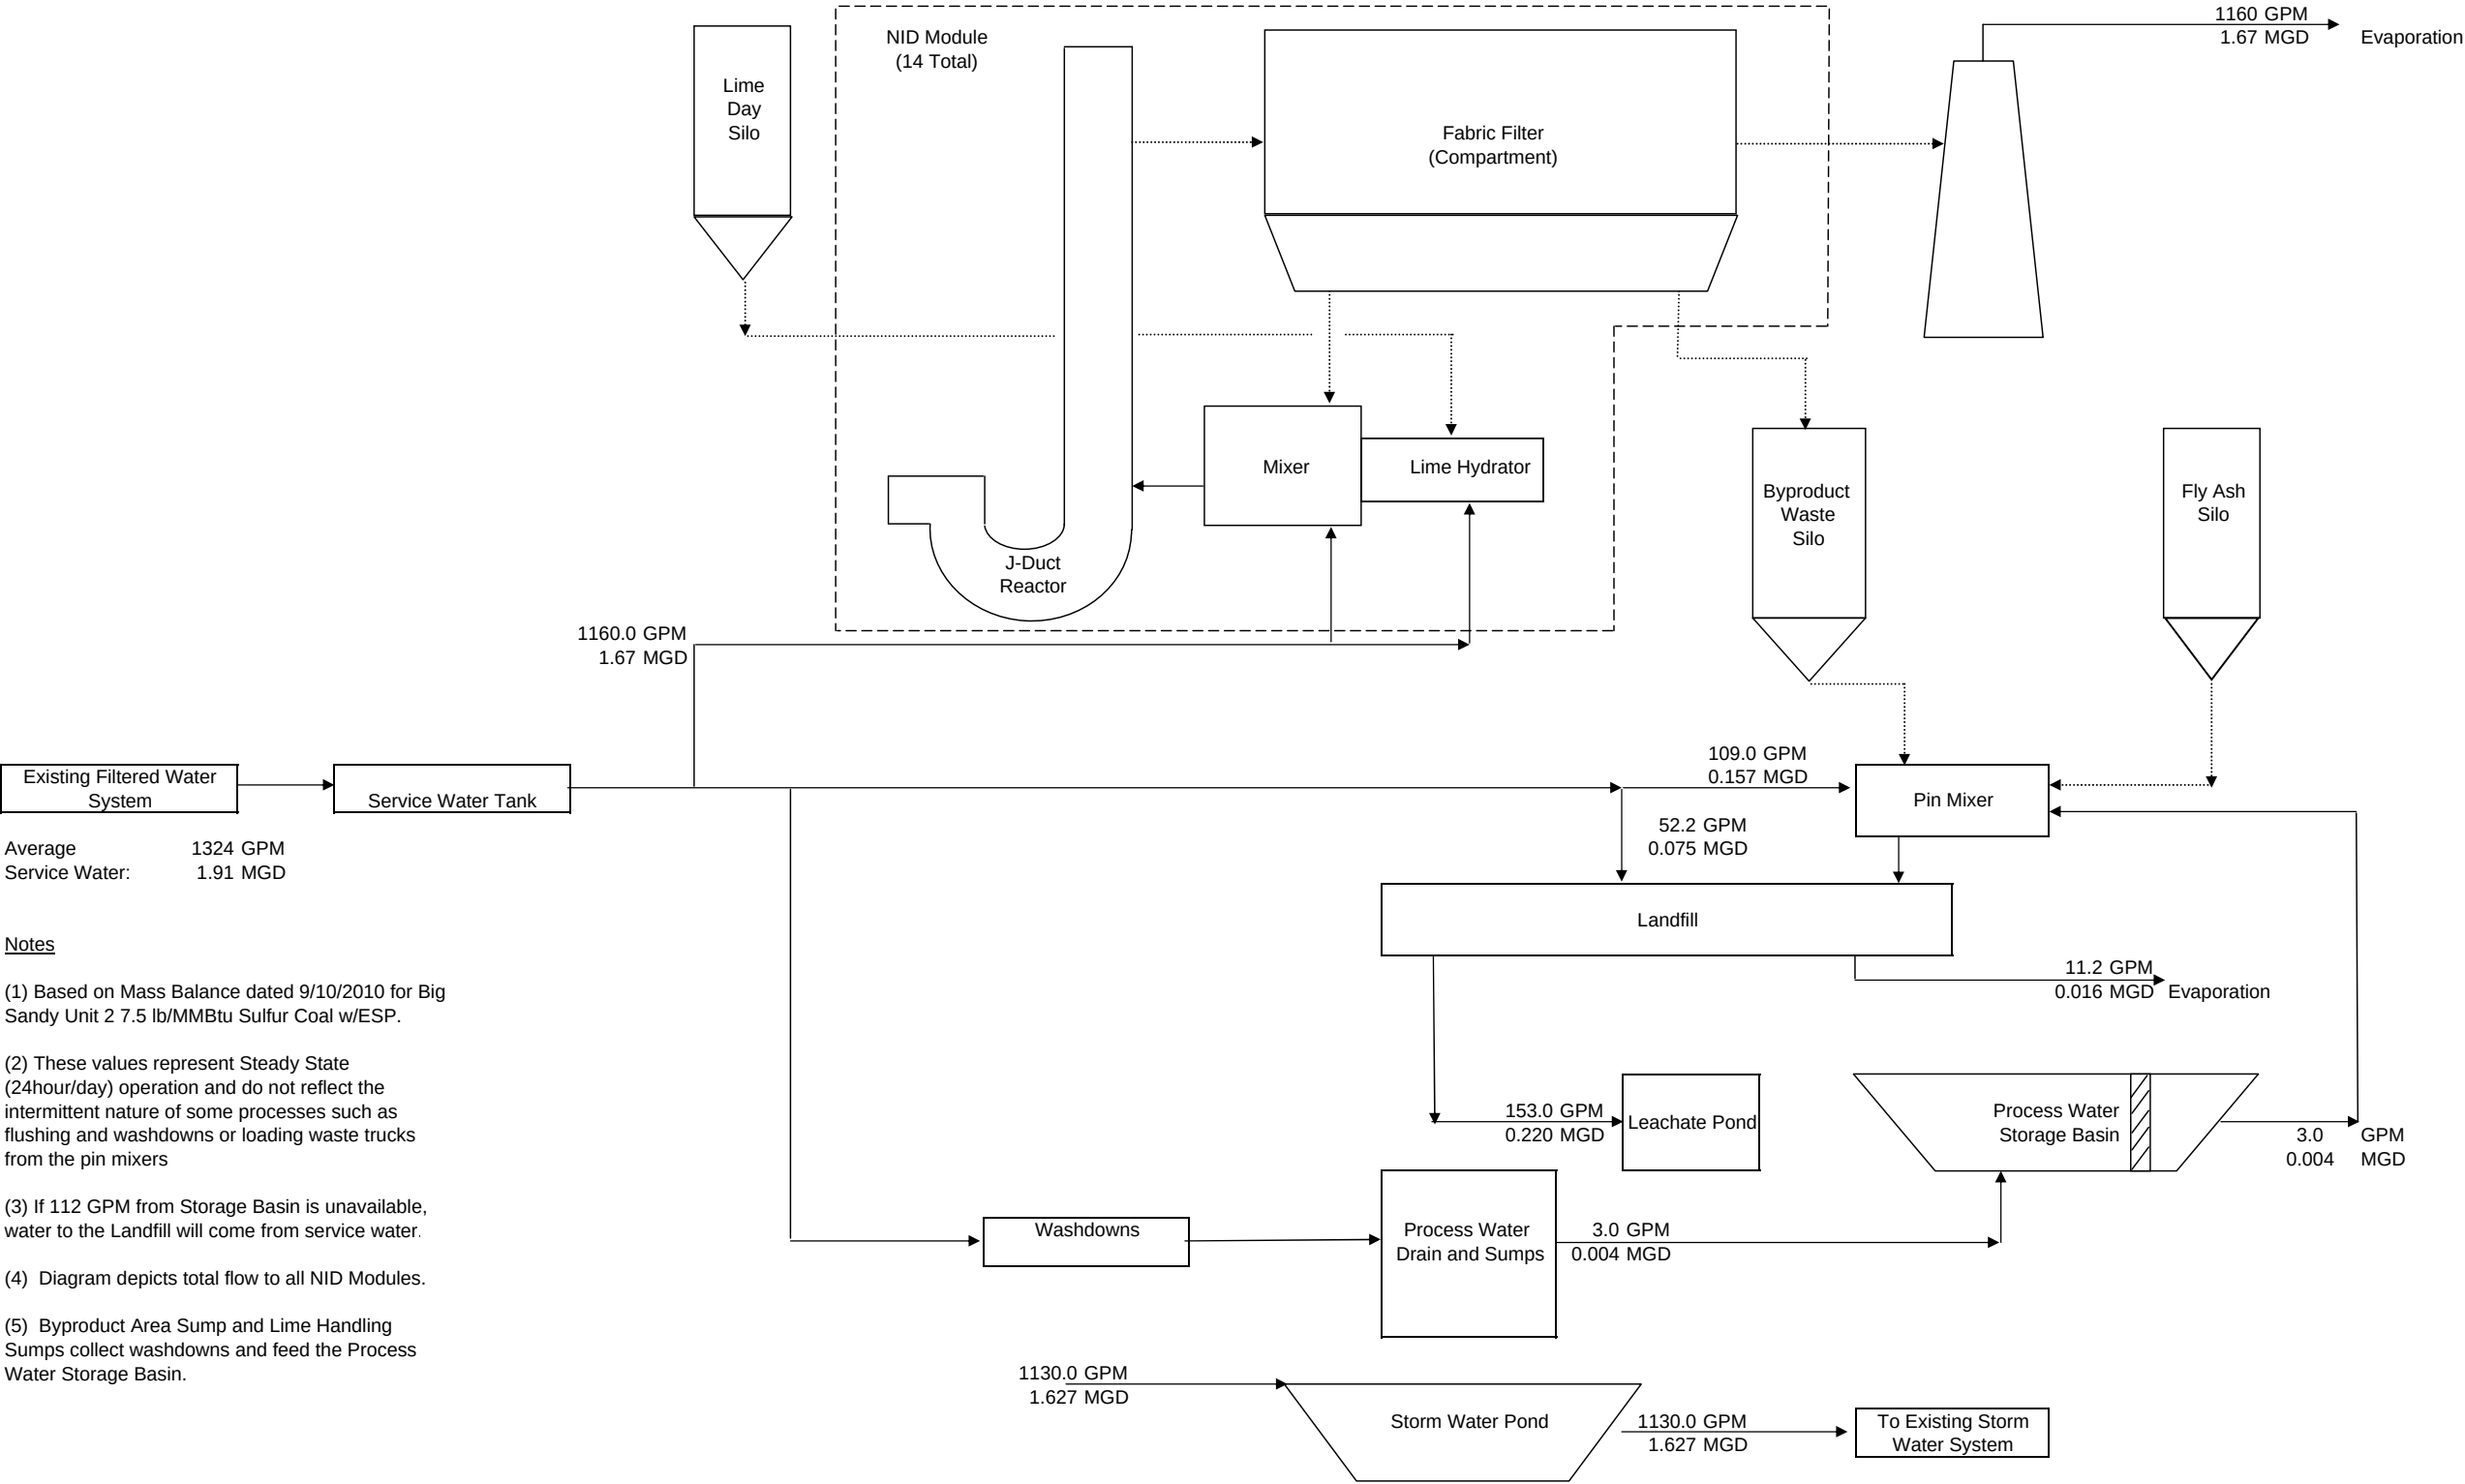

Notes

- (1) Based on Mass Balance dated 9/10/2010 for Big Sandy Unit 2 7.5 lb/MMBtu Sulfur Coal w/ESP.
- (2) These values represent Steady State (24hour/day) operation and do not reflect the intermittent nature of some processes such as flushing and washdowns or loading waste trucks from the pin mixers
- (3) If 112 GPM from Storage Basin is unavailable, water to the Landfill will come from service water.
- (4) Diagram depicts total flow to all NID Modules.
- (5) Byproduct Area Sump and Lime Handling Sumps collect washdowns and feed the Process Water Storage Basin.



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-5 NID Electrical One-Lines


BASIC DESCRIPTION OF ONE LINES - NID

A. NID FGD SYSTEM (ESP OUT)

1. The preliminary ID fan size on which the one line has been developed is 19,500 HP.
2. The 138 kV voltage used in the study is 1.009 PU based on information received from the system planning group.
3. The 138 kV line to the existing SCR transformers will be tapped to feed new 138 kV – 13.8 kV FGD transformers.
4. The existing SCR switchgear which is fed from existing 138 kV – 13.8 kV transformers will be modified to include a tie breaker and will feed the 4.16 kV and 480 volt FGD loads.

B. NID FGD SYSTEM (ESP IN)

1. The preliminary ID fan size on which the one line has been developed is 14,000 HP.
2. The existing ID Booster Fans will be retained. Due to loading considerations, the existing ID booster fans will be fed from the new ID fan switchgear.
3. The 138 kV voltage used in the study is 1.009 PU based on information received from the system planning group.
4. The 138 kV line to the SCR transformers will be tapped to feed new 138 kV – 13.8 kV FGD transformers.
5. The existing SCR switchgear which is fed from existing 138 kV – 13.8 kV transformers will be modified to include a tie breaker and will feed the 4.16 kV and 480 volt FGD loads.

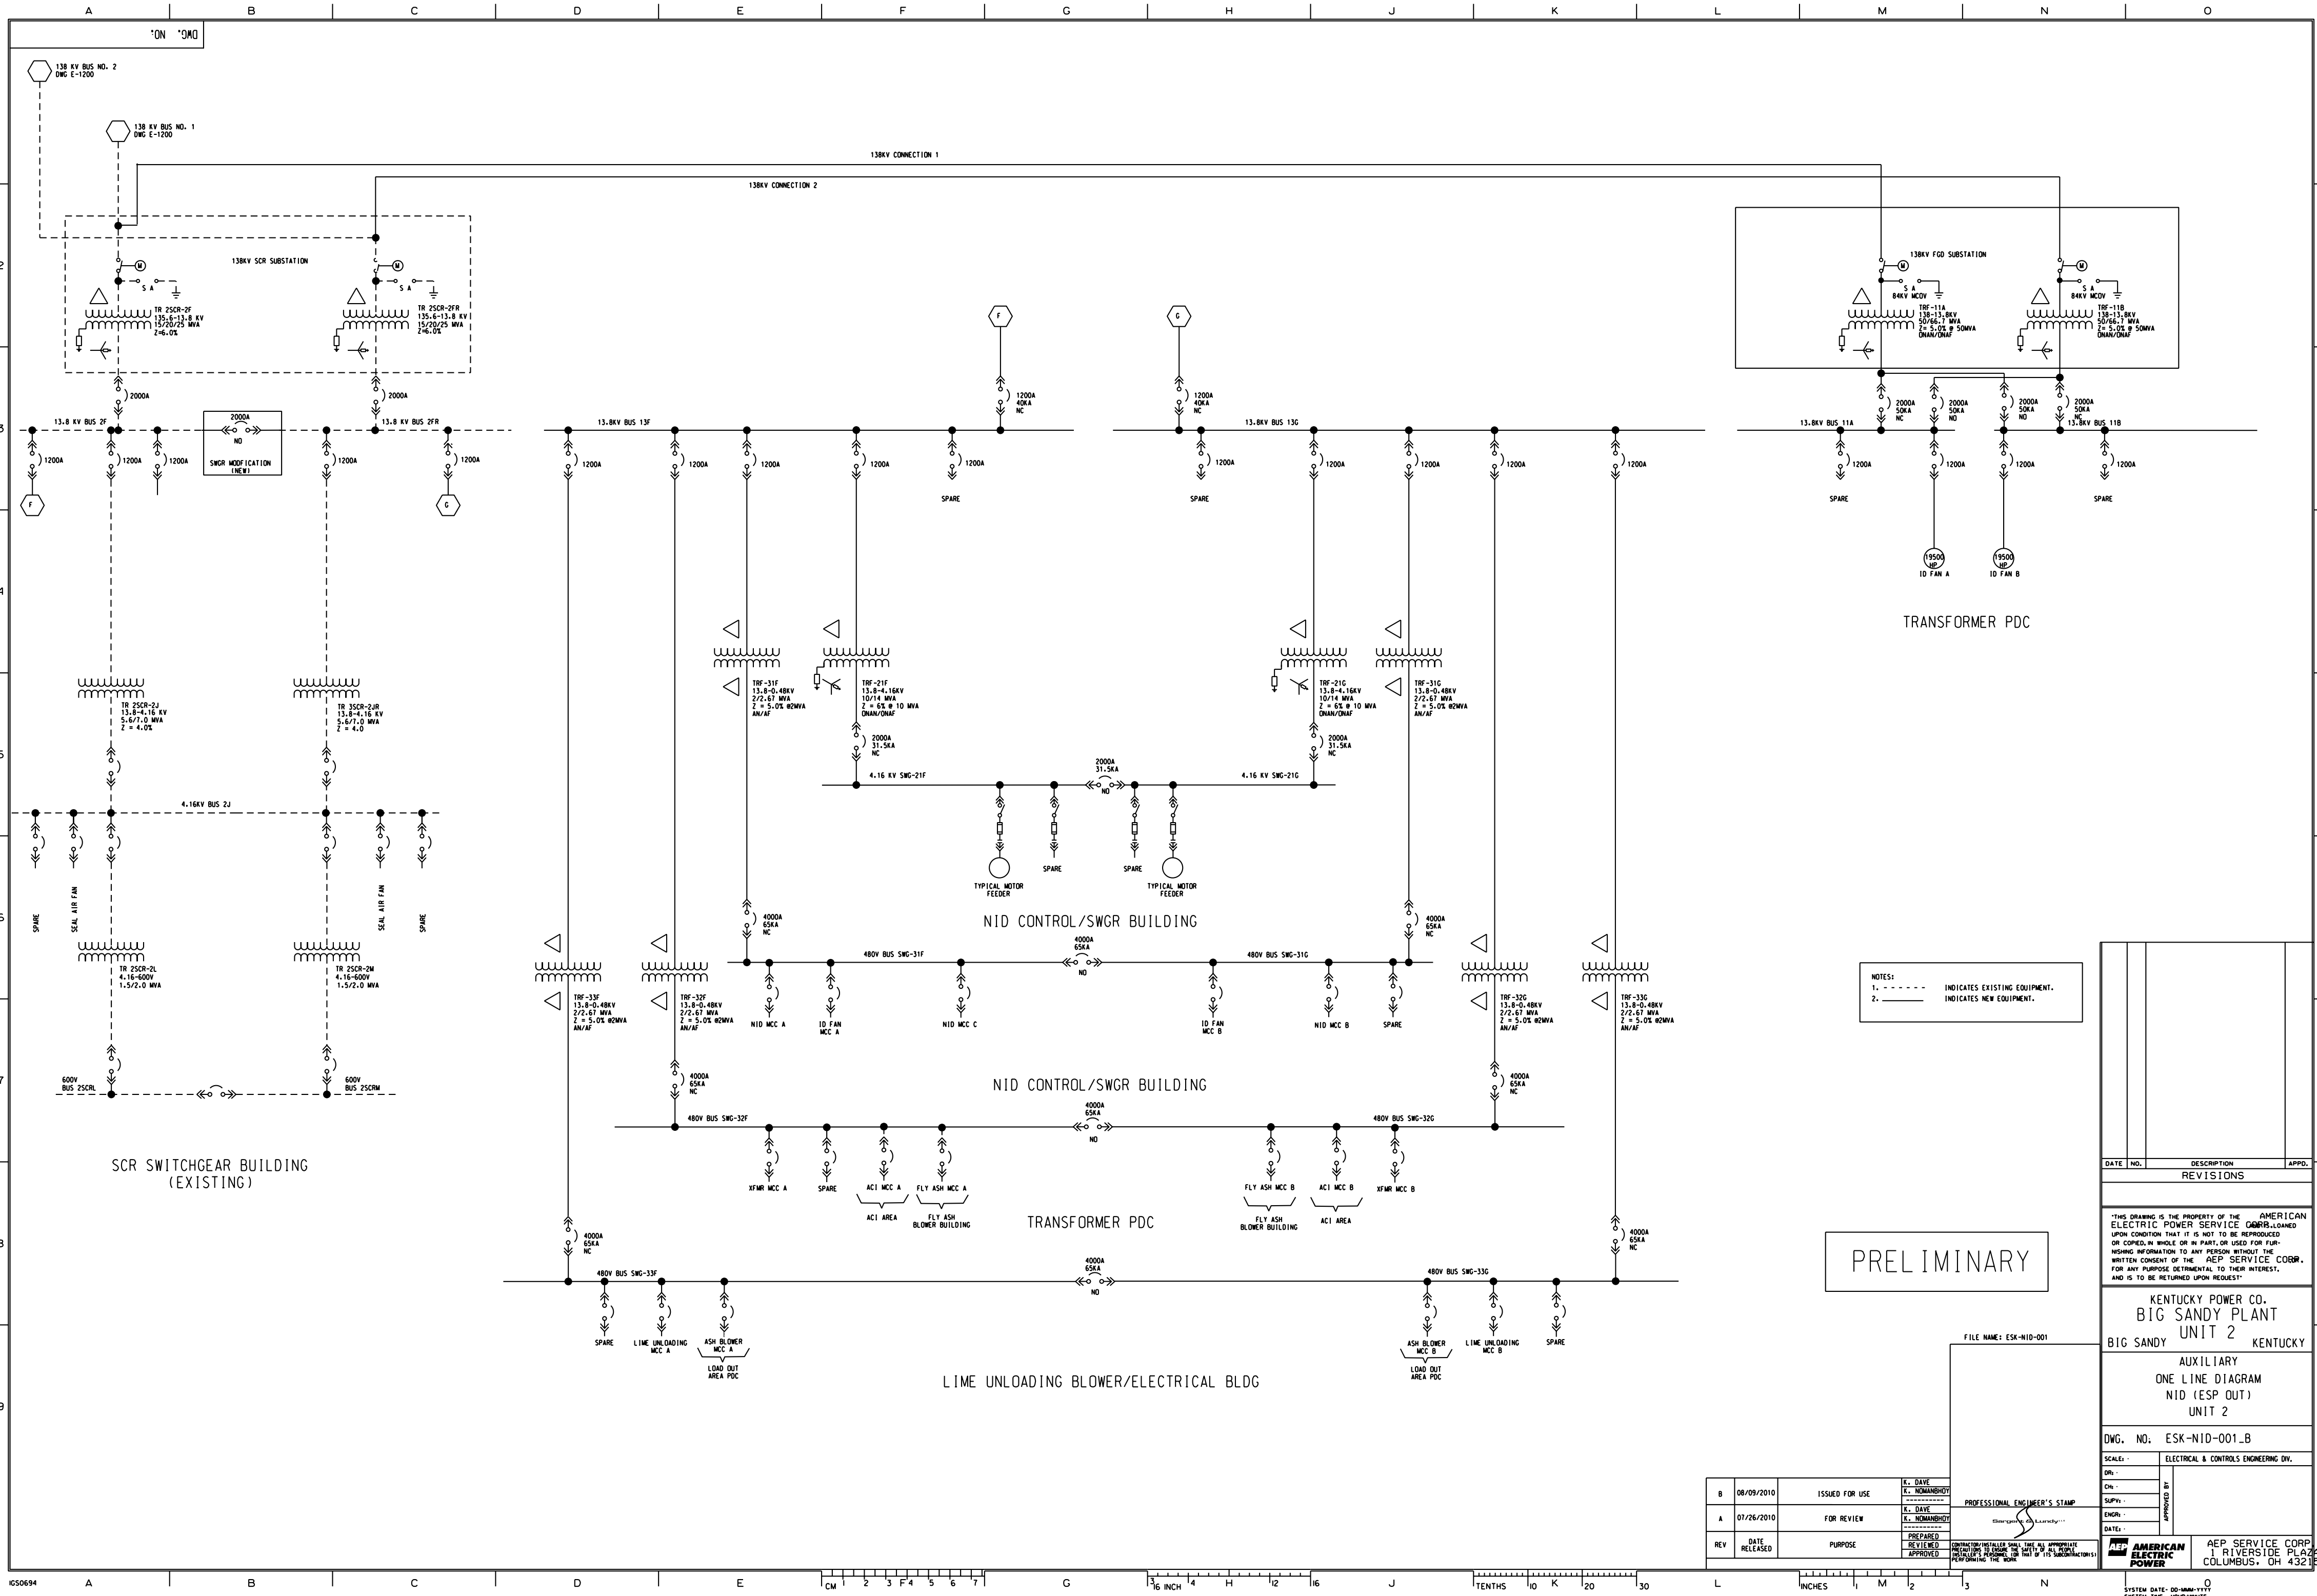

NOTES:
1. - - - - - INDICATES EXISTING EQUIPMENT.
2. _____ INDICATES NEW EQUIPMENT.

PRELIMINARY

DATE

NO.

DESCRIPTION

APPR.

REVISIONS

THIS DRAWING IS THE PROPERTY OF THE AMERICAN ELECTRIC POWER SERVICE COMPANY. IT IS LOANED TO YOU ON THE CONDITION THAT IT IS NOT TO BE REPRODUCED OR COPIED, IN WHOLE OR IN PART, OR USED FOR FURNISHING INFORMATION TO ANY PERSON WITHOUT THE WRITTEN CONSENT OF THE AEP SERVICE COMPANY. FOR ANY PURPOSE DETRIMENTAL TO THEIR INTEREST, AND IS TO BE RETURNED UPON REQUEST.

KENTUCKY POWER CO.
BIG SANDY PLANT
UNIT 2
BIG SANDY KENTUCKY

AUXILIARY
ONE LINE DIAGRAM
NID (ESP OUT)
UNIT 2

DWG. NO. ESK-NID-001.B

SCALE: ELECTRICAL & CONTROLS ENGINEERING DIV.

DR: _____

ENR: _____

DATE: _____

APPROVED BY

CONTRACTOR/INSTALLER SHALL USE ALL APPROPRIATE PRECAUTIONS TO ENSURE THE SAFETY OF ALL PEOPLE PERFORMING THE WORK.

PROFESSIONAL ENGINEER'S STAMP


FILE NAME: ESK-NID-001

SYSTEM DATE: 00-MMM-YYYY

SYSTEM TIME: HOUR:MINUTE

AMERICAN ELECTRIC POWER

AEP SERVICE CORP.
1 RIVERSIDE PLAZA
COLUMBUS, OH 43215

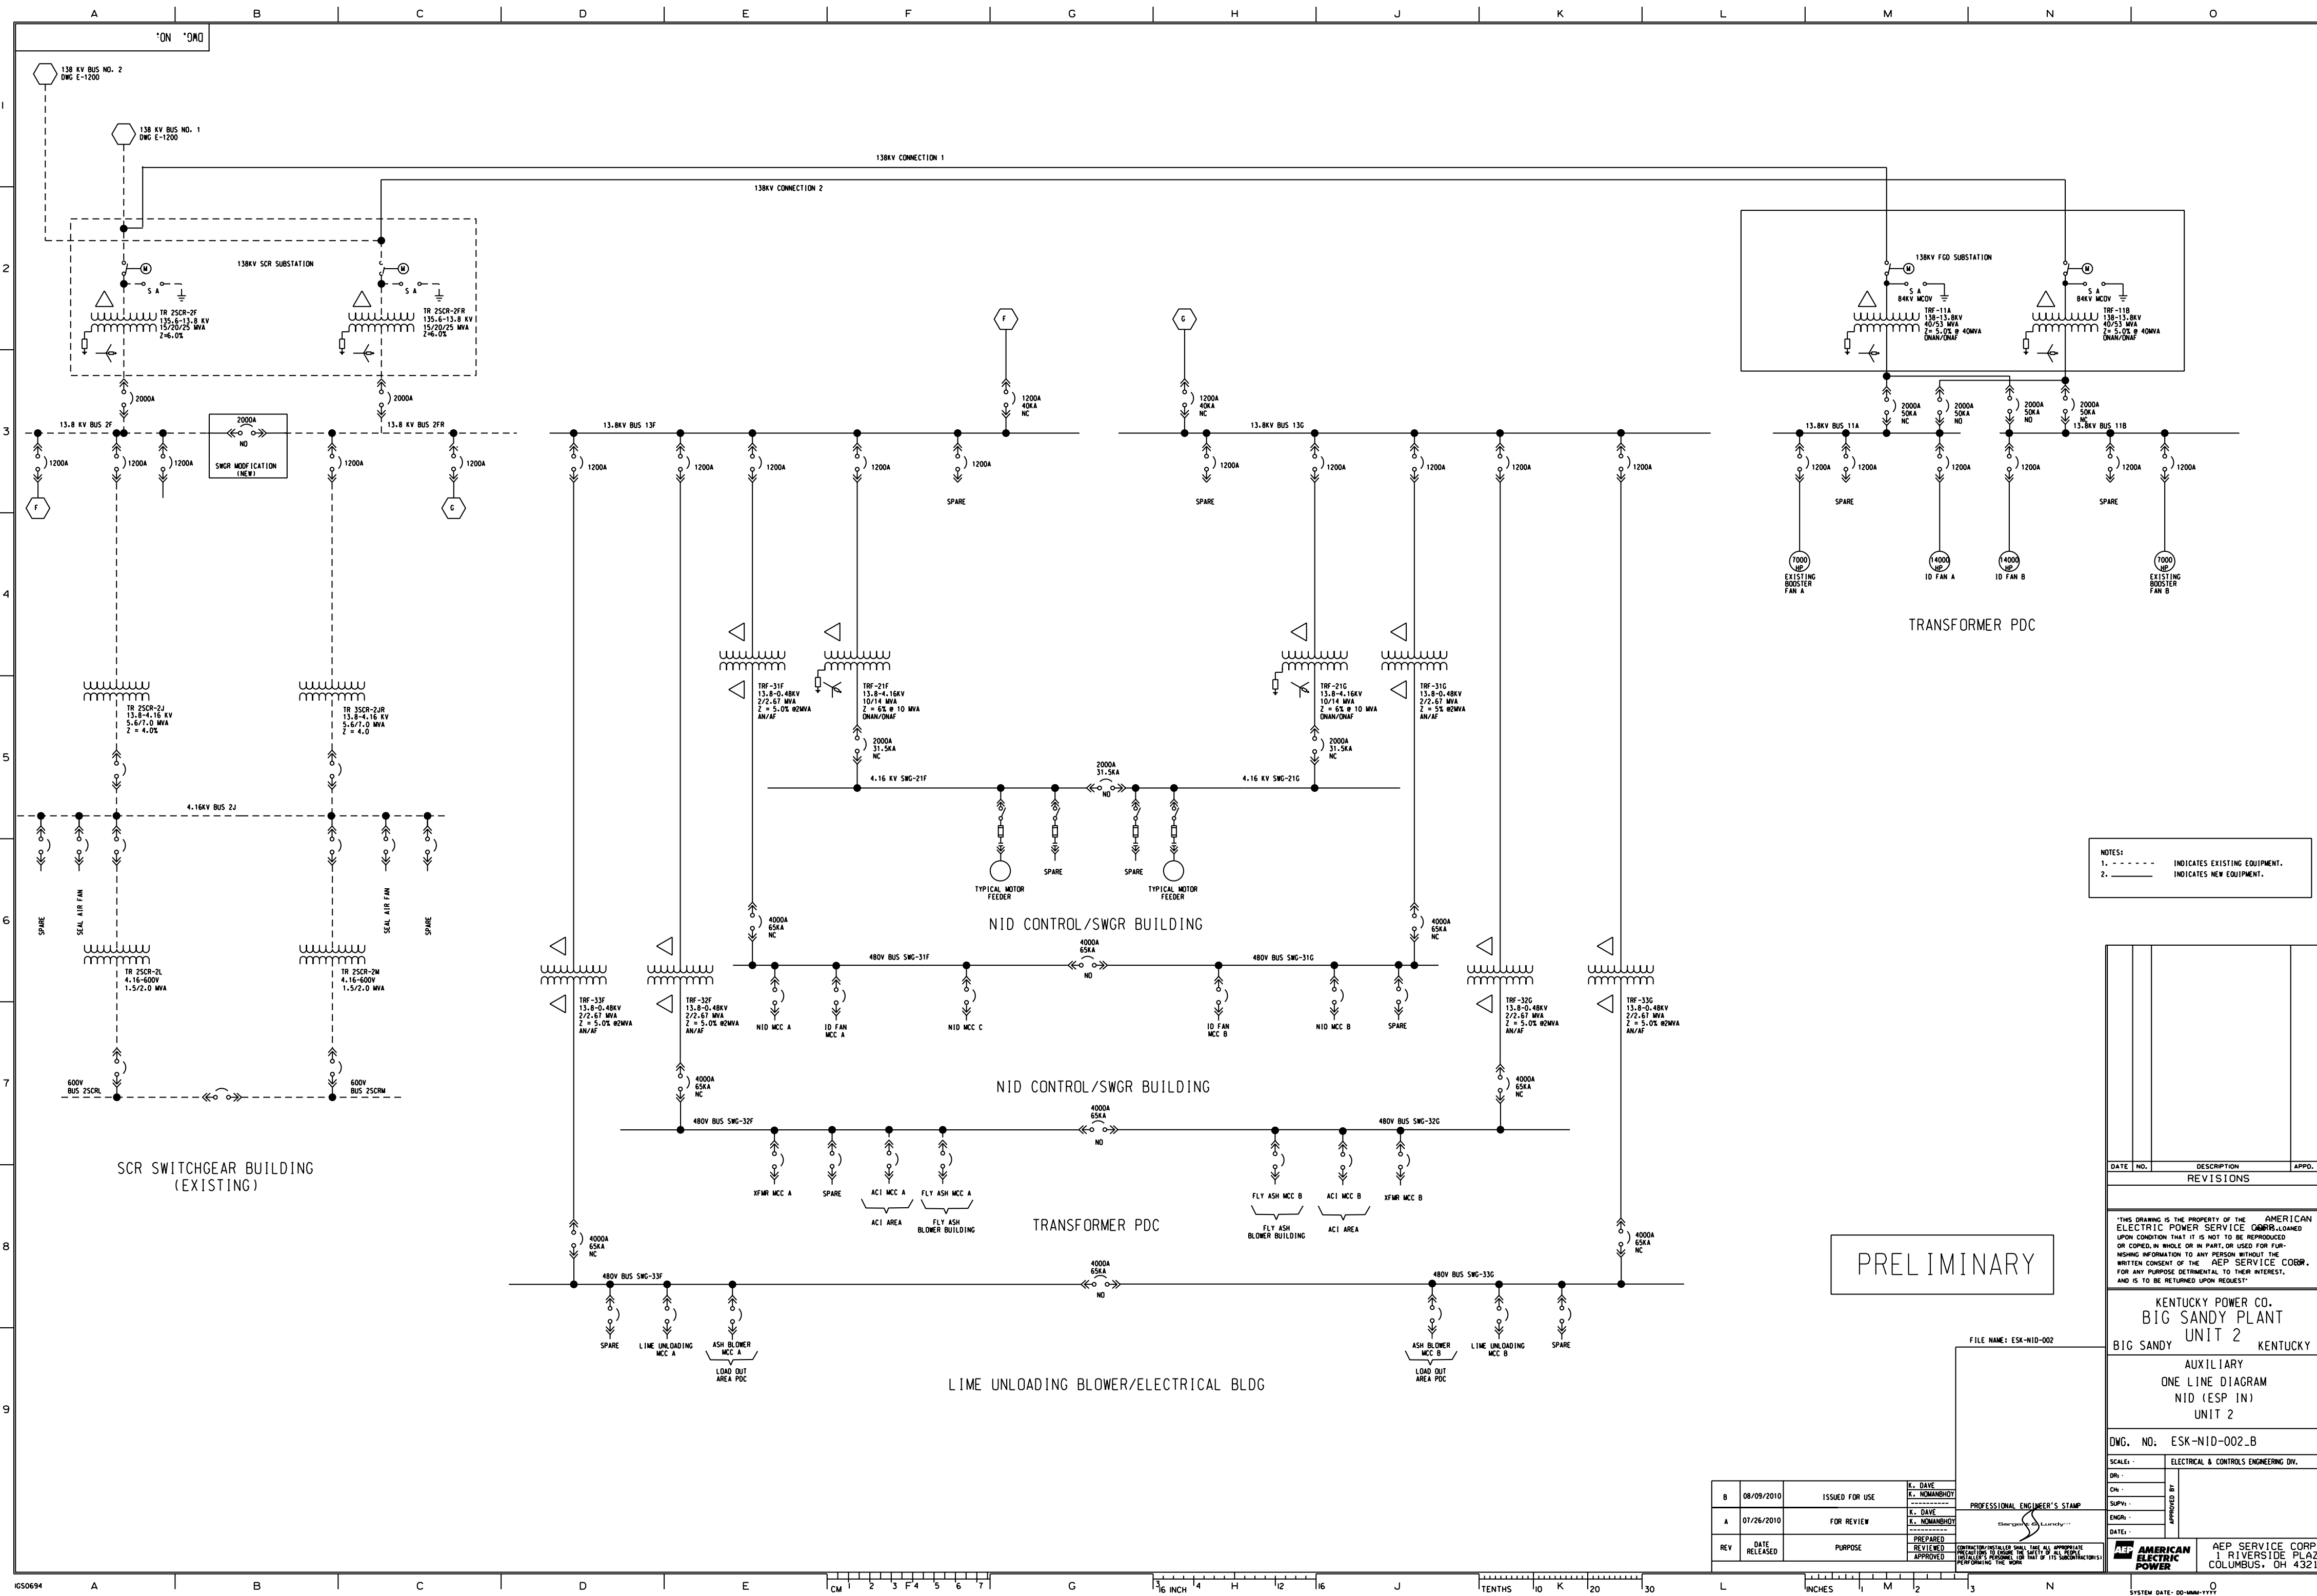

- NOTES:
1. - - - - - INDICATES EXISTING EQUIPMENT.
2. _____ INDICATES NEW EQUIPMENT.

PRELIMINARY

DATE	NO.	DESCRIPTION	APPD.
REVISIONS			
THIS DRAWING IS THE PROPERTY OF THE AMERICAN ELECTRIC POWER SERVICE CORP. LOANED UPON CONDITION THAT IT IS NOT TO BE REPRODUCED OR COPIED, IN WHOLE OR IN PART, OR USED FOR FURNISHING INFORMATION TO ANY PERSON WITHOUT THE WRITTEN CONSENT OF THE AEP SERVICE CORP. FOR ANY PURPOSE DETRIMENTAL TO THEIR INTEREST, AND IS TO BE RETURNED UPON REQUEST.			
KENTUCKY POWER CO. BIG SANDY PLANT UNIT 2 BIG SANDY KENTUCKY			
AUXILIARY ONE LINE DIAGRAM NID (ESP IN) UNIT 2			
DWG. NO: ESK-NID-002.B			
SCALE: -		ELECTRICAL & CONTROLS ENGINEERING DIV.	
DRN: -	CHK: -	APPROVED BY: [Signature] DATE: -	
SUPV: -	ENGR: -		
DESIGN: -	DATE: -		
CONTRACTOR/INSTALLER SHALL TAKE ALL APPROPRIATE PRECAUTIONS TO PROTECT ALL EXISTING UTILITIES PRIOR TO ANY WORK.			
PROFESSIONAL ENGINEER'S STAMP		AEP SERVICE CORP. 1 RIVERSIDE PLAZA COLUMBUS, OH 43215	

B	08/09/2010	ISSUED FOR USE	E. DAVE
A	07/26/2010	FOR REVIEW	E. DAVE
REV	DATE RELEASED	PURPOSE	REVIEWED APPROVED



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-6
NID Detailed Capital Cost Estimate No. 30723 Base Est-1A ESP in Service
(3.0 lb SO₂/MMbtu)

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS														
1.1	ID FANS - OEM EQUIPMENT	1,795,000 ACFM WITH 14,600 HP MOTORS (\$625,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	EST	2	EA	3,144,000		6,288,000	0	7800.00	17,940	MECH	88.89	1,594,700	7,882,700
1.2	PIPING & SUPPORTS - MECHANICAL							21,800	28,700					120,500	171,000
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	250	LF		48.80	0	12,200	1.44	414	SPNG	94.41	39,100	51,300
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000
	PIPE SUPPORTS		EST	105	EA		35.00	0	3,700	1.50	181	MECH	88.89	16,100	19,800
1.3	DAMPERS							553,500	0					263,200	816,700
	INLET DAMPERS	2X50% DOUBLE LOUVER TYPE WITH SEAL AIR FANS TOTAL FOR TWO FANS	EST	580	SF	450		261,000	0	2.50	1,668	MECH	88.89	148,200	409,200
	OUTLET DAMPERS	2X50% GUILLOTINE DAMPERS, WITH SEAL AIR FANS TOTAL FOR TWO FANS	EST	450	SF	650		292,500	0	2.50	1,294	MECH	88.89	115,000	407,500
1.4	EXPANSION JOINTS		EST	570	LF		230.00	0	131,100	2.00	1,311	MECH	88.89	116,500	247,600
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	EST	800	TN		3,250.00	0	2,600,000	60.00	55,200	FLDU	107.96	5,959,400	8,559,400
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	400	TN		2,900.00	0	1,160,000	24.00	11,040	STST	105.71	1,167,000	2,327,000
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	EST	5,000	SF		40.00	0	200,000	0.55	3,163	DINS	81.75	258,500	458,500
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	EST	72,000	SF		12.00	0	864,000	0.25	20,700	DINS	81.75	1,692,200	2,556,200
1.9	DUCT SUPPORT STEEL - FOUNDATIONS							0	295,500					532,700	828,200
	EXCAVATION / BACKFILL		EST	1,900	CY			0	0	0.15	328	EXFD	90.00	29,500	29,500
	REINFORCING		EST	110	TN		1,150.00	0	126,500	20.00	2,530	REIN	78.27	198,000	324,500
	FORMWORK		EST	6,200	SF		2.50	0	15,500	0.14	998	FORM	99.43	99,300	114,800
	CONCRETE		EST	1,200	CY		105.00	0	126,000	1.50	2,070	CONP	79.64	164,900	290,900
	MUD MAT		EST	190	CY		105.00	0	20,000	1.50	328	CONP	79.64	26,100	46,100
	EMBEDDED STEEL		EST	3,000	LB		2.50	0	7,500	0.06	207	CARP	71.88	14,900	22,400
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT							0	106,000					185,600	291,600
	EXCAVATION / BACKFILL		EST	600	CY			0	0	0.15	104	EXFD	90.00	9,300	9,300
	REINFORCING		EST	40	TN		1,150.00	0	46,000	20.00	920	REIN	78.27	72,000	118,000
	FORMWORK		EST	1,500	SF		2.50	0	3,800	0.14	242	FORM	99.43	24,000	27,800
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000
	MUD MAT		EST	40	CY		105.00	0	4,200	1.50	69	CONP	79.64	5,500	9,700
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS							0	273,800					433,700	707,500
	EXCAVATION / BACKFILL		EST	1,160	CY			0	0	0.15	200	EXFD	90.00	18,000	18,000
	REINFORCING		EST	111	TN		1,150.00	0	127,700	20.00	2,553	REIN	78.27	199,800	327,500
	FORMWORK		EST	1,624	SF		2.50	0	4,100	0.14	261	FORM	99.43	26,000	30,100
	CONCRETE		EST	1,178	CY		105.00	0	123,700	1.50	2,032	CONP	79.64	161,800	285,500
	MUD MAT		EST	114	CY		105.00	0	12,000	1.50	197	CONP	79.64	15,700	27,700
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	EST	7,875	SF		500.00	0	3,937,500	0.00	0	STST	105.71	0	3,937,500
1.13	TRANSFORMERS							770,000	0					145,600	915,600
	SST TRANSFORMERS: 21F & 21G	13.8KV-4160V, 3 PHASE, 2 WINDING	EST	2	EA	300000		600,000	0	500.00	1,150	EHEA	79.16	91,000	691,000
	SUS TRANSFORMERS: 31F, 31G	13.8KV-4160V, 3 PHASE, CAST COIL	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600
1.14	SWITCHGEAR							1,082,000	0		0			569,000	1,651,000
	13KV MEDIUM VOLTAGE	PRICE PER SECTION	EST	10	EA	50000		500,000	0	230.00	2,645	EHEA	79.16	209,400	709,400
	4.16 KV MEDIUM VOLTAGE (21F/G)	PRICE PER SECTION	EST	10	EA	39200		392,000	0	280.00	3,220	EHEA	79.16	254,900	646,900
	480V LOW VOLTAGE (31F/G)	PRICE PER SECTION	EST	5	EA	38000		190,000	0	230.00	1,323	EHEA	79.16	104,700	294,700
1.15	CABLE BUS & TERMINATIONS							756,300	35,800		0			1,316,200	2,108,300
	15KV CABLE BUS TO 13F/G)	CABLE BUS	EST	1,300	FT	466		605,800	0	6.75	10,091	WIRE	98.84	997,400	1,603,200
	5KV CABLE BUS	CABLE BUS	EST	150	FT	385		57,800	0	4.70	811	WIRE	98.84	80,100	137,900
	480V CABLE BUS	CABLE BUS	EST	150	FT	618		92,700	0	10.30	1,777	WIRE	98.84	175,600	268,300
	CABLE BUS TERMINATION	500MCM- 15KV TERMINATIONS	EST	4	EA		1,800.00	0	7,200	33.00	152	WIRE	98.84	15,000	22,200
	CABLE BUS TERMINATION	1000MCM- 5KV TERMINATIONS	EST	4	EA		4,440.00	0	17,800	51.60	237	WIRE	98.84	23,500	41,300
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
1.16	MCC							120,000	0					7,200	127,200
	480V MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600
	DC MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600
1.17	MIMIC PANELS		EST	1	EA	17500		17,500	0	40.00	46	WIRE	98.84	4,500	22,000
1.18	EMERGENCY POWER SYSTEM							285,500	0					38,900	324,400
	DC PANEL BOARD		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100
	UPS		EST	1	EA	60000		60,000	0	32.00	37	WIRE	98.84	3,600	63,600
	SWITCHBOARD		EST	1	EA	40000		40,000	0	40.00	46	WIRE	98.84	4,500	44,500
	BYPASS TRANSFORMERS		EST	1	EA	25000		25,000	0	40.00	46	WIRE	98.84	4,500	29,500
	BATTERY CHARGER		EST	2	EA	32000		64,000	0	16.00	37	WIRE	98.84	3,600	67,600
	BATTERIES		EST	1	LT	50000		50,000	0	80.00	92	WIRE	98.84	9,100	59,100
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	EST	3,600	LF		51.75	0	186,300	0.69	2,865	WIRE	98.84	283,200	469,500

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
1.20	MEDIUM VOLTAGE POWER CABLE & TERMINATION							0	91,600		0			393,700	485,300
	1/C # 350KCMIL-5KV		EST	14,600	LF		6.13	0	89,500	0.23	3,862	WIRE	98.84	381,700	471,200
	1/C # 2/0-5KV		EST	900	LF		2.35	0	2,100	0.12	121	WIRE	98.84	12,000	14,100
1.21	LOW VOLTAGE POWER CABLE & TERMINATION							0	543,000		0			794,800	1,337,800
	3/C # 500KCMIL - 600V		EST	2,600	LF		26.12	0	67,900	0.69	2,063	WIRE	98.84	203,900	271,800
	#4/0 - #12 AWG-600V		EST	65,800	LF		7.22	0	475,100	0.08	5,978	WIRE	98.84	590,900	1,066,000
1.22	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	107,800	LF		3.20	0	345,000	0.23	28,513	WIRE	98.84	2,818,200	3,163,200
1.23	GROUNDING							11,100	0					37,200	48,300
	GROUND ROD	3/4" - 20' LONG EACH	EST	18	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,000	FT	7.65		7,700	0	0.12	138	WIRE	98.84	13,600	21,300
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
1.24	LIGHTING/ TRANSFORMERS & PANELS							26,000	30,000					29,500	85,500
	LIGHT FIXTURES		EST	40	EA		750	0	30,000	4.00	184	WIRE	98.84	18,200	48,200
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
1.25	RACEWAY, CABLE TRAY, & CONDUIT							0	1,569,000		0			7,502,000	9,071,000
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	5,120	LF		18.25	0	93,400	1.10	6,477	WIRE	98.84	640,200	733,600
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	3,000	LF		21.50	0	64,500	1.45	5,003	WIRE	98.84	494,400	558,900
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	9,200	LF		27.10	0	249,300	1.75	18,515	WIRE	98.84	1,830,000	2,079,300
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	2,400	LF		30.30	0	72,700	1.95	5,382	WIRE	98.84	532,000	604,700
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,000	LF		61.00	0	244,000	1.13	5,184	WIRE	98.84	512,400	756,400
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,600	LF		31.00	0	266,600	0.81	7,981	WIRE	98.84	788,900	1,055,500
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,000	LF		21.50	0	172,000	0.65	5,934	WIRE	98.84	586,500	758,500
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	12,000	LF		9.25	0	111,000	0.35	4,858	WIRE	98.84	480,100	591,100
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	15,000	LF		7.15	0	107,300	0.28	4,899	WIRE	98.84	484,200	591,500
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	27,000	LF		4.44	0	119,900	0.24	7,421	WIRE	98.84	733,500	853,400
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	46,750	LF		1.46	0	68,300	0.08	4,247	WIRE	98.84	419,800	488,100
1.26	DUCT BANK							0	40,800					280,000	320,800
	DUCT BANK WITH 3-5" & 3-3" CONDUITS		EST	300	LF		142.42	0	14,200	3.17	1,094	ECND	75.97	83,100	97,300
	DUCT BANK WITH 6-5" & 6-3" CONDUITS		EST	375	LF		265.88	0	26,600	6.01	2,592	ECND	75.97	196,900	223,500
1.27	FOUNDATION FOR TRANSFORMERS							0	64,600		0			168,200	232,800

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	EXCAVATION / BACKFILL		EST	950	CY			0	0	0.15	164	EXFD	90.00	14,700	14,700
	REINFORCING		EST	18	TN		1,150.00	0	20,700	20.00	414	REIN	78.27	32,400	53,100
	FORMWORK		EST	4,500	SF		2.50	0	11,300	0.14	725	FORM	99.43	72,000	83,300
	CONCRETE		EST	178	CY		105.00	0	18,700	1.50	307	CONP	79.64	24,500	43,200
	MUD MAT		EST	42	CY		105.00	0	4,400	1.50	72	CONP	79.64	5,800	10,200
	EMBEDDED STEEL		EST	3,800	LB		2.50	0	9,500	0.06	262	CARP	71.88	18,800	28,300
1.28	FIREWALL FOR TRANSFORMERS							0	3,200					8,300	11,500
	REINFORCING		EST	1.2	TN		1,150.00	0	1,400	20.00	28	REIN	78.27	2,200	3,600
	FORMWORK		EST	80	SF		2.50	0	200	0.14	13	FORM	99.43	1,300	1,500
	CONCRETE		EST	15	CY		105.00	0	1,600	3.50	60	CONP	79.64	4,800	6,400
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							9,931,700	12,505,900		276,347			26,720,500	49,158,100
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						24,030		83.48	2,006,000	2,006,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						30,038			946,245	946,245
	PER DIEM	NONE		0.00	HR						330,415			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				62,530					133,603	196,132
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				625,295						625,295
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			496,585							496,585
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				625,295					1,336,025	1,961,320
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT			15	%				1,875,885					4,008,075	5,883,960
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							496,600	3,189,000					8,429,900	12,115,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ID FANS						10,428,300	15,694,900					35,150,400	61,273,600
2.0	NID MODULES														
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS/COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	EST	1	LT	49,311,000		49,311,000	0	410000.00	471,500	MECH	88.89	41,911,600	91,222,600
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	EST	80,640	SF	30		2,419,200	0	0.00	0	DINS	81.75	0	2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF						58,100	1,316,900					1,747,600	3,122,600
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	200	TN		2,900.00	0	580,000	24.00	5,520	STST	105.71	583,500	1,163,500
	SIDING FOR PENTHOUSE		EST	8,960	SF		12.00	0	107,500	0.11	1,133	SDNG	93.41	105,900	213,400
	CONCRETE FLOOR FOR PENTHOUSE		EST	632	CY		230.00	0	145,400	7.50	5,451	SDNG	93.41	509,200	654,600
	ROOFING FOR PENTHOUSE		EST	25,600	SF		18.00	0	460,800	0.22	6,477	ROOF	69.12	447,700	908,500
	H&V		EST	1	LT	58100	23240	58,100	23,200	1084.00	1,247	HVAC	81.24	101,300	182,600

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH						92,200	2,428,900					2,544,900	5,066,000
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	560	TN		2,900.00	0	1,624,000	24.00	15,456	STST	105.71	1,633,900	3,257,900
	SIDING FOR BOTTOM ENCLOSURE		EST	25,600	SF		12.00	0	307,200	0.11	3,238	SDNG	93.41	302,500	609,700
	ROOFING FOR BOTTOM ENCLOSURE		EST	25,600	SF		18.00	0	460,800	0.22	6,477	ROOF	69.12	447,700	908,500
	H&V		EST	1	LT	92200	36880	92,200	36,900	1721.33	1,980	HVAC	81.24	160,800	289,900
2.5	PIPING & SUPPORTS - MECHANICAL							125,200	174,500					385,900	685,600
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED	EST	300	LF		23.0	0	6,900	1.48	511	SPNG	94.41	48,200	55,100
	LARGE BORE PIPING	6" SS, SCH 40 WELDED	EST	400	LF		111.00	0	44,400	2.02	929	SPNG	94.41	87,700	132,100
	LARGE BORE PIPING	18" CS, STD WELDED	EST	400	LF		234.10	0	93,600	2.34	1,076	SPNG	94.41	101,600	195,200
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	150	LF		22.20	0	3,300	1.26	217	SPNG	94.41	20,500	23,800
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	100	LF		48.80	0	4,900	1.44	166	SPNG	94.41	15,600	20,500
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	300	LF		33.70	0	10,100	1.32	455	SPNG	94.41	43,000	53,100
	VALVE	18" GATE, 150 #, CS, WELDED	EST	4	EA	17,500		70,000	0	28.30	130	SPNG	94.41	12,300	82,300
	VALVE	6" GATE, 150 #, SS, WELDED	EST	6	EA	4,700		28,200	0	12.96	89	SPNG	94.41	8,400	36,600
	VALVE	4" GATE, 150 #, CS, WELDED	EST	5	EA	2,500		12,500	0	7.70	44	SPNG	94.41	4,200	16,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	10	EA	1,450		14,500	0	5.64	65	SPNG	94.41	6,100	20,600
	PIPE SUPPORTS		EST	150	EA		75.00	0	11,300	2.50	431	MECH	88.89	38,300	49,600
2.6	DUCTWORK							0	6,175,000					14,153,600	20,328,600
	NID MODULE INLET	INCLUDES INTERNAL BRACING AND TURNING VANES	EST	1,900	TN		3,250.00	0	6,175,000	60.00	131,100	FLDU	107.96	14,153,600	20,328,600
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	950	TN		2,900.00	0	2,755,000	24.00	26,220	STST	105.71	2,771,700	5,526,700
2.8	DUCTWORK INSULATION & LAGGING		EST	170,000	SF		12.00	0	2,040,000	0.25	48,875	DINS	81.75	3,995,500	6,035,500
2.9	NID MODULE- FOUNDATIONS							0	1,087,000					1,682,500	2,769,500
	EXCAVATION / BACKFILL		EST	4,400	CY			0	0	0.15	759	EXFD	90.00	68,300	68,300
	REINFORCING		EST	450	TN		1,150.00	0	517,500	20.00	10,350	REIN	78.27	810,100	1,327,600
	FORMWORK		EST	3,200	SF		2.50	0	8,000	0.14	515	FORM	99.43	51,200	59,200
	CONCRETE		EST	4,750	CY		105.00	0	498,800	1.50	8,194	CONP	79.64	652,600	1,151,400
	MUD MAT		EST	340	CY		105.00	0	35,700	1.50	587	CONP	79.64	46,700	82,400
	EMBEDDED STEEL		EST	10,800	LB		2.50	0	27,000	0.06	745	CARP	71.88	53,600	80,600
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY							0	1,152,000					2,863,700	4,015,700
	SUPPORT STEEL	MATERIAL INCLUDED WITH OEM EQUIPMENT	EST	640	TN			0	0	24.00	17,664	STST	105.71	1,867,300	1,867,300
	ACCESS GALLERY		EST	25,600	SF		45.00	0	1,152,000	0.40	11,776	GALL	84.61	996,400	2,148,400
2.11	GROUNDING							0	16,000		0			46,100	62,100
	GROUND ROD	3/4" - 20' LONG	EST	16	EA		150	0	2,400	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,650	FT		7.65	0	12,600	0.12	228	WIRE	98.84	22,500	35,100
	CADWELD		EST	64	EA		15	0	1,000	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
2.12	LIGHTING/ TRANSFORMERS & PANELS							156,000	150,000		0			159,100	465,100
	LIGHT FIXTURES		EST	200	EA		750	0	150,000	4.00	920	WIRE	98.84	90,900	240,900
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	6	EA	10000		60,000	0	40.00	276	WIRE	98.84	27,300	87,300
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	6	EA	7500		45,000	0	32.00	221	WIRE	98.84	21,800	66,800
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	6	EA	5000		30,000	0	16.00	110	WIRE	98.84	10,900	40,900
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	6	EA	3500		21,000	0	12.00	83	WIRE	98.84	8,200	29,200
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0													
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							52,161,700	17,295,300		781,455			72,262,200	141,719,200

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400
	VALVE	14" BFLY 150# CS, FLANGED	EST	4	EA	3,000		12,000	0	16.60	76	SPNG	94.41	7,200	19,200
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	1,000	CY			0	0	0.20	230	EXFD	90.00	20,700	20,700
	BEDDING	FOR UNDERGROUND PIPING	EST	133	CY		35.0	0	4,700	0.25	38	EXFD	90.00	3,500	8,200
	PIPE SUPPORTS		EST	238	EA		50.00	0	11,900	1.50	410	MECH	88.89	36,400	48,300
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	EST	55	TN		2,900.00	0	159,500	24.00	1,518	STST	105.71	160,500	320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	EST	650	TN		2,900.00	0	1,885,000	24.00	17,940	STST	105.71	1,896,400	3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING						0	42,700					79,300	122,000
	EXCAVATION / BACKFILL		EST	500	CY			0	0	0.15	86	EXFD	90.00	7,800	7,800
	REINFORCING		EST	15	TN		1,150.00	0	17,300	20.00	345	REIN	78.27	27,000	44,300
	FORMWORK		EST	750	SF		2.50	0	1,900	0.14	121	FORM	99.43	12,000	13,900
	CONCRETE		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	1,000	LB		2.50	0	2,500	0.06	69	CARP	71.88	5,000	7,500
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS							0	69,600					130,200	199,800
	EXCAVATION / BACKFILL		EST	800	CY			0	0	0.15	138	EXFD	90.00	12,400	12,400
	REINFORCING		EST	25	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200
	CONCRETE		EST	300	CY		105.00	0	31,500	1.50	518	CONP	79.64	41,200	72,700
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H						75,000	335,000					24,400	434,400
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	3,000	SF		105	0	315,000	0.00	0	STST	105.71	0	315,000
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	40T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	75000	20000	75,000	20,000	350.00	300	HVAC	81.24	24,400	119,400
4.10	CONCRETE PIT FOR THE ELEVATOR		EST	10	CY		230.00	0	2,300	7.50	86	CONP	79.64	6,900	9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS						0	368,100					613,200	981,300
	EXCAVATION / BACKFILL		EST	2,900	CY			0	0	0.15	500	EXFD	90.00	45,000	45,000
	REINFORCING		EST	147.0	TN		1,150.00	0	169,100	20.00	3,381	REIN	78.27	264,600	433,700
	FORMWORK		EST	2,600	SF		2.50	0	6,500	0.14	419	FORM	99.43	41,600	48,100
	CONCRETE		EST	1,600	CY		105.00	0	168,000	1.50	2,760	CONP	79.64	219,800	387,800
	MUD MAT		EST	90	CY		105.00	0	9,500	1.50	155	CONP	79.64	12,400	21,900
	EMBEDDED STEEL		EST	6,000	LB		2.50	0	15,000	0.06	414	CARP	71.88	29,800	44,800
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS							0	14,200					26,200	40,400
	EXCAVATION / BACKFILL		EST	110	CY			0	0	0.15	19	EXFD	90.00	1,700	1,700
	REINFORCING		EST	4.8	TN		1,150.00	0	5,500	20.00	110	REIN	78.27	8,600	14,100
	FORMWORK		EST	320	SF		2.50	0	800	0.14	52	FORM	99.43	5,100	5,900
	CONCRETE		EST	60	CY		105.00	0	6,300	1.50	104	CONP	79.64	8,200	14,500

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	MUD MAT		EST	8	CY		105.00	0	800	1.50	14	CONP	79.64	1,100	1,900
	EMBEDDED STEEL		EST	300	LB		2.50	0	800	0.06	21	CARP	71.88	1,500	2,300
4.13	PIPE RACK - FOUNDATIONS							0	239,600					519,100	758,700
	EXCAVATION / BACKFILL		EST	3,200	CY			0	0	0.15	552	EXFD	90.00	49,700	49,700
	REINFORCING		EST	90.0	TN		1,150.00	0	103,500	20.00	2,070	REIN	78.27	162,000	265,500
	FORMWORK		EST	9,500	SF		2.50	0	23,800	0.14	1,530	FORM	99.43	152,100	175,900
	CONCRETE		EST	950	CY		105.00	0	99,800	1.50	1,639	CONP	79.64	130,500	230,300
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	EST	5	EA	39200		196,000	0	230.00	1,323	EHEA	79.16	104,700	300,700
4.16	CABLE BUS DUCT							134,700	10,800					200,200	345,700
	480V CABLE BUS	BUST DUCT ONLY	EST	150	FT	898		134,700	0	10.30	1,777	WIRE	98.84	175,600	310,300
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
4.17	MCC							61,800	0					3,600	65,400
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400
4.18	MIMIC PANELS		EST	1	EA	17500		17,500	0	12.00	14	WIRE	98.84	1,400	18,900
4.19	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700
	DC PANEL BOARD		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000
	VRLA BATTERIES		EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700
4.20	GROUNDING							13,300	0					41,300	54,600
	GROUND ROD	3/4" - 20' LONG	EST	16	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,300	FT	7.65		9,900	0	0.12	179	WIRE	98.84	17,700	27,600
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
4.21	LIGHTING/ TRANSFORMERS & PANELS							52,000	135,000					104,500	291,500
	LIGHT FIXTURES		EST	180	EA		750	0	135,000	4.00	828	WIRE	98.84	81,800	216,800
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	10000		20,000	0	40.00	92	WIRE	98.84	9,100	29,100
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	7500		15,000	0	32.00	74	WIRE	98.84	7,300	22,300
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	2	EA	5000		10,000	0	16.00	37	WIRE	98.84	3,600	13,600
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	2	EA	3500		7,000	0	12.00	28	WIRE	98.84	2,700	9,700
4.22	RACEWAY, CABLE TRAY, & CONDUIT							0	296,400					1,429,900	1,726,300
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,050	LF		18.25	0	19,200	1.10	1,328	WIRE	98.84	131,300	150,500
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	600	LF		21.50	0	12,900	1.45	1,001	WIRE	98.84	98,900	111,800
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,700	LF		27.10	0	46,100	1.75	3,421	WIRE	98.84	338,200	384,300
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	500	LF		30.30	0	15,200	1.95	1,121	WIRE	98.84	110,800	126,000
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	750	LF		61.00	0	45,800	1.13	972	WIRE	98.84	96,100	141,900

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip. Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS														0
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	2,386,000		2,386,000	0	14200.00	16,330	MECH	88.89	1,451,600	3,837,600
6.2	FLY ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, TWO PRESSURE EXHAUSTERS, TRANSFER STATION, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	2,285,000		2,285,000	0	14000.00	16,100	MECH	88.89	1,431,100	3,716,100
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.		2	EA	14,000		28,000	0	60.00	138	MECH	88.89	12,300	40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP		1	EA	12,000		12,000	0	45.00	52	MECH	88.89	4,600	16,600
6.5	PIPING - MECHANICAL		EST	1	LT			142,800	131,000					408,700	682,500
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	300	LF		45.1	0	13,500	0.87	300	SPNG	94.41	28,300	41,800
	LARGE BORE PIPING	6" CS, SCH 40 WELDED - ON PIPE RACK	EST	200	LF		32.2	0	6,400	0.88	202	SPNG	94.41	19,100	25,500
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	400	LF		14.1	0	5,600	0.83	382	SPNG	94.41	36,000	41,600
	LARGE BORE PIPING	10" CS, SCH 40 WELDED	EST	300	LF		110.3	0	33,100	2.40	828	SPNG	94.41	78,200	111,300
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	600	LF		72.8	0	43,700	1.45	1,001	SPNG	94.41	94,500	138,200
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400
	VALVE	6" AIR OPERATED, 150 #, CS, FLANGED	EST	2	EA	14,000		28,000	0	17.30	40	SPNG	94.41	3,800	31,800
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,000	CY			0	0	0.20	460	EXFD	90.00	41,400	41,400
	BEDDING	FOR UNDERGROUND PIPING	EST	267	CY		35.0	0	9,300	0.25	77	EXFD	90.00	6,900	16,200
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	110	EA		75.00	0	8,300	2.50	316	MECH	88.89	28,100	36,400
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 60' DIA X 92' H - 3225 TONS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	1,452,000		1,452,000	0	0.00	0	CONP	79.64	0	1,452,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID													
6.8	FLY ASH SILO	STEEL -STORAGE SILO, 16' DIA X 18' H, 48TONS						50,000	26,100					72,400	148,500

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	SILO BIN	PIN MIXERS INCLUDED WITH FLY ASH HANDLING MECHANICAL EQUIPMENT	EST	1	EA	50,000		50,000	0	450.00	518	TANK	89.16	46,100	96,100
	SUPPORT STEEL FOR SILO	THREE-COAT SHOP PAINT	EST	9	TN		2,900.00	0	26,100	24.00	248	STST	105.71	26,300	52,400
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS							0	162,400					273,700	436,100
	EXCAVATION / BACKFILL		EST	1,300	CY			0	0	0.15	224	EXFD	90.00	20,200	20,200
	REINFORCING		EST	65.0	TN		1,150.00	0	74,800	20.00	1,495	REIN	78.27	117,000	191,800
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200
	CONCRETE		EST	670	CY		105.00	0	70,400	1.50	1,156	CONP	79.64	92,400	162,400
	MUD MAT		EST	40	CY		105.00	0	4,200	1.50	69	CONP	79.64	5,500	9,700
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800
6.10	FLY ASH SILO - FOUNDATIONS							0	13,900					29,400	43,300
	EXCAVATION / BACKFILL		EST	300	CY			0	0	0.15	52	EXFD	90.00	4,700	4,700
	REINFORCING		EST	5.0	TN		1,150.00	0	5,800	20.00	115	REIN	78.27	9,000	14,800
	FORMWORK		EST	320	SF		2.50	0	800	0.14	52	FORM	99.43	5,100	5,900
	CONCRETE		EST	50	CY		105.00	0	5,300	1.50	86	CONP	79.64	6,900	12,200
	MUD MAT		EST	5	CY		105.00	0	500	1.50	9	CONP	79.64	700	1,200
	EMBEDDED STEEL		EST	600	LB		2.50	0	1,500	0.06	41	CARP	71.88	3,000	4,500
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS							0	97,600					161,900	259,500
	EXCAVATION / BACKFILL		EST	470	CY			0	0	0.15	81	EXFD	90.00	7,300	7,300
	REINFORCING		EST	38	TN		1,150.00	0	43,700	20.00	874	REIN	78.27	68,400	112,100
	FORMWORK		EST	960	SF		2.50	0	2,400	0.14	155	FORM	99.43	15,400	17,800
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000
	MUD MAT		EST	43	CY		105.00	0	4,500	1.50	74	CONP	79.64	5,900	10,400
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H						40,000	241,500					26,200	307,700
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	2,700	SF		85	0	229,500	0.00	0	STST	105.71	0	229,500
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	20T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	40000	12000	40,000	12,000	280.00	322	HVAC	81.24	26,200	78,200
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS							0	82,800					141,100	223,900
	EXCAVATION / BACKFILL		EST	450	CY			0	0	0.15	78	EXFD	90.00	7,000	7,000
	REINFORCING		EST	30	TN		1,150.00	0	34,500	20.00	690	REIN	78.27	54,000	88,500
	FORMWORK		EST	1,100	SF		2.50	0	2,800	0.14	177	FORM	99.43	17,600	20,400
	CONCRETE		EST	350	CY		105.00	0	36,800	1.50	604	CONP	79.64	48,100	84,900
	MUD MAT		EST	40	CY		105.00	0	4,200	1.50	69	CONP	79.64	5,500	9,700
	EMBEDDED STEEL		EST	1,800	LB		2.50	0	4,500	0.06	124	CARP	71.88	8,900	13,400
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	110' L X 30' W X 25' H						75,000	276,500					24,400	375,900
	PREENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	2,700	SF		95	0	256,500	0.00	0	STST	105.71	0	256,500
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	40T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	75000	20000	75,000	20,000	350.00	300	HVAC	81.24	24,400	119,400

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	EST	600	SF		500.00	0	300,000	0.00	0	STST	105.71	0	300,000
6.16	MCC	480V MCC PER LINE UP	EST	4	EA	30000		120,000	0	16.00	74	WIRE	98.84	7,300	127,300
6.17	EMERGENBCY POWER SYSTEM							185,500	0					40,000	225,500
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100
	SATELLITE UPS		EST	2	EA	41200		82,400	0	16.00	37	WIRE	98.84	3,600	86,000
	VRLA BATTERIES		EST	2	LT	36050		72,100	0	120.00	276	WIRE	98.84	27,300	99,400
6.18	LIGHTING/ TRANSFORMERS & PANELS							18,500	75,000					53,200	146,700
	LIGHT FIXTURES		EST	100	EA		750	0	75,000	4.00	460	WIRE	98.84	45,500	120,500
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
6.19	RACEWAY, CABLE TRAY, & CONDUIT							0	32,800					177,400	210,200
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	350	LF		27.10	0	9,500	1.75	704	WIRE	98.84	69600	79,100
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	350	LF		31.00	0	10,900	0.81	325	WIRE	98.84	32100	43,000
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,300	LF		4.44	0	5,800	0.24	357	WIRE	98.84	35300	41,100
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,500	LF		1.46	0	6,600	0.08	409	WIRE	98.84	40400	47,000
6.20	GROUNDING							0	4,500					10,900	15,400
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA		150	0	600	4.00	18	WIRE	98.84	1,800	2,400
	500 MCM	BARE COPPER WIRE	EST	500	FT		7.65	0	3,800	0.12	69	WIRE	98.84	6,800	10,600
	CADWELD		EST	8	EA		15	0	100	2.00	18	WIRE	98.84	1,800	1,900
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION							0	63,300					143,000	206,300
	3/C # 500KCMIL- 600V		EST	1,400	LF		26.12	0	36,600	0.69	1,111	WIRE	98.84	109,800	146,400
	#4/0 - #12 AWG-600V		EST	3,700	LF		7.22	0	26,700	0.08	336	WIRE	98.84	33,200	59,900
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,500	LF		3.20	0	20,800	0.08	591	WIRE	98.84	58,400	79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	EST	30	LF		205.00	0	6,200	4.05	140	ECND	75.97	10600	16,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							6,794,800	1,543,900		51,485			4,586,100	12,924,800
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE							0						0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						4,477		83.48	374,000	374,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						5,596			392,582	392,582
	PER DIEM	NONE		0.00	HR						61.558			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				7,720					22,931	30,650
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				77,195						77,195

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			339,740							339,740
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				77,195					229,305	306,500
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				231,585					687,915	919,500
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							339,700	393,700					1,706,700	2,440,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS						7,134,500	1,937,600					6,292,800	15,365,000
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID													0
8.0	ACTIVATED CARBON INJECTION SYSTEM														0
8.1	ACI MECHANICAL EQUIPMENT:		EST	1	LT	2805900		2,805,900	0	8690.00	9,994	MECH	88.89	888,300	3,694,200
	PAC CARBON STORAGE SILO	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	BIN VENT FILTER	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	SUPPORT STEEL	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	ROOF ACCESS LADDER	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	ROOF MOUNTED JIB CRANE	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	INSTRUMENTATION FOR SILO	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	PRESSURE VACUUM RELIEF	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	3X50% PAC FEED TRAIN	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	FEED HOPERS WITH ROTARY FEEDERS	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	GRAVIMETRIC FEEDERS	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	REGENERATIVE BLOWERS AND EDUCTORS	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	PAC LOADING PIPE WITH CERAMIC BACKED ELBOWS	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
	PAC DISTRIBUTION MANIFOLD AND LANCES	INCLUDED WITH ACI MECHANICAL EQUIPMENT	EST	1	LT			0	0		0	MECH	88.89	0	0
8.2	PIPING - MECHANICAL		EST	1	LT			29,800	149,800					377,100	556,700
	LARGE BORE PIPING	2" CS, SCH 80 WELDED	EST	150	LF		22.2	0	3,300	1.26	217	SPNG	94.41	20,500	23,800
	LARGE BORE PIPING	10" CS, SCH 40 WELDED	EST	1,200	LF		110.3	0	132,400	2.40	3,312	SPNG	94.41	312,700	445,100
	VALVE	2" GATE 150 #, CS, WELDED	EST	4	EA	960		3,800	0	5.60	26	SPNG	94.41	2,400	6,200
	VALVE	10" GATE, 150 #, CS, WELDED	EST	4	EA	6,500		26,000	0	16.10	74	SPNG	94.41	7,000	33,000
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	113	EA		125.00	0	14,100	3.00	388	MECH	88.89	34,500	48,600
8.3	ACI SYSTEM - FOUNDATIONS							0	41,500					79,200	120,700
	EXCAVATION / BACKFILL		EST	404	CY			0	0	0.15	70	EXFD	90.00	6,300	6,300
	REINFORCING		EST	14.0	TN		1,150.00	0	16,100	20.00	322	REIN	78.27	25,200	41,300
	FORMWORK		EST	1,050	SF		2.50	0	2,600	0.14	169	FORM	99.43	16,800	19,400

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	CONCRETE		EST	175	CY		105.00	0	18,400	1.50	302	CONP	79.64	24,000	42,400
	MUD MAT		EST	25	CY		105.00	0	2,600	1.50	43	CONP	79.64	3,400	6,000
	EMBEDDED STEEL		EST	705	LB		2.50	0	1,800	0.06	49	CARP	71.88	3,500	5,300
8.4	MCC							61,800	0					3,600	65,400
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400
8.5	GROUNDING							5,500	0					18,600	24,100
	GROUND ROD	3/4" - 20' LONG	EST	8	EA	150		1,200	0	4.00	37	WIRE	98.84	3,600	4,800
	500 MCM	BARE COPPER WIRE	EST	500	FT	7.65		3,800	0	0.12	69	WIRE	98.84	6,800	10,600
	CADWELD		EST	32	EA	15		500	0	2.00	74	WIRE	98.84	7,300	7,800
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	8.00	9	WIRE	98.84	900	900
8.6	LIGHTING / TRANSFORMERS & PANELS							26,000	15,000					20,400	61,400
	LIGHT FIXTURES		EST	20	EA		750	0	15,000	4.00	92	WIRE	98.84	9,100	24,100
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
8.7	RACEWAY, CABLE TRAY, & CONDUIT							0	84,600					276,700	361,300
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	300	LF		18.25	0	5,500	1.10	330	WIRE	98.84	32600	38,100
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	200	LF		21.50	0	4,300	1.45	290	WIRE	98.84	28700	33,000
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	200	LF		61.00	0	12,200	1.13	225	WIRE	98.84	22300	34,500
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	250	LF		31.00	0	7,800	0.81	202	WIRE	98.84	19900	27,700
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	300	LF		21.50	0	6,500	0.65	194	WIRE	98.84	19100	25,600
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	300	LF		9.25	0	2,800	0.35	106	WIRE	98.84	10400	13,200
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	500	LF		7.15	0	3,600	0.28	142	WIRE	98.84	14000	17,600
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	2,000	LF		4.44	0	8,900	0.24	478	WIRE	98.84	47200	56,100
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,000	LF		1.46	0	4,400	0.08	273	WIRE	98.84	26900	31,300
	DUCT BANK WITH 12-5" & 6-3" CONDUITS	3.08' H X 5.2' W	EST	75	LF		381.96	0	28,600	6.48	559	FORM	99.43	55600	84,200
8.8	LOW VOLTAGE POWER CABLE & TERMINATION							0	16,000					62,900	78,900
	#4/0 - #12 AWG-600V		EST	2,000	LF		7.22			0.08	182	WIRE	98.84	18000	18,000
	CONTROL & INSTRUMENT CABLE														
	#14, #16 & PR # 20 & SHLD WIRE		EST	5,000	LF		3.20	0	16,000	0.08	454	WIRE	98.84	44900	60,900
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							2,929,000	306,900		18,831			1,726,800	4,962,700
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						1,637		83.48	137,000	137,000

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,047			143,591	143,591
	PER DIEM	NONE		0.00	HR						22,516			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				1,535					8,634	10,169
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				15,345						15,345
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			146,450							146,450
	SALES TAX - NOT INCLUDED													0	0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				15,345					86,340	101,685
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				46,035					259,020	305,055
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							146,500	78,300					634,600	859,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ACTIVATED CARBON INJECTION SYSTEM						3,075,500	385,200					2,361,400	5,822,000
9.0	COMPRESSED AIR SYSTEM														
9.1	AIR COMPRESSOR & AUXILIARIES							848,000	0					184,600	1,032,600
	AIR COMPRESSOR	4100 CFM, OIL FREE	EST	2	EA	350000		700,000	0	750.00	1,725	MECH	88.89	153,300	853,300
	DRYERS	DESICCANT TYPE, HEATED AIR	EST	2	EA	60000		120,000	0	115.00	265	MECH	88.89	23,500	143,500
	RECEIVERS	3000 GAL WITH SAFETY RELIEF VALVE AND PRESSURE GAUGE	EST	2	EA	14000		28,000	0	38.00	87	MECH	88.89	7,800	35,800
9.2	PIPING - MECHANICAL							320,600	344,800					875,600	1,541,000
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	500	LF		14.5	0	7,300	0.70	403	SPNG	94.41	38,000	45,300
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	500	LF		45.1	0	22,600	0.87	500	SPNG	94.41	47,200	69,800
	LARGE BORE PIPING	6" SS, SCHEDULE 40, WELDED	EST	200	LF		111.0	0	22,200	2.02	465	SPNG	94.41	43,900	66,100
	LARGE BORE PIPING	8" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	700	LF		122.2	0	85,500	1.26	1,014	SPNG	94.41	95,800	181,300
	SMALL BORE PIPING	2" CS, SCH 80 WELDED, UNDERGROUND WRAPPED	EST	700	LF		20.80	0	14,600	0.64	515	SPNG	94.41	48,600	63,200
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" CS, SCH 80 WELDED	EST	200	LF		19.30	0	3,900	1.16	267	SPNG	94.41	25,200	29,100
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	700	LF		48.80	0	34,200	1.44	1,159	SPNG	94.41	109,400	143,600
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	1,500	LF		33.70	0	50,600	1.32	2,277	SPNG	94.41	215,000	265,600
	VALVE	2" GLOBE, 150# SS, WELDED	EST	50	EA	1,450		72,500	0	5.64	324	SPNG	94.41	30,600	103,100
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400
	VALVE	4" GATE, 150 #, SS, WELDED	EST	10	EA	3,400		34,000	0	9.24	106	SPNG	94.41	10,000	44,000
	VALVE	6" GATE, 150 #, SS, WELDED	EST	2	EA	4,700		9,400	0	12.96	30	SPNG	94.41	2,800	12,200
	VALVE	8" GATE, 150 #, SS, WELDED	EST	14	EA	6,240		87,400	0	15.96	257	SPNG	94.41	24,300	111,700
	VALVE	<2" GLOBE, 150# CS, WELDED	EST	10	EA	450		4,500	0	3.40	39	SPNG	94.41	3,700	8,200
	VALVE	<2" GLOBE, 150# SS, WELDED	EST	100	EA	750	750.00	75,000	75,000	4.08	469	SPNG	94.41	44,300	194,300
	VALVE	2" GLOBE, 150# CS, WELDED	EST	15	EA	850		12,800	0	4.20	72	SPNG	94.41	6,800	19,600
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	440	EA		50.00	0	22,000	2.00	1,012	MECH	88.89	90,000	112,000
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	583	CY			0	0	0.20	134	EXFD	90.00	12,100	12,100
	BEDDING	FOR UNDERGROUND PIPING	EST	78	CY		35.0	0	2,700	0.25	22	EXFD	90.00	2,000	4,700
9.3	AIR COMPRESSOR BUILDING - FOUNDATIONS							0	249,800					395,800	645,600
	EXCAVATION / BACKFILL		EST	1,100	CY			0	0	0.15	190	EXFD	90.00	17,100	17,100
	REINFORCING		EST	100	TN		1,150.00	0	115,000	20.00	2,300	REIN	78.27	180,000	295,000
	FORMWORK		EST	1,500	SF		2.50	0	3,800	0.14	242	FORM	99.43	24,000	27,800
	CONCRETE		EST	1,100	CY		105.00	0	115,500	1.50	1,898	CONP	79.64	151,100	266,600

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	MUD MAT		EST	100	CY		105.00	0	10,500	1.50	173	CONP	79.64	13,700	24,200
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900
9.4	AIR COMPRESSOR BUILDING	120' L X 60' W X 20' H						0	612,000					0	612,000
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	7,200	SF		85	0	612,000	0.00	0	STST	105.71	0	612,000
9.5	LIGHTING/ TRANSFORMERS & PANELS							11,000	10,500					11,400	32,900
	LIGHT FIXTURES		EST	14	EA		750	0	10,500	4.00	64	WIRE	98.84	6,400	16,900
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
9.6	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0						0	0					0	
9.7	GROUNDING							4,500	0					10,900	15,400
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA	150		600	0	4.00	18	WIRE	98.84	1,800	2,400
	500 MCM	BARE COPPER WIRE	EST	500	FT	7.65		3,800	0	0.12	69	WIRE	98.84	6,800	10,600
	CADWELD		EST	8	EA	15		100	0	2.00	18	WIRE	98.84	1,800	1,900
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							1,184,100	1,217,100		16,582			1,478,300	3,879,500
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						1,442		83.48	120,000	120,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						1,802			126,438	126,438
	PER DIEM	NONE		0.00	HR						19,826			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				6,086					7,392	13,477
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				60,855						60,855
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			59,205							59,205
	SALES TAX - NOT INCLUDED													0	0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				60,855					73,915	134,770
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				182,565					221,745	404,310
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							59,200	310,400					549,500	919,100
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	COMPRESSED AIR SYSTEM						1,243,300	1,527,500					2,027,800	4,798,600
10.0	SERVICE WATER SYSTEM														
10.1	PUMPS							186,000	0					90,000	276,000
	SERVICE WATER PUMPS	3000 GPM, 150 HP	EST	2	EA	45000		90,000	0	220.00	506	MECH	88.89	45,000	135,000
	MAKE UP WATER PUMPS	4000 GPM, 100 HP	EST	2	EA	48000		96,000	0	220.00	506	MECH	88.89	45,000	141,000
10.2	PIPING - MECHANICAL		EST	1	LT			298,400	342,800					688,300	1,329,500
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	900	LF		45.1	0	40,600	0.87	900	SPNG	94.41	85,000	125,600
	LARGE BORE PIPING	6" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	400	LF		80.4	0	32,200	1.14	524	SPNG	94.41	49,500	81,700
	LARGE BORE PIPING	6" SS, SCHEDULE 40, WELDED	EST	200	LF		111.0	0	22,200	2.02	465	SPNG	94.41	43,900	66,100
	LARGE BORE PIPING	10" SS, SCHEDULE 40, WELDED	EST	1,000	LF		179.9	0	179,900	2.49	2,864	SPNG	94.41	270,300	450,200
	LARGE BORE PIPING	14" HDPE (UNDERGROUND)	EST	500	LF		65.5	0	32,800	1.02	587	SPNG	94.41	55,400	88,200

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	300	LF		48.80	0	14,600	1.44	497	SPNG	94.41	46,900	61,500
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	4" GATE, 150 #, SS, WELDED	EST	12	EA	3,400		40,800	0	9.24	128	SPNG	94.41	12,000	52,800
	VALVE	6" GATE, 150 #, SS, WELDED	EST	8	EA	4,700		37,600	0	12.96	119	SPNG	94.41	11,300	48,900
	VALVE	10" GATE, 150 #, SS, WELDED	EST	20	EA	9,500		190,000	0	18.52	426	SPNG	94.41	40,200	230,200
	VALVE	14" BFLY 150# SS, FLANGED	EST	4	EA	7,500		30,000	0	19.76	91	SPNG	94.41	8,600	38,600
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	160	EA		95.00	0	15,200	2.50	460	MECH	88.89	40,900	56,100
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	417	CY			0	0	0.20	96	EXFD	90.00	8,600	8,600
	BEDDING	FOR UNDERGROUND PIPING	EST	56	CY		35.0	0	1,900	0.25	16	EXFD	90.00	1,400	3,300
10.3	PIPING - FIRE PROTECTION SYSTEM		EST	1	LT			181,200	284,600	89.55	7,176	0	1207.47	673,300	1,139,100
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED	EST	200	LF		24.4	0	4,900	0.73	168	SPNG	94.41	15,900	20,800
	LARGE BORE PIPING	8" CS, SCHEDULE 40, WELDED	EST	300	LF		64.2	0	19,300	0.98	338	SPNG	94.41	31,900	51,200
	LARGE BORE PIPING	12" CS, SCHEDULE 40, WELDED	EST	150	LF		174.6	0	26,200	1.43	247	SPNG	94.41	23,300	49,500
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	3,000	LF		72.8	0	218,400	1.45	5,003	SPNG	94.41	472,300	690,700
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400
	VALVE	8" GATE, 150 #, CS, WELDED	EST	6	EA	4,800		28,800	0	13.30	92	SPNG	94.41	8,700	37,500
	VALVE	10" GATE, 150 #, CS, WELDED	EST	4	EA	6,500		26,000	0	16.10	74	SPNG	94.41	7,000	33,000
	VALVE	10" GATE WITH PIV, 150 #, CS, WELDED	EST	10	EA	7,000		70,000	0	17.71	204	SPNG	94.41	19,200	89,200
	VALVE	12" GATE, 150 #, CS, WELDED	EST	2	EA	8,200		16,400	0	19.20	44	SPNG	94.41	4,200	20,600
	FIRE HYDRANTS		EST	10	EA	1,500		15,000	0	8.00	92	MECH	88.89	8,200	23,200
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	54	EA		75.00	0	4,100	2.50	156	MECH	88.89	13,800	17,900
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,500	CY			0	0	0.20	575	EXFD	90.00	51,800	51,800
	BEDDING	FOR UNDERGROUND PIPING	EST	333	CY		35.0	0	11,700	0.25	96	EXFD	90.00	8,600	20,300
10.4	TANKS							0	234,000					0	234,000
	SERVICE WATER TANKS	20,000 GAL, CS, 14' DIA X 20' - SUBCONTRACT PRICE INCLUDES LABOR WITH EXTERIOR PRIMED AND FIELD PAINTED	EST	2	EA	60000.0		0	120,000	0.00	0	TANK	89.16	0	120,000
	MAKE UP WATER TANK	40,000 GAL, CS, 20' DIA X 20' - SUBCONTRACT PRICE INCLUDES LABOR WITH EXTERIOR PRIMED AND FIELD PAINTED	EST	1	EA	114000.0		0	114,000	0.00	0	TANK	89.16	0	114,000
10.5	SERVICE WATER TANK & PUMP - FOUNDATIONS							0	41,100					73,300	114,400
	EXCAVATION / BACKFILL		EST	296	CY			0	0	0.15	51	EXFD	90.00	4,600	4,600
	REINFORCING		EST	15.0	TN	1,150.00		0	17,300	20.00	345	REIN	78.27	27,000	44,300
	FORMWORK		EST	700	SF	2.50		0	1,800	0.14	113	FORM	99.43	11,200	13,000
	CONCRETE		EST	170	CY		105.00	0	17,900	1.50	293	CONP	79.64	23,400	41,300
	MUD MAT		EST	15	CY		105.00	0	1,600	1.50	26	CONP	79.64	2,100	3,700
	EMBEDDED STEEL		EST	1,000	LB	2.50		0	2,500	0.06	69	CARP	71.88	5,000	7,500
10.6	MAKE UP WATER TANK & PUMP - FOUNDATION							0	27,300					48,800	76,100
	EXCAVATION / BACKFILL		EST	197	CY			0	0	0.15	34	EXFD	90.00	3,100	3,100
	REINFORCING		EST	10	TN	1,150.00		0	11,500	20.00	229	REIN	78.27	18,000	29,500
	FORMWORK		EST	466	SF	2.50		0	1,200	0.14	75	FORM	99.43	7,500	8,700
	CONCRETE		EST	113	CY		105.00	0	11,900	1.50	195	CONP	79.64	15,500	27,400
	MUD MAT		EST	10	CY		105.00	0	1,000	1.50	17	CONP	79.64	1,400	2,400
	EMBEDDED STEEL		EST	665	LB	2.50		0	1,700	0.06	46	CARP	71.88	3,300	5,000
10.7	ELECTRICAL	INCLUDED IN ID FANS, 1.0													
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							665,600	929,800		17,005			1,573,700	3,169,100

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						1,479		83.48	123,000	123,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						1,848			129,662	129,662
	PER DIEM	NONE		0.00	HR						20,332			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				4,649					7,869	12,518
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				46,490						46,490
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			33,280							33,280
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				46,490					78,685	125,175
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				139,470					236,055	375,525
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							33,300	237,100					575,300	845,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	SERVICE WATER SYSTEM						698,900	1,166,900					2,149,000	4,014,700
11.0	POTABLE WATER SYSTEM														
11.1	PUMPS							30,000	0					18,400	48,400
	POTABLE WATER BOOSTER PUMPS	50 GPM, 5 HP	EST	2	EA	15000		30,000	0	90.00	207	MECH	88.89	18,400	48,400
11.2	PIPING - MECHANICAL		EST	1	LT			99,500	195,600					457,000	752,100
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	800	LF		45.1	0	36,100	0.87	800	SPNG	94.41	75,600	111,700
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED	EST	200	LF		68.3	0	13,700	1.82	419	SPNG	94.41	39,500	53,200
	LARGE BORE PIPING	6" SS, SCHEDULE 40, WELDED	EST	800	LF		111.0	0	88,800	2.02	1,858	SPNG	94.41	175,500	264,300
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	200	LF		14.1	0	2,800	0.83	191	SPNG	94.41	18,000	20,800
	SMALL BORE PIPING	2" D.I. SCH 80 (UNDERGROUND)	EST	500	LF		15.00	0	7,500	0.30	173	SPNG	94.41	16,300	23,800
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	200	LF		33.70	0	6,700	1.32	304	SPNG	94.41	28,700	35,400
	SMALL BORE PIPING	2" COPPER	EST	300	LF		28.50	0	8,600	0.43	148	SPNG	94.41	14,000	22,600
	VALVE	2" GLOBE, 150# CS, WELDED	EST	10	EA	850		8,500	0	4.20	48	SPNG	94.41	4,600	13,100
	VALVE	<2" GLOBE, 150# SS, WELDED	EST	8	EA	750	750.00	6,000	6,000	4.08	38	SPNG	94.41	3,500	15,500
	VALVE	4" GATE, 150 #, SS, WELDED	EST	20	EA	4,250		85,000	0	9.24	213	SPNG	94.41	20,100	105,100
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	150	EA		60.00	0	9,000	2.50	431	MECH	88.89	38,300	47,300
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	583	CY			0	0	0.20	134	EXFD	90.00	12,100	12,100
	BEDDING	FOR UNDERGROUND PIPING	EST	78	CY		35.0	0	2,700	0.25	22	EXFD	90.00	2,000	4,700
11.3	TANKS							0	8,500					0	8,500
	POTABLE WATER TANK	1,000 GAL, SS, 5' DIA X 8' - SUBCONTRACT PRICE INCLUDES LABOR	EST	1	EA		8500.0	0	8,500	0.00	0	TANK	89.16	0	8,500
11.4	POTABLE WATER TANK & PUMP - FOUNDATIONS							0	5,200					8,800	14,000
	EXCAVATION / BACKFILL		EST	20	CY			0	0	0.15	3	EXFD	90.00	300	300
	REINFORCING		EST	3.0	TN		1,150.00	0	3,500	20.00	69	REIN	78.27	5,400	8,900
	FORMWORK		EST	75	SF		2.50	0	200	0.14	12	FORM	99.43	1,200	1,400
	CONCRETE		EST	12	CY		105.00	0	1,300	1.50	21	CONP	79.64	1,600	2,900
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	60	LB		2.50	0	200	0.06	4	CARP	71.88	300	500

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	15KV CABLE BUS DUCT	BUS DUCT ONLY	EST	200	FT	442		88,400	0	3.30	759	WIRE	98.84	75,000	163,400
	480V CABLE BUS DUCT	BUS DUCT ONLY	EST	150	FT	618		92,700	0	10.30	1,777	WIRE	98.84	175,600	268,300
	CABLE BUS TERMINATION	500MCM - 15KV TERMINATIONS	EST	4	EA		1,800.00	0	7,200	33.00	152	WIRE	98.84	15,000	22,200
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
12.8	PANELS - RELAY							100,000	0					9,100	109,100
	RELAY PANELS & INTERLOCK	ALLOWANCE	EST	1	LT	100000		100,000	0	80.00	92	WIRE	98.84	9,100	109,100
12.9	MIMIC PANELS		EST	1	EA	17500		17,500	0	40.00	46	WIRE	98.84	4,500	22,000
12.10	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700
	DC PANEL BOARD		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000
	VRLA BATTERIES	8HR-400A, 480V	EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700
12.11	GROUNDING							23,300	0					59,100	82,400
	GROUND ROD	3/4" - 20' LONG EACH	EST	16	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	2,600	FT	7.65		19,900	0	0.12	359	WIRE	98.84	35,500	55,400
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
12.12	LIGHTING/ TRANSFORMERS & PANELS							26,000	30,000					29,500	85,500
	LIGHT FIXTURES		EST	40	EA		750	0	30,000	4.00	184	WIRE	98.84	18,200	48,200
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
12.13	OUTDOOR LIGHTING	NEW AUX YARD LIGHTING - ALLOWANCE	EST	1	LT	25000		25,000	0	500.00	575	WIRE	98.84	56,800	81,800
12.14	RACEWAY, CABLE TRAY, & CONDUIT							0	372,900					1,787,900	2,160,800
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,250	LF		18.25	0	22,800	1.10	1,581	WIRE	98.84	156,300	179,100
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	750	LF		21.50	0	16,100	1.45	1,251	WIRE	98.84	123,600	139,700
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	2,200	LF		27.10	0	59,600	1.75	4,428	WIRE	98.84	437,600	497,200
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	600	LF		30.30	0	18,200	1.95	1,346	WIRE	98.84	133,000	151,200
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,000	LF		61.00	0	61,000	1.13	1,296	WIRE	98.84	128,100	189,100
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,800	LF		31.00	0	55,800	0.81	1,670	WIRE	98.84	165,100	220,900
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	2,000	LF		21.50	0	43,000	0.65	1,484	WIRE	98.84	146,600	189,600
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,000	LF		9.25	0	27,800	0.35	1,214	WIRE	98.84	120,000	147,800
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,700	LF		7.15	0	26,500	0.28	1,208	WIRE	98.84	119,400	145,900
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	6,200	LF		4.44	0	27,500	0.24	1,704	WIRE	98.84	168,400	195,900
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	10,000	LF		1.46	0	14,600	0.08	909	WIRE	98.84	89,800	104,400
12.15	DUCT BANK							0	26,200	0.05	0			54,300	80,500
	UNDERGROUND SURVEY FOR NEW DUCT BANK RUN	MAIN FEEDER BETWEEN EXISTING SCR SUBSTATION TO FGD AUX XFMR	EST	200	LF			0	0	0.80	184	ECND	75.97	14,000	14,000
	4' X 4' DUCT BANK (138KV SCR TO FGD AUX XFMR SUBSTATION)	6 - 6" PVC	EST	40	LF		375	0	15,000	6.25	288	ECND	75.97	21,800	36,800
	DUCT BANK WITH 6-5" & 4-3" CONDUITS	2.38' H X 4' W	EST	50	LF		223.02	0	11,200	4.24	244	ECND	75.97	18,500	29,700
12.16	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 500KCMIL- 15KV	EST	1,800	LF		9.27	0	16,700	0.23	476	WIRE	98.84	47,100	63,800
12.17	LOW VOLTAGE POWER CABLE & TERMINATION							0	96,600					147,700	244,300
	3/C # 500KCMIL- 600V		EST	600	LF		26.12	0	15,700	0.69	476	WIRE	98.84	47,100	62,800
	#4/0 - #12 AWG-600V		EST	11,200	LF		7.22	0	80,900	0.08	1,018	WIRE	98.84	100,600	181,500

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
12.18	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,800	LF		3.20	0	21,800	0.08	618	WIRE	98.84	61,100	82,900
12.19	FOUNDATION FOR AUX TRANSFORMER							0	70,200					183,600	253,800
	EXCAVATION / BACKFILL		EST	1,000	CY			0	0	0.15	173	EXFD	90.00	15,500	15,500
	REINFORCING		EST	20.0	TN		1,150.00	0	23,000	20.00	460	REIN	78.27	36,000	59,000
	FORMWORK		EST	5,000	SF		2.50	0	12,500	0.14	805	FORM	99.43	80,000	92,500
	CONCRETE		EST	190	CY		105.00	0	20,000	1.50	328	CONP	79.64	26,100	46,100
	MUD MAT		EST	45	CY		105.00	0	4,700	1.50	78	CONP	79.64	6,200	10,900
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800
12.20	FIREWALL FOR TRANSFORMERS							0	4,300					7,600	11,900
	REINFORCING		EST	1.5	TN		1,150.00	0	1,700	20.00	35	REIN	78.27	2,700	4,400
	FORMWORK		EST	120	SF		2.50	0	300	0.14	19	FORM	99.43	1,900	2,200
	CONCRETE		EST	22	CY		105.00	0	2,300	1.50	38	CONP	79.64	3,000	5,300
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							3,482,400	729,900		37,359			3,546,900	7,759,200
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS				1	LS									
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						3,249		83.48	271,000	271,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						4,061			284,864	284,864
	PER DIEM	NONE		0.00	HR						44,668			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				3,650					17,735	21,384
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				36,495						36,495
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			174,120							174,120
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				36,495					177,345	213,840
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				109,485					532,035	641,520
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							174,100	186,100					1,282,979	1,643,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	FGD SUBSTATION						3,656,500	916,000					4,829,900	9,402,400
13.0	FGD DCS SYSTEM														0
13.1	DCS	3200 I/O POINTS	EST	3,200	EA	750		2,400,000	0	2.50	9,200	INEL	88.43	813,600	3,213,600
13.2	DCS - VENDOR FIELD SUPPORT	200 MAN DAYS @ \$1500/DAY - SHOWN AS SUBCONTRACT COST	EST	200	DAYS	1500		300,000	0		0	INEL	88.43	0	300,000
13.3	LOCALLY MOUNTED INSTRUMENTS							0	650,400					852,900	1,503,300
	LOCALLY MOUNTED INSTRUMENTS		EST	275	EA		2200	0	605,000	20.00	6,325	INEL	88.43	559,300	1,164,300
	INSTRUMENT RACKS	INCLUDED WITH INSTRUMENTS													
	INSTRUMENT TUBING	ALLOWANCE	EST	8,250	LF		5.5	0	45,400	0.35	3,321	INEL	88.43	293,600	339,000
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							2,700,000	650,400		18,846			1,666,500	5,016,900
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						1,639		83.48	137,000	137,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,048			143,700	143,700
	PER DIEM	NONE		0.00	HR						22,533			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				3,252					8,333	11,585
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				32,520						32,520
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			135,000							135,000
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				32,520					83,325	115,845
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				97,560					249,975	347,535
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							135,000	165,900					622,300	923,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	FGD DCS SYSTEM						2,835,000	816,300					2,288,800	5,940,100
14.0	CEM SYSTEM														0
14.1	CEM SYSTEM	PROVIDED BY AEP		1	LT	1260000	540000	1,260,000	540,000					310,000	2,110,000
15.0	TRUCK & RAIL INFRASTRUCTURE														0
15.1	EXISTING RAILROAD IMPROVEMENTS	FOR FULL RAILCAR STORAGE TRACK IMPROVEMENTS - 3250 LF						0	660,200					689,200	1,349,400
	REMOVE AND REPLACE 8" OF THE BALLAST	INCLUDES DISPOSAL OF REMOVED BALLAST	EST	3,250	LF		12.25	0	39,800	0.16	598	RRTK	88.26	52,800	92,600
	REPLACE 75% OF THE EXISTING WOODEN RAILROAD TIES	INCLUDES TIE PLATES, SPIKES AND BOLTS	EST	1,950	LF		80	0	156,000	0.85	1,906	RRTK	88.26	168,200	324,200
	REMOVE THE EXISTING RAIL AND REPLACE WITH 132-LB RAIL		EST	3,250	LF		87.5	0	284,400	1.05	3,924	RRTK	88.26	346,400	630,800
	REPLACE EXISTING #8 TURNOUTS		EST	4	EA		45000	0	180,000	300.00	1,380	RRTK	88.26	121,800	301,800
15.2	EXISTING RAILROAD IMPROVEMENTS	FOR LOOP TRACK UPGRADE - 5000 LF						0	1,008,800					1,055,600	2,064,400
	REMOVE AND REPLACE 8" OF THE BALLAST	INCLUDES DISPOSAL OF REMOVED BALLAST	EST	5,000	LF		12.25	0	61,300	0.16	920	RRTK	88.26	81,200	142,500
	REPLACE 75% OF THE EXISTING WOODEN RAILROAD TIES	INCLUDES TIE PLATES, SPIKES AND BOLTS	EST	3,000	LF		80	0	240,000	0.85	2,933	RRTK	88.26	258,800	498,800
	REMOVE THE EXISTING RAIL AND REPLACE WITH 132-LB RAIL		EST	5,000	LF		87.5	0	437,500	1.05	6,038	RRTK	88.26	532,900	970,400
	REPLACE EXISTING #8 TURNOUTS		EST	6	EA		45000	0	270,000	300.00	2,070	RRTK	88.26	182,700	452,700
15.3	NEW RAILROAD TRACK	INCLUDES, 132LB RAIL, 7" TIMBERS, TIE PLATES, SPIKES, BOLTS, 12" SUB BALLAST, 12" BALLAST, 12 OZ/SY GEOTEXTILE MEMBRANE, 12" SUBGRADE PREP	EST	1,400	LF		180	0	252,000	1.50	2,415	RRTK	88.26	213,100	465,100
15.4	FIELD FABRICATED TURNOUTS	#8 TURNOUT	EST	2	EA		45000	0	90,000	270.00	621	RRTK	88.26	54,800	144,800
15.5	RAIL SCALE	SUBCONTRACT COST, INCLUDES FOUNDATIONS	EST	2	EA	106250		212,500	0	0.00	0	MECH	88.89	0	212,500
15.6	NEW CONCRETE ENCASEMENT	OVER AND AROUND DUCT BANK CONNECTING THE PLANT TO SWITCHYARD. THIS IS UNDER THE NEW TRACK WORK EXTENSION						0	33,200					67,700	100,900

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	EXCAVATION / BACKFILL		EST	170	CY			0	0	0.15	29	EXFD	90.00	2,600	2,600
	REINFORCING		EST	13	TN		1,150.00	0	14,400	20.00	288	REIN	78.27	22,500	36,900
	FORMWORK		EST	1,350	SF		2.50	0	3,400	0.14	217	FORM	99.43	21,600	25,000
	CONCRETE		EST	113	CY		105.00	0	11,900	1.50	195	CONP	79.64	15,500	27,400
	MUD MAT		EST	20	CY		105.00	0	2,100	1.50	35	CONP	79.64	2,700	4,800
	EMBEDDED STEEL		EST	567	LB		2.50	0	1,400	0.06	39	CARP	71.88	2,800	4,200
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							212,500	2,044,200		23,607			2,080,400	4,337,100
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						2,053		83.48	171,000	171,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,566			180,008	180,008
	PER DIEM	NONE		0.00	HR						28,226			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				10,221					10,402	20,623
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				102,210						102,210
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			10,625							10,625
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				102,210					104,020	206,230
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				306,630					312,060	618,690
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							10,600	521,300					777,500	1,309,400
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	TRUCK & RAIL INFRASTRUCTURE						223,100	2,565,500					2,857,900	5,646,500
16.0	SITE IMPROVEMENTS - CIVIL WORK														
16.1	SITE GRADING							0	0					555,200	555,200
	CUT		EST	17,000	CY			0	0	0.08	1,564	ETWK	177.49	277,600	277,600
	FILL		EST	17,000	CY			0	0	0.08	1,564	ETWK	177.49	277,600	277,600
16.2	ROADS & SURFACING							0	1,204,900					1,667,500	2,872,400
	20' WIDE ACCESS ROAD	INCLUDES: 1.5" ASPHALT SURFACE COURSE 1.5" ASPHALT BINDER COURSE 12" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	5,600	SY		47	0	263,200	0.40	2,576	PBIT	90.25	232,500	495,700
	24' WIDE ACCESS ROAD	INCLUDES: 1.5" ASPHALT SURFACE COURSE 1.5" ASPHALT BINDER COURSE 12" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	5,300	SY		47	0	249,100	0.40	2,438	PBIT	90.25	220,000	469,100
	24' WIDE ACCESS ROAD AGGREGATE SHOULDERS	INCLUDES: 12" BASE COURSE 10 OZ/SY GEOTEXTILE	EST	1,300	SY		17.5	0	22,800	0.10	150	BCSE	105.94	15,800	38,600

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	LIME UNLOADING AREA	INCLUDES: 1.5" ASPHALT SURFACE COURSE 1.5" ASPHALT BINDER COURSE 12" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	2,400	SY		47	0	112,800	0.40	1,104	PBIT	90.25	99,600	212,400
	PARKING AREA	INCLUDES: 1.5" ASPHALT SURFACE COURSE 1.5" ASPHALT BINDER COURSE 12" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	900	SY		47	0	42,300	0.40	414	PBIT	90.25	37,400	79,700
	BYPRODUCT & WASTE LOADING AREA - SURFACING	12" REINFORCED CONCRETE	EST	1,900	SY		96	0	182,400	1.60	3,496	CONP	79.64	278,400	460,800
	BYPRODUCT & WASTE LOADING AREA	6" CONCRETE CURB	EST	560	LF		6.5	0	3,600	0.96	618	COND	70.04	43,300	46,900
	CONCRETE PAD BUILDING ENTRANCES	10" REINFORCED CONCRETE	EST	340	SY		80	0	27,200	1.50	587	CONP	79.64	46,700	73,900
	AGGREGATE AREA SURFACING	INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	33,500	SY		9	0	301,500	0.17	6,549	BCSE	105.94	693,800	995,300
16.3	NEW CONCRETE ENCASEMENT	16' X 4' X 40' - FOR EXISTING ASH PIPE HAUL ROAD CROSSING						0	36,500					66,500	103,000
	EXCAVATION / BACKFILL		EST	300	CY			0	0	0.15	52	EXFD	90.00	4,700	4,700
	REINFORCING		EST	25.0	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800
	FORMWORK		EST	500	SF		2.50	0	1,300	0.14	81	FORM	99.43	8,000	9,300
	CONCRETE		EST	50	CY		105.00	0	5,300	1.50	86	CONP	79.64	6,900	12,200
	MUD MAT		EST	5	CY		105.00	0	500	1.50	9	CONP	79.64	700	1,200
	EMBEDDED STEEL		EST	250	LB		2.50	0	600	0.06	17	CARP	71.88	1,200	1,800
16.4	TRUCK SCALE & CONCRETE APPROACH							170,000	27,300					92,000	289,300
	TRUCK SCALE	SUBCONTRACT COST, INCLUDES FOUNDATIONS AND LABOR	EST	2	EA	85000		170,000	0	0.00	0	MECH	88.89	0	170,000
	CONCRETE APPROACH FOR TRUCK SCALE	20' x 40' - TOTAL FOR TWO SCALES	EST	119	CY		230.0	0	27,300	7.50	1,022	EXFD	90.00	92,000	119,300
16.5	PROCESS WATER STORAGE BASIN							60,000	81,600					240,300	381,900
	SAND EXCAVATION		EST	3,000	CY			0	0	0.03	90	ETWK	177.49	15,900	15,900
	ROCK EXCAVATION	ASSUME ROCK IS RIPPABLE	EST	400	CY			0	0	0.05	22	ETWK	177.49	3,900	3,900
	POND SURFACING	6" REINFORCED CONCRETE	EST	1,700	SY		48	0	81,600	1.20	2,346	CONP	79.64	186,800	268,400
	PUMPS	500 GPM, 75 PSIG	EST	2	EA	30000		60,000	0	165.00	380	MECH	88.89	33,700	93,700
16.6	PROCESS WATER STORAGE BASIN PUMP STRUCTURE - CONCRETE							0	47,000					105,400	152,400
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0
	REINFORCING		EST	7	TN		1,150.00	0	8,100	20.00	161	REIN	78.27	12,600	20,700
	FORMWORK		EST	3,968	SF		2.50	0	9,900	0.14	639	FORM	99.43	63,500	73,400
	CONCRETE		EST	76	CY		105.00	0	8,000	1.50	131	CONP	79.64	10,400	18,400
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	380	LB		2.50	0	1,000	0.06	26	CARP	71.88	1,900	2,900
	PROCESS WATER BASIN PUMP STRUCTURE - GALLERY		EST	5	TN		4,000.00	0	20,000	35.00	201	GALL	84.61	17,000	37,000
16.7	STORM WATER DRAINAGE TRENCH	2' W X 3' DEEP CAST-IN-PLACE CONCRETE TRENCH W/REINFORCING & HS-20 RATED GRATE COVERS	EST	3,900	LF		135	0	526,500	1.50	6,728	CONP	79.64	535,800	1,062,300
16.8	STORM WATER RUNOFF POND							0	15,000					122,600	137,600
	SAND EXCAVATION		EST	11,000	CY			0	0	0.03	329	ETWK	177.49	58,400	58,400

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	ROCK EXCAVATION	ASSUME ROCK IS RIPPABLE	EST	3,700	CY			0	0	0.05	204	ETWK	177.49	36,300	36,300
	4" TOPSOIL		EST	650	CY		14	0	9,100	0.03	22	LAND	61.45	1,400	10,500
	GRASS SEEDING, FERTILIZER AND MULCH		EST	1.2	AC		4930	0	5,900	240.00	331	MSTR	80.04	26,500	32,400
16.9	STORM WATER RUNOFF POND PUMP STRUCTURE - CONCRETE							90,000	42,300					182,200	314,500
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0
	REINFORCING		EST	3	TN		1,150.00	0	3,500	20.00	69	REIN	78.27	5,400	8,900
	FORMWORK		EST	2,025	SF		2.50	0	5,100	0.14	326	FORM	99.43	32,400	37,500
	CONCRETE		EST	33	CY		105.00	0	3,500	1.50	57	CONP	79.64	4,500	8,000
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	165	LB		2.50	0	400	0.06	11	CARP	71.88	800	1,200
	STORM WATER POND PUMP STRUCTURE - GALLERY		EST	5	TN		4,000.00	0	20,000	35.00	201	GALL	84.61	17,000	37,000
	PUMPS	500 GPM, 75 PSIG	EST	3	EA	30000		90,000	0	165.00	569	MECH	88.89	50,600	140,600
	PIPING	6" HDPE, SDR 9	EST	1,000	LF		9.8	0	9,800	0.69	794	YDPP	90.14	71,500	81,300
16.10	OILY WATER SEWER							4,500	112,600					236,000	353,100
	PIPING	6" CISP	EST	1,500	LF		21.5	0	32,300	0.33	569	YDPP	90.14	51,300	83,600
	PIPING	8" CISP	EST	1,400	LF		33.5	0	46,900	0.54	869	YDPP	90.14	78,400	125,300
	PIPING	6" HDPE, SDR 9	EST	1,000	LF		9.8	0	9,800	0.69	794	YDPP	90.14	71,500	81,300
	POST INDICATOR VALVE		EST	6	EA	750		4,500	0	6.00	41	YDPP	90.14	3,700	8,200
	MANHOLES		EST	15	EA		1575.0	0	23,600	20.00	345	YDPP	90.14	31,100	54,700
16.11	OIL SEPARATOR	500 GPM W/ INTEGRAL LIFT STATION	EST	2	EA	50000		100,000	0	560.00	1,288	YDPP	90.14	116,100	216,100
16.12	SANITARY SEWER							0	22,200					96,900	119,100
	PIPING	6" CISP	EST	500	LF		21.5	0	10,800	0.33	190	YDPP	90.14	17,100	27,900
	MANHOLES		EST	4	EA		1575.0	0	6,300	20.00	92	YDPP	90.14	8,300	14,600
	PIPING	4" HDPE (UNDERGROUND)	EST	1,500	LF		3.4	0	5,100	0.46	794	YDPP	90.14	71,500	76,600
16.13	SANITARY LIFT STATION	PACKAGED TYPE COMPLETE WITH PUMPS, 100,000 GPD	EST	1	EA	150,000	3.4	150,000	0	475.00	546	YDPP	90.14	49,200	199,200
16.14	EROSION & SEDIMENT CONTROL							0	12,400					20,400	32,800
	SILT FENCE		EST	2,400	LF		1.0	0	2,400	0.02	55	LAND	61.45	3,400	5,800
	ROCK CHECK DAMS		EST	20	EA		500.0	0	10,000	12.00	276	LAND	61.45	17,000	27,000
16.15	CONSTRUCTION LAYDOWN AREA	ALLOWANCE FOR 10 ACRES, DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED	EST	10	AC		70,000.0	0	700,000	800.00	9,200	EXFD	90.00	828,000	1,528,000
16.16	CRAFT PARKING	DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED. ALLOWANCE FOR 20,000 SY INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	20,000	SY		9	0	180,000	0.17	3,910	BCSE	105.94	414,200	594,200
16.17	CONTRACTOR OFFICES (AREA)	DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED. ALLOWANCE FOR 5,000 SY AREA (TRAILERS BY CONTRACTORS) INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	5,000	SY		9	0	45,000	0.17	978	BCSE	105.94	103,600	148,600

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							574,500	3,053,300		56,485			5,431,900	9,059,700
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						4,912		83.48	410,000	410,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						6,140			430,707	430,707
	PER DIEM	NONE		0.00	HR						67,537			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				15,267					27,160	42,426
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				152,665						152,665
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			28,725							28,725
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				152,665					271,595	424,260
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				457,995					814,785	1,272,780
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							28,700	778,600					1,954,200	2,761,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	SITE IMPROVEMENTS - CIVIL WORK						603,200	3,831,900					7,386,100	11,821,300
															0
17.0	BOP ITEMS														
17.1	PIPE INSULATION	AVERAGE 6" PIPE SIZE	EST	3,400	LF		10	0	34,000	0.39	1,525	PINS	69.50	106,000	140,000
17.2	HEAT TRACING							0	175,600					248,500	424,100
	CABLE	AVERAGE 6" PIPE SIZE	EST	3,000	LF		10.35	0	31,100	0.05	173	WIRE	98.84	17,000	48,100
	POWER CONNECTOR AND OTHER ACCESSORIES INCLUDING THERMOSTATS FOR HEAT TRACING (BY ZONES)		EST	55	EA		450	0	24,500	8.00	502	WIRE	98.84	49,600	74,100
	HEAT TRACING BALANCE OF PLANT INCL PANELS, POWER WIRING AND CONDUITS		EST	4	LT		30000	0	120,000	400.00	1,840	WIRE	98.84	181,900	301,900
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)							0	176,700					677,700	854,400
	TOUCH UP PAINT FOR SHOP PAINTED STEEL		EST	31,185	SF		3	0	93,600	0.15	5,379	PNTR	66.72	358,900	452,500
	TOUCH UP PAINT FOR EQUIPMENT		EST	12,000	SF		3	0	36,000	0.15	2,070	PNTR	66.72	138,100	174,100
	PAINTING CS PIPE ONLY	AVERAGE 6" PIPE SIZE, ALLOWANCE FOR 10,000 LF PIPE	EST	15,700	SF		3	0	47,100	0.15	2,708	PNTR	66.72	180,700	227,800
17.4	HOISTS & TROLLEYS							150,000	175,000					204,400	529,400
	MISC HOISTS & TROLLEYS	IN BUILDINGS FOR EQUIPMENT MAINTENANCE AND FOR ID FANS	EST	10	EA	15000	17500	150,000	175,000	200.00	2,300	MECH	88.89	204,400	529,400
17.5	MISC AUX STEEL FOR PIPE SUPPORTS	FIELD FABRICATED	EST	35	TN		3500	0	122,500	120.00	4,830	STST	105.71	510,600	633,100
17.6	MISC PIPE SUPPORT FOUNDATIONS							0	10,500					19,600	30,100
	EXCAVATION / BACKFILL		EST	65	CY			0	0	0.15	11	EXFD	90.00	1,000	1,000
	REINFORCING		EST	5.0	TN		1,150.00	0	5,800	20.00	115	REIN	78.27	9,000	14,800
	FORMWORK		EST	260	SF		2.50	0	700	0.14	42	FORM	99.43	4,200	4,900
	CONCRETE		EST	25	CY		105.00	0	2,600	1.50	43	CONP	79.64	3,400	6,000
	MUD MAT		EST	10	CY		105.00	0	1,100	1.50	17	CONP	79.64	1,400	2,500

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	EMBEDDED STEEL		EST	125	LB		2.50	0	300	0.06	9	CARP	71.88	600	900
17.7	EYE WASH STATIONS	WITH 50 KW HEATERS	EST	5	EA	6000	1000	30,000	5,000	60.00	345	MECH	88.89	30,700	65,700
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS	STAND PIPE FOR BUILDINGS	EST	10	EA		30000	0	300,000	240.00	2,760	MECH	88.89	245,300	545,300
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							180,000	999,300		24,669			2,042,800	3,222,100
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE							0						0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						2,145		83.48	179,000	179,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,681			188,104	188,104
	PER DIEM	NONE		0.00	HR						29,495			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				4,997					10,214	15,211
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				49,965						49,965
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			9,000							9,000
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				49,965					102,140	152,105
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				149,895					306,420	456,315
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							9,000	254,822					785,878	1,049,700
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS						189,000	1,254,100					2,828,700	4,271,800
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE														0
18.1	RELOCATE HYDROGEN STORAGE TANK							0	15,600					86,800	102,400
	LABOR ALLOWANCE TO RELOCATED THE TANK	LABOR ALLOWANCE TO RELOCATE THE TANK	EST	1	LT			0	0	500.00	575	MECH	88.89	51,100	51,100
	NEW FOUNDATION ALLOWANCE FOR THE RELOCATED TANK		EST	35	CY		230	0	8,100	6.00	242	MECH	88.89	21,500	29,600
	ELECTRICAL ALLOWANCE FOR THE RELOCATED TANK	INCLUDES LIGHTING	EST	1	LT		7500	0	7,500	125.00	144	WIRE	98.84	14,200	21,700
18.2	NEW HYDROGEN LINE TO PLANT							0	62,100					150,600	212,700
	LARGE BORE PIPE	DOUBLE WALL PIPE	EST	800	LF		75	0	60,000	1.65	1,518	YDPP	90.14	136,800	196,800
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	593	CY			0	0	0.20	136	EXFD	90.00	12,300	12,300
	BEDDING	FOR UNDERGROUND PIPING	EST	59	CY		35	0	2,100	0.25	17	EXFD	90.00	1,500	3,600
18.3	RELOCATE MISC. UNDERGROUND UTILITIES	ALLOWANCE	EST	1	LT		125000	0	125,000	1500.00	1,725	WIRE	98.84	170,500	295,500
18.4	OUTAGE TIE-IN DUCTWORK	ALLOWANCE FOR 85 TON DUCTWORK	ALLOW	85	TN		3250	0	276,300	70.00	6,843	FLDU	107.96	738,700	1,015,000
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							0	479,000		11,199			1,146,600	1,625,600
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE							0						0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0

				AEP										Estimate No.:	30723B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						974		83.48	81,000	81,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						1,217			85,395	85,395
	PER DIEM	NONE		0.00	HR						13,390			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				2,395					5,733	8,128
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				23,950						23,950
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			0							0
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				23,950					57,330	81,280
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				71,850					171,990	243,840
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							0	122,100					401,400	523,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE						0	601,100					1,548,000	2,149,200
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT														
19.1	ARSENIC, ASBESTOS , LEAD ABATEMENT	ALLOWANCE PROVIDED BY AEP													750,000
99.00	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS							91,113,100	46,466,400		1,419,123			132,636,000	288,565,500
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE			9	MN	75,000.00		675,000	0		7,452			662,400	1,337,400
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						123,402		93.46	10,301,000	10,301,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						154,998			9,712,349	9,712,349
	PER DIEM	NONE		0.00	HR									0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				229,632					661,630	891,262
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				2,296,320						2,296,320
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			4,492,655							4,492,655
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				2,296,320					6,616,300	8,912,620
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				6,888,960					19,848,900	26,737,860
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							5,167,700	11,711,200					47,802,600	64,681,500
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST							96,280,800	58,177,600					180,438,600	353,247,000
	TOTAL PROJECT DIRECT AND CONSTRUCTION INDIRECT COSTS							96,280,800	58,177,600					180,438,600	353,247,000
								0							
	INDIRECT COSTS														
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES			1.0	LT										25,000,000
	CONSTRUCTION MANAGEMENT			3.0	%										10,597,400
	S-U / COMMISSIONING			1.0											3,532,500



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-7
NID Detailed Capital Cost Estimate No. 30727 Base Est-1B ESP not in Service
(3.0 lb SO₂/MMbtu)

[illegible]

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS							0	273,800					433,700	707,500
	EXCAVATION / BACKFILL		EST	1,160	CY			0	0	0.15	200	EXFD	90.00	18,000	18,000
	REINFORCING		EST	111	TN		1,150.00	0	127,700	20.00	2,553	REIN	78.27	199,800	327,500
	FORMWORK		EST	1,624	SF		2.50	0	4,100	0.14	261	FORM	99.43	26,000	30,100
	CONCRETE		EST	1,178	CY		105.00	0	123,700	1.50	2,032	CONP	79.64	161,800	285,500
	MUD MAT		EST	114	CY		105.00	0	12,000	1.50	197	CONP	79.64	15,700	27,700
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	EST	7,875	SF		500.00	0	3,937,500	0.00	0	STST	105.71	0	3,937,500
1.13	TRANSFORMERS							770,000	0					145,600	915,600
	SST TRANSFORMERS: 21F & 21G	13.8KV-4160V, 3 PHASE, 2 WINDING	EST	2	EA	300000		600,000	0	500.00	1,150	EHEA	79.16	91,000	691,000
	SUS TRANSFORMERS: 31F, 31G	13.8KV-4160V, 3 PHASE, CAST COIL	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600
1.14	SWITCHGEAR							1,082,000	0		0			569,000	1,651,000
	13KV MEDIUM VOLTAGE	PRICE PER SECTION	EST	10	EA	50000		500,000	0	230.00	2,645	EHEA	79.16	209,400	709,400
	4.16 KV MEDIUM VOLTAGE (21F/G)	PRICE PER SECTION	EST	10	EA	39200		392,000	0	280.00	3,220	EHEA	79.16	254,900	646,900
	480V LOW VOLTAGE (31F/G)	PRICE PER SECTION	EST	5	EA	38000		190,000	0	230.00	1,323	EHEA	79.16	104,700	294,700
1.15	CABLE BUS & TERMINATIONS							756,300	35,800		0			1,316,200	2,108,300
	15KV CABLE BUS TO 13F/G)	CABLE BUS	EST	1,300	FT	466		605,800	0	6.75	10,091	WIRE	98.84	997,400	1,603,200
	5KV CABLE BUS	CABLE BUS	EST	150	FT	385		57,800	0	4.70	811	WIRE	98.84	80,100	137,900
	480V CABLE BUS	CABLE BUS	EST	150	FT	618		92,700	0	10.30	1,777	WIRE	98.84	175,600	268,300
	CABLE BUS TERMINATION	500MCM- 15KV TERMINATIONS	EST	4	EA		1,800.00	0	7,200	33.00	152	WIRE	98.84	15,000	22,200
	CABLE BUS TERMINATION	1000MCM- 5KV TERMINATIONS	EST	4	EA		4,440.00	0	17,800	51.60	237	WIRE	98.84	23,500	41,300
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
1.16	MCC							120,000	0					7,200	127,200
	480V MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600
	DC MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600
1.17	MIMIC PANELS		EST	1	EA	17500		17,500	0	40.00	46	WIRE	98.84	4,500	22,000
1.18	EMERGENCY POWER SYSTEM							285,500	0					38,900	324,400
	DC PANEL BOARD		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100
	UPS		EST	1	EA	60000		60,000	0	32.00	37	WIRE	98.84	3,600	63,600
	SWITCHBOARD		EST	1	EA	40000		40,000	0	40.00	46	WIRE	98.84	4,500	44,500
	BYPASS TRANSFORMERS		EST	1	EA	25000		25,000	0	40.00	46	WIRE	98.84	4,500	29,500
	BATTERY CHARGER		EST	2	EA	32000		64,000	0	16.00	37	WIRE	98.84	3,600	67,600
	BATTERIES		EST	1	LT	50000		50,000	0	80.00	92	WIRE	98.84	9,100	59,100
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	EST	3,600	LF		51.75	0	186,300	0.69	2,865	WIRE	98.84	283,200	469,500

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
1.20	MEDIUM VOLTAGE POWER CABLE & TERMINATION							0	91,600		0			393,700	485,300
	1/C # 350KCMIL-5KV		EST	14,600	LF		6.13	0	89,500	0.23	3,862	WIRE	98.84	381,700	471,200
	1/C # 2/0-5KV		EST	900	LF		2.35	0	2,100	0.12	121	WIRE	98.84	12,000	14,100
1.21	LOW VOLTAGE POWER CABLE & TERMINATION							0	543,000		0			794,800	1,337,800
	3/C # 500KCMIL - 600V		EST	2,600	LF		26.12	0	67,900	0.69	2,063	WIRE	98.84	203,900	271,800
	#4/0 - #12 AWG-600V		EST	65,800	LF		7.22	0	475,100	0.08	5,978	WIRE	98.84	590,900	1,066,000
1.22	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	107,800	LF		3.20	0	345,000	0.23	28,513	WIRE	98.84	2,818,200	3,163,200
1.23	GROUNDING							11,100	0					37,200	48,300
	GROUND ROD	3/4" - 20' LONG EACH	EST	18	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,000	FT	7.65		7,700	0	0.12	138	WIRE	98.84	13,600	21,300
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
1.24	LIGHTING/ TRANSFORMERS & PANELS							26,000	30,000					29,500	85,500
	LIGHT FIXTURES		EST	40	EA		750	0	30,000	4.00	184	WIRE	98.84	18,200	48,200
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
1.25	RACEWAY, CABLE TRAY, & CONDUIT							0	1,569,000		0			7,502,000	9,071,000
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	5,120	LF		18.25	0	93,400	1.10	6,477	WIRE	98.84	640,200	733,600
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	3,000	LF		21.50	0	64,500	1.45	5,003	WIRE	98.84	494,400	558,900
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	9,200	LF		27.10	0	249,300	1.75	18,515	WIRE	98.84	1,830,000	2,079,300
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	2,400	LF		30.30	0	72,700	1.95	5,382	WIRE	98.84	532,000	604,700
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,000	LF		61.00	0	244,000	1.13	5,184	WIRE	98.84	512,400	756,400
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,600	LF		31.00	0	266,600	0.81	7,981	WIRE	98.84	788,900	1,055,500
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,000	LF		21.50	0	172,000	0.65	5,934	WIRE	98.84	586,500	758,500
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	12,000	LF		9.25	0	111,000	0.35	4,858	WIRE	98.84	480,100	591,100
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	15,000	LF		7.15	0	107,300	0.28	4,899	WIRE	98.84	484,200	591,500
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	27,000	LF		4.44	0	119,900	0.24	7,421	WIRE	98.84	733,500	853,400
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	46,750	LF		1.46	0	68,300	0.08	4,247	WIRE	98.84	419,800	488,100
1.26	DUCT BANK							0	40,800					280,000	320,800
	DUCT BANK WITH 3-5" & 3-3" CONDUITS		EST	300	LF		142.42	0	14,200	3.17	1,094	ECND	75.97	83,100	97,300
	DUCT BANK WITH 6-5" & 6-3" CONDUITS		EST	375	LF		265.88	0	26,600	6.01	2,592	ECND	75.97	196,900	223,500
1.27	FOUNDATION FOR TRANSFORMERS							0	64,600		0			168,200	232,800

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	EXCAVATION / BACKFILL		EST	950	CY			0	0	0.15	164	EXFD	90.00	14,700	14,700
	REINFORCING		EST	18	TN		1,150.00	0	20,700	20.00	414	REIN	78.27	32,400	53,100
	FORMWORK		EST	4,500	SF		2.50	0	11,300	0.14	725	FORM	99.43	72,000	83,300
	CONCRETE		EST	178	CY		105.00	0	18,700	1.50	307	CONP	79.64	24,500	43,200
	MUD MAT		EST	42	CY		105.00	0	4,400	1.50	72	CONP	79.64	5,800	10,200
	EMBEDDED STEEL		EST	3,800	LB		2.50	0	9,500	0.06	262	CARP	71.88	18,800	28,300
1.28	FIREWALL FOR TRANSFORMERS							0	3,200					8,300	11,500
	REINFORCING		EST	1.2	TN		1,150.00	0	1,400	20.00	28	REIN	78.27	2,200	3,600
	FORMWORK		EST	80	SF		2.50	0	200	0.14	13	FORM	99.43	1,300	1,500
	CONCRETE		EST	15	CY		105.00	0	1,600	3.50	60	CONP	79.64	4,800	6,400
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							10,563,700	12,505,900		277,244			26,800,200	49,869,800
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						24,108		83.48	2,013,000	2,013,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						30,135			2,114,023	2,114,023
	PER DIEM	NONE		0.00	HR						331,487			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				62,530					134,001	196,531
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				625,295						625,295
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			528,185							528,185
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				625,295					1,340,010	1,965,305
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				1,875,885					4,020,030	5,895,915
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							528,200	3,189,000					9,621,100	13,338,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ID FANS						11,091,900	15,694,900					36,421,300	63,208,100
2.0	NID MODULES														
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS / COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	EST	1	LT	50,231,000		50,231,000	0	414600.00	476,790	MECH	88.89	42,381,900	92,612,900
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	EST	80,640	SF	30		2,419,200	0	0.00	0	DINS	81.75	0	2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF						58,100	1,316,900					1,747,600	3,122,600
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	200	TN		2,900.00	0	580,000	24.00	5,520	STST	105.71	583,500	1,163,500
	SIDING FOR PENTHOUSE		EST	8,960	SF		12.00	0	107,500	0.11	1,133	SDNG	93.41	105,900	213,400
	CONCRETE FLOOR FOR PENTHOUSE		EST	632	CY		230.00	0	145,400	7.50	5,451	SDNG	93.41	509,200	654,600
	ROOFING FOR PENTHOUSE		EST	25,600	SF		18.00	0	460,800	0.22	6,477	ROOF	69.12	447,700	908,500

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	H&V		EST	1	LT	58100	23240	58,100	23,200	1084.00	1,247	HVAC	81.24	101,300	182,600
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH						92,200	2,428,900					2,544,900	5,066,000
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	560	TN		2,900.00	0	1,624,000	24.00	15,456	STST	105.71	1,633,900	3,257,900
	SIDING FOR BOTTOM ENCLOSURE		EST	25,600	SF		12.00	0	307,200	0.11	3,238	SDNG	93.41	302,500	609,700
	ROOFING FOR BOTTOM ENCLOSURE		EST	25,600	SF		18.00	0	460,800	0.22	6,477	ROOF	69.12	447,700	908,500
	H&V		EST	1	LT	92200	36880	92,200	36,900	1721.33	1,980	HVAC	81.24	160,800	289,900
2.5	PIPING & SUPPORTS - MECHANICAL							125,200	174,500					385,900	685,600
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED	EST	300	LF		23.0	0	6,900	1.48	511	SPNG	94.41	48,200	55,100
	LARGE BORE PIPING	6" SS, SCH 40 WELDED	EST	400	LF		111.00	0	44,400	2.02	929	SPNG	94.41	87,700	132,100
	LARGE BORE PIPING	18" CS, STD WELDED	EST	400	LF		234.10	0	93,600	2.34	1,076	SPNG	94.41	101,600	195,200
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	150	LF		22.20	0	3,300	1.26	217	SPNG	94.41	20,500	23,800
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	100	LF		48.80	0	4,900	1.44	166	SPNG	94.41	15,600	20,500
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	300	LF		33.70	0	10,100	1.32	455	SPNG	94.41	43,000	53,100
	VALVE	18" GATE, 150 #, CS, WELDED	EST	4	EA	17,500		70,000	0	28.30	130	SPNG	94.41	12,300	82,300
	VALVE	6" GATE, 150 #, SS, WELDED	EST	6	EA	4,700		28,200	0	12.96	89	SPNG	94.41	8,400	36,600
	VALVE	4" GATE, 150 #, CS, WELDED	EST	5	EA	2,500		12,500	0	7.70	44	SPNG	94.41	4,200	16,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	10	EA	1,450		14,500	0	5.64	65	SPNG	94.41	6,100	20,600
	PIPE SUPPORTS		EST	150	EA		75.00	0	11,300	2.50	431	MECH	88.89	38,300	49,600
2.6	DUCTWORK							0	4,797,000					10,995,100	15,792,100
	NID MODULE INLET	INCLUDES INTERNAL BRACING AND TURNING VANES	EST	1,476	TN		3,250.00	0	4,797,000	60.00	101,844	FLDU	107.96	10,995,100	15,792,100
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	738	TN		2,900.00	0	2,140,200	24.00	20,369	STST	105.71	2,153,200	4,293,400
2.8	DUCTWORK INSULATION & LAGGING		EST	136,000	SF		12.00	0	1,632,000	0.25	39,100	DINS	81.75	3,196,400	4,828,400
2.9	NID MODULE- FOUNDATIONS							0	1,087,000					1,682,500	2,769,500
	EXCAVATION / BACKFILL		EST	4,400	CY			0	0	0.15	759	EXFD	90.00	68,300	68,300
	REINFORCING		EST	450	TN		1,150.00	0	517,500	20.00	10,350	REIN	78.27	810,100	1,327,600
	FORMWORK		EST	3,200	SF		2.50	0	8,000	0.14	515	FORM	99.43	51,200	59,200
	CONCRETE		EST	4,750	CY		105.00	0	498,800	1.50	8,194	CONP	79.64	652,600	1,151,400
	MUD MAT		EST	340	CY		105.00	0	35,700	1.50	587	CONP	79.64	46,700	82,400
	EMBEDDED STEEL		EST	10,800	LB		2.50	0	27,000	0.06	745	CARP	71.88	53,600	80,600
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY							0	1,152,000					2,863,700	4,015,700
	SUPPORT STEEL	MATERIAL INCLUDED WITH OEM EQUIPMENT	EST	640	TN			0	0	24.00	17,664	STST	105.71	1,867,300	1,867,300
	ACCESS GALLERY		EST	25,600	SF		45.00	0	1,152,000	0.40	11,776	GALL	84.61	996,400	2,148,400
2.11	GROUNDING							0	16,000		0			46,100	62,100
	GROUND ROD	3/4" - 20' LONG	EST	16	EA		150	0	2,400	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,650	FT		7.65	0	12,600	0.12	228	WIRE	98.84	22,500	35,100
	CADWELD		EST	64	EA		15	0	1,000	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
2.12	LIGHTING/ TRANSFORMERS & PANELS							156,000	150,000		0			159,100	465,100
	LIGHT FIXTURES		EST	200	EA		750	0	150,000	4.00	920	WIRE	98.84	90,900	240,900
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	6	EA	10000		60,000	0	40.00	276	WIRE	98.84	27,300	87,300
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	6	EA	7500		45,000	0	32.00	221	WIRE	98.84	21,800	66,800
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	6	EA	5000		30,000	0	16.00	110	WIRE	98.84	10,900	40,900
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	6	EA	3500		21,000	0	12.00	83	WIRE	98.84	8,200	29,200
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0													

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							53,081,700	14,894,500		741,862			68,156,400	136,132,600
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE			9	MN	75000		675,000		720.00	7,452	MECH	88.89	662400	1,337,400
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						64,510		83.48	5,385,000	5,385,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						81,382			5,709,080	5,709,080
	PER DIEM	NONE		0.00	HR						895,207			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				74,473					340,782	415,255
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				744,725						744,725
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			2,654,085							2,654,085
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				744,725					3,407,820	4,152,545
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				2,234,175					10,223,460	12,457,635
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							3,329,100	3,798,100					25,728,500	32,855,700
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES						56,410,800	18,692,600					93,884,900	168,988,300
3.0	NEW STACK														
3.1	CONCRETE STACK (DRY)	PROVIDED BY AEP													17,600,000
4.0	LIME HANDLING SYSTEM														
4.1	LIME STORAGE SILO							5,992,400	0					0	5,992,400
	SILO	CONCRETE SILO 80' DIA X 152' H - 14256 TONS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	5,702,400.00		5,702,400	0	0.00	0	CONP	79.64	0	5,702,400
	ELEVATOR	MAINTENANCE ELEVATOR COMMON FOR BOTH SILOS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	290,000.00		290,000	0	0.00	0	MECH	88.89	0	290,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTER, TWO FILTER SEPARATORS	EST	1	LT	700,000		700,000	0	4400.00	5,060	MECH	88.89	449,800	1,149,800
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	1,100,000		1,100,000	0	6400.00	7,360	MECH	88.89	654,200	1,754,200
4.4	PIPING - MECHANICAL							88,700	130,300					342,600	561,600
	LARGE BORE PIPING	14" CS, SCH 40 WELDED - ON PIPE RACK	EST	500	LF		163.1	0	81,600	1.67	960	SPNG	94.41	90,700	172,300
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	1,200	LF		14.1	0	16,900	0.83	1,145	SPNG	94.41	108,100	125,000
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	VALVE	2" GLOBE, 150# SS, WELDED	EST	6	EA	1,450		8,700	0	5.64	39	SPNG	94.41	3,700	12,400
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400
	VALVE	14" BFLY 150# CS, FLANGED	EST	4	EA	3,000		12,000	0	16.60	76	SPNG	94.41	7,200	19,200
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	1,000	CY			0	0	0.20	230	EXFD	90.00	20,700	20,700
	BEDDING	FOR UNDERGROUND PIPING	EST	133	CY		35.0	0	4,700	0.25	38	EXFD	90.00	3,500	8,200
	PIPE SUPPORTS		EST	238	EA		50.00	0	11,900	1.50	410	MECH	88.89	36,400	48,300
4.5	LIME STORAGE SILO ACCESS STAIR TOWER		EST	55	TN		2,900.00	0	159,500	24.00	1,518	STST	105.71	160,500	320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	EST	650	TN		2,900.00	0	1,885,000	24.00	17,940	STST	105.71	1,896,400	3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING						0	42,700					79,300	122,000
	EXCAVATION / BACKFILL		EST	500	CY			0	0	0.15	86	EXFD	90.00	7,800	7,800
	REINFORCING		EST	15	TN		1,150.00	0	17,300	20.00	345	REIN	78.27	27,000	44,300
	FORMWORK		EST	750	SF		2.50	0	1,900	0.14	121	FORM	99.43	12,000	13,900
	CONCRETE		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	1,000	LB		2.50	0	2,500	0.06	69	CARP	71.88	5,000	7,500
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS							0	69,600					130,200	199,800
	EXCAVATION / BACKFILL		EST	800	CY			0	0	0.15	138	EXFD	90.00	12,400	12,400
	REINFORCING		EST	25	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200
	CONCRETE		EST	300	CY		105.00	0	31,500	1.50	518	CONP	79.64	41,200	72,700
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H						75,000	335,000					24,400	434,400
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	3,000	SF		105	0	315,000	0.00	0	STST	105.71	0	315,000
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	40T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	75000	20000	75,000	20,000	350.00	300	HVAC	81.24	24,400	119,400
4.10	CONCRETE PIT FOR THE ELEVATOR		EST	10	CY		230.00	0	2,300	7.50	86	CONP	79.64	6,900	9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS						0	368,100					613,200	981,300
	EXCAVATION / BACKFILL		EST	2,900	CY			0	0	0.15	500	EXFD	90.00	45,000	45,000
	REINFORCING		EST	147.0	TN		1,150.00	0	169,100	20.00	3,381	REIN	78.27	264,600	433,700
	FORMWORK		EST	2,600	SF		2.50	0	6,500	0.14	419	FORM	99.43	41,600	48,100
	CONCRETE		EST	1,600	CY		105.00	0	168,000	1.50	2,760	CONP	79.64	219,800	387,800
	MUD MAT		EST	90	CY		105.00	0	9,500	1.50	155	CONP	79.64	12,400	21,900
	EMBEDDED STEEL		EST	6,000	LB		2.50	0	15,000	0.06	414	CARP	71.88	29,800	44,800
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS							0	14,200					26,200	40,400
	EXCAVATION / BACKFILL		EST	110	CY			0	0	0.15	19	EXFD	90.00	1,700	1,700
	REINFORCING		EST	4.8	TN		1,150.00	0	5,500	20.00	110	REIN	78.27	8,600	14,100
	FORMWORK		EST	320	SF		2.50	0	800	0.14	52	FORM	99.43	5,100	5,900
	CONCRETE		EST	60	CY		105.00	0	6,300	1.50	104	CONP	79.64	8,200	14,500

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	MUD MAT		EST	8	CY		105.00	0	800	1.50	14	CONP	79.64	1,100	1,900
	EMBEDDED STEEL		EST	300	LB		2.50	0	800	0.06	21	CARP	71.88	1,500	2,300
4.13	PIPE RACK - FOUNDATIONS							0	239,600					519,100	758,700
	EXCAVATION / BACKFILL		EST	3,200	CY			0	0	0.15	552	EXFD	90.00	49,700	49,700
	REINFORCING		EST	90.0	TN		1,150.00	0	103,500	20.00	2,070	REIN	78.27	162,000	265,500
	FORMWORK		EST	9,500	SF		2.50	0	23,800	0.14	1,530	FORM	99.43	152,100	175,900
	CONCRETE		EST	950	CY		105.00	0	99,800	1.50	1,639	CONP	79.64	130,500	230,300
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	EST	5	EA	39200		196,000	0	230.00	1,323	EHEA	79.16	104,700	300,700
4.16	CABLE BUS DUCT							134,700	10,800					200,200	345,700
	480V CABLE BUS	BUST DUCT ONLY	EST	150	FT	898		134,700	0	10.30	1,777	WIRE	98.84	175,600	310,300
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
4.17	MCC							61,800	0					3,600	65,400
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400
4.18	MIMIC PANELS		EST	1	EA	17500		17,500	0	12.00	14	WIRE	98.84	1,400	18,900
4.19	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700
	DC PANEL BOARD		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000
	VRLA BATTERIES		EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700
4.20	GROUNDING							13,300	0					41,300	54,600
	GROUND ROD	3/4" - 20' LONG	EST	16	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,300	FT	7.65		9,900	0	0.12	179	WIRE	98.84	17,700	27,600
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
4.21	LIGHTING/ TRANSFORMERS & PANELS							52,000	135,000					104,500	291,500
	LIGHT FIXTURES		EST	180	EA		750	0	135,000	4.00	828	WIRE	98.84	81,800	216,800
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	10000		20,000	0	40.00	92	WIRE	98.84	9,100	29,100
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	7500		15,000	0	32.00	74	WIRE	98.84	7,300	22,300
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	2	EA	5000		10,000	0	16.00	37	WIRE	98.84	3,600	13,600
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	2	EA	3500		7,000	0	12.00	28	WIRE	98.84	2,700	9,700
4.22	RACEWAY, CABLE TRAY, & CONDUIT							0	296,400					1,429,900	1,726,300
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,050	LF		18.25	0	19,200	1.10	1,328	WIRE	98.84	131,300	150,500
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	600	LF		21.50	0	12,900	1.45	1,001	WIRE	98.84	98,900	111,800
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,700	LF		27.10	0	46,100	1.75	3,421	WIRE	98.84	338,200	384,300
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	500	LF		30.30	0	15,200	1.95	1,121	WIRE	98.84	110,800	126,000
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	750	LF		61.00	0	45,800	1.13	972	WIRE	98.84	96,100	141,900

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS														0
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	2,822,000		2,822,000	0	15740.00	18,101	MECH	88.89	1,609,000	4,431,000
6.2	ECONOMIZER ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES JET PUMPS AND PIPING / SUPPORTS TO THE BOTTOM ASH POND	EST	1	LT	400,000		400,000	0	2900.00	3,335	MECH	88.89	296,400	696,400
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.		2	EA	14,000		28,000	0	60.00	138	MECH	88.89	12,300	40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP		1	EA	12,000		12,000	0	45.00	52	MECH	88.89	4,600	16,600
6.5	PIPING - MECHANICAL		EST	1	LT			142,800	131,000					408,700	682,500
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	300	LF		45.1	0	13,500	0.87	300	SPNG	94.41	28,300	41,800
	LARGE BORE PIPING	6" CS, SCH 40 WELDED - ON PIPE RACK	EST	200	LF		32.2	0	6,400	0.88	202	SPNG	94.41	19,100	25,500
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	400	LF		14.1	0	5,600	0.83	382	SPNG	94.41	36,000	41,600
	LARGE BORE PIPING	10" CS, SCH 40 WELDED	EST	300	LF		110.3	0	33,100	2.40	828	SPNG	94.41	78,200	111,300
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	600	LF		72.8	0	43,700	1.45	1,001	SPNG	94.41	94,500	138,200
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400
	VALVE	6" AIR OPERATED, 150 #, CS, FLANGED	EST	2	EA	14,000		28,000	0	17.30	40	SPNG	94.41	3,800	31,800
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,000	CY			0	0	0.20	460	EXFD	90.00	41,400	41,400
	BEDDING	FOR UNDERGROUND PIPING	EST	267	CY		35.0	0	9,300	0.25	77	EXFD	90.00	6,900	16,200
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	110	EA		75.00	0	8,300	2.50	316	MECH	88.89	28,100	36,400
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 60' DIA X 143' H - 5400 TONS -SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	2,430,000		2,430,000	0	0.00	0	CONP	79.64	0	2,430,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID													
6.8	FLY ASH SILO	NOT REQUIRED - ECONOMIZER FLY ASH SLUICD TO BOTTOM ASH POND						0	0					0	0
	SILO BIN		EST	0	EA	50,000		0	0	450.00	0	TANK	89.16	0	0
	SUPPORT STEEL FOR SILO		EST	0	TN		2,900.00	0	0	24.00	0	STST	105.71	0	0

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS							0	162,400					273,700	436,100
	EXCAVATION / BACKFILL		EST	1,300	CY			0	0	0.15	224	EXFD	90.00	20,200	20,200
	REINFORCING		EST	65.0	TN		1,150.00	0	74,800	20.00	1,495	REIN	78.27	117,000	191,800
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200
	CONCRETE		EST	670	CY		105.00	0	70,400	1.50	1,156	CONP	79.64	92,000	162,400
	MUD MAT		EST	40	CY		105.00	0	4,200	1.50	69	CONP	79.64	5,500	9,700
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800
6.10	FLY ASH SILO - FOUNDATIONS	NOT REQUIRED						0	0					0	0
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0
	REINFORCING		EST	0.0	TN		1,150.00	0	0	20.00	0	REIN	78.27	0	0
	FORMWORK		EST	0	SF		2.50	0	0	0.14	0	FORM	99.43	0	0
	CONCRETE		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	0	LB		2.50	0	0	0.06	0	CARP	71.88	0	0
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS							0	97,600					161,900	259,500
	EXCAVATION / BACKFILL		EST	470	CY			0	0	0.15	81	EXFD	90.00	7,300	7,300
	REINFORCING		EST	38	TN		1,150.00	0	43,700	20.00	874	REIN	78.27	68,400	112,100
	FORMWORK		EST	960	SF		2.50	0	2,400	0.14	155	FORM	99.43	15,400	17,800
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000
	MUD MAT		EST	43	CY		105.00	0	4,500	1.50	74	CONP	79.64	5,900	10,400
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H						40,000	241,500					26,200	307,700
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	2,700	SF		85	0	229,500	0.00	0	STST	105.71	0	229,500
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	20T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	40000	12000	40,000	12,000	280.00	322	HVAC	81.24	26,200	78,200
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS	NOT REQUIRED						0	0					0	0
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0
	REINFORCING		EST	0	TN		1,150.00	0	0	20.00	0	REIN	78.27	0	0
	FORMWORK		EST	0	SF		2.50	0	0	0.14	0	FORM	99.43	0	0
	CONCRETE		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	0	LB		2.50	0	0	0.06	0	CARP	71.88	0	0
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	NOT REQUIRED						0	0					0	0
	PREENGINEERED BUILDING INCLUDING H&V AND LIGHTING		EST	0	SF		95	0	0	0.00	0	STST	105.71	0	0
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS		EST	0	LT	75000	20000	0	0	350.00	0	HVAC	81.24	0	0
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	EST	600	SF		500.00	0	300,000	0.00	0	STST	105.71	0	300,000

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
6.16	MCC	480V MCC PER LINE UP	EST	4	EA	30000		120,000	0	16.00	74	WIRE	98.84	7,300	127,300
6.17	EMERGENBCY POWER SYSTEM							185,500	0					40,000	225,500
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100
	SATELLITE UPS		EST	2	EA	41200		82,400	0	16.00	37	WIRE	98.84	3,600	86,000
	VRLA BATTERIES		EST	2	LT	36050		72,100	0	120.00	276	WIRE	98.84	27,300	99,400
6.18	LIGHTING/ TRANSFORMERS & PANELS							18,500	75,000					53,200	146,700
	LIGHT FIXTURES		EST	100	EA		750	0	75,000	4.00	460	WIRE	98.84	45,500	120,500
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
6.19	RACEWAY, CABLE TRAY, & CONDUIT							0	32,800					177,400	210,200
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	350	LF		27.10	0	9,500	1.75	704	WIRE	98.84	69600	79,100
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	350	LF		31.00	0	10,900	0.81	325	WIRE	98.84	32100	43,000
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,300	LF		4.44	0	5,800	0.24	357	WIRE	98.84	35300	41,100
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,500	LF		1.46	0	6,600	0.08	409	WIRE	98.84	40400	47,000
6.20	GROUNDING							0	4,500					10,900	15,400
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA		150	0	600	4.00	18	WIRE	98.84	1,800	2,400
	500 MCM	BARE COPPER WIRE	EST	500	FT		7.65	0	3,800	0.12	69	WIRE	98.84	6,800	10,600
	CADWELD		EST	8	EA		15	0	100	2.00	18	WIRE	98.84	1,800	1,900
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION							0	63,300					143,000	206,300
	3/C # 500KCMIL- 600V		EST	1,400	LF		26.12	0	36,600	0.69	1,111	WIRE	98.84	109,800	146,400
	#4/0 - #12 AWG-600V		EST	3,700	LF		7.22	0	26,700	0.08	336	WIRE	98.84	33,200	59,900
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,500	LF		3.20	0	20,800	0.08	591	WIRE	98.84	58,400	79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	EST	30	LF		205.00	0	6,200	4.05	140	ECND	75.97	10600	16,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							6,198,800	1,144,600		37,329			3,341,500	10,684,900
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE							0						0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						3,246		83.48	271,000	271,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						4,058			284,640	284,640
	PER DIEM	NONE		0.00	HR						44,633			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				5,723					16,708	22,431
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				57,230						57,230
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			309,940							309,940
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				57,230					167,075	224,305
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				171,690					501,225	672,915

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400
8.5	GROUNDING							5,500	0					18,600	24,100
	GROUND ROD	3/4" - 20' LONG	EST	8	EA	150		1,200	0	4.00	37	WIRE	98.84	3,600	4,800
	500 MCM	BARE COPPER WIRE	EST	500	FT	7.65		3,800	0	0.12	69	WIRE	98.84	6,800	10,600
	CADWELD		EST	32	EA	15		500	0	2.00	74	WIRE	98.84	7,300	7,800
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	8.00	9	WIRE	98.84	900	900
8.6	LIGHTING / TRANSFORMERS & PANELS							26,000	15,000					20,400	61,400
	LIGHT FIXTURES		EST	20	EA		750	0	15,000	4.00	92	WIRE	98.84	9,100	24,100
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
8.7	RACEWAY, CABLE TRAY, & CONDUIT							0	84,600					276,700	361,300
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	300	LF		18.25	0	5,500	1.10	330	WIRE	98.84	32600	38,100
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	200	LF		21.50	0	4,300	1.45	290	WIRE	98.84	28700	33,000
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	200	LF		61.00	0	12,200	1.13	225	WIRE	98.84	22300	34,500
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	250	LF		31.00	0	7,800	0.81	202	WIRE	98.84	19900	27,700
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	300	LF		21.50	0	6,500	0.65	194	WIRE	98.84	19100	25,600
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	300	LF		9.25	0	2,800	0.35	106	WIRE	98.84	10400	13,200
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	500	LF		7.15	0	3,600	0.28	142	WIRE	98.84	14000	17,600
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	2,000	LF		4.44	0	8,900	0.24	478	WIRE	98.84	47200	56,100
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,000	LF		1.46	0	4,400	0.08	273	WIRE	98.84	26900	31,300
	DUCT BANK WITH 12-5" & 6-3" CONDUITS	3.08' H X 5.2' W	EST	75	LF		381.96	0	28,600	6.48	559	FORM	99.43	55600	84,200
8.8	LOW VOLTAGE POWER CABLE & TERMINATION							0	16,000					62,900	78,900
	#4/0 - #12 AWG-600V		EST	2,000	LF		7.22			0.08	182	WIRE	98.84	18000	18,000
	CONTROL & INSTRUMENT CABLE														
	#14, #16 & PR # 20 & SHLD WIRE		EST	5,000	LF		3.20	0	16,000	0.08	454	WIRE	98.84	44900	60,900
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							2,929,000	306,900		18,831			1,726,800	4,962,700
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						1,637		83.48	137,000	137,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,047			143,591	143,591
	PER DIEM	NONE		0.00	HR						22,516			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				1,535					8,634	10,169

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				15,345						15,345
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			146,450							146,450
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				15,345					86,340	101,685
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				46,035					259,020	305,055
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							146,500	78,300					634,600	859,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ACTIVATED CARBON INJECTION SYSTEM						3,075,500	385,200					2,361,400	5,822,000
9.0	COMPRESSED AIR SYSTEM														
9.1	AIR COMPRESSOR & AUXILIARIES							848,000	0					184,600	1,032,600
	AIR COMPRESSOR	4100 CFM, OIL FREE	EST	2	EA	350000		700,000	0	750.00	1,725	MECH	88.89	153,300	853,300
	DRYERS	DESICCANT TYPE, HEATED AIR	EST	2	EA	60000		120,000	0	115.00	265	MECH	88.89	23,500	143,500
	RECEIVERS	3000 GAL WITH SAFETY RELIEF VALVE AND PRESSURE GAUGE	EST	2	EA	14000		28,000	0	38.00	87	MECH	88.89	7,800	35,800
9.2	PIPING - MECHANICAL							320,600	344,800					875,600	1,541,000
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	500	LF		14.5	0	7,300	0.70	403	SPNG	94.41	38,000	45,300
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	500	LF		45.1	0	22,600	0.87	500	SPNG	94.41	47,200	69,800
	LARGE BORE PIPING	6" SS, SCHEDULE 40, WELDED	EST	200	LF		111.0	0	22,200	2.02	465	SPNG	94.41	43,900	66,100
	LARGE BORE PIPING	8" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	700	LF		122.2	0	85,500	1.26	1,014	SPNG	94.41	95,800	181,300
	SMALL BORE PIPING	2" CS, SCH 80 WELDED, UNDERGROUND WRAPPED	EST	700	LF		20.80	0	14,600	0.64	515	SPNG	94.41	48,600	63,200
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" CS, SCH 80 WELDED	EST	200	LF		19.30	0	3,900	1.16	267	SPNG	94.41	25,200	29,100
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	700	LF		48.80	0	34,200	1.44	1,159	SPNG	94.41	109,400	143,600
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	1,500	LF		33.70	0	50,600	1.32	2,277	SPNG	94.41	215,000	265,600
	VALVE	2" GLOBE, 150# SS, WELDED	EST	50	EA	1,450		72,500	0	5.64	324	SPNG	94.41	30,600	103,100
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400
	VALVE	4" GATE, 150 #, SS, WELDED	EST	10	EA	3,400		34,000	0	9.24	106	SPNG	94.41	10,000	44,000
	VALVE	6" GATE, 150 #, SS, WELDED	EST	2	EA	4,700		9,400	0	12.96	30	SPNG	94.41	2,800	12,200
	VALVE	8" GATE, 150 #, SS, WELDED	EST	14	EA	6,240		87,400	0	15.96	257	SPNG	94.41	24,300	111,700
	VALVE	<2" GLOBE, 150# CS, WELDED	EST	10	EA	450		4,500	0	3.40	39	SPNG	94.41	3,700	8,200
	VALVE	<2" GLOBE, 150# SS, WELDED	EST	100	EA	750	750.00	75,000	75,000	4.08	469	SPNG	94.41	44,300	194,300
	VALVE	2" GLOBE, 150# CS, WELDED	EST	15	EA	850		12,800	0	4.20	72	SPNG	94.41	6,800	19,600
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	440	EA		50.00	0	22,000	2.00	1,012	MECH	88.89	90,000	112,000
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	583	CY			0	0	0.20	134	EXFD	90.00	12,100	12,100
	BEDDING	FOR UNDERGROUND PIPING	EST	78	CY		35.0	0	2,700	0.25	22	EXFD	90.00	2,000	4,700
9.3	AIR COMPRESSOR BUILDING - FOUNDATIONS							0	249,800					395,800	645,600
	EXCAVATION / BACKFILL		EST	1,100	CY			0	0	0.15	190	EXFD	90.00	17,100	17,100
	REINFORCING		EST	100	TN		1,150.00	0	115,000	20.00	2,300	REIN	78.27	180,000	295,000
	FORMWORK		EST	1,500	SF		2.50	0	3,800	0.14	242	FORM	99.43	24,000	27,800
	CONCRETE		EST	1,100	CY		105.00	0	115,500	1.50	1,898	CONP	79.64	151,100	266,600
	MUD MAT		EST	100	CY		105.00	0	10,500	1.50	173	CONP	79.64	13,700	24,200
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900
9.4	AIR COMPRESSOR BUILDING	120' L X 60' W X 20' H						0	612,000					0	612,000

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	7,200	SF		85	0	612,000	0.00	0	STST	105.71	0	612,000
9.5	LIGHTING/ TRANSFORMERS & PANELS							11,000	10,500					11,400	32,900
	LIGHT FIXTURES		EST	14	EA		750	0	10,500	4.00	64	WIRE	98.84	6,400	16,900
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
9.6	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0													
9.7	GROUNDING							4,500	0					10,900	15,400
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA	150		600	0	4.00	18	WIRE	98.84	1,800	2,400
	500 MCM	BARE COPPER WIRE	EST	500	FT	7.65		3,800	0	0.12	69	WIRE	98.84	6,800	10,600
	CADWELD		EST	8	EA	15		100	0	2.00	18	WIRE	98.84	1,800	1,900
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							1,184,100	1,217,100		16,582			1,478,300	3,879,500
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						1,442		83.48	120,000	120,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						1,802			126,438	126,438
	PER DIEM	NONE		0.00	HR						19,826			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				6,086					7,392	13,477
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				60,855						60,855
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			59,205							59,205
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				60,855					73,915	134,770
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				182,565					221,745	404,310
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							59,200	310,400					549,500	919,100
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	COMPRESSED AIR SYSTEM						1,243,300	1,527,500					2,027,800	4,798,600
10.0	SERVICE WATER SYSTEM														
10.1	PUMPS							186,000	0					90,000	276,000
	SERVICE WATER PUMPS	3000 GPM, 150 HP	EST	2	EA	45000		90,000	0	220.00	506	MECH	88.89	45,000	135,000
	MAKE UP WATER PUMPS	4000 GPM, 100 HP	EST	2	EA	48000		96,000	0	220.00	506	MECH	88.89	45,000	141,000
10.2	PIPING - MECHANICAL		EST	1	LT			298,400	342,800					688,300	1,329,500
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	900	LF		45.1	0	40,600	0.87	900	SPNG	94.41	85,000	125,600
	LARGE BORE PIPING	6" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	400	LF		80.4	0	32,200	1.14	524	SPNG	94.41	49,500	81,700
	LARGE BORE PIPING	6" SS, SCHEDULE 40, WELDED	EST	200	LF		111.0	0	22,200	2.02	465	SPNG	94.41	43,900	66,100
	LARGE BORE PIPING	10" SS, SCHEDULE 40, WELDED	EST	1,000	LF		179.9	0	179,900	2.49	2,864	SPNG	94.41	270,300	450,200
	LARGE BORE PIPING	14" HDPE (UNDERGROUND)	EST	500	LF		65.5	0	32,800	1.02	587	SPNG	94.41	55,400	88,200
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	300	LF		48.80	0	14,600	1.44	497	SPNG	94.41	46,900	61,500
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	4" GATE, 150 #, SS, WELDED	EST	12	EA	3,400		40,800	0	9.24	128	SPNG	94.41	12,000	52,800

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	VALVE	6" GATE, 150 #, SS, WELDED	EST	8	EA	4,700		37,600	0	12.96	119	SPNG	94.41	11,300	48,900
	VALVE	10" GATE, 150 #, SS, WELDED	EST	20	EA	9,500		190,000	0	18.52	426	SPNG	94.41	40,200	230,200
	VALVE	14" BFLY 150# SS, FLANGED	EST	4	EA	7,500		30,000	0	19.76	91	SPNG	94.41	8,600	38,600
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	160	EA		95.00	0	15,200	2.50	460	MECH	88.89	40,900	56,100
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	417	CY			0	0	0.20	96	EXFD	90.00	8,600	8,600
	BEDDING	FOR UNDERGROUND PIPING	EST	56	CY		35.0	0	1,900	0.25	16	EXFD	90.00	1,400	3,300
10.3	PIPING - FIRE PROTECTION SYSTEM		EST	1	LT			181,200	284,600	89.55	7,176	0	1207.47	673,300	1,139,100
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED	EST	200	LF		24.4	0	4,900	0.73	168	SPNG	94.41	15,900	20,800
	LARGE BORE PIPING	8" CS, SCHEDULE 40, WELDED	EST	300	LF		64.2	0	19,300	0.98	338	SPNG	94.41	31,900	51,200
	LARGE BORE PIPING	12" CS, SCHEDULE 40, WELDED	EST	150	LF		174.6	0	26,200	1.43	247	SPNG	94.41	23,300	49,500
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	3,000	LF		72.8	0	218,400	1.45	5,003	SPNG	94.41	472,300	690,700
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400
	VALVE	8" GATE, 150 #, CS, WELDED	EST	6	EA	4,800		28,800	0	13.30	92	SPNG	94.41	8,700	37,500
	VALVE	10" GATE, 150 #, CS, WELDED	EST	4	EA	6,500		26,000	0	16.10	74	SPNG	94.41	7,000	33,000
	VALVE	10" GATE WITH PIV, 150 #, CS, WELDED	EST	10	EA	7,000		70,000	0	17.71	204	SPNG	94.41	19,200	89,200
	VALVE	12" GATE, 150 #, CS, WELDED	EST	2	EA	8,200		16,400	0	19.20	44	SPNG	94.41	4,200	20,600
	FIRE HYDRANTS		EST	10	EA	1,500		15,000	0	8.00	92	MECH	88.89	8,200	23,200
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	54	EA		75.00	0	4,100	2.50	156	MECH	88.89	13,800	17,900
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,500	CY			0	0	0.20	575	EXFD	90.00	51,800	51,800
	BEDDING	FOR UNDERGROUND PIPING	EST	333	CY		35.0	0	11,700	0.25	96	EXFD	90.00	8,600	20,300
10.4	TANKS							0	234,000					0	234,000
	SERVICE WATER TANKS	20,000 GAL, CS, 14' DIA X 20' - SUBCONTRACT PRICE INCLUDES LABOR WITH EXTERIOR PRIMED AND FIELD PAINTED	EST	2	EA	60000.0		0	120,000	0.00	0	TANK	89.16	0	120,000
	MAKE UP WATER TANK	40,000 GAL, CS, 20' DIA X 20' - SUBCONTRACT PRICE INCLUDES LABOR WITH EXTERIOR PRIMED AND FIELD PAINTED	EST	1	EA	114000.0		0	114,000	0.00	0	TANK	89.16	0	114,000
10.5	SERVICE WATER TANK & PUMP - FOUNDATIONS							0	41,100					73,300	114,400
	EXCAVATION / BACKFILL		EST	296	CY			0	0	0.15	51	EXFD	90.00	4,600	4,600
	REINFORCING		EST	15.0	TN	1,150.00		0	17,300	20.00	345	REIN	78.27	27,000	44,300
	FORMWORK		EST	700	SF	2.50		0	1,800	0.14	113	FORM	99.43	11,200	13,000
	CONCRETE		EST	170	CY	105.00		0	17,900	1.50	293	CONP	79.64	23,400	41,300
	MUD MAT		EST	15	CY	105.00		0	1,600	1.50	26	CONP	79.64	2,100	3,700
	EMBEDDED STEEL		EST	1,000	LB	2.50		0	2,500	0.06	69	CARP	71.88	5,000	7,500
10.6	MAKE UP WATER TANK & PUMP - FOUNDATION							0	27,300					48,800	76,100
	EXCAVATION / BACKFILL		EST	197	CY			0	0	0.15	34	EXFD	90.00	3,100	3,100
	REINFORCING		EST	10	TN	1,150.00		0	11,500	20.00	229	REIN	78.27	18,000	29,500
	FORMWORK		EST	466	SF	2.50		0	1,200	0.14	75	FORM	99.43	7,500	8,700
	CONCRETE		EST	113	CY	105.00		0	11,900	1.50	195	CONP	79.64	15,500	27,400
	MUD MAT		EST	10	CY	105.00		0	1,000	1.50	17	CONP	79.64	1,400	2,400
	EMBEDDED STEEL		EST	665	LB	2.50		0	1,700	0.06	46	CARP	71.88	3,300	5,000
10.7	ELECTRICAL	INCLUDED IN ID FANS, 1.0													
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							665,600	929,800		17,005			1,573,700	3,169,100
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						1,479		83.48	123,000	123,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						1,848			129,662	129,662
	PER DIEM	NONE		0.00	HR						20,332			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				4,649					7,869	12,518
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				46,490						46,490
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			33,280							33,280
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				46,490					78,685	125,175
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				139,470					236,055	375,525
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							33,300	237,100					575,300	845,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	SERVICE WATER SYSTEM						698,900	1,166,900					2,149,000	4,014,700
11.0	POTABLE WATER SYSTEM														
11.1	PUMPS							30,000	0					18,400	48,400
	POTABLE WATER BOOSTER PUMPS	50 GPM, 5 HP	EST	2	EA	15000		30,000	0	90.00	207	MECH	88.89	18,400	48,400
11.2	PIPING - MECHANICAL		EST	1	LT			99,500	181,900					448,200	729,600
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	800	LF		45.1	0	36,100	0.87	800	SPNG	94.41	75,600	111,700
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED	EST	200	LF		68.3	0	13,700	1.82	419	SPNG	94.41	39,500	53,200
	LARGE BORE PIPING	6" SS, SCHEDULE 40, WELDED	EST	800	LF		111.0	0	88,800	2.02	1,858	SPNG	94.41	175,500	264,300
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	200	LF		14.1	0	2,800	0.83	191	SPNG	94.41	18,000	20,800
	SMALL BORE PIPING	2" D.I. SCH 80 (UNDERGROUND)	EST	500	LF		15.00	0	7,500	0.30	173	SPNG	94.41	16,300	23,800
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	200	LF		33.70	0	6,700	1.32	304	SPNG	94.41	28,700	35,400
	SMALL BORE PIPING	2" COPPER	EST	300	LF		28.50	0	8,600	0.43	148	SPNG	94.41	14,000	22,600
	VALVE	2" GLOBE, 150# CS, WELDED	EST	10	EA	850		8,500	0	4.20	48	SPNG	94.41	4,600	13,100
	VALVE	<2" GLOBE, 150# SS, WELDED	EST	8	EA	750	750.00	6,000	6,000	4.08	38	SPNG	94.41	3,500	15,500
	VALVE	4" GATE, 150 #, SS, WELDED	EST	20	EA	4,250		85,000	0	9.24	213	SPNG	94.41	20,100	105,100
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	150	EA		60.00	0	9,000	2.50	431	MECH	88.89	38,300	47,300
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	583	CY			0	0	0.20	134	EXFD	90.00	12,100	12,100
	BEDDING	FOR UNDERGROUND PIPING	EST	78	CY		35.0	0	2,700	0.25	22	EXFD	90.00	2,000	4,700
11.3	TANKS							0	8,500					0	8,500
	POTABLE WATER TANK	1,000 GAL, SS, 5' DIA X 8' - SUBCONTRACT PRICE INCLUDES LABOR	EST	1	EA		8500.0	0	8,500	0.00	0	TANK	89.16	0	8,500
11.4	POTABLE WATER TANK & PUMP - FOUNDATIONS							0	5,200					8,800	14,000
	EXCAVATION / BACKFILL		EST	20	CY			0	0	0.15	3	EXFD	90.00	300	300
	REINFORCING		EST	3.0	TN		1,150.00	0	3,500	20.00	69	REIN	78.27	5,400	8,900
	FORMWORK		EST	75	SF		2.50	0	200	0.14	12	FORM	99.43	1,200	1,400
	CONCRETE		EST	12	CY		105.00	0	1,300	1.50	21	CONP	79.64	1,600	2,900
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	60	LB		2.50	0	200	0.06	4	CARP	71.88	300	500
11.5	ELECTRICAL	INCLUDED IN ID FANS, 1.0													
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							129,500	195,600		5,095			475,400	800,500

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						443		83.48	37,000	37,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						554			38,852	38,852
	PER DIEM	NONE		0.00	HR						6,092			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				978					2,377	3,355
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				9,780						9,780
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			6,475							6,475
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				9,780					23,770	33,550
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				29,340					71,310	100,650
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							6,500	49,900					173,300	229,700
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	POTABLE WATER SYSTEM						136,000	245,500					648,700	1,030,200
12.0	FGD SUBSTATION														
12.1	TRANSFORMERS							1,560,500	0					273,100	1,833,600
	FGD SUBSTATION-AUX TRANSFORMERS: 11A & 11B	138KV-13.8KV- 2 WINDING XFMR	EST	2	EA	695250		1,390,500	0	1200.00	2,760	EHEA	79.16	218,500	1,609,000
	SUS TRANSFORMERS: 32F, 32G	13.8KV-480V,3PHASE	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600
12.2	TRANSFORMER PDC	15W X 45' X 10"H. SUBCONTRACT PRICE INCLUDES LABOR	EST	675.0	SF	300.0		202500.0	0.0	0.0	0.0	STST	105.71	0.0	202500.0
12.3	TRANSFORMER PDC - FOUNDATION							0	73,200					131,700	204,900
	EXCAVATION / BACKFILL		EST	700	CY			0	0	0.15	121	EXFD	90.00	10,900	10,900
	REINFORCING		EST	26	TN		1,150.00	0	30,200	20.00	604	REIN	78.27	47,300	77,500
	FORMWORK		EST	1,100	SF		2.50	0	2,800	0.14	177	FORM	99.43	17,600	20,400
	CONCRETE		EST	300	CY		105.00	0	31,500	1.50	518	CONP	79.64	41,200	72,700
	MUD MAT		EST	35	CY		105.00	0	3,700	1.50	60	CONP	79.64	4,800	8,500
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900
12.4	138KV MAIN FEEDER & TERMINATIONS							264,000	0					254,000	518,000
	138KV STRUCTURE AND SWITCH		EST	1	LT	103500		103,500	0	450.00	518	STST	105.71	54,700	158,200
	138KV MAIN FEEDER	1/C 750KCMIL- 138KV	EST	2,100	LF	51.75		108,700	0	0.69	1,671	WIRE	98.84	165,200	273,900
	138KV ACCESSORIES		EST	1	LT	51750		51,800	0	300.00	345	WIRE	98.84	34,100	85,900
12.5	SWITCHGEAR							914,200	0					121,600	1,035,800
	13.8 KV MEDIUM VOLTAGE (11A/B)	PRICE PER SECTION	EST	8	EA	75000		600,000	0	40.00	368	EHEA	79.16	29,100	629,100
	480V LOW VOLTAGE (32F/G)	PRICE PER SECTION	EST	5	EA	38000		190,000	0	16.00	92	EHEA	79.16	7,300	197,300
	EXISTING SCR SWITCHGEAR MODIFICATION	TURNKEY INCLUDING INSTALLATION & MATERIAL (EATON QUOTE 7/16/10)	Q	1	LT	124,200		124,200	0	750.00	863	WIRE	98.84	85,200	209,400
12.6	MCC	480V MCC, PER LINE UP	EST	2	EA	30000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600
12.7	CABLE BUS							181,100	18,000					290,200	489,300
	15KV CABLE BUS DUCT	BUS DUCT ONLY	EST	200	FT	442		88,400	0	3.30	759	WIRE	98.84	75,000	163,400
	480V CABLE BUS DUCT	BUS DUCT ONLY	EST	150	FT	618		92,700	0	10.30	1,777	WIRE	98.84	175,600	268,300
	CABLE BUS TERMINATION	500MCM - 15KV TERMINATIONS	EST	4	EA		1,800.00	0	7,200	33.00	152	WIRE	98.84	15,000	22,200

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
12.8	PANELS - RELAY							100,000	0					9,100	109,100
	RELAY PANELS & INTERLOCK	ALLOWANCE	EST	1	LT	100000		100,000	0	80.00	92	WIRE	98.84	9,100	109,100
12.9	MIMIC PANELS		EST	1	EA	17500		17,500	0	40.00	46	WIRE	98.84	4,500	22,000
12.10	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700
	DC PANEL BOARD		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000
	VRLA BATTERIES	8HR-400A, 480V	EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700
12.11	GROUNDING							23,300	0					59,100	82,400
	GROUND ROD	3/4" - 20' LONG EACH	EST	16	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	2,600	FT	7.65		19,900	0	0.12	359	WIRE	98.84	35,500	55,400
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
12.12	LIGHTING/ TRANSFORMERS & PANELS							26,000	30,000					29,500	85,500
	LIGHT FIXTURES		EST	40	EA		750	0	30,000	4.00	184	WIRE	98.84	18,200	48,200
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
12.13	OUTDOOR LIGHTING	NEW AUX YARD LIGHTING - ALLOWANCE	EST	1	LT	25000		25,000	0	500.00	575	WIRE	98.84	56,800	81,800
12.14	RACEWAY, CABLE TRAY, & CONDUIT							0	372,900					1,787,900	2,160,800
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,250	LF		18.25	0	22,800	1.10	1,581	WIRE	98.84	156,300	179,100
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	750	LF		21.50	0	16,100	1.45	1,251	WIRE	98.84	123,600	139,700
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	2,200	LF		27.10	0	59,600	1.75	4,428	WIRE	98.84	437,600	497,200
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	600	LF		30.30	0	18,200	1.95	1,346	WIRE	98.84	133,000	151,200
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,000	LF		61.00	0	61,000	1.13	1,296	WIRE	98.84	128,100	189,100
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,800	LF		31.00	0	55,800	0.81	1,670	WIRE	98.84	165,100	220,900
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	2,000	LF		21.50	0	43,000	0.65	1,484	WIRE	98.84	146,600	189,600
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,000	LF		9.25	0	27,800	0.35	1,214	WIRE	98.84	120,000	147,800
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,700	LF		7.15	0	26,500	0.28	1,208	WIRE	98.84	119,400	145,900
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	6,200	LF		4.44	0	27,500	0.24	1,704	WIRE	98.84	168,400	195,900
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	10,000	LF		1.46	0	14,600	0.08	909	WIRE	98.84	89,800	104,400
12.15	DUCT BANK							0	26,200	0.05	0			54,300	80,500
	UNDERGROUND SURVEY FOR NEW DUCT BANK RUN	MAIN FEEDER BETWEEN EXISTING SCR SUBSTATION TO FGD AUX XFMR	EST	200	LF			0	0	0.80	184	ECND	75.97	14,000	14,000
	4' X 4' DUCT BANK (138KV SCR TO FGD AUX XFMR SUBSTATION)	6 - 6" PVC	EST	40	LF		375	0	15,000	6.25	288	ECND	75.97	21,800	36,800
	DUCT BANK WITH 6-5" & 4-3" CONDUITS	2.38' H X 4' W	EST	50	LF		223.02	0	11,200	4.24	244	ECND	75.97	18,500	29,700
12.16	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 500KMIL- 15KV	EST	1,800	LF		9.27	0	16,700	0.23	476	WIRE	98.84	47,100	63,800
12.17	LOW VOLTAGE POWER CABLE & TERMINATION							0	96,600					147,700	244,300
	3/C # 500KMIL- 600V		EST	600	LF		26.12	0	15,700	0.69	476	WIRE	98.84	47,100	62,800
	#4/0 - #12 AWG-600V		EST	11,200	LF		7.22	0	80,900	0.08	1,018	WIRE	98.84	100,600	181,500
12.18	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,800	LF		3.20	0	21,800	0.08	618	WIRE	98.84	61,100	82,900
12.19	FOUNDATION FOR AUX TRANSFORMER							0	70,200					183,600	253,800

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	EXCAVATION / BACKFILL		EST	1,000	CY			0	0	0.15	173	EXFD	90.00	15,500	15,500
	REINFORCING		EST	20.0	TN		1,150.00	0	23,000	20.00	460	REIN	78.27	36,000	59,000
	FORMWORK		EST	5,000	SF		2.50	0	12,500	0.14	805	FORM	99.43	80,000	92,500
	CONCRETE		EST	190	CY		105.00	0	20,000	1.50	328	CONP	79.64	26,100	46,100
	MUD MAT		EST	45	CY		105.00	0	4,700	1.50	78	CONP	79.64	10,900	10,900
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800
12.20	FIREWALL FOR TRANSFORMERS							0	4,300					7,600	11,900
	REINFORCING		EST	1.5	TN		1,150.00	0	1,700	20.00	35	REIN	78.27	2,700	4,400
	FORMWORK		EST	120	SF		2.50	0	300	0.14	19	FORM	99.43	1,900	2,200
	CONCRETE		EST	22	CY		105.00	0	2,300	1.50	38	CONP	79.64	3,000	5,300
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							3,482,400	729,900		37,359			3,546,900	7,759,200
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						3,249		83.48	271,000	271,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						4,061			284,864	284,864
	PER DIEM	NONE		0.00	HR						44,668			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				3,650					17,735	21,384
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				36,495						36,495
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			174,120							174,120
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				36,495					177,345	213,840
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				109,485					532,035	641,520
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							174,100	186,100					1,282,979	1,643,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	FGD SUBSTATION						3,656,500	916,000					4,829,900	9,402,400
13.0	FGD DCS SYSTEM														0
13.1	DCS	3200 I/O POINTS	EST	3,200	EA	750		2,400,000	0	2.50	9,200	INEL	88.43	813,600	3,213,600
13.2	DCS - VENDOR FIELD SUPPORT	200 MAN DAYS @ \$1500/DAY - SHOWN AS SUBCONTRACT COST	EST	200	DAYS	1500		300,000	0		0	INEL	88.43	0	300,000
13.3	LOCALLY MOUNTED INSTRUMENTS							0	650,400					852,900	1,503,300
	LOCALLY MOUNTED INSTRUMENTS		EST	275	EA		2200	0	605,000	20.00	6,325	INEL	88.43	559,300	1,164,300
	INSTRUMENT RACKS	INCLUDED WITH INSTRUMENTS													
	INSTRUMENT TUBING	ALLOWANCE	EST	8,250	LF		5.5	0	45,400	0.35	3,321	INEL	88.43	293,600	339,000
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							2,700,000	650,400		18,846			1,666,500	5,016,900
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						1,639		83.48	137,000	137,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,048			143,700	143,700
	PER DIEM	NONE		0.00	HR						22,533			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				3,252					8,333	11,585
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				32,520						32,520
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			135,000							135,000
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				32,520					83,325	115,845
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				97,560					249,975	347,535
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							135,000	165,900					622,300	923,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	FGD DCS SYSTEM						2,835,000	816,300					2,288,800	5,940,100
14.0	CEM SYSTEM														0
14.1	CEM SYSTEM	PROVIDED BY AEP		1	LT	1260000	540000	1,260,000	540,000					310,000	2,110,000
15.0	TRUCK & RAIL INFRASTRUCTURE														0
15.1	EXISTING RAILROAD IMPROVEMENTS	FOR FULL RAILCAR STORAGE TRACK IMPROVEMENTS - 3250 LF						0	660,200					689,200	1,349,400
	REMOVE AND REPLACE 8" OF THE BALLAST	INCLUDES DISPOSAL OF REMOVED BALLAST	EST	3,250	LF		12.25	0	39,800	0.16	598	RRTK	88.26	52,800	92,600
	REPLACE 75% OF THE EXISTING WOODEN RAILROAD TIES	INCLUDES TIE PLATES, SPIKES AND BOLTS	EST	1,950	LF		80	0	156,000	0.85	1,906	RRTK	88.26	168,200	324,200
	REMOVE THE EXISTING RAIL AND REPLACE WITH 132-LB RAIL		EST	3,250	LF		87.5	0	284,400	1.05	3,924	RRTK	88.26	346,400	630,800
	REPLACE EXISTING #8 TURNOUTS		EST	4	EA		45000	0	180,000	300.00	1,380	RRTK	88.26	121,800	301,800
15.2	EXISTING RAILROAD IMPROVEMENTS	FOR LOOP TRACK UPGRADE - 5000 LF						0	1,008,800					1,055,600	2,064,400
	REMOVE AND REPLACE 8" OF THE BALLAST	INCLUDES DISPOSAL OF REMOVED BALLAST	EST	5,000	LF		12.25	0	61,300	0.16	920	RRTK	88.26	81,200	142,500
	REPLACE 75% OF THE EXISTING WOODEN RAILROAD TIES	INCLUDES TIE PLATES, SPIKES AND BOLTS	EST	3,000	LF		80	0	240,000	0.85	2,933	RRTK	88.26	258,800	498,800
	REMOVE THE EXISTING RAIL AND REPLACE WITH 132-LB RAIL		EST	5,000	LF		87.5	0	437,500	1.05	6,038	RRTK	88.26	532,900	970,400
	REPLACE EXISTING #8 TURNOUTS		EST	6	EA		45000	0	270,000	300.00	2,070	RRTK	88.26	182,700	452,700
15.3	NEW RAILROAD TRACK	INCLUDES, 132LB RAIL, 7" TIMBERS, TIE PLATES, SPIKES, BOLTS, 12' SUB BALLAST, 12" BALLAST, 12 OZ/SY GEOTEXTILE MEMBRANE, 12" SUBGRADE PREP	EST	1,400	LF		180	0	252,000	1.50	2,415	RRTK	88.26	213,100	465,100
15.4	FIELD FABRICATED TURNOUTS	#8 TURNOUT	EST	2	EA		45000	0	90,000	270.00	621	RRTK	88.26	54,800	144,800
15.5	RAIL SCALE	SUBCONTRACT COST, INCLUDES FOUNDATIONS	EST	2	EA	106250		212,500	0	0.00	0	MECH	88.89	0	212,500
15.6	NEW CONCRETE ENCASEMENT	OVER AND AROUND DUCT BANK CONNECTING THE PLANT TO SWITCHYARD. THIS IS UNDER THE NEW TRACK WORK EXTENSION						0	33,200					67,700	100,900
	EXCAVATION / BACKFILL		EST	170	CY			0	0	0.15	29	EXFD	90.00	2,600	2,600
	REINFORCING		EST	13	TN		1,150.00	0	14,400	20.00	288	REIN	78.27	22,500	36,900
	FORMWORK		EST	1,350	SF		2.50	0	3,400	0.14	217	FORM	99.43	21,600	25,000
	CONCRETE		EST	113	CY		105.00	0	11,900	1.50	195	CONP	79.64	15,500	27,400

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	MUD MAT		EST	20	CY		105.00	0	2,100	1.50	35	CONP	79.64	2,700	4,800
	EMBEDDED STEEL		EST	567	LB		2.50	0	1,400	0.06	39	CARP	71.88	2,800	4,200
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							212,500	2,044,200		23,607			2,080,400	4,337,100
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE							0						0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						2,053		83.48	171,000	171,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,566			180,008	180,008
	PER DIEM	NONE		0.00	HR						28,226			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				10,221					10,402	20,623
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				102,210						102,210
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			10,625							10,625
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				102,210					104,020	206,230
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				306,630					312,060	618,690
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							10,600	521,300					777,500	1,309,400
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	TRUCK & RAIL INFRASTRUCTURE						223,100	2,565,500					2,857,900	5,646,500
16.0	SITE IMPROVEMENTS - CIVIL WORK														
16.1	SITE GRADING							0	0					555,200	555,200
	CUT		EST	17,000	CY			0	0	0.08	1,564	ETWK	177.49	277,600	277,600
	FILL		EST	17,000	CY			0	0	0.08	1,564	ETWK	177.49	277,600	277,600
16.2	ROADS & SURFACING							0	1,204,900					1,667,500	2,872,400
	20' WIDE ACCESS ROAD	INCLUDES: 1.5" ASPHALT SURFACE COURSE 1.5" ASPHALT BINDER COURSE 12" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	5,600	SY		47	0	263,200	0.40	2,576	PBIT	90.25	232,500	495,700
	24' WIDE ACCESS ROAD	INCLUDES: 1.5" ASPHALT SURFACE COURSE 1.5" ASPHALT BINDER COURSE 12" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	5,300	SY		47	0	249,100	0.40	2,438	PBIT	90.25	220,000	469,100
	24' WIDE ACCESS ROAD AGGREGATE SHOULDERS	INCLUDES: 12" BASE COURSE 10 OZ/SY GEOTEXTILE	EST	1,300	SY		17.5	0	22,800	0.10	150	BCSE	105.94	15,800	38,600
	LIME UNLOADING AREA	INCLUDES: 1.5" ASPHALT SURFACE COURSE 1.5" ASPHALT BINDER COURSE 12" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	2,400	SY		47	0	112,800	0.40	1,104	PBIT	90.25	99,600	212,400

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	PARKING AREA	INCLUDES: 1.5" ASPHALT SURFACE COURSE 1.5" ASPHALT BINDER COURSE 12" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	900	SY		47	0	42,300	0.40	414	PBIT	90.25	37,400	79,700
	BYPRODUCT & WASTE LOADING AREA - SURFACING	12" REINFORCED CONCRETE	EST	1,900	SY		96	0	182,400	1.60	3,496	CONP	79.64	278,400	460,800
	BYPRODUCT & WASTE LOADING AREA	6" CONCRETE CURB	EST	560	LF		6.5	0	3,600	0.96	618	COND	70.04	43,300	46,900
	CONCRETE PAD BUILDING ENTRANCES	10" REINFORCED CONCRETE	EST	340	SY		80	0	27,200	1.50	587	CONP	79.64	46,700	73,900
	AGGREGATE AREA SURFACING	INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	33,500	SY		9	0	301,500	0.17	6,549	BCSE	105.94	693,800	995,300
16.3	NEW CONCRETE ENCASEMENT	16' X 4' X 40' - FOR EXISTING ASH PIPE HAUL ROAD CROSSING						0	36,500					66,500	103,000
	EXCAVATION / BACKFILL		EST	300	CY			0	0	0.15	52	EXFD	90.00	4,700	4,700
	REINFORCING		EST	25.0	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800
	FORMWORK		EST	500	SF		2.50	0	1,300	0.14	81	FORM	99.43	8,000	9,300
	CONCRETE		EST	50	CY		105.00	0	5,300	1.50	86	CONP	79.64	6,900	12,200
	MUD MAT		EST	5	CY		105.00	0	500	1.50	9	CONP	79.64	700	1,200
	EMBEDDED STEEL		EST	250	LB		2.50	0	600	0.06	17	CARP	71.88	1,200	1,800
16.4	TRUCK SCALE & CONCRETE APPROACH							170,000	27,300					92,000	289,300
	TRUCK SCALE	SUBCONTRACT COST, INCLUDES FOUNDATIONS AND LABOR	EST	2	EA	85000		170,000	0	0.00	0	MECH	88.89	0	170,000
	CONCRETE APPROACH FOR TRUCK SCALE	20' x 40' - TOTAL FOR TWO SCALES	EST	119	CY		230.0	0	27,300	7.50	1,022	EXFD	90.00	92,000	119,300
16.5	PROCESS WATER STORAGE BASIN							60,000	81,600					240,300	381,900
	SAND EXCAVATION		EST	3,000	CY			0	0	0.03	90	ETWK	177.49	15,900	15,900
	ROCK EXCAVATION	ASSUME ROCK IS RIPPABLE	EST	400	CY			0	0	0.05	22	ETWK	177.49	3,900	3,900
	POND SURFACING	6" REINFORCED CONCRETE	EST	1,700	SY		48	0	81,600	1.20	2,346	CONP	79.64	186,800	268,400
	PUMPS	500 GPM, 75 PSIG	EST	2	EA	30000		60,000	0	165.00	380	MECH	88.89	33,700	93,700
16.6	PROCESS WATER STORAGE BASIN PUMP STRUCTURE - CONCRETE							0	47,000					105,400	152,400
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0
	REINFORCING		EST	7	TN		1,150.00	0	8,100	20.00	161	REIN	78.27	12,600	20,700
	FORMWORK		EST	3,968	SF		2.50	0	9,900	0.14	639	FORM	99.43	63,500	73,400
	CONCRETE		EST	76	CY		105.00	0	8,000	1.50	131	CONP	79.64	10,400	18,400
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	380	LB		2.50	0	1,000	0.06	26	CARP	71.88	1,900	2,900
	PROCESS WATER BASIN PUMP STRUCTURE - GALLERY		EST	5	TN		4,000.00	0	20,000	35.00	201	GALL	84.61	17,000	37,000
16.7	STORM WATER DRAINAGE TRENCH	2' W X 3' DEEP CAST-IN-PLACE CONCRETE TRENCH W/REINFORCING & HS-20 RATED GRATE COVERS	EST	3,900	LF		135	0	526,500	1.50	6,728	CONP	79.64	535,800	1,062,300
16.8	STORM WATER RUNOFF POND							0	15,000					122,600	137,600
	SAND EXCAVATION		EST	11,000	CY			0	0	0.03	329	ETWK	177.49	58,400	58,400
	ROCK EXCAVATION	ASSUME ROCK IS RIPPABLE	EST	3,700	CY			0	0	0.05	204	ETWK	177.49	36,300	36,300
	4" TOPSOIL		EST	650	CY		14	0	9,100	0.03	22	LAND	61.45	1,400	10,500
	GRASS SEEDING, FERTILIZER AND MULCH		EST	1.2	AC		4930	0	5,900	240.00	331	MSTR	80.04	26,500	32,400
16.9	STORM WATER RUNOFF POND PUMP STRUCTURE - CONCRETE							90,000	42,300					182,200	314,500

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0
	REINFORCING		EST	3	TN		1,150.00	0	3,500	20.00	69	REIN	78.27	5,400	8,900
	FORMWORK		EST	2,025	SF		2.50	0	5,100	0.14	326	FORM	99.43	32,400	37,500
	CONCRETE		EST	33	CY		105.00	0	3,500	1.50	57	CONP	79.64	4,500	8,000
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	165	LB		2.50	0	400	0.06	11	CARP	71.88	800	1,200
	STORM WATER POND PUMP STRUCTURE - GALLERY		EST	5	TN		4,000.00	0	20,000	35.00	201	GALL	84.61	17,000	37,000
	PUMPS	500 GPM, 75 PSIG	EST	3	EA	30000		90,000	0	165.00	569	MECH	88.89	50,600	140,600
	PIPING	6" HDPE, SDR 9	EST	1,000	LF		9.8	0	9,800	0.69	794	YDPP	90.14	71,500	81,300
16.10	OILY WATER SEWER							4,500	112,600					236,000	353,100
	PIPING	6" CISP	EST	1,500	LF		21.5	0	32,300	0.33	569	YDPP	90.14	51,300	83,600
	PIPING	8" CISP	EST	1,400	LF		33.5	0	46,900	0.54	869	YDPP	90.14	78,400	125,300
	PIPING	6" HDPE, SDR 9	EST	1,000	LF		9.8	0	9,800	0.69	794	YDPP	90.14	71,500	81,300
	POST INDICATOR VALVE		EST	6	EA	750		4,500	0	6.00	41	YDPP	90.14	3,700	8,200
	MANHOLES		EST	15	EA		1575.0	0	23,600	20.00	345	YDPP	90.14	31,100	54,700
16.11	OIL SEPARATOR	500 GPM W/ INTEGRAL LIFT STATION	EST	2	EA	50000		100,000	0	560.00	1,288	YDPP	90.14	116,100	216,100
16.12	SANITARY SEWER							0	22,200					96,900	119,100
	PIPING	6" CISP	EST	500	LF		21.5	0	10,800	0.33	190	YDPP	90.14	17,100	27,900
	MANHOLES		EST	4	EA		1575.0	0	6,300	20.00	92	YDPP	90.14	8,300	14,600
	PIPING	4" HDPE (UNDERGROUND)	EST	1,500	LF		3.4	0	5,100	0.46	794	YDPP	90.14	71,500	76,600
16.13	SANITARY LIFT STATION	PACKAGED TYPE COMPLETE WITH PUMPS, 100,000 GPD	EST	1	EA	150,000	3.4	150,000	0	475.00	546	YDPP	90.14	49,200	199,200
16.14	EROSION & SEDIMENT CONTROL							0	12,400					20,400	32,800
	SILT FENCE		EST	2,400	LF		1.0	0	2,400	0.02	55	LAND	61.45	3,400	5,800
	ROCK CHECK DAMS		EST	20	EA		500.0	0	10,000	12.00	276	LAND	61.45	17,000	27,000
16.15	CONSTRUCTION LAYDOWN AREA	ALLOWANCE FOR 10 ACRES, DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED	EST	10	AC		70,000.0	0	700,000	800.00	9,200	EXFD	90.00	828,000	1,528,000
16.16	CRAFT PARKING	DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED. ALLOWANCE FOR 20,000 SY INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	20,000	SY		9	0	180,000	0.17	3,910	BCSE	105.94	414,200	594,200
16.17	CONTRACTOR OFFICES (AREA)	DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED. ALLOWANCE FOR 5,000 SY AREA (TRAILERS BY CONTRACTORS) INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	EST	5,000	SY		9	0	45,000	0.17	978	BCSE	105.94	103,600	148,600
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							574,500	3,053,300		56,485			5,431,900	9,059,700
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						4,912		83.48	410,000	410,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						6,140			430,707	430,707
	PER DIEM	NONE		0.00	HR						67,537			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				15,267					27,160	42,426
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				152,665						152,665
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			28,725							28,725
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				152,665					271,595	424,260
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				457,995					814,785	1,272,780
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							28,700	778,600					1,954,200	2,761,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	SITE IMPROVEMENTS - CIVIL WORK						603,200	3,831,900					7,386,100	11,821,300
17.0	BOP ITEMS														0
17.1	PIPE INSULATION	AVERAGE 6" PIPE SIZE	EST	3,400	LF		10	0	34,000	0.39	1,525	PINS	69.50	106,000	140,000
17.2	HEAT TRACING							0	175,600					248,500	424,100
	CABLE	AVERAGE 6" PIPE SIZE	EST	3,000	LF		10.35	0	31,100	0.05	173	WIRE	98.84	17,000	48,100
	POWER CONNECTOR AND OTHER ACCESSORIES INCLUDING THERMOSTATS FOR HEAT TRACING (BY ZONES)		EST	55	EA		450	0	24,500	8.00	502	WIRE	98.84	49,600	74,100
	HEAT TRACING BALANCE OF PLANT INCL PANELS, POWER WIRING AND CONDUITS		EST	4	LT		30000	0	120,000	400.00	1,840	WIRE	98.84	181,900	301,900
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)							0	170,900					655,800	826,700
	TOUCH UP PAINT FOR SHOP PAINTED STEEL		EST	29,277	SF		3	0	87,800	0.15	5,050	PNTR	66.72	337,000	424,800
	TOUCH UP PAINT FOR EQUIPMENT		EST	12,000	SF		3	0	36,000	0.15	2,070	PNTR	66.72	138,100	174,100
	PAINTING CS PIPE ONLY	AVERAGE 6" PIPE SIZE, ALLOWANCE FOR 10,000 LF PIPE	EST	15,700	SF		3	0	47,100	0.15	2,708	PNTR	66.72	180,700	227,800
17.4	HOISTS & TROLLEYS							150,000	175,000					204,400	529,400
	MISC HOISTS & TROLLEYS	IN BUILDINGS FOR EQUIPMENT MAINTENANCE AND FOR ID FANS	EST	10	EA	15000	17500	150,000	175,000	200.00	2,300	MECH	88.89	204,400	529,400
17.5	MISC AUX STEEL FOR PIPE SUPPORTS	FIELD FABRICATED	EST	35	TN		3500	0	122,500	120.00	4,830	STST	105.71	510,600	633,100
17.6	MISC PIPE SUPPORT FOUNDATIONS							0	10,500					19,600	30,100
	EXCAVATION / BACKFILL		EST	65	CY			0	0	0.15	11	EXFD	90.00	1,000	1,000
	REINFORCING		EST	5.0	TN		1,150.00	0	5,800	20.00	115	REIN	78.27	9,000	14,800
	FORMWORK		EST	260	SF		2.50	0	700	0.14	42	FORM	99.43	4,200	4,900
	CONCRETE		EST	25	CY		105.00	0	2,600	1.50	43	CONP	79.64	3,400	6,000
	MUD MAT		EST	10	CY		105.00	0	1,100	1.50	17	CONP	79.64	1,400	2,500
	EMBEDDED STEEL		EST	125	LB		2.50	0	300	0.06	9	CARP	71.88	600	900
17.7	EYE WASH STATIONS	WITH 50 KW HEATERS	EST	5	EA	6000	1000	30,000	5,000	60.00	345	MECH	88.89	30,700	65,700
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS	STAND PIPE FOR BUILDINGS	EST	10	EA		30000	0	300,000	240.00	2,760	MECH	88.89	245,300	545,300

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							180,000	993,500		24,340			2,020,900	3,194,400
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						2,117		83.48	177,000	177,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,646			185,594	185,594
	PER DIEM	NONE		0.00	HR						29,102			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				4,968					10,105	15,072
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				49,675						49,675
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			9,000							9,000
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				49,675					101,045	150,720
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				149,025					303,135	452,160
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							9,000	253,343					776,879	1,039,221
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS						189,000	1,246,800					2,797,800	4,233,600
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE														0
18.1	RELOCATE HYDROGEN STORAGE TANK							0	15,600					86,800	102,400
	LABOR ALLOWANCE TO RELOCATED THE TANK	LABOR ALLOWANCE TO RELOCATE THE TANK	EST	1	LT			0	0	500.00	575	MECH	88.89	51,100	51,100
	NEW FOUNDATION ALLOWANCE FOR THE RELOCATED TANK		EST	35	CY		230	0	8,100	6.00	242	MECH	88.89	21,500	29,600
	ELECTRICAL ALLOWANCE FOR THE RELOCATED TANK	INCLUDES LIGHTING	EST	1	LT		7500	0	7,500	125.00	144	WIRE	98.84	14,200	21,700
18.2	NEW HYDROGEN LINE TO PLANT							0	62,100					150,600	212,700
	LARGE BORE PIPE	DOUBLE WALL PIPE	EST	800	LF		75	0	60,000	1.65	1,518	YDPP	90.14	136,800	196,800
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	593	CY			0	0	0.20	136	EXFD	90.00	12,300	12,300
	BEDDING	FOR UNDERGROUND PIPING	EST	59	CY		35	0	2,100	0.25	17	EXFD	90.00	1,500	3,600
18.3	RELOCATE MISC. UNDERGROUND UTILITIES	ALLOWANCE	EST	1	LT		125000	0	125,000	1500.00	1,725	WIRE	98.84	170,500	295,500
18.4	OUTAGE TIE-IN DUCTWORK	ALLOWANCE FOR 85 TON DUCTWORK	ALLOW	85	TN		3250	0	276,300	70.00	6,843	FLDU	107.96	738,700	1,015,000
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							0	479,000		11,199			1,146,600	1,625,600
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						974		83.48	81,000	81,000

				AEP										Estimate No.:	30727B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	CRAFT START-UP SUPPORT	1% OF TOTAL LABOR MANHOURS (INCLUDES OVERTIME INEFFICIENCY & COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - BASED ON ASSUMED 5X10 WORKWEEK)		1.0	%						14,847		93.23	1,500,500	1,500,500
	INITIAL FILLS			0.3	%										1,033,500
	OPERATOR & TRAINING MANUALS			1.0	LT										300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)			1.0	LT										400,000
	OWNERS COST - % of ACCT NOS. 92, 93.1, 93.2, 93.3, 93.4	BY AEP		0.0	%										0
	SUBTOTAL - INDIRECT COSTS														42,014,500
	TOTAL PROJECT DIRECT AND INDIRECT COSTS														386,528,200
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT			1.3	%			1,262,000							1,262,000
	SPARE PARTS FOR THE OEM EQUIPMENT			0.80				782,440							782,440
	SPARE PARTS FOR THE BOP EQUIPMENT			0.50				479,560							479,560
	CONTINGENCY			14.6	%										56,485,500
	ESCALATION														33,591,600
	EQUIPMENT	4.0%/yr		4.0	%			10,130,900							10,130,900
	MATERIAL	2.0%/yr		2.0	%				3,922,500						3,922,500
	LABOR	2.5%/yr		2.5	%									15,745,600	15,745,600
	INDIRECTS	2.5%/yr		2.5	%									3,792,600	3,792,600
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP													-
	TOTAL PROJECT COST														477,867,300
	REFERENCE COSTS:														
A	ESP DEMOLITION	ALLOWANCE FOR 1000T STRUCTURE	ALLOW	1,000	TN			0	0	6.00	6,900	WRKG	120.63	832,300	832,300
B	REMOVE BOOSTER AIR FANS		ALLOW	2	EA			0	0	400.00	920	WRKG	120.63	111,000	111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-8
NID Detailed Capital Cost Estimate No. 30722 Est-2A ESP in Service
(1.7 lb SO₂/MMbtu)

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip.Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>			
1.0	ID FANS																	
1.1	ID FANS - OEM EQUIPMENT	1,795,000 ACFM WITH 14,600 HP MOTORS (\$625,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	EST	2	EA	3,144,000		6,288,000	0	7800.00	17,940	MECH	88.89	1,594,700	7,882,700			
1.2	PIPING & SUPPORTS - MECHANICAL							21,800	28,700					120,500	171,000			
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300			
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900			
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	250	LF		48.80	0	12,200	1.44	414	SPNG	94.41	39,100	51,300			
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700			
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000			
	PIPE SUPPORTS		EST	105	EA		35.00	0	3,700	1.50	181	MECH	88.89	16,100	19,800			
1.3	DAMPERS							553,500	0					263,200	816,700			
	INLET DAMPERS	2X50% DOUBLE LOUVER TYPE WITH SEAL AIR FANS TOTAL FOR TWO FANS	EST	580	SF	450		261,000	0	2.50	1,668	MECH	88.89	148,200	409,200			
	OUTLET DAMPERS	2X50% GUILLLOTINE DAMPERS, WITH SEAL AIR FANS TOTAL FOR TWO FANS	EST	450	SF	650		292,500	0	2.50	1,294	MECH	88.89	115,000	407,500			
1.4	EXPANSION JOINTS		EST	570	LF		230.00	0	131,100	2.00	1,311	MECH	88.89	116,500	247,600			
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	EST	800	TN		3,250.00	0	2,600,000	60.00	55,200	FLDU	107.96	5,959,400	8,559,400			
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	400	TN		2,900.00	0	1,160,000	24.00	11,040	STST	105.71	1,167,000	2,327,000			
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	EST	5,000	SF		40.00	0	200,000	0.55	3,163	DINS	81.75	258,500	458,500			
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	EST	72,000	SF		12.00	0	864,000	0.25	20,700	DINS	81.75	1,692,200	2,556,200			
1.9	DUCT SUPPORT STEEL - FOUNDATIONS							0	295,500					532,700	828,200			
	EXCAVATION / BACKFILL		EST	1,900	CY			0	0	0.15	328	EXFD	90.00	29,500	29,500			
	REINFORCING		EST	110	TN		1,150.00	0	126,500	20.00	2,530	REIN	78.27	198,000	324,500			
	FORMWORK		EST	6,200	SF		2.50	0	15,500	0.14	998	FORM	99.43	114,800	114,800			
	CONCRETE		EST	1,200	CY		105.00	0	126,000	1.50	2,070	CONP	79.64	164,900	290,900			
	MUD MAT		EST	190	CY		105.00	0	20,000	1.50	328	CONP	79.64	26,100	46,100			
	EMBEDDED STEEL		EST	3,000	LB		2.50	0	7,500	0.06	207	CARP	71.88	14,900	22,400			
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT							0	106,000					185,600	291,600			
	EXCAVATION / BACKFILL		EST	600	CY			0	0	0.15	104	EXFD	90.00	9,300	9,300			
	REINFORCING		EST	40	TN		1,150.00	0	46,000	20.00	920	REIN	78.27	72,000	118,000			
	FORMWORK		EST	1,500	SF		2.50	0	3,800	0.14	242	FORM	99.43	24,000	27,800			
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000			
	MUD MAT		EST	40	CY		105.00	0	4,200	1.50	69	CONP	79.64	5,500	9,700			
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800			

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS							0	273,800					433,700	707,500			
	EXCAVATION / BACKFILL		EST	1,160	CY			0	0	0.15	200	EXFD	90.00	18,000	18,000			
	REINFORCING		EST	111	TN		1,150.00	0	127,700	20.00	2,553	REIN	78.27	199,800	327,500			
	FORMWORK		EST	1,624	SF		2.50	0	4,100	0.14	261	FORM	99.43	26,000	30,100			
	CONCRETE		EST	1,178	CY		105.00	0	123,700	1.50	2,032	CONP	79.64	161,800	285,500			
	MUD MAT		EST	114	CY		105.00	0	12,000	1.50	197	CONP	79.64	15,700	27,700			
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700			
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	EST	7,875	SF		500.00	0	3,937,500	0.00	0	STST	105.71	0	3,937,500			
1.13	TRANSFORMERS							770,000	0					145,600	915,600			
	SST TRANSFORMERS: 21F & 21G	13.8KV-4160V, 3 PHASE, 2 WINDING	EST	2	EA	300000		600,000	0	500.00	1,150	EHEA	79.16	91,000	691,000			
	SUS TRANSFORMERS: 31F, 31G	13.8KV-4160V, 3 PHASE, CAST COIL	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600			
1.14	SWITCHGEAR							1,082,000	0		0			569,000	1,651,000			
	13KV MEDIUM VOLTAGE	PRICE PER SECTION	EST	10	EA	50000		500,000	0	230.00	2,645	EHEA	79.16	209,400	709,400			
	4.16 KV MEDIUM VOLTAGE (21F/G)	PRICE PER SECTION	EST	10	EA	39200		392,000	0	280.00	3,220	EHEA	79.16	254,900	646,900			
	480V LOW VOLTAGE (31F/G)	PRICE PER SECTION	EST	5	EA	38000		190,000	0	230.00	1,323	EHEA	79.16	104,700	294,700			
1.15	CABLE BUS & TERMINATIONS							756,300	35,800		0			1,316,200	2,108,300			
	15KV CABLE BUS TO 13F/G)	CABLE BUS	EST	1,300	FT	466		605,800	0	6.75	10,091	WIRE	98.84	997,400	1,603,200			
	5KV CABLE BUS	CABLE BUS	EST	150	FT	385		57,800	0	4.70	811	WIRE	98.84	80,100	137,900			
	480V CABLE BUS	CABLE BUS	EST	150	FT	618		92,700	0	10.30	1,777	WIRE	98.84	175,600	268,300			
	CABLE BUS TERMINATION	500MCM- 15KV TERMINATIONS	EST	4	EA		1,800.00	0	7,200	33.00	152	WIRE	98.84	15,000	22,200			
	CABLE BUS TERMINATION	1000MCM- 5KV TERMINATIONS	EST	4	EA		4,440.00	0	17,800	51.60	237	WIRE	98.84	23,500	41,300			
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400			
1.16	MCC							120,000	0					7,200	127,200			
	480V MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600			
	DC MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600			
1.17	MIMIC PANELS		EST	1	EA	17500		17,500	0	40.00	46	WIRE	98.84	4,500	22,000			
1.18	EMERGENCY POWER SYSTEM							285,500	0					38,900	324,400			
	DC PANEL BOARD		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000			
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100			
	UPS		EST	1	EA	60000		60,000	0	32.00	37	WIRE	98.84	3,600	63,600			
	SWITCHBOARD		EST	1	EA	40000		40,000	0	40.00	46	WIRE	98.84	4,500	44,500			
	BYPASS TRANSFORMERS		EST	1	EA	25000		25,000	0	40.00	46	WIRE	98.84	4,500	29,500			
	BATTERY CHARGER		EST	2	EA	32000		64,000	0	16.00	37	WIRE	98.84	3,600	67,600			
	BATTERIES		EST	1	LT	50000		50,000	0	80.00	92	WIRE	98.84	9,100	59,100			
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	EST	3,600	LF		51.75	0	186,300	0.69	2,865	WIRE	98.84	283,200	469,500			

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							51,429,700	17,295,300		777,200			71,884,000	140,609,000			
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																	
	ADDITIONAL CRANE ALLOWANCE			9	MN	75000		675,000		720.00	7,452	MECH	88.89	662400	1,337,400			
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0			
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS													
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						67,583		83.48	5,642,000	5,642,000			
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						85,223			5,978,531	5,978,531			
	PER DIEM	NONE		0.00	HR						937,458			0	0			
	CONSUMABLES - % of ACCT NO. 90			0.5	%				86,477					359,420	445,897			
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				864,765						864,765			
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%				2,571,485						2,571,485			
	SALES TAX - NOT INCLUDED														0			
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				864,765					3,594,200	4,458,965			
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				2,594,295					10,782,600	13,376,895			
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							3,246,500	4,410,300					27,019,200	34,675,900			
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES						54,676,200	21,705,600					98,903,200	175,284,900			
3.0	NEW STACK																	
4.0	LIME HANDLING SYSTEM																	
4.1	LIME STORAGE SILO							3,240,000	0					0	3,240,000			
	SILO	CONCRETE SILO 65' DIA X 116' H - 7100 TONS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	2,950,000.00		2,950,000	0	0.00	0	CONP	79.64	0	2,950,000			
	ELEVATOR	MAINTENANCE ELEVATOR COMMON FOR BOTH SILOS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	290,000.00		290,000	0	0.00	0	MECH	88.89	0	290,000			
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTER, TWO FILTER SEPARATORS	EST	1	LT	350,000		350,000	0	2900.00	3,335	MECH	88.89	296,400	646,400			
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	1,100,000		1,100,000	0	6400.00	7,360	MECH	88.89	654,200	1,754,200			
4.4	PIPING - MECHANICAL							88,700	130,300					342,600	561,600			
	LARGE BORE PIPING	14" CS, SCH 40 WELDED - ON PIPE RACK	EST	500	LF		163.1	0	81,600	1.67	960	SPNG	94.41	90,700	172,300			
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	1,200	LF		14.1	0	16,900	0.83	1,145	SPNG	94.41	108,100	125,000			
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300			
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900			
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200			
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700			
	VALVE	2" GLOBE, 150# SS, WELDED	EST	6	EA	1,450		8,700	0	5.64	39	SPNG	94.41	3,700	12,400			

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
	EMBEDDED STEEL		EST	300	LB		2.50	0	800	0.06	21	CARP	71.88	1,500	2,300			
4.13	PIPE RACK - FOUNDATIONS							0	239,600					519,100	758,700			
	EXCAVATION / BACKFILL		EST	3,200	CY			0	0	0.15	552	EXFD	90.00	49,700	49,700			
	REINFORCING		EST	90.0	TN		1,150.00	0	103,500	20.00	2,070	REIN	78.27	162,000	265,500			
	FORMWORK		EST	9,500	SF		2.50	0	23,800	0.14	1,530	FORM	99.43	152,100	175,900			
	CONCRETE		EST	950	CY		105.00	0	99,800	1.50	1,639	CONP	79.64	130,500	230,300			
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300			
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600			
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	EST	5	EA	39200		196,000	0	230.00	1,323	EHEA	79.16	104,700	300,700			
4.16	CABLE BUS DUCT							134,700	10,800					200,200	345,700			
	480V CABLE BUS	BUST DUCT ONLY	EST	150	FT	898		134,700	0	10.30	1,777	WIRE	98.84	175,600	310,300			
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400			
4.17	MCC							61,800	0					3,600	65,400			
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400			
4.18	MIMIC PANELS		EST	1	EA	17500		17,500	0	12.00	14	WIRE	98.84	1,400	18,900			
4.19	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700			
	DC PANEL BOARD		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000			
	UPS PANEL BOARDS		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000			
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000			
	VRLA BATTERIES		EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700			
4.20	GROUNDING							13,300	0					41,300	54,600			
	GROUND ROD	3/4" - 20' LONG	EST	16	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700			
	500 MCM	BARE COPPER WIRE	EST	1,300	FT	7.65		9,900	0	0.12	179	WIRE	98.84	17,700	27,600			
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500			
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800			
4.21	LIGHTING/ TRANSFORMERS & PANELS							52,000	135,000					104,500	291,500			
	LIGHT FIXTURES		EST	180	EA		750	0	135,000	4.00	828	WIRE	98.84	81,800	216,800			
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	10000		20,000	0	40.00	92	WIRE	98.84	9,100	29,100			
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	7500		15,000	0	32.00	74	WIRE	98.84	7,300	22,300			
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	2	EA	5000		10,000	0	16.00	37	WIRE	98.84	3,600	13,600			
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	2	EA	3500		7,000	0	12.00	28	WIRE	98.84	2,700	9,700			
4.22	RACEWAY, CABLE TRAY, & CONDUIT							0	296,400					1,429,900	1,726,300			
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,050	LF		18.25	0	19,200	1.10	1,328	WIRE	98.84	131,300	150,500			
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	600	LF		21.50	0	12,900	1.45	1,001	WIRE	98.84	98,900	111,800			
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,700	LF		27.10	0	46,100	1.75	3,421	WIRE	98.84	338,200	384,300			
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	500	LF		30.30	0	15,200	1.95	1,121	WIRE	98.84	110,800	126,000			
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	750	LF		61.00	0	45,800	1.13	972	WIRE	98.84	96,100	141,900			

				AEP										Estimate No.:	30722B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip.Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>		
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,450	LF		31.00	0	45,000	0.81	1,346	WIRE	98.84	133,000	178,000		
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,550	LF		21.50	0	33,300	0.65	1,150	WIRE	98.84	113,600	146,900		
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	2,400	LF		9.25	0	22,200	0.35	972	WIRE	98.84	96,000	118,200		
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,050	LF		7.15	0	21,800	0.28	996	WIRE	98.84	98,500	120,300		
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	5,150	LF		4.44	0	22,900	0.24	1,415	WIRE	98.84	139,900	162,800		
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,200	LF		1.46	0	12,000	0.08	745	WIRE	98.84	73,600	85,600		
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	EST	6,600	LF		3.54	0	23,400	0.12	888	WIRE	98.84	87,800	111,200		
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400		
4.25	LOW VOLTAGE POWER CABLE & TERMINATION							0	132,200					260,800	393,000		
	3/C # 500KCML- 600V		EST	2,100	LF		26.12	0	54,900	0.69	1,666	WIRE	98.84	164,700	219,600		
	#4/0 - #12 AWG-600V		EST	10,700	LF		7.22	0	77,300	0.08	972	WIRE	98.84	96,100	173,400		
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	18,000	LF		3.20	0	57,600	0.08	1,635	WIRE	98.84	161,600	219,200		
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	EST	350	LF		174.67	0	61,100	3.80	1,530	FORM	99.43	152,100	213,200		
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	EST	14.0	CY		250	0	3,500	8.00	129	CONP	79.64	10,300	13,800		
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							5,607,300	3,831,800		75,423			7,191,100	16,630,200		
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																
	ADDITIONAL CRANE ALLOWANCE								0					0	0		
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0		
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS												
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						6,559		83.48	548,000	548,000		
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						8,198			575,110	575,110		
	PER DIEM	NONE		0.00	HR						90,180			0	0		
	CONSUMABLES - % of ACCT NO. 90			0.5	%				19,159					35,956	55,115		
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				191,590						191,590		
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			280,365							280,365		
	SALES TAX - NOT INCLUDED														0		
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				191,590					359,555	551,145		
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				574,770					1,078,665	1,653,435		
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							280,400	977,100					2,597,300	3,854,800		
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM						5,887,700	4,808,900					9,788,400	20,485,000		
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID													0		

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS														0			
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	1,767,000		1,767,000	0	10520.00	12,098	MECH	88.89	1,075,400	2,842,400			
6.2	FLY ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, TWO PRESSURE EXHAUSTERS, TRANSFER STATION, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	2,285,000		2,285,000	0	14000.00	16,100	MECH	88.89	1,431,100	3,716,100			
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.		2	EA	14,000		28,000	0	60.00	138	MECH	88.89	12,300	40,300			
6.4	AGITATOR FOR SUMP PUMPS	5 HP		1	EA	12,000		12,000	0	45.00	52	MECH	88.89	4,600	16,600			
6.5	PIPING - MECHANICAL		EST	1	LT			142,800	131,000					408,700	682,500			
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	300	LF		45.1	0	13,500	0.87	300	SPNG	94.41	28,300	41,800			
	LARGE BORE PIPING	6" CS, SCH 40 WELDED - ON PIPE RACK	EST	200	LF		32.2	0	6,400	0.88	202	SPNG	94.41	19,100	25,500			
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700			
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	400	LF		14.1	0	5,600	0.83	382	SPNG	94.41	36,000	41,600			
	LARGE BORE PIPING	10" CS, SCH 40 WELDED	EST	300	LF		110.3	0	33,100	2.40	828	SPNG	94.41	78,200	111,300			
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	600	LF		72.8	0	43,700	1.45	1,001	SPNG	94.41	94,500	138,200			
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900			
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200			
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700			
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000			
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400			
	VALVE	6" AIR OPERATED, 150 #, CS, FLANGED	EST	2	EA	14,000		28,000	0	17.30	40	SPNG	94.41	3,800	31,800			
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400			
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,000	CY			0	0	0.20	460	EXFD	90.00	41,400	41,400			
	BEDDING	FOR UNDERGROUND PIPING	EST	267	CY		35.0	0	9,300	0.25	77	EXFD	90.00	6,900	16,200			
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	110	EA		75.00	0	8,300	2.50	316	MECH	88.89	28,100	36,400			
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 55' DIA X 61' H - 1670 TONS -SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	795,000		795,000	0	0.00	0	CONP	79.64	0	795,000			
6.7	RECYCLE SILO	NOT REQUIRED FOR NID																
6.8	FLY ASH SILO	STEEL -STORAGE SILO, 12' DIA X 13' H, 25TONS						35,000	20,300					66,500	121,800			

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	EST	600	SF		500.00	0	300,000	0.00	0	STST	105.71	0	300,000			
6.16	MCC	480V MCC PER LINE UP	EST	4	EA	30000		120,000	0	16.00	74	WIRE	98.84	7,300	127,300			
6.17	EMERGENBCY POWER SYSTEM							185,500	0					40,000	225,500			
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100			
	SATELLITE UPS		EST	2	EA	41200		82,400	0	16.00	37	WIRE	98.84	3,600	86,000			
	VRLA BATTERIES		EST	2	LT	36050		72,100	0	120.00	276	WIRE	98.84	27,300	99,400			
6.18	LIGHTING/ TRANSFORMERS & PANELS							18,500	75,000					53,200	146,700			
	LIGHT FIXTURES		EST	100	EA		750	0	75,000	4.00	460	WIRE	98.84	45,500	120,500			
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500			
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800			
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900			
6.19	RACEWAY, CABLE TRAY, & CONDUIT							0	32,800					177,400	210,200			
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	350	LF		27.10	0	9,500	1.75	704	WIRE	98.84	69600	79,100			
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	350	LF		31.00	0	10,900	0.81	325	WIRE	98.84	32100	43,000			
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,300	LF		4.44	0	5,800	0.24	357	WIRE	98.84	35300	41,100			
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,500	LF		1.46	0	6,600	0.08	409	WIRE	98.84	40400	47,000			
6.20	GROUNDING							0	4,500					10,900	15,400			
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA		150	0	600	4.00	18	WIRE	98.84	1,800	2,400			
	500 MCM	BARE COPPER WIRE	EST	500	FT		7.65	0	3,800	0.12	69	WIRE	98.84	6,800	10,600			
	CADWELD		EST	8	EA		15	0	100	2.00	18	WIRE	98.84	1,800	1,900			
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500			
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400			
6.22	LOW VOLTAGE POWER CABLE & TERMINATION							0	63,300					143,000	206,300			
	3/C # 500KCML- 600V		EST	1,400	LF		26.12	0	36,600	0.69	1,111	WIRE	98.84	109,800	146,400			
	#4/0 - #12 AWG-600V		EST	3,700	LF		7.22	0	26,700	0.08	336	WIRE	98.84	33,200	59,900			
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,500	LF		3.20	0	20,800	0.08	591	WIRE	98.84	58,400	79,200			
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	EST	30	LF		205.00	0	6,200	4.05	140	ECND	75.97	10600	16,800			
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							5,503,800	1,503,600		46,513			4,149,000	11,156,400			
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																	
	ADDITIONAL CRANE ALLOWANCE								0					0	0			
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0			
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS													
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						4,045		83.48	338,000	338,000			
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						5,056			354,668	354,668			
	PER DIEM	NONE		0.00	HR						55,613			0	0			
	CONSUMABLES - % of ACCT NO. 90			0.5	%				7,518					20,745	28,263			
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				75,180						75,180			

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:													Reviewer:	JMK		
		Est=Estimated													Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip.Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>			
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			275,190							275,190			
	SALES TAX - NOT INCLUDED														0			
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				75,180					207,450	282,630			
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				225,540					622,350	847,890			
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							275,200	383,400					1,543,200	2,201,800			
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS						5,779,000	1,887,000					5,692,200	13,358,200			
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID													0			
8.0	ACTIVATED CARBON INJECTION SYSTEM														0			
9.0	COMPRESSED AIR SYSTEM																	
10.0	SERVICE WATER SYSTEM																	
11.0	POTABLE WATER SYSTEM																	
12.0	FGD SUBSTATION																	
13.0	FGD DCS SYSTEM														0			
14.0	CEM SYSTEM														0			
15.0	TRUCK & RAIL INFRASTRUCTURE														0			
16.0	SITE IMPROVEMENTS - CIVIL WORK																	
17.0	BOP ITEMS														0			
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE														0			
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT																	
99.00	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS							85,790,100	46,282,100		1,405,160			131,423,900	281,846,100			
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																	
	ADDITIONAL CRANE ALLOWANCE			9	MN	75,000.00		675,000	0		7,452			662,400	1,337,400			
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0			
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS													
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						122,188		93.53	10,200,000	10,200,000			
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						153,480			10,766,814	10,766,814			
	PER DIEM	NONE		0.00	HR									0	0			
	CONSUMABLES - % of ACCT NO. 90			0.5	%				228,711					655,570	884,280			
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				2,287,105						2,287,105			
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			4,226,505							4,226,505			
	SALES TAX - NOT INCLUDED														0			
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				2,287,105					6,555,695	8,842,800			

				AEP											Estimate No.:	30722B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-2A - 1.7 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:													Reviewer:	JMK		
		Est=Estimated													Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				6,861,315					19,667,085	26,528,400			
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							4,901,500	11,664,200					48,507,600	65,073,300			
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST							90,691,600	57,946,300					179,931,500	346,919,400			
	TOTAL PROJECT DIRECT AND CONSTRUCTION INDIRECT COSTS							90,691,600	57,946,300					179,931,500	346,919,400			
								0	0									
	INDIRECT COSTS																	
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES			1.0	LT										25,000,000			
	CONSTRUCTION MANAGEMENT			3.0	%										10,407,600			
	S-U / COMMISSIONING			1.0											3,469,200			
	CRAFT START-UP SUPPORT	1% OF TOTAL LABOR MANHOURS (INCLUDES OVERTIME INEFFICIENCY & COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - BASED ON ASSUMED 5X10 WORKWEEK)		1.0	%						15,273		93.53	1,548,600	1,548,600			
	INITIAL FILLS			0.3	%										1,040,800			
	OPERATOR & TRAINING MANUALS			1.0	LT										300,000			
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)			1.0	LT										400,000			
	OWNERS COST - % of ACCT NOS. 92, 93.1, 93.2, 93.3, 93.4	BY AEP		0.0	%										0			
	SUBTOTAL - INDIRECT COSTS														42,166,200			
	TOTAL PROJECT DIRECT AND INDIRECT COSTS														389,085,600			
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT			1.3	%			1,179,000							1,179,000		390,264,600	
	SPARE PARTS FOR THE OEM EQUIPMENT			0.80				730,980							730,980			
	SPARE PARTS FOR THE BOP EQUIPMENT			0.50				448,020							448,020			
	CONTINGENCY			14.8	%										57,861,200			
	ESCALATION														33,671,700			
	EQUIPMENT	4.0%/yr		4.0	%			9,464,500							9,464,500			
	MATERIAL	2.0%/yr		2.0	%				4,158,700						4,158,700			
	LABOR	2.5%/yr		2.5	%									16,242,200	16,242,200			
	INDIRECTS	2.5%/yr		2.5	%									3,806,300	3,806,300			
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP													-			
	TOTAL PROJECT COST														481,797,500			
	REFERENCE COSTS:																	
A	ESP STRUCTURAL INTEGRITY MODS	ALLOWANCE FOR 150 TON FRAMING REINFORCEMENT	ALLOW	150	TN		2900	0	435,000	120.00	20,700	STST	105.71	2,188,200	2,623,200			



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-9
NID Detailed Capital Cost Estimate No. 30726 Est-2B ESP not in Service
(1.7 lb SO₂/MMbtu)

				AEP										Estimate No.:	30726B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
1.0	ID FANS																
2.0	NID MODULES																
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS / COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	EST	1	LT	49,600,000		49,600,000	0	411400.00	473,110	MECH	88.89	42,054,700	91,654,700		
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	EST	80,640	SF	30		2,419,200	0	0.00	0	DINS	81.75	0	2,419,200		
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF						58,100	1,316,900					1,747,600	3,122,600		
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	200	TN		2,900.00	0	580,000	24.00	5,520	STST	105.71	583,500	1,163,500		
	SIDING FOR PENTHOUSE		EST	8,960	SF		12.00	0	107,500	0.11	1,133	SDNG	93.41	105,900	213,400		
	CONCRETE FLOOR FOR PENTHOUSE		EST	632	CY		230.00	0	145,400	7.50	5,451	SDNG	93.41	509,200	654,600		
	ROOFING FOR PENTHOUSE		EST	25,600	SF		18.00	0	460,800	0.22	6,477	ROOF	69.12	447,700	908,500		
	H&V		EST	1	LT	58100	23240	58,100	23,200	1084.00	1,247	HVAC	81.24	101,300	182,600		
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH						92,200	2,428,900					2,544,900	5,066,000		
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	560	TN		2,900.00	0	1,624,000	24.00	15,456	STST	105.71	1,633,900	3,257,900		
	SIDING FOR BOTTOM ENCLOSURE		EST	25,600	SF		12.00	0	307,200	0.11	3,238	SDNG	93.41	302,500	609,700		
	ROOFING FOR BOTTOM ENCLOSURE		EST	25,600	SF		18.00	0	460,800	0.22	6,477	ROOF	69.12	447,700	908,500		
	H&V		EST	1	LT	92200	36880	92,200	36,900	1721.33	1,980	HVAC	81.24	160,800	289,900		
2.5	PIPING & SUPPORTS - MECHANICAL							125,200	174,500					385,900	685,600		
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED	EST	300	LF		23.00	0	6,900	1.48	511	SPNG	94.41	48,200	55,100		
	LARGE BORE PIPING	6" SS, SCH 40 WELDED	EST	400	LF		111.00	0	44,400	2.02	929	SPNG	94.41	87,700	132,100		
	LARGE BORE PIPING	18" CS, STD WELDED	EST	400	LF		234.10	0	93,600	2.34	1,076	SPNG	94.41	101,600	195,200		
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	150	LF		22.20	0	3,300	1.26	217	SPNG	94.41	20,500	23,800		
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	100	LF		48.80	0	4,900	1.44	166	SPNG	94.41	15,600	20,500		
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	300	LF		33.70	0	10,100	1.32	455	SPNG	94.41	43,000	53,100		
	VALVE	18" GATE, 150 #, CS, WELDED	EST	4	EA	17,500		70,000	0	28.30	130	SPNG	94.41	12,300	82,300		
	VALVE	6" GATE, 150 #, SS, WELDED	EST	6	EA	4,700		28,200	0	12.96	89	SPNG	94.41	8,400	36,600		
	VALVE	4" GATE, 150 #, CS, WELDED	EST	5	EA	2,500		12,500	0	7.70	44	SPNG	94.41	4,200	16,700		
	VALVE	2" GLOBE, 150# SS, WELDED	EST	10	EA	1,450		14,500	0	5.64	65	SPNG	94.41	6,100	20,600		
	PIPE SUPPORTS		EST	150	EA		75.00	0	11,300	2.50	431	MECH	88.89	38,300	49,600		
2.6	DUCTWORK							0	4,797,000					10,995,100	15,792,100		
	NID MODULE INLET	INCLUDES INTERNAL BRACING AND TURNING VANES	EST	1,476	TN		3,250.00	0	4,797,000	60.00	101,844	FLDU	107.96	10,995,100	15,792,100		
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	738	TN		2,900.00	0	2,140,200	24.00	20,369	STST	105.71	2,153,200	4,293,400		
2.8	DUCTWORK INSULATION & LAGGING		EST	136,000	SF		12.00	0	1,632,000	0.25	39,100	DINS	81.75	3,196,400	4,828,400		
2.9	NID MODULE- FOUNDATIONS							0	1,087,000					1,682,500	2,769,500		
	EXCAVATION / BACKFILL		EST	4,400	CY			0	0	0.15	759	EXFD	90.00	68,300	68,300		
	REINFORCING		EST	450	TN		1,150.00	0	517,500	20.00	10,350	REIN	78.27	810,100	1,327,600		
	FORMWORK		EST	3,200	SF		2.50	0	8,000	0.14	515	FORM	99.43	51,200	59,200		
	CONCRETE		EST	4,750	CY		105.00	0	498,800	1.50	8,194	CONP	79.64	652,600	1,151,400		
	MUD MAT		EST	340	CY		105.00	0	35,700	1.50	587	CONP	79.64	46,700	82,400		

				AEP										Estimate No.:	30726B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
	ELEVATOR	MAINTENANCE ELEVATOR COMMON FOR BOTH SILOS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	290,000.00		290,000	0	0.00	0	MECH	88.89	0	290,000		
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	350,000		350,000	0	2900.00	3,335	MECH	88.89	296,400	646,400		
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	1,100,000		1,100,000	0	6400.00	7,360	MECH	88.89	654,200	1,754,200		
4.4	PIPING - MECHANICAL							88,700	130,300					342,600	561,600		
	LARGE BORE PIPING	14" CS, SCH 40 WELDED - ON PIPE RACK	EST	500	LF		163.1	0	81,600	1.67	960	SPNG	94.41	90,700	172,300		
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	1,200	LF		14.1	0	16,900	0.83	1,145	SPNG	94.41	108,100	125,000		
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300		
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900		
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200		
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700		
	VALVE	2" GLOBE, 150# SS, WELDED	EST	6	EA	1,450		8,700	0	5.64	39	SPNG	94.41	3,700	12,400		
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400		
	VALVE	14" BFLY 150# CS, FLANGED	EST	4	EA	3,000		12,000	0	16.60	76	SPNG	94.41	7,200	19,200		
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	1,000	CY			0	0	0.20	230	EXFD	90.00	20,700	20,700		
	BEDDING	FOR UNDERGROUND PIPING	EST	133	CY		35.0	0	4,700	0.25	38	EXFD	90.00	3,500	8,200		
	PIPE SUPPORTS		EST	238	EA		50.00	0	11,900	1.50	410	MECH	88.89	36,400	48,300		
4.5	LIME STORAGE SILO ACCESS STAIR TOWER		EST	55	TN		2,900.00	0	159,500	24.00	1,518	STST	105.71	160,500	320,000		
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	EST	650	TN		2,900.00	0	1,885,000	24.00	17,940	STST	105.71	1,896,400	3,781,400		
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING						0	42,700					79,300	122,000		
	EXCAVATION / BACKFILL		EST	500	CY			0	0	0.15	86	EXFD	90.00	7,800	7,800		
	REINFORCING		EST	15	TN		1,150.00	0	17,300	20.00	345	REIN	78.27	27,000	44,300		
	FORMWORK		EST	750	SF		2.50	0	1,900	0.14	121	FORM	99.43	12,000	13,900		
	CONCRETE		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500		
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0		
	EMBEDDED STEEL		EST	1,000	LB		2.50	0	2,500	0.06	69	CARP	71.88	5,000	7,500		
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS							0	69,600					130,200	199,800		
	EXCAVATION / BACKFILL		EST	800	CY			0	0	0.15	138	EXFD	90.00	12,400	12,400		
	REINFORCING		EST	25	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800		
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200		
	CONCRETE		EST	300	CY		105.00	0	31,500	1.50	518	CONP	79.64	41,200	72,700		
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0		
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700		
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H						75,000	335,000					24,400	434,400		
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	3,000	SF		105	0	315,000	0.00	0	STST	105.71	0	315,000		

				AEP										Estimate No.:	30726B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
	GROUND ROD	3/4" - 20' LONG	EST	16	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700		
	500 MCM	BARE COPPER WIRE	EST	1,300	FT	7.65		9,900	0	0.12	179	WIRE	98.84	17,700	27,600		
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500		
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800		
4.21	LIGHTING/ TRANSFORMERS & PANELS							52,000	135,000					104,500	291,500		
	LIGHT FIXTURES		EST	180	EA		750	0	135,000	4.00	828	WIRE	98.84	81,800	216,800		
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	10000		20,000	0	40.00	92	WIRE	98.84	9,100	29,100		
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	7500		15,000	0	32.00	74	WIRE	98.84	7,300	22,300		
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	2	EA	5000		10,000	0	16.00	37	WIRE	98.84	3,600	13,600		
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	2	EA	3500		7,000	0	12.00	28	WIRE	98.84	2,700	9,700		
4.22	RACEWAY, CABLE TRAY, & CONDUIT							0	296,400					1,429,900	1,726,300		
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,050	LF		18.25	0	19,200	1.10	1,328	WIRE	98.84	131,300	150,500		
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	600	LF		21.50	0	12,900	1.45	1,001	WIRE	98.84	98,900	111,800		
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,700	LF		27.10	0	46,100	1.75	3,421	WIRE	98.84	338,200	384,300		
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	500	LF		30.30	0	15,200	1.95	1,121	WIRE	98.84	110,800	126,000		
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	750	LF		61.00	0	45,800	1.13	972	WIRE	98.84	96,100	141,900		
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,450	LF		31.00	0	45,000	0.81	1,346	WIRE	98.84	133,000	178,000		
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,550	LF		21.50	0	33,300	0.65	1,150	WIRE	98.84	113,600	146,900		
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	2,400	LF		9.25	0	22,200	0.35	972	WIRE	98.84	96,000	118,200		
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,050	LF		7.15	0	21,800	0.28	996	WIRE	98.84	98,500	120,300		
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	5,150	LF		4.44	0	22,900	0.24	1,415	WIRE	98.84	139,900	162,800		
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,200	LF		1.46	0	12,000	0.08	745	WIRE	98.84	73,600	85,600		
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	EST	6,600	LF		3.54	0	23,400	0.12	888	WIRE	98.84	87,800	111,200		
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400		
4.25	LOW VOLTAGE POWER CABLE & TERMINATION							0	132,200					260,800	393,000		
	3/C # 500KCMIL- 600V		EST	2,100	LF		26.12	0	54,900	0.69	1,666	WIRE	98.84	164,700	219,600		
	#4/0 - #12 AWG-600V		EST	10,700	LF		7.22	0	77,300	0.08	972	WIRE	98.84	96,100	173,400		
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	18,000	LF		3.20	0	57,600	0.08	1,635	WIRE	98.84	161,600	219,200		
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	EST	350	LF		174.67	0	61,100	3.80	1,530	FORM	99.43	152,100	213,200		
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	EST	14.0	CY		250	0	3,500	8.00	129	CONP	79.64	10,300	13,800		
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							5,479,700	3,831,800		75,423			7,191,100	16,502,600		
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																

				AEP										Estimate No.:	30726B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
	ADDITIONAL CRANE ALLOWANCE								0					0	0		
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0		
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS												
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						6,559		83.48	548,000	548,000		
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						8,198			575,110	575,110		
	PER DIEM	NONE		0.00	HR						90,180			0	0		
	CONSUMABLES - % of ACCT NO. 90			0.5	%				19,159					35,956	55,115		
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				191,590						191,590		
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			273,985							273,985		
	SALES TAX - NOT INCLUDED														0		
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				191,590					359,555	551,145		
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				574,770					1,078,665	1,653,435		
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							274,000	977,100					2,597,300	3,848,400		
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM						5,753,700	4,808,900					9,788,400	20,351,000		
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID													0		
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS														0		
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	2,386,000		2,386,000	0	14200.00	16,330	MECH	88.89	1,451,600	3,837,600		
6.2	ECONOMIZER ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES JET PUMPS AND PIPING / SUPPORTS TO THE BOTTOM ASH POND	EST	1	LT	400,000		400,000	0	2900.00	3,335	MECH	88.89	296,400	696,400		
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.		2	EA	14,000		28,000	0	60.00	138	MECH	88.89	12,300	40,300		
6.4	AGITATOR FOR SUMP PUMPS	5 HP		1	EA	12,000		12,000	0	45.00	52	MECH	88.89	4,600	16,600		
6.5	PIPING - MECHANICAL		EST	1	LT			142,800	131,000					408,700	682,500		
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	300	LF		45.1	0	13,500	0.87	300	SPNG	94.41	28,300	41,800		
	LARGE BORE PIPING	6" CS, SCH 40 WELDED - ON PIPE RACK	EST	200	LF		32.2	0	6,400	0.88	202	SPNG	94.41	19,100	25,500		
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700		
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	400	LF		14.1	0	5,600	0.83	382	SPNG	94.41	36,000	41,600		
	LARGE BORE PIPING	10" CS, SCH 40 WELDED	EST	300	LF		110.3	0	33,100	2.40	828	SPNG	94.41	78,200	111,300		
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	600	LF		72.8	0	43,700	1.45	1,001	SPNG	94.41	94,500	138,200		
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900		
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200		
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700		
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000		
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400		

				AEP										Estimate No.:	30726B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
	VALVE	6" AIR OPERATED, 150 #, CS, FLANGED	EST	2	EA	14,000		28,000	0	17.30	40	SPNG	94.41	3,800	31,800		
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400		
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,000	CY			0	0	0.20	460	EXFD	90.00	41,400	41,400		
	BEDDING	FOR UNDERGROUND PIPING	EST	267	CY		35.00	0	9,300	0.25	77	EXFD	90.00	6,900	16,200		
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	110	EA		75.00	0	8,300	2.50	316	MECH	88.89	28,100	36,400		
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 55' DIA X 129' H - 4075 TONS -SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	1,834,000		1,834,000	0	0.00	0	CONP	79.64	0	1,834,000		
6.7	RECYCLE SILO	NOT REQUIRED FOR NID															
6.8	FLY ASH SILO	NOT REQUIRED - ECONOMIZER FLY ASH SLUICD TO BOTTOM ASH POND						0	0					0	0		
	SILO BIN		EST	0	EA	50,000		0	0	450.00	0	TANK	89.16	0	0		
	SUPPORT STEEL FOR SILO		EST	0	TN		2,900.00	0	0	24.00	0	STST	105.71	0	0		
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS							0	132,300					227,000	359,300		
	EXCAVATION / BACKFILL		EST	1,200	CY			0	0	0.15	207	EXFD	90.00	18,600	18,600		
	REINFORCING		EST	50.0	TN		1,150.00	0	57,500	20.00	1,150	REIN	78.27	90,000	147,500		
	FORMWORK		EST	1,100	SF		2.50	0	2,800	0.14	177	FORM	99.43	17,600	20,400		
	CONCRETE		EST	560	CY		105.00	0	58,800	1.50	966	CONP	79.64	76,900	135,700		
	MUD MAT		EST	30	CY		105.00	0	3,200	1.50	52	CONP	79.64	4,100	7,300		
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800		
6.10	FLY ASH SILO - FOUNDATIONS	NOT REQUIRED						0	0					0	0		
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0		
	REINFORCING		EST	0.0	TN		1,150.00	0	0	20.00	0	REIN	78.27	0	0		
	FORMWORK		EST	0	SF		2.50	0	0	0.14	0	FORM	99.43	0	0		
	CONCRETE		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0		
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0		
	EMBEDDED STEEL		EST	0	LB		2.50	0	0	0.06	0	CARP	71.88	0	0		
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS							0	97,600					161,900	259,500		
	EXCAVATION / BACKFILL		EST	470	CY			0	0	0.15	81	EXFD	90.00	7,300	7,300		
	REINFORCING		EST	38	TN		1,150.00	0	43,700	20.00	874	REIN	78.27	68,400	112,100		
	FORMWORK		EST	960	SF		2.50	0	2,400	0.14	155	FORM	99.43	15,400	17,800		
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000		
	MUD MAT		EST	43	CY		105.00	0	4,500	1.50	74	CONP	79.64	5,900	10,400		
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900		
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H						40,000	241,500					26,200	307,700		
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	2,700	SF		85	0	229,500	0.00	0	STST	105.71	0	229,500		
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	20T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	40000	12000	40,000	12,000	280.00	322	HVAC	81.24	26,200	78,200		

			AEP												Estimate No.:	30726B		
			BIG SANDY UNIT 2												Project No.:	12721-000		
			FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU												Date:	9/10/2010		
			ORDER OF MAGNITUDE COST ESTIMATE												Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS	NOT REQUIRED						0	0					0	0			
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0			
	REINFORCING		EST	0	TN		1,150.00	0	0	20.00	0	REIN	78.27	0	0			
	FORMWORK		EST	0	SF		2.50	0	0	0.14	0	FORM	99.43	0	0			
	CONCRETE		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	0	LB		2.50	0	0	0.06	0	CARP	71.88	0	0			
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	NOT REQUIRED						0	0					0	0			
	PREENGINEERED BUILDING INCLUDING H&V AND LIGHTING		EST	0	SF		95	0	0	0.00	0	STST	105.71	0	0			
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS		EST	0	LT	75000	20000	0	0	350.00	0	HVAC	81.24	0	0			
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	EST	600	SF		500.00	0	300,000	0.00	0	STST	105.71	0	300,000			
6.16	MCC	480V MCC PER LINE UP	EST	4	EA	30000		120,000	0	16.00	74	WIRE	98.84	7,300	127,300			
6.17	EMERGENBCY POWER SYSTEM							185,500	0					40,000	225,500			
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100			
	SATELLITE UPS		EST	2	EA	41200		82,400	0	16.00	37	WIRE	98.84	3,600	86,000			
	VRLA BATTERIES		EST	2	LT	36050		72,100	0	120.00	276	WIRE	98.84	27,300	99,400			
6.18	LIGHTING/ TRANSFORMERS & PANELS							18,500	75,000					53,200	146,700			
	LIGHT FIXTURES		EST	100	EA		750	0	75,000	4.00	460	WIRE	98.84	45,500	120,500			
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500			
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800			
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900			
6.19	RACEWAY, CABLE TRAY, & CONDUIT							0	32,800					177,400	210,200			
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	350	LF		27.10	0	9,500	1.75	704	WIRE	98.84	69600	79,100			
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	350	LF		31.00	0	10,900	0.81	325	WIRE	98.84	32100	43,000			
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,300	LF		4.44	0	5,800	0.24	357	WIRE	98.84	35300	41,100			
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,500	LF		1.46	0	6,600	0.08	409	WIRE	98.84	40400	47,000			
6.20	GROUNDING							0	4,500					10,900	15,400			
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA		150	0	600	4.00	18	WIRE	98.84	1,800	2,400			
	500 MCM	BARE COPPER WIRE	EST	500	FT		7.65	0	3,800	0.12	69	WIRE	98.84	6,800	10,600			
	CADWELD		EST	8	EA		15	0	100	2.00	18	WIRE	98.84	1,800	1,900			
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500			
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400			
6.22	LOW VOLTAGE POWER CABLE & TERMINATION							0	63,300					143,000	206,300			
	3/C # 500KCMIL- 600V		EST	1,400	LF		26.12	0	36,600	0.69	1,111	WIRE	98.84	109,800	146,400			
	#4/0 - #12 AWG-600V		EST	3,700	LF		7.22	0	26,700	0.08	336	WIRE	98.84	33,200	59,900			
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,500	LF		3.20	0	20,800	0.08	591	WIRE	98.84	58,400	79,200			

				AEP										Estimate No.:	30726B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	EST	30	LF		205.00	0	6,200	4.05	140	ECND	75.97	10600	16,800		
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							5,166,800	1,114,500		34,973			3,137,400	9,418,700		
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																
	ADDITIONAL CRANE ALLOWANCE								0					0	0		
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0		
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS												
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						3,041		83.48	254,000	254,000		
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						3,801			266,672	266,672		
	PER DIEM	NONE		0.00	HR						41,815			0	0		
	CONSUMABLES - % of ACCT NO. 90			0.5	%				5,573					15,687	21,260		
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				55,725						55,725		
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			258,340							258,340		
	SALES TAX - NOT INCLUDED														0		
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				55,725					156,870	212,595		
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				167,175					470,610	637,785		
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							258,300	284,200					1,163,800	1,706,400		
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS						5,425,100	1,398,700					4,301,200	11,125,100		
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID													0		
8.0	ACTIVATED CARBON INJECTION SYSTEM														0		
9.0	COMPRESSED AIR SYSTEM																
10.0	SERVICE WATER SYSTEM																
11.0	POTABLE WATER SYSTEM																
12.0	FGD SUBSTATION																
13.0	FGD DCS SYSTEM														0		
14.0	CEM SYSTEM														0		
15.0	TRUCK & RAIL INFRASTRUCTURE														0		
16.0	SITE IMPROVEMENTS - CIVIL WORK																
17.0	BOP ITEMS														0		
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE														0		
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT																

			AEP												Estimate No.:	30726B		
			BIG SANDY UNIT 2												Project No.:	12721-000		
			FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU												Date:	9/10/2010		
			ORDER OF MAGNITUDE COST ESTIMATE												Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip.Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>			
	LABOR	2.5%/yr		2.5	%									15,630,300	15,630,300			
	INDIRECTS	2.5%/yr		2.5	%									3,762,900	3,762,900			
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP													-			
	TOTAL PROJECT COST														469,053,000			
	REFERENCE COSTS:																	
A	ESP DEMOLITION	ALLOWANCE FOR 1000T STRUCTURE	ALLOW	1,000	TN			0	0	6.00	6,900	WRKG	120.63	832,300	832,300			
B	REMOVE BOOSTER AIR FANS		ALLOW	2	EA			0	0	400.00	920	WRKG	120.63	111,000	111,000			



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-10
NID Detailed Capital Cost Estimate No. 30724 Est-3A ESP in Service
(4.5 lb SO₂/MMbtu)

				AEP											Estimate No.:	30724B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
1.0	ID FANS																	
1.1	ID FANS - OEM EQUIPMENT	1,795,000 ACFM WITH 14,600 HP MOTORS (\$625,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	EST	2	EA	3,144,000		6,288,000	0	7800.00	17,940	MECH	88.89	1,594,700	7,882,700			
1.2	PIPING & SUPPORTS - MECHANICAL							21,800	28,700					120,500	171,000			
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300			
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900			
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	250	LF		48.80	0	12,200	1.44	414	SPNG	94.41	39,100	51,300			
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700			
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000			
	PIPE SUPPORTS		EST	105	EA		35.00	0	3,700	1.50	181	MECH	88.89	16,100	19,800			
1.3	DAMPERS							553,500	0					263,200	816,700			
	INLET DAMPERS	2X50% DOUBLE LOUVER TYPE WITH SEAL AIR FANS TOTAL FOR TWO FANS	EST	580	SF	450		261,000	0	2.50	1,668	MECH	88.89	148,200	409,200			
	OUTLET DAMPERS	2X50% GUILLOTINE DAMPERS, WITH SEAL AIR FANS TOTAL FOR TWO FANS	EST	450	SF	650		292,500	0	2.50	1,294	MECH	88.89	115,000	407,500			
1.4	EXPANSION JOINTS		EST	570	LF		230.00	0	131,100	2.00	1,311	MECH	88.89	116,500	247,600			
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	EST	800	TN		3,250.00	0	2,600,000	60.00	55,200	FLDU	107.96	5,959,400	8,559,400			
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	400	TN		2,900.00	0	1,160,000	24.00	11,040	STST	105.71	1,167,000	2,327,000			
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	EST	5,000	SF		40.00	0	200,000	0.55	3,163	DINS	81.75	258,500	458,500			
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	EST	72,000	SF		12.00	0	864,000	0.25	20,700	DINS	81.75	1,692,200	2,556,200			
1.9	DUCT SUPPORT STEEL - FOUNDATIONS							0	295,500					532,700	828,200			
	EXCAVATION / BACKFILL		EST	1,900	CY			0	0	0.15	328	EXFD	90.00	29,500	29,500			
	REINFORCING		EST	110	TN		1,150.00	0	126,500	20.00	2,530	REIN	78.27	198,000	324,500			
	FORMWORK		EST	6,200	SF		2.50	0	15,500	0.14	998	FORM	99.43	99,300	114,800			
	CONCRETE		EST	1,200	CY		105.00	0	126,000	1.50	2,070	CONP	79.64	164,900	290,900			
	MUD MAT		EST	190	CY		105.00	0	20,000	1.50	328	CONP	79.64	26,100	46,100			
	EMBEDDED STEEL		EST	3,000	LB		2.50	0	7,500	0.06	207	CARP	71.88	14,900	22,400			
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT							0	106,000					185,600	291,600			
	EXCAVATION / BACKFILL		EST	600	CY			0	0	0.15	104	EXFD	90.00	9,300	9,300			
	REINFORCING		EST	40	TN		1,150.00	0	46,000	20.00	920	REIN	78.27	72,000	118,000			
	FORMWORK		EST	1,500	SF		2.50	0	3,800	0.14	242	FORM	99.43	24,000	27,800			
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000			
	MUD MAT		EST	40	CY		105.00	0	4,200	1.50	69	CONP	79.64	5,500	9,700			
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800			

				AEP											Estimate No.:	30724B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS							0	273,800					433,700	707,500			
	EXCAVATION / BACKFILL		EST	1,160	CY			0	0	0.15	200	EXFD	90.00	18,000	18,000			
	REINFORCING		EST	111	TN		1,150.00	0	127,700	20.00	2,553	REIN	78.27	199,800	327,500			
	FORMWORK		EST	1,624	SF		2.50	0	4,100	0.14	261	FORM	99.43	26,000	30,100			
	CONCRETE		EST	1,178	CY		105.00	0	123,700	1.50	2,032	CONP	79.64	161,800	285,500			
	MUD MAT		EST	114	CY		105.00	0	12,000	1.50	197	CONP	79.64	15,700	27,700			
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700			
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	EST	7,875	SF		500.00	0	3,937,500	0.00	0	STST	105.71	0	3,937,500			
1.13	TRANSFORMERS							770,000	0					145,600	915,600			
	SST TRANSFORMERS: 21F & 21G	13.8KV-4160V, 3 PHASE, 2 WINDING	EST	2	EA	300000		600,000	0	500.00	1,150	EHEA	79.16	91,000	691,000			
	SUS TRANSFORMERS: 31F, 31G	13.8KV-4160V, 3 PHASE, CAST COIL	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600			
1.14	SWITCHGEAR							1,082,000	0		0			569,000	1,651,000			
	13KV MEDIUM VOLTAGE	PRICE PER SECTION	EST	10	EA	50000		500,000	0	230.00	2,645	EHEA	79.16	209,400	709,400			
	4.16 KV MEDIUM VOLTAGE (21F/G)	PRICE PER SECTION	EST	10	EA	39200		392,000	0	280.00	3,220	EHEA	79.16	254,900	646,900			
	480V LOW VOLTAGE (31F/G)	PRICE PER SECTION	EST	5	EA	38000		190,000	0	230.00	1,323	EHEA	79.16	104,700	294,700			
1.15	CABLE BUS & TERMINATIONS							756,300	35,800		0			1,316,200	2,108,300			
	15KV CABLE BUS TO 13F/G)	CABLE BUS	EST	1,300	FT	466		605,800	0	6.75	10,091	WIRE	98.84	997,400	1,603,200			
	5KV CABLE BUS	CABLE BUS	EST	150	FT	385		57,800	0	4.70	811	WIRE	98.84	80,100	137,900			
	480V CABLE BUS	CABLE BUS	EST	150	FT	618		92,700	0	10.30	1,777	WIRE	98.84	175,600	268,300			
	CABLE BUS TERMINATION	500MCM- 15KV TERMINATIONS	EST	4	EA		1,800.00	0	7,200	33.00	152	WIRE	98.84	15,000	22,200			
	CABLE BUS TERMINATION	1000MCM- 5KV TERMINATIONS	EST	4	EA		4,440.00	0	17,800	51.60	237	WIRE	98.84	23,500	41,300			
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400			
1.16	MCC							120,000	0					7,200	127,200			
	480V MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600			
	DC MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600			
1.17	MIMIC PANELS		EST	1	EA	17500		17,500	0	40.00	46	WIRE	98.84	4,500	22,000			
1.18	EMERGENCY POWER SYSTEM							285,500	0					38,900	324,400			
	DC PANEL BOARD		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000			
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100			
	UPS		EST	1	EA	60000		60,000	0	32.00	37	WIRE	98.84	3,600	63,600			
	SWITCHBOARD		EST	1	EA	40000		40,000	0	40.00	46	WIRE	98.84	4,500	44,500			
	BYPASS TRANSFORMERS		EST	1	EA	25000		25,000	0	40.00	46	WIRE	98.84	4,500	29,500			
	BATTERY CHARGER		EST	2	EA	32000		64,000	0	16.00	37	WIRE	98.84	3,600	67,600			
	BATTERIES		EST	1	LT	50000		50,000	0	80.00	92	WIRE	98.84	9,100	59,100			
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	EST	3,600	LF		51.75	0	186,300	0.69	2,865	WIRE	98.84	283,200	469,500			

				AEP											Estimate No.:	30724B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					

				AEP										Estimate No.:	30724B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							55,903,700	17,248,900		802,406			74,042,400	147,195,000		
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																
	ADDITIONAL CRANE ALLOWANCE			9	MN	75000		675,000		720.00	7,452	MECH	88.89	662400	1,337,400		
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0		
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS												
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						69,774		83.48	5,825,000	5,825,000		
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						87,963			6,170,730	6,170,730		
	PER DIEM	NONE		0.00	HR						967,595			0	0		
	CONSUMABLES - % of ACCT NO. 90			0.5	%				86,245					370,212	456,457		
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				862,445						862,445		
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%				2,795,185						2,795,185		
	SALES TAX - NOT INCLUDED														0		
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				862,445					3,702,120	4,564,565		
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				2,587,335					11,106,360	13,693,695		
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							3,470,200	4,398,500					27,836,800	35,705,500		
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES						59,373,900	21,647,400					101,879,200	182,900,500		
3.0	NEW STACK																
4.0	LIME HANDLING SYSTEM																
4.1	LIME STORAGE SILO							8,952,000	0					0	8,952,000		
	SILO	CONCRETE SILO 75' DIA X 132' H - 10512 TONS -SUBCONTRACT COST INCLUDES LABOR	EST	2	EA	4,331,000.00		8,662,000	0	0.00	0	CONP	79.64	0	8,662,000		
	ELEVATOR	MAINTENANCE ELEVATOR COMMON FOR BOTH SILOS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	290,000.00		290,000	0	0.00	0	MECH	88.89	0	290,000		
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTER, TWO FILTER SEPARATORS	EST	1	LT	1,100,000		1,100,000	0	5800.00	6,670	MECH	88.89	592,900	1,692,900		
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	2,866,000		2,866,000	0	15300.00	17,595	MECH	88.89	1,564,000	4,430,000		
4.4	PIPING - MECHANICAL							88,700	130,300					342,600	561,600		
	LARGE BORE PIPING	14" CS, SCH 40 WELDED - ON PIPE RACK	EST	500	LF		163.1	0	81,600	1.67	960	SPNG	94.41	90,700	172,300		
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	1,200	LF		14.1	0	16,900	0.83	1,145	SPNG	94.41	108,100	125,000		
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300		
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900		
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200		
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700		
	VALVE	2" GLOBE, 150# SS, WELDED	EST	6	EA	1,450		8,700	0	5.64	39	SPNG	94.41	3,700	12,400		

				AEP											Estimate No.:	30724B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400			
	VALVE	14" BFLY 150# CS, FLANGED	EST	4	EA	3,000		12,000	0	16.60	76	SPNG	94.41	7,200	19,200			
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	1,000	CY			0	0	0.20	230	EXFD	90.00	20,700	20,700			
	BEDDING	FOR UNDERGROUND PIPING	EST	133	CY		35.0	0	4,700	0.25	38	EXFD	90.00	3,500	8,200			
	PIPE SUPPORTS		EST	238	EA		50.00	0	11,900	1.50	410	MECH	88.89	36,400	48,300			
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	EST	55	TN		2,900.00	0	159,500	24.00	1,518	STST	105.71	160,500	320,000			
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	EST	650	TN		2,900.00	0	1,885,000	24.00	17,940	STST	105.71	1,896,400	3,781,400			
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING						0	42,700					79,300	122,000			
	EXCAVATION / BACKFILL		EST	500	CY			0	0	0.15	86	EXFD	90.00	7,800	7,800			
	REINFORCING		EST	15	TN		1,150.00	0	17,300	20.00	345	REIN	78.27	27,000	44,300			
	FORMWORK		EST	750	SF		2.50	0	1,900	0.14	121	FORM	99.43	12,000	13,900			
	CONCRETE		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500			
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	1,000	LB		2.50	0	2,500	0.06	69	CARP	71.88	5,000	7,500			
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS							0	69,600					130,200	199,800			
	EXCAVATION / BACKFILL		EST	800	CY			0	0	0.15	138	EXFD	90.00	12,400	12,400			
	REINFORCING		EST	25	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800			
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200			
	CONCRETE		EST	300	CY		105.00	0	31,500	1.50	518	CONP	79.64	41,200	72,700			
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700			
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H						75,000	335,000					24,400	434,400			
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	3,000	SF		105	0	315,000	0.00	0	STST	105.71	0	315,000			
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	40T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	75000	20000	75,000	20,000	350.00	300	HVAC	81.24	24,400	119,400			
4.10	CONCRETE PIT FOR THE ELEVATOR		EST	10	CY		230.00	0	2,300	7.50	86	CONP	79.64	6,900	9,200			
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS						0	560,700					917,900	1,478,600			
	EXCAVATION / BACKFILL		EST	3,900	CY			0	0	0.15	673	EXFD	90.00	60,500	60,500			
	REINFORCING		EST	230.0	TN		1,150.00	0	264,500	20.00	5,290	REIN	78.27	414,000	678,500			
	FORMWORK		EST	3,200	SF		2.50	0	8,000	0.14	515	FORM	99.43	51,200	59,200			
	CONCRETE		EST	2,400	CY		105.00	0	252,000	1.50	4,140	CONP	79.64	329,700	581,700			
	MUD MAT		EST	130	CY		105.00	0	13,700	1.50	224	CONP	79.64	17,900	31,600			
	EMBEDDED STEEL		EST	9,000	LB		2.50	0	22,500	0.06	621	CARP	71.88	44,600	67,100			
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS							0	14,200					26,200	40,400			
	EXCAVATION / BACKFILL		EST	110	CY			0	0	0.15	19	EXFD	90.00	1,700	1,700			
	REINFORCING		EST	4.8	TN		1,150.00	0	5,500	20.00	110	REIN	78.27	8,600	14,100			
	FORMWORK		EST	320	SF		2.50	0	800	0.14	52	FORM	99.43	5,100	5,900			
	CONCRETE		EST	60	CY		105.00	0	6,300	1.50	104	CONP	79.64	8,200	14,500			

				AEP											Estimate No.:	30724B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
	MUD MAT		EST	8	CY		105.00	0	800	1.50	14	CONP	79.64	1,100	1,900			
	EMBEDDED STEEL		EST	300	LB		2.50	0	800	0.06	21	CARP	71.88	1,500	2,300			
4.13	PIPE RACK - FOUNDATIONS							0	239,600					519,100	758,700			
	EXCAVATION / BACKFILL		EST	3,200	CY			0	0	0.15	552	EXFD	90.00	49,700	49,700			
	REINFORCING		EST	90.0	TN		1,150.00	0	103,500	20.00	2,070	REIN	78.27	162,000	265,500			
	FORMWORK		EST	9,500	SF		2.50	0	23,800	0.14	1,530	FORM	99.43	152,100	175,900			
	CONCRETE		EST	950	CY		105.00	0	99,800	1.50	1,639	CONP	79.64	130,500	230,300			
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300			
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600			
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	EST	5	EA	39200		196,000	0	230.00	1,323	EHEA	79.16	104,700	300,700			
4.16	CABLE BUS DUCT							134,700	10,800					200,200	345,700			
	480V CABLE BUS	BUST DUCT ONLY	EST	150	FT	898		134,700	0	10.30	1,777	WIRE	98.84	175,600	310,300			
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400			
4.17	MCC							61,800	0					3,600	65,400			
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400			
4.18	MIMIC PANELS		EST	1	EA	17500		17,500	0	12.00	14	WIRE	98.84	1,400	18,900			
4.19	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700			
	DC PANEL BOARD		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000			
	UPS PANEL BOARDS		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000			
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000			
	VRLA BATTERIES		EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700			
4.20	GROUNDING							13,300	0					41,300	54,600			
	GROUND ROD	3/4" - 20' LONG	EST	16	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700			
	500 MCM	BARE COPPER WIRE	EST	1,300	FT	7.65		9,900	0	0.12	179	WIRE	98.84	17,700	27,600			
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500			
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800			
4.21	LIGHTING/ TRANSFORMERS & PANELS							52,000	135,000					104,500	291,500			
	LIGHT FIXTURES		EST	180	EA		750	0	135,000	4.00	828	WIRE	98.84	81,800	216,800			
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	10000		20,000	0	40.00	92	WIRE	98.84	9,100	29,100			
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	7500		15,000	0	32.00	74	WIRE	98.84	7,300	22,300			
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	2	EA	5000		10,000	0	16.00	37	WIRE	98.84	3,600	13,600			
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	2	EA	3500		7,000	0	12.00	28	WIRE	98.84	2,700	9,700			
4.22	RACEWAY, CABLE TRAY, & CONDUIT							0	296,400					1,429,900	1,726,300			
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,050	LF		18.25	0	19,200	1.10	1,328	WIRE	98.84	131,300	150,500			
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	600	LF		21.50	0	12,900	1.45	1,001	WIRE	98.84	98,900	111,800			
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,700	LF		27.10	0	46,100	1.75	3,421	WIRE	98.84	338,200	384,300			
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	500	LF		30.30	0	15,200	1.95	1,121	WIRE	98.84	110,800	126,000			
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	750	LF		61.00	0	45,800	1.13	972	WIRE	98.84	96,100	141,900			

				AEP BIG SANDY UNIT 2												Estimate No.:	30724B		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU												Project No.:	12721-000		
				ORDER OF MAGNITUDE COST ESTIMATE												Date:	9/10/2010		
		Cost Type:													Preparer:	MNO			
		Est=Estimated													Reviewer:	JMK			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY				Approver:	PEF	
		Q=Vendor Quote								Labor Productivity =			1.15						
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip.Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>				
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,450	LF		31.00	0	45,000	0.81	1,346	WIRE	98.84	133,000	178,000				
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,550	LF		21.50	0	33,300	0.65	1,150	WIRE	98.84	113,600	146,900				
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	2,400	LF		9.25	0	22,200	0.35	972	WIRE	98.84	96,000	118,200				
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	3,050	LF		7.15	0	21,800	0.28	996	WIRE	98.84	98,500	120,300				
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	5,150	LF		4.44	0	22,900	0.24	1,415	WIRE	98.84	139,900	162,800				
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,200	LF		1.46	0	12,000	0.08	745	WIRE	98.84	73,600	85,600				
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	EST	6,600	LF		3.54	0	23,400	0.12	888	WIRE	98.84	87,800	111,200				
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400				
4.25	LOW VOLTAGE POWER CABLE & TERMINATION							0	132,200					260,800	393,000				
	3/C # 500KCML- 600V		EST	2,100	LF		26.12	0	54,900	0.69	1,666	WIRE	98.84	164,700	219,600				
	#4/0 - #12 AWG-600V		EST	10,700	LF		7.22	0	77,300	0.08	972	WIRE	98.84	96,100	173,400				
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	18,000	LF		3.20	0	57,600	0.08	1,635	WIRE	98.84	161,600	219,200				
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	EST	350	LF		174.67	0	61,100	3.80	1,530	FORM	99.43	152,100	213,200				
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	EST	14.0	CY		250	0	3,500	8.00	129	CONP	79.10	10,200	13,700				
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							13,835,300	4,168,400		95,838			8,945,400	26,949,100				
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																		
	ADDITIONAL CRANE ALLOWANCE							0						0	0				
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0				
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS														
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						8,334		83.48	696,000	696,000				
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						10,417			730,781	730,781				
	PER DIEM	NONE		0.00	HR						114,589			0	0				
	CONSUMABLES - % of ACCT NO. 90			0.5	%				20,842					44,727	65,569				
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				208,420						208,420				
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			691,765							691,765				
	SALES TAX - NOT INCLUDED														0				
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				208,420					447,270	655,690				
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				625,260					1,341,810	1,967,070				
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							691,800	1,062,900					3,260,600	5,015,300				
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM						14,527,100	5,231,300					12,206,000	31,964,400				
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID													0				

				AEP											Estimate No.:	30724B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS														0			
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	2,386,000		2,386,000	0	14200.00	16,330	MECH	88.89	1,451,600	3,837,600			
6.2	FLY ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, TWO PRESSURE EXHAUSTERS, TRANSFER STATION, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	2,285,000		2,285,000	0	14000.00	16,100	MECH	88.89	1,431,100	3,716,100			
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.		2	EA	14,000		28,000	0	60.00	138	MECH	88.89	12,300	40,300			
6.4	AGITATOR FOR SUMP PUMPS	5 HP		1	EA	12,000		12,000	0	45.00	52	MECH	88.89	4,600	16,600			
6.5	PIPING - MECHANICAL		EST	1	LT			142,800	131,000					408,700	682,500			
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	300	LF		45.1	0	13,500	0.87	300	SPNG	94.41	28,300	41,800			
	LARGE BORE PIPING	6" CS, SCH 40 WELDED - ON PIPE RACK	EST	200	LF		32.2	0	6,400	0.88	202	SPNG	94.41	19,100	25,500			
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700			
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	400	LF		14.1	0	5,600	0.83	382	SPNG	94.41	36,000	41,600			
	LARGE BORE PIPING	10" CS, SCH 40 WELDED	EST	300	LF		110.3	0	33,100	2.40	828	SPNG	94.41	78,200	111,300			
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	600	LF		72.8	0	43,700	1.45	1,001	SPNG	94.41	94,500	138,200			
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900			
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200			
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700			
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000			
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400			
	VALVE	6" AIR OPERATED, 150 #, CS, FLANGED	EST	2	EA	14,000		28,000	0	17.30	40	SPNG	94.41	3,800	31,800			
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400			
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,000	CY			0	0	0.20	460	EXFD	90.00	41,400	41,400			
	BEDDING	FOR UNDERGROUND PIPING	EST	267	CY		35.0	0	9,300	0.25	77	EXFD	90.00	6,900	16,200			
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	110	EA		75.00	0	8,300	2.50	316	MECH	88.89	28,100	36,400			
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 65' DIA X 110' H - 4644 TONS -SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	2,090,000		2,090,000	0	0.00	0	CONP	79.64	0	2,090,000			
6.7	RECYCLE SILO	NOT REQUIRED FOR NID																
6.8	FLY ASH SILO	STEEL -STORAGE SILO, 18' DIA X 19' H, 69 TONS						55,000	29,000					80,500	164,500			
	SILO BIN	PIN MIXERS INCLUDED WITH FLY ASH HANDLING MECHANICAL EQUIPMENT	EST	1	EA	55,000		55,000	0	500.00	575	TANK	89.16	51,300	106,300			

				AEP											Estimate No.:	30724B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
	SUPPORT STEEL FOR SILO	THREE-COAT SHOP PAINT	EST	10	TN		2,900.00	0	29,000	24.00	276	STST	105.71	29,200	58,200			
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS							0	188,700					317,300	506,000			
	EXCAVATION / BACKFILL		EST	1,500	CY			0	0	0.15	259	EXFD	90.00	23,300	23,300			
	REINFORCING		EST	75.0	TN		1,150.00	0	86,300	20.00	1,725	REIN	78.27	135,000	221,300			
	FORMWORK		EST	1,300	SF		2.50	0	3,300	0.14	209	FORM	99.43	20,800	24,100			
	CONCRETE		EST	780	CY		105.00	0	81,900	1.50	1,346	CONP	79.64	107,200	189,100			
	MUD MAT		EST	45	CY		105.00	0	4,700	1.50	78	CONP	79.64	6,200	10,900			
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300			
6.10	FLY ASH SILO - FOUNDATIONS							0	16,200					34,100	50,300			
	EXCAVATION / BACKFILL		EST	350	CY			0	0	0.15	60	EXFD	90.00	5,400	5,400			
	REINFORCING		EST	6.0	TN		1,150.00	0	6,900	20.00	138	REIN	78.27	10,800	17,700			
	FORMWORK		EST	360	SF		2.50	0	900	0.14	58	FORM	99.43	5,800	6,700			
	CONCRETE		EST	60	CY		105.00	0	6,300	1.50	104	CONP	79.64	8,200	14,500			
	MUD MAT		EST	3	CY		105.00	0	300	1.50	5	CONP	79.64	400	700			
	EMBEDDED STEEL		EST	700	LB		2.50	0	1,800	0.06	48	CARP	71.88	3,500	5,300			
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS							0	97,600					161,900	259,500			
	EXCAVATION / BACKFILL		EST	470	CY			0	0	0.15	81	EXFD	90.00	7,300	7,300			
	REINFORCING		EST	38	TN		1,150.00	0	43,700	20.00	874	REIN	78.27	68,400	112,100			
	FORMWORK		EST	960	SF		2.50	0	2,400	0.14	155	FORM	99.43	15,400	17,800			
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000			
	MUD MAT		EST	43	CY		105.00	0	4,500	1.50	74	CONP	79.64	5,900	10,400			
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900			
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H						40,000	241,500					25,600	307,100			
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	2,700	SF		85	0	229,500	0.00	0	STST	105.71	0	229,500			
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	20T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	40000	12000	40,000	12,000	280.00	322	HVAC	79.48	25,600	77,600			
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS							0	82,800					139,700	222,500			
	EXCAVATION / BACKFILL		EST	450	CY			0	0	0.15	78	EXFD	90.00	7,000	7,000			
	REINFORCING		EST	30	TN		1,150.00	0	34,500	20.00	690	REIN	78.27	54,000	88,500			
	FORMWORK		EST	1,100	SF		2.50	0	2,800	0.14	177	FORM	99.43	17,600	20,400			
	CONCRETE		EST	350	CY		105.00	0	36,800	1.50	604	CONP	77.91	47,000	83,800			
	MUD MAT		EST	40	CY		105.00	0	4,200	1.50	69	CONP	77.91	5,400	9,600			
	EMBEDDED STEEL		EST	1,800	LB		2.50	0	4,500	0.06	124	CARP	70.32	8,700	13,200			
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	110' L X 30' W X 25' H						75,000	276,500					23,800	375,300			
	PREENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	2,700	SF		95	0	256,500	0.00	0	STST	103.41	0	256,500			
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	40T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	75000	20000	75,000	20,000	350.00	300	HVAC	79.48	23,800	118,800			
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	EST	600	SF		500.00	0	300,000	0.00	0	STST	105.71	0	300,000			

				AEP											Estimate No.:	30724B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
6.16	MCC	480V MCC PER LINE UP	EST	4	EA	30000		120,000	0	16.00	74	WIRE	98.84	7,300	127,300			
6.17	EMERGENBCY POWER SYSTEM							185,500	0					40,000	225,500			
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100			
	SATELLITE UPS		EST	2	EA	41200		82,400	0	16.00	37	WIRE	98.84	3,600	86,000			
	VRLA BATTERIES		EST	2	LT	36050		72,100	0	120.00	276	WIRE	98.84	27,300	99,400			
6.18	LIGHTING/ TRANSFORMERS & PANELS							18,500	75,000					53,200	146,700			
	LIGHT FIXTURES		EST	100	EA		750	0	75,000	4.00	460	WIRE	98.84	45,500	120,500			
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500			
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800			
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900			
6.19	RACEWAY, CABLE TRAY, & CONDUIT							0	32,800					177,400	210,200			
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	350	LF		27.10	0	9,500	1.75	704	WIRE	98.84	69600	79,100			
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	350	LF		31.00	0	10,900	0.81	325	WIRE	98.84	32100	43,000			
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,300	LF		4.44	0	5,800	0.24	357	WIRE	98.84	35300	41,100			
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,500	LF		1.46	0	6,600	0.08	409	WIRE	98.84	40400	47,000			
6.20	GROUNDING							0	4,500					10,900	15,400			
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA		150	0	600	4.00	18	WIRE	98.84	1,800	2,400			
	500 MCM	BARE COPPER WIRE	EST	500	FT		7.65	0	3,800	0.12	69	WIRE	98.84	6,800	10,600			
	CADWELD		EST	8	EA		15	0	100	2.00	18	WIRE	98.84	1,800	1,900			
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500			
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400			
6.22	LOW VOLTAGE POWER CABLE & TERMINATION							0	63,300					143,000	206,300			
	3/C # 500KCML- 600V		EST	1,400	LF		26.12	0	36,600	0.69	1,111	WIRE	98.84	109,800	146,400			
	#4/0 - #12 AWG-600V		EST	3,700	LF		7.22	0	26,700	0.08	336	WIRE	98.84	33,200	59,900			
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,500	LF		3.20	0	20,800	0.08	591	WIRE	98.84	58,400	79,200			
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	EST	30	LF		205.00	0	6,200	4.05	140	ECND	75.97	10600	16,800			
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							7,437,800	1,575,400		52,177			4,639,900	13,653,100			
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																	
	ADDITIONAL CRANE ALLOWANCE								0					0	0			
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0			
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS													
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						4,537		83.48	379,000	379,000			
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						5,671			397,857	397,857			
	PER DIEM	NONE		0.00	HR						62,386			0	0			
	CONSUMABLES - % of ACCT NO. 90			0.5	%				7,877					23,200	31,077			
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				78,770						78,770			
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			371,890							371,890			
	SALES TAX - NOT INCLUDED														0			
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				78,770					231,995	310,765			
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				236,310					695,985	932,295			

				AEP										Estimate No.:	30724B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
17.7	EYE WASH STATIONS	WITH 50 KW HEATERS	EST	5	EA	6000	1000	30,000	5,000	60.00	345	MECH	88.89	30,700	65,700		
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS	STAND PIPE FOR BUILDINGS	EST	10	EA		30000	0	300,000	240.00	2,760	MECH	88.89	245,300	545,300		
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							180,000	998,500		24,627			2,028,800	3,207,300		
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																
	ADDITIONAL CRANE ALLOWANCE								0					0	0		
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0		
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS												
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						2,141		83.48	179,000	179,000		
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,677			187,782	187,782		
	PER DIEM	NONE		0.00	HR						29,445			0	0		
	CONSUMABLES - % of ACCT NO. 90			0.5	%				4,993					10,144	15,137		
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				49,925						49,925		
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			9,000							9,000		
	SALES TAX - NOT INCLUDED														0		
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				49,925					101,440	151,365		
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				149,775					304,320	454,095		
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							9,000	254,618					782,686	1,046,304		
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS						189,000	1,253,100					2,811,500	4,253,600		
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE														0		
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT																
99.00	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS							100,426,100	46,643,300		1,456,403			135,807,800	301,227,200		
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																
	ADDITIONAL CRANE ALLOWANCE			9	MN	75,000.00		675,000	0		7,452			662,400	1,337,400		
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0		
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS												
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						126,644		93.25	10,572,000	10,572,000		
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						159,050			11,157,551	11,157,551		
	PER DIEM	NONE		0.00	HR									0	0		
	CONSUMABLES - % of ACCT NO. 90			0.5	%				230,517					677,489	908,006		
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				2,305,165						2,305,165		
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			4,958,305							4,958,305		
	SALES TAX - NOT INCLUDED														0		
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				2,305,165					6,774,890	9,080,055		
	CONTRACTOR'S GENERAL AND ADMINISTRATION EXPENSE - % of ACCT NO. 90			15	%				6,915,495					20,324,670	27,240,165		



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-11
NID Detailed Capital Cost Estimate No. 30728 Est-3B ESP not in Service
(4.5 lb SO₂/MMbtu)

				AEP										Estimate No.:	30728B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS														
2.0	NID MODULES														
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS / COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	EST	1	LT	53,973,000		53,973,000	0	432800.00	497,720	MECH	88.89	44,242,300	98,215,300
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	EST	80,640	SF	30		2,419,200	0	0.00	0	DINS	81.75	0	2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF						58,100	1,316,900					1,747,600	3,122,600
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	200	TN		2,900.00	0	580,000	24.00	5,520	STST	105.71	583,500	1,163,500
	SIDING FOR PENTHOUSE		EST	8,960	SF		12.00	0	107,500	0.11	1,133	SDNG	93.41	105,900	213,400
	CONCRETE FLOOR FOR PENTHOUSE		EST	632	CY		230.00	0	145,400	7.50	5,451	SDNG	93.41	509,200	654,600
	ROOFING FOR PENTHOUSE		EST	25,600	SF		18.00	0	460,800	0.22	6,477	ROOF	69.12	447,700	908,500
	H&V		EST	1	LT	58100	23240	58,100	23,200	1084.00	1,247	HVAC	81.24	101,300	182,600
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH						92,200	2,428,900					2,544,900	5,066,000
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	560	TN		2,900.00	0	1,624,000	24.00	15,456	STST	105.71	1,633,900	3,257,900
	SIDING FOR BOTTOM ENCLOSURE		EST	25,600	SF		12.00	0	307,200	0.11	3,238	SDNG	93.41	302,500	609,700
	ROOFING FOR BOTTOM ENCLOSURE		EST	25,600	SF		18.00	0	460,800	0.22	6,477	ROOF	69.12	447,700	908,500
	H&V		EST	1	LT	92200	36880	92,200	36,900	1721.33	1,980	HVAC	81.24	160,800	289,900
2.5	PIPING & SUPPORTS - MECHANICAL							125,200	174,500					385,900	685,600
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED	EST	300	LF		23.0	0	6,900	1.48	511	SPNG	94.41	48,200	55,100
	LARGE BORE PIPING	6" SS, SCH 40 WELDED	EST	400	LF		111.00	0	44,400	2.02	929	SPNG	94.41	87,700	132,100
	LARGE BORE PIPING	18" CS, STD WELDED	EST	400	LF		234.10	0	93,600	2.34	1,076	SPNG	94.41	101,600	195,200
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	150	LF		22.20	0	3,300	1.26	217	SPNG	94.41	20,500	23,800
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	100	LF		48.80	0	4,900	1.44	166	SPNG	94.41	15,600	20,500
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	300	LF		33.70	0	10,100	1.32	455	SPNG	94.41	43,000	53,100
	VALVE	18" GATE, 150 #, CS, WELDED	EST	4	EA	17,500		70,000	0	28.30	130	SPNG	94.41	12,300	82,300
	VALVE	6" GATE, 150 #, SS, WELDED	EST	6	EA	4,700		28,200	0	12.96	89	SPNG	94.41	8,400	36,600
	VALVE	4" GATE, 150 #, CS, WELDED	EST	5	EA	2,500		12,500	0	7.70	44	SPNG	94.41	4,200	16,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	10	EA	1,450		14,500	0	5.64	65	SPNG	94.41	6,100	20,600
	PIPE SUPPORTS		EST	150	EA		75.00	0	11,300	2.50	431	MECH	88.89	38,300	49,600
2.6	DUCTWORK							0	4,797,000					10,995,100	15,792,100
	NID MODULE INLET	INCLUDES INTERNAL BRACING AND TURNING VANES	EST	1,476	TN		3,250.00	0	4,797,000	60.00	101,844	FLDU	107.96	10,995,100	15,792,100
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	738	TN		2,900.00	0	2,140,200	24.00	20,369	STST	105.71	2,153,200	4,293,400
2.8	DUCTWORK INSULATION & LAGGING		EST	136,000	SF		12.00	0	1,632,000	0.25	39,100	DINS	81.75	3,196,400	4,828,400
2.9	NID MODULE- FOUNDATIONS							0	1,087,000					1,682,500	2,769,500
	EXCAVATION / BACKFILL		EST	4,400	CY			0	0	0.15	759	EXFD	90.00	68,300	68,300
	REINFORCING		EST	450	TN		1,150.00	0	517,500	20.00	10,350	REIN	78.27	810,100	1,327,600
	FORMWORK		EST	3,200	SF		2.50	0	8,000	0.14	515	FORM	99.43	51,200	59,200
	CONCRETE		EST	4,750	CY		105.00	0	498,800	1.50	8,194	CONP	79.64	652,600	1,151,400
	MUD MAT		EST	340	CY		105.00	0	35,700	1.50	587	CONP	79.64	46,700	82,400

				AEP										Estimate No.:	30728B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	EMBEDDED STEEL		EST	10,800	LB		2.50	0	27,000	0.06	745	CARP	71.88	53,600	80,600
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY							0	1,152,000					2,863,700	4,015,700
	SUPPORT STEEL	MATERIAL INCLUDED WITH OEM EQUIPMENT	EST	640	TN			0	0	24.00	17,664	STST	105.71	1,867,300	1,867,300
	ACCESS GALLERY		EST	25,600	SF		45.00	0	1,152,000	0.40	11,776	GALL	84.61	996,400	2,148,400
2.11	GROUNDING							0	16,000		0			46,100	62,100
	GROUND ROD	3/4" - 20' LONG	EST	18	EA		150	0	2,400	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,650	FT		7.65	0	12,600	0.12	228	WIRE	98.84	22,500	35,100
	CADWELD		EST	64	EA		15	0	1,000	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
2.12	LIGHTING/ TRANSFORMERS & PANELS							156,000	150,000		0			159,100	465,100
	LIGHT FIXTURES		EST	200	EA		750	0	150,000	4.00	920	WIRE	98.84	90,900	240,900
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	6	EA	10000		60,000	0	40.00	276	WIRE	98.84	27,300	87,300
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	6	EA	7500		45,000	0	32.00	221	WIRE	98.84	21,800	66,800
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	6	EA	5000		30,000	0	16.00	110	WIRE	98.84	10,900	40,900
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	6	EA	3500		21,000	0	12.00	83	WIRE	98.84	8,200	29,200
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0													
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							56,823,700	14,894,500		762,792			70,016,800	141,735,000
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE			9	MN	75000		675,000		720.00	7,452	MECH	88.89	662400	1,337,400
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						66,330		83.48	5,537,000	5,537,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						83,657			5,868,674	5,868,674
	PER DIEM	NONE		0.00	HR						920,232			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				74,473					350,084	424,557
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				744,725						744,725
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			2,841,185							2,841,185
	SALES TAX - NOT INCLUDED													0	
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				744,725					3,500,840	4,245,565
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				2,234,175					10,502,520	12,736,695
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							3,516,200	3,798,100					26,421,500	33,735,800
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES						60,339,900	18,692,600					96,438,300	175,470,800
3.0	NEW STACK														
4.0	LIME HANDLING SYSTEM														
4.1	LIME STORAGE SILO							8,698,000	0					0	8,698,000
	SILO	CONCRETE SILO 80' DIA X 125' H - 10512 TONS -SUBCONTRACT COST INCLUDES LABOR	EST	2	EA	4,204,000.00		8,408,000	0	0.00	0	CONP	79.64	0	8,408,000

				AEP										Estimate No.:	30728B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	ELEVATOR	MAINTENANCE ELEVATOR COMMON FOR BOTH SILOS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	290,000.00		290,000	0	0.00	0	MECH	88.89	0	290,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	1,100,000		1,100,000	0	5800.00	6,670	MECH	88.89	592,900	1,692,900
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	2,866,000		2,866,000	0	15300.00	17,595	MECH	88.89	1,564,000	4,430,000
4.4	PIPING - MECHANICAL							88,700	130,300					342,600	561,600
	LARGE BORE PIPING	14" CS, SCH 40 WELDED - ON PIPE RACK	EST	500	LF		163.1	0	81,600	1.67	960	SPNG	94.41	90,700	172,300
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	1,200	LF		14.1	0	16,900	0.83	1,145	SPNG	94.41	108,100	125,000
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	6	EA	1,450		8,700	0	5.64	39	SPNG	94.41	3,700	12,400
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400
	VALVE	14" BFLY 150# CS, FLANGED	EST	4	EA	3,000		12,000	0	16.60	76	SPNG	94.41	7,200	19,200
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	1,000	CY			0	0	0.20	230	EXFD	90.00	20,700	20,700
	BEDDING	FOR UNDERGROUND PIPING	EST	133	CY		35.0	0	4,700	0.25	38	EXFD	90.00	3,500	8,200
	PIPE SUPPORTS		EST	238	EA		50.00	0	11,900	1.50	410	MECH	88.89	36,400	48,300
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	EST	55	TN		2,900.00	0	159,500	24.00	1,518	STST	105.71	160,500	320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	EST	650	TN		2,900.00	0	1,885,000	24.00	17,940	STST	105.71	1,896,400	3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING						0	42,700					79,300	122,000
	EXCAVATION / BACKFILL		EST	500	CY			0	0	0.15	86	EXFD	90.00	7,800	7,800
	REINFORCING		EST	15	TN		1,150.00	0	17,300	20.00	345	REIN	78.27	27,000	44,300
	FORMWORK		EST	750	SF		2.50	0	1,900	0.14	121	FORM	99.43	12,000	13,900
	CONCRETE		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	1,000	LB		2.50	0	2,500	0.06	69	CARP	71.88	5,000	7,500
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS							0	69,600					130,200	199,800
	EXCAVATION / BACKFILL		EST	800	CY			0	0	0.15	138	EXFD	90.00	12,400	12,400
	REINFORCING		EST	25	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200
	CONCRETE		EST	300	CY		105.00	0	31,500	1.50	518	CONP	79.64	41,200	72,700
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H						75,000	335,000					24,400	434,400

				AEP										Estimate No.:	30728B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	3,000	SF		105	0	315,000	0.00	0	STST	105.71	0	315,000
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	40T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	75000	20000	75,000	20,000	350.00	300	HVAC	81.24	24,400	119,400
4.10	CONCRETE PIT FOR THE ELEVATOR		EST	10	CY		230.00	0	2,300	7.50	86	CONP	79.64	6,900	9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS						0	560,700					917,900	1,478,600
	EXCAVATION / BACKFILL		EST	3,900	CY			0	0	0.15	673	EXFD	90.00	60,500	60,500
	REINFORCING		EST	230.0	TN		1,150.00	0	264,500	20.00	5,290	REIN	78.27	414,000	678,500
	FORMWORK		EST	3,200	SF		2.50	0	8,000	0.14	515	FORM	99.43	51,200	59,200
	CONCRETE		EST	2,400	CY		105.00	0	252,000	1.50	4,140	CONP	79.64	329,700	581,700
	MUD MAT		EST	130	CY		105.00	0	13,700	1.50	224	CONP	79.64	17,900	31,600
	EMBEDDED STEEL		EST	9,000	LB		2.50	0	22,500	0.06	621	CARP	71.88	44,600	67,100
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS							0	14,200					26,200	40,400
	EXCAVATION / BACKFILL		EST	110	CY			0	0	0.15	19	EXFD	90.00	1,700	1,700
	REINFORCING		EST	4.8	TN		1,150.00	0	5,500	20.00	110	REIN	78.27	8,600	14,100
	FORMWORK		EST	320	SF		2.50	0	800	0.14	52	FORM	99.43	5,100	5,900
	CONCRETE		EST	60	CY		105.00	0	6,300	1.50	104	CONP	79.64	8,200	14,500
	MUD MAT		EST	8	CY		105.00	0	800	1.50	14	CONP	79.64	1,100	1,900
	EMBEDDED STEEL		EST	300	LB		2.50	0	800	0.06	21	CARP	71.88	1,500	2,300
4.13	PIPE RACK - FOUNDATIONS							0	239,600					519,100	758,700
	EXCAVATION / BACKFILL		EST	3,200	CY			0	0	0.15	552	EXFD	90.00	49,700	49,700
	REINFORCING		EST	90.0	TN		1,150.00	0	103,500	20.00	2,070	REIN	78.27	162,000	265,500
	FORMWORK		EST	9,500	SF		2.50	0	23,800	0.14	1,530	FORM	99.43	152,100	175,900
	CONCRETE		EST	950	CY		105.00	0	99,800	1.50	1,639	CONP	79.64	130,500	230,300
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	EST	5	EA	39200		196,000	0	230.00	1,323	EHEA	79.16	104,700	300,700
4.16	CABLE BUS DUCT							134,700	10,800					200,200	345,700
	480V CABLE BUS	BUST DUCT ONLY	EST	150	FT	898		134,700	0	10.30	1,777	WIRE	98.84	175,600	310,300
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
4.17	MCC							61,800	0					3,600	65,400
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400
4.18	MIMIC PANELS		EST	1	EA	17500		17,500	0	12.00	14	WIRE	98.84	1,400	18,900
4.19	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700
	DC PANEL BOARD		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000
	VRLA BATTERIES		EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700

				AEP										Estimate No.:	30728B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						8,334		83.48	696,000	696,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						10,417			730,781	730,781
	PER DIEM	NONE		0.00	HR						114,589			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				20,842					44,728	65,570
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				208,420						208,420
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			679,065							679,065
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				208,420					447,275	655,695
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				625,260					1,341,825	1,967,085
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							679,100	1,062,900					3,260,600	5,002,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM						14,260,400	5,231,300					12,206,100	31,697,800
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID													0
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS														0
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	2,900,000		2,900,000	0	15800.00	18,170	MECH	88.89	1,615,100	4,515,100
6.2	ECONOMIZER ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES JET PUMPS AND PIPING / SUPPORTS TO THE BOTTOM ASH POND	EST	1	LT	400,000		400,000	0	2900.00	3,335	MECH	88.89	296,400	696,400
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.		2	EA	14,000		28,000	0	60.00	138	MECH	88.89	12,300	40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP		1	EA	12,000		12,000	0	45.00	52	MECH	88.89	4,600	16,600
6.5	PIPING - MECHANICAL		EST	1	LT			142,800	131,000					408,700	682,500
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	300	LF		45.1	0	13,500	0.87	300	SPNG	94.41	28,300	41,800
	LARGE BORE PIPING	6" CS, SCH 40 WELDED - ON PIPE RACK	EST	200	LF		32.2	0	6,400	0.88	202	SPNG	94.41	19,100	25,500
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	400	LF		14.1	0	5,600	0.83	382	SPNG	94.41	36,000	41,600
	LARGE BORE PIPING	10" CS, SCH 40 WELDED	EST	300	LF		110.3	0	33,100	2.40	828	SPNG	94.41	78,200	111,300
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	600	LF		72.8	0	43,700	1.45	1,001	SPNG	94.41	94,500	138,200
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000

				AEP										Estimate No.:	30728B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400
	VALVE	6" AIR OPERATED, 150 #, CS, FLANGED	EST	2	EA	14,000		28,000	0	17.30	40	SPNG	94.41	3,800	31,800
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,000	CY			0	0	0.20	460	EXFD	90.00	41,400	41,400
	BEDDING	FOR UNDERGROUND PIPING	EST	267	CY		35.0	0	9,300	0.25	77	EXFD	90.00	6,900	16,200
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	110	EA		75.00	0	8,300	2.50	316	MECH	88.89	28,100	36,400
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 65' DIA X 151' H - 6652 TONS -SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	2,994,000		2,994,000	0	0.00	0	CONP	79.64	0	2,994,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID													
6.8	FLY ASH SILO	NOT REQUIRED - ECONOMIZER FLY ASH SLUICD TO BOTTOM ASH POND						0	0					0	0
	SILO BIN		EST	0	EA	50,000		0	0	450.00	0	TANK	89.16	0	0
	SUPPORT STEEL FOR SILO		EST	0	TN		2,900.00	0	0	24.00	0	STST	105.71	0	0
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS							0	188,700					317,300	506,000
	EXCAVATION / BACKFILL		EST	1,500	CY			0	0	0.15	259	EXFD	90.00	23,300	23,300
	REINFORCING		EST	75.0	TN		1,150.00	0	86,300	20.00	1,725	REIN	78.27	135,000	221,300
	FORMWORK		EST	1,300	SF		2.50	0	3,300	0.14	209	FORM	99.43	20,800	24,100
	CONCRETE		EST	780	CY		105.00	0	81,900	1.50	1,346	CONP	79.64	107,200	189,100
	MUD MAT		EST	45	CY		105.00	0	4,700	1.50	78	CONP	79.64	6,200	10,900
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300
6.10	FLY ASH SILO - FOUNDATIONS	NOT REQUIRED						0	0					0	0
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0
	REINFORCING		EST	0.0	TN		1,150.00	0	0	20.00	0	REIN	78.27	0	0
	FORMWORK		EST	0	SF		2.50	0	0	0.14	0	FORM	99.43	0	0
	CONCRETE		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	0	LB		2.50	0	0	0.06	0	CARP	71.88	0	0
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS							0	97,600					161,900	259,500
	EXCAVATION / BACKFILL		EST	470	CY			0	0	0.15	81	EXFD	90.00	7,300	7,300
	REINFORCING		EST	38	TN		1,150.00	0	43,700	20.00	874	REIN	78.27	68,400	112,100
	FORMWORK		EST	960	SF		2.50	0	2,400	0.14	155	FORM	99.43	15,400	17,800
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000
	MUD MAT		EST	43	CY		105.00	0	4,500	1.50	74	CONP	79.64	5,900	10,400
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H						40,000	241,500					26,200	307,700
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	2,700	SF		85	0	229,500	0.00	0	STST	105.71	0	229,500
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	20T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	40000	12000	40,000	12,000	280.00	322	HVAC	81.24	26,200	78,200

				AEP											Estimate No.:	30728B
				BIG SANDY UNIT 2											Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU											Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO
		Cost Type:												Reviewer:	JMK	
		Est=Estimated												Approver:	PEF	
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY				
		Q=Vendor Quote								Labor Productivity =		1.15				
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost	
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS	NOT REQUIRED						0	0					0	0	
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0	
	REINFORCING		EST	0	TN	1,150.00		0	0	20.00	0	REIN	78.27	0	0	
	FORMWORK		EST	0	SF	2.50		0	0	0.14	0	FORM	99.43	0	0	
	CONCRETE		EST	0	CY	105.00		0	0	1.50	0	CONP	79.64	0	0	
	MUD MAT		EST	0	CY	105.00		0	0	1.50	0	CONP	79.64	0	0	
	EMBEDDED STEEL		EST	0	LB	2.50		0	0	0.06	0	CARP	71.88	0	0	
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	NOT REQUIRED						0	0					0	0	
	PREENGINEERED BUILDING INCLUDING H&V AND LIGHTING		EST	0	SF	95		0	0	0.00	0	STST	105.71	0	0	
	ADDITONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS		EST	0	LT	75000	20000	0	0	350.00	0	HVAC	81.24	0	0	
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	EST	600	SF		500.00	0	300,000	0.00	0	STST	105.71	0	300,000	
6.16	MCC	480V MCC PER LINE UP	EST	4	EA	30000		120,000	0	16.00	74	WIRE	98.84	7,300	127,300	
6.17	EMERGENBCY POWER SYSTEM							185,500	0					40,000	225,500	
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100	
	SATELLITE UPS		EST	2	EA	41200		82,400	0	16.00	37	WIRE	98.84	3,600	86,000	
	VRLA BATTERIES		EST	2	LT	36050		72,100	0	120.00	276	WIRE	98.84	27,300	99,400	
6.18	LIGHTING/ TRANSFORMERS & PANELS							18,500	75,000					53,200	146,700	
	LIGHT FIXTURES		EST	100	EA		750	0	75,000	4.00	460	WIRE	98.84	45,500	120,500	
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500	
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800	
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900	
6.19	RACEWAY, CABLE TRAY, & CONDUIT							0	32,800					177,400	210,200	
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	350	LF		27.10	0	9,500	1.75	704	WIRE	98.84	69600	79,100	
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	350	LF		31.00	0	10,900	0.81	325	WIRE	98.84	32100	43,000	
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,300	LF		4.44	0	5,800	0.24	357	WIRE	98.84	35300	41,100	
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,500	LF		1.46	0	6,600	0.08	409	WIRE	98.84	40400	47,000	
6.20	GROUNDING							0	4,500					10,900	15,400	
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA		150	0	600	4.00	18	WIRE	98.84	1,800	2,400	
	500 MCM	BARE COPPER WIRE	EST	500	FT		7.65	0	3,800	0.12	69	WIRE	98.84	6,800	10,600	
	CADWELD		EST	8	EA		15	0	100	2.00	18	WIRE	98.84	1,800	1,900	
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500	
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400	
6.22	LOW VOLTAGE POWER CABLE & TERMINATION							0	63,300					143,000	206,300	
	3/C # 500KCMIL- 600V		EST	1,400	LF		26.12	0	36,600	0.69	1,111	WIRE	98.84	109,800	146,400	
	#4/0 - #12 AWG-600V		EST	3,700	LF		7.22	0	26,700	0.08	336	WIRE	98.84	33,200	59,900	
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,500	LF		3.20	0	20,800	0.08	591	WIRE	98.84	58,400	79,200	

				AEP										Estimate No.:	30728B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
99.00	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS							101,127,100	43,879,400		1,403,169			130,611,100	293,967,600
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE			#REF!	MN	75,000.00		675,000	0		7,452			662,400	1,337,400
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						122,015		93.08	10,185,000	10,185,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						153,264			10,751,633	10,751,633
	PER DIEM	NONE		0.00	HR									0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				216,697					651,506	868,203
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				2,166,970						2,166,970
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			4,993,355							4,993,355
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				2,166,970					6,515,055	8,682,025
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				6,500,910					19,545,165	26,046,075
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							5,668,400	11,051,500					48,310,800	65,030,700
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST							106,795,500	54,930,900					178,921,900	358,998,300
	TOTAL PROJECT DIRECT AND CONSTRUCTION INDIRECT COSTS							106,795,500	54,930,900					178,921,900	358,998,300
	INDIRECT COSTS														
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES			1.0	LT										25,000,000
	CONSTRUCTION MANAGEMENT			3.0	%										10,769,900
	S-U / COMMISSIONING			1.0											3,590,000
	CRAFT START-UP SUPPORT	1% OF TOTAL LABOR MANHOURS (INCLUDES OVERTIME INEFFICIENCY & COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - BASED ON ASSUMED 5X10 WORKWEEK)		1.0	%						15,252		93.08	1,539,000	1,539,000
	INITIAL FILLS			0.3	%										1,077,000
	OPERATOR & TRAINING MANUALS			1.0	LT										300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)			1.0	LT										400,000
	OWNERS COST - % of ACCT NOS. 92, 93.1, 93.2, 93.3, 93.4	BY AEP		0.0	%										0
	SUBTOTAL - INDIRECT COSTS														42,675,900
	TOTAL PROJECT DIRECT AND INDIRECT COSTS														401,674,200
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT			1.3	%			1,388,300							1,388,300
	SPARE PARTS FOR THE OEM EQUIPMENT			0.80				860,746							860,746
	SPARE PARTS FOR THE BOP EQUIPMENT			0.50				527,554							527,554
	CONTINGENCY			14.5	%										58,316,600
	ESCALATION														35,090,700
	EQUIPMENT	4.0%/yr		4.0	%			11,145,100							11,145,100
	MATERIAL	2.0%/yr		2.0	%				3,942,300						3,942,300

				AEP										Estimate No.:	30728B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip.Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>
	LABOR	2.5%/yr		2.5	%									16,151,000	16,151,000
	INDIRECTS	2.5%/yr		2.5	%									3,852,300	3,852,300
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP													-
	TOTAL PROJECT COST														496,469,800
	REFERENCE COSTS:														
A	ESP DEMOLITION	ALLOWANCE FOR 1000T STRUCTURE	ALLOW	1,000	TN			0	0	6.00	6,900	WRKG	120.63	832,300	832,300
B	REMOVE BOOSTER AIR FANS		ALLOW	2	EA			0	0	400.00	920	WRKG	120.63	111,000	111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-12
NID Detailed Capital Cost Estimate No. 30725 Est-4A ESP in Service
(7.5 lb SO₂/MMbtu)

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip. Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>
1.0	ID FANS														
1.1	ID FANS - OEM EQUIPMENT	1,795,000 ACFM WITH 14,600 HP MOTORS (\$625,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	EST	2	EA	3,144,000		6,288,000	0	7800.00	17,940	MECH	88.89	1,594,700	7,882,700
1.2	PIPING & SUPPORTS - MECHANICAL							21,800	28,700					120,500	171,000
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	250	LF		48.80	0	12,200	1.44	414	SPNG	94.41	39,100	51,300
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000
	PIPE SUPPORTS		EST	105	EA		35.00	0	3,700	1.50	181	MECH	88.89	16,100	19,800
1.3	DAMPERS							553,500	0					263,200	816,700
	INLET DAMPERS	2X50% DOUBLE LOUVER TYPE WITH SEAL AIR FANS TOTAL FOR TWO FANS	EST	580	SF	450		261,000	0	2.50	1,668	MECH	88.89	148,200	409,200
	OUTLET DAMPERS	2X50% GUILLOTINE DAMPERS, WITH SEAL AIR FANS TOTAL FOR TWO FANS	EST	450	SF	650		292,500	0	2.50	1,294	MECH	88.89	115,000	407,500
1.4	EXPANSION JOINTS		EST	570	LF		230.00	0	131,100	2.00	1,311	MECH	88.89	116,500	247,600
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	EST	800	TN		3,250.00	0	2,600,000	60.00	55,200	FLDU	107.96	5,959,400	8,559,400
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	400	TN		2,900.00	0	1,160,000	24.00	11,040	STST	105.71	1,167,000	2,327,000
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	EST	5,000	SF		40.00	0	200,000	0.55	3,163	DINS	81.75	258,500	458,500
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	EST	72,000	SF		12.00	0	864,000	0.25	20,700	DINS	81.75	1,692,200	2,556,200
1.9	DUCT SUPPORT STEEL - FOUNDATIONS							0	295,500					532,700	828,200
	EXCAVATION / BACKFILL		EST	1,900	CY			0	0	0.15	328	EXFD	90.00	29,500	29,500
	REINFORCING		EST	110	TN		1,150.00	0	126,500	20.00	2,530	REIN	78.27	198,000	324,500
	FORMWORK		EST	6,200	SF		2.50	0	15,500	0.14	998	FORM	99.43	99,300	114,800
	CONCRETE		EST	1,200	CY		105.00	0	126,000	1.50	2,070	CONP	79.64	164,900	290,900
	MUD MAT		EST	190	CY		105.00	0	20,000	1.50	328	CONP	79.64	26,100	46,100
	EMBEDDED STEEL		EST	3,000	LB		2.50	0	7,500	0.06	207	CARP	71.88	14,900	22,400
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT							0	106,000					185,600	291,600
	EXCAVATION / BACKFILL		EST	600	CY			0	0	0.15	104	EXFD	90.00	9,300	9,300
	REINFORCING		EST	40	TN		1,150.00	0	46,000	20.00	920	REIN	78.27	72,000	118,000
	FORMWORK		EST	1,500	SF		2.50	0	3,800	0.14	242	FORM	99.43	24,000	27,800
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000
	MUD MAT		EST	40	CY		105.00	0	4,200	1.50	69	CONP	79.64	5,500	9,700
	EMBEDDED STEEL		EST	4,000	LB		2.50	0	10,000	0.06	276	CARP	71.88	19,800	29,800

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip. Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS							0	273,800					433,700	707,500
	EXCAVATION / BACKFILL		EST	1,160	CY			0	0	0.15	200	EXFD	90.00	18,000	18,000
	REINFORCING		EST	111	TN		1,150.00	0	127,700	20.00	2,553	REIN	78.27	199,800	327,500
	FORMWORK		EST	1,624	SF		2.50	0	4,100	0.14	261	FORM	99.43	26,000	30,100
	CONCRETE		EST	1,178	CY		105.00	0	123,700	1.50	2,032	CONP	79.64	161,800	285,500
	MUD MAT		EST	114	CY		105.00	0	12,000	1.50	197	CONP	79.64	15,700	27,700
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	EST	7,875	SF		500.00	0	3,937,500	0.00	0	STST	105.71	0	3,937,500
1.13	TRANSFORMERS							770,000	0					145,600	915,600
	SST TRANSFORMERS: 21F & 21G	13.8KV-4160V, 3 PHASE, 2 WINDING	EST	2	EA	300000		600,000	0	500.00	1,150	EHEA	79.16	91,000	691,000
	SUS TRANSFORMERS: 31F, 31G	13.8KV-4160V, 3 PHASE, CAST COIL	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600
1.14	SWITCHGEAR							1,082,000	0		0			569,000	1,651,000
	13KV MEDIUM VOLTAGE	PRICE PER SECTION	EST	10	EA	50000		500,000	0	230.00	2,645	EHEA	79.16	209,400	709,400
	4.16 KV MEDIUM VOLTAGE (21F/G)	PRICE PER SECTION	EST	10	EA	39200		392,000	0	280.00	3,220	EHEA	79.16	254,900	646,900
	480V LOW VOLTAGE (31F/G)	PRICE PER SECTION	EST	5	EA	38000		190,000	0	230.00	1,323	EHEA	79.16	104,700	294,700
1.15	CABLE BUS & TERMINATIONS							756,300	35,800		0			1,316,200	2,108,300
	15KV CABLE BUS TO 13F/G)	CABLE BUS	EST	1,300	FT	466		605,800	0	6.75	10,091	WIRE	98.84	997,400	1,603,200
	5KV CABLE BUS	CABLE BUS	EST	150	FT	385		57,800	0	4.70	811	WIRE	98.84	80,100	137,900
	480V CABLE BUS	CABLE BUS	EST	150	FT	618		92,700	0	10.30	1,777	WIRE	98.84	175,600	268,300
	CABLE BUS TERMINATION	500MCM- 15KV TERMINATIONS	EST	4	EA		1,800.00	0	7,200	33.00	152	WIRE	98.84	15,000	22,200
	CABLE BUS TERMINATION	1000MCM- 5KV TERMINATIONS	EST	4	EA		4,440.00	0	17,800	51.60	237	WIRE	98.84	23,500	41,300
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
1.16	MCC							120,000	0					7,200	127,200
	480V MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600
	DC MCC	PER LINE UP	EST	2	EA	30,000		60,000	0	16.00	37	WIRE	98.84	3,600	63,600
1.17	MIMIC PANELS		EST	1	EA	17500		17,500	0	40.00	46	WIRE	98.84	4,500	22,000
1.18	EMERGENCY POWER SYSTEM							285,500	0					38,900	324,400
	DC PANEL BOARD		EST	1	EA	15500		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100
	UPS		EST	1	EA	60000		60,000	0	32.00	37	WIRE	98.84	3,600	63,600
	SWITCHBOARD		EST	1	EA	40000		40,000	0	40.00	46	WIRE	98.84	4,500	44,500
	BYPASS TRANSFORMERS		EST	1	EA	25000		25,000	0	40.00	46	WIRE	98.84	4,500	29,500
	BATTERY CHARGER		EST	2	EA	32000		64,000	0	16.00	37	WIRE	98.84	3,600	67,600
	BATTERIES		EST	1	LT	50000		50,000	0	80.00	92	WIRE	98.84	9,100	59,100
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	EST	3,600	LF		51.75	0	186,300	0.69	2,865	WIRE	98.84	283,200	469,500

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
1.20	MEDIUM VOLTAGE POWER CABLE & TERMINATION							0	91,600		0			393,700	485,300
	1/C # 350KCMIL-5KV		EST	14,600	LF		6.13	0	89,500	0.23	3,862	WIRE	98.84	381,700	471,200
	1/C # 2/0-5KV		EST	900	LF		2.35	0	2,100	0.12	121	WIRE	98.84	12,000	14,100
1.21	LOW VOLTAGE POWER CABLE & TERMINATION							0	543,000		0			794,800	1,337,800
	3/C # 500KCMIL - 600V		EST	2,600	LF		26.12	0	67,900	0.69	2,063	WIRE	98.84	203,900	271,800
	#4/0 - #12 AWG-600V		EST	65,800	LF		7.22	0	475,100	0.08	5,978	WIRE	98.84	590,900	1,066,000
1.22	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	107,800	LF		3.20	0	345,000	0.23	28,513	WIRE	98.84	2,818,200	3,163,200
1.23	GROUNDING							11,100	0					37,200	48,300
	GROUND ROD	3/4" - 20' LONG EACH	EST	18	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,000	FT	7.65		7,700	0	0.12	138	WIRE	98.84	13,600	21,300
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
1.24	LIGHTING/ TRANSFORMERS & PANELS							26,000	30,000					29,500	85,500
	LIGHT FIXTURES		EST	40	EA		750	0	30,000	4.00	184	WIRE	98.84	18,200	48,200
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	7500		7,500	0	32.00	37	WIRE	98.84	3,600	11,100
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
1.25	RACEWAY, CABLE TRAY, & CONDUIT							0	1,569,000		0			7,502,000	9,071,000
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	5,120	LF		18.25	0	93,400	1.10	6,477	WIRE	98.84	640,200	733,600
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	3,000	LF		21.50	0	64,500	1.45	5,003	WIRE	98.84	494,400	558,900
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	9,200	LF		27.10	0	249,300	1.75	18,515	WIRE	98.84	1,830,000	2,079,300
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	2,400	LF		30.30	0	72,700	1.95	5,382	WIRE	98.84	532,000	604,700
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,000	LF		61.00	0	244,000	1.13	5,184	WIRE	98.84	512,400	756,400
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,600	LF		31.00	0	266,600	0.81	7,981	WIRE	98.84	788,900	1,055,500
	3" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	8,000	LF		21.50	0	172,000	0.65	5,934	WIRE	98.84	586,500	758,500
	2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	12,000	LF		9.25	0	111,000	0.35	4,858	WIRE	98.84	480,100	591,100
	1-1/2" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	15,000	LF		7.15	0	107,300	0.28	4,899	WIRE	98.84	484,200	591,500
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	27,000	LF		4.44	0	119,900	0.24	7,421	WIRE	98.84	733,500	853,400
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	46,750	LF		1.46	0	68,300	0.08	4,247	WIRE	98.84	419,800	488,100
1.26	DUCT BANK							0	40,800					280,000	320,800
	DUCT BANK WITH 3-5" & 3-3" CONDUITS		EST	300	LF		142.42	0	14,200	3.17	1,094	ECND	75.97	83,100	97,300
	DUCT BANK WITH 6-5" & 6-3" CONDUITS		EST	375	LF		265.88	0	26,600	6.01	2,592	ECND	75.97	196,900	223,500
1.27	FOUNDATION FOR TRANSFORMERS							0	64,600		0			168,200	232,800

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	EXCAVATION / BACKFILL		EST	950	CY			0	0	0.15	164	EXFD	90.00	14,700	14,700
	REINFORCING		EST	18	TN		1,150.00	0	20,700	20.00	414	REIN	78.27	32,400	53,100
	FORMWORK		EST	4,500	SF		2.50	0	11,300	0.14	725	FORM	99.43	72,000	83,300
	CONCRETE		EST	178	CY		105.00	0	18,700	1.50	307	CONP	79.64	24,500	43,200
	MUD MAT		EST	42	CY		105.00	0	4,400	1.50	72	CONP	79.64	5,800	10,200
	EMBEDDED STEEL		EST	3,800	LB		2.50	0	9,500	0.06	262	CARP	71.88	18,800	28,300
1.28	FIREWALL FOR TRANSFORMERS							0	3,200					8,300	11,500
	REINFORCING		EST	1.2	TN		1,150.00	0	1,400	20.00	28	REIN	78.27	2,200	3,600
	FORMWORK		EST	80	SF		2.50	0	200	0.14	13	FORM	99.43	1,300	1,500
	CONCRETE		EST	15	CY		105.00	0	1,600	3.50	60	CONP	79.64	4,800	6,400
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							9,931,700	12,505,900		276,347			26,720,500	49,158,100
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE								0					0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						24,030		83.48	2,006,000	2,006,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						30,038			2,107,183	2,107,183
	PER DIEM	NONE		0.00	HR						330,415			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				62,530					133,603	196,132
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				625,295						625,295
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			496,585							496,585
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				625,295					1,336,025	1,961,320
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				1,875,885					4,008,075	5,883,960
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							496,600	3,189,000					9,590,900	13,276,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ID FANS						10,428,300	15,694,900					36,311,400	62,434,600
2.0	NID MODULES														
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS/COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	EST	1	LT	66,387,200		66,387,200	0	504700.00	661,662	MECH	88.89	58,815,100	125,202,300
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	EST	100,352	SF	30		3,010,600	0	0.00	0	DINS	81.75	0	3,010,600
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 29600 SF						65,200	1,537,000					2,048,900	3,651,100
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	233	TN		2,900.00	0	674,400	24.00	6,419	STST	105.71	678,500	1,352,900
	SIDING FOR PENTHOUSE		EST	9,853	SF		12.00	0	118,200	0.11	1,246	SDNG	93.41	116,400	234,600
	CONCRETE FLOOR FOR PENTHOUSE		EST	760	CY		230.00	0	174,800	7.50	6,555	SDNG	93.41	612,300	787,100
	ROOFING FOR PENTHOUSE		EST	30,192	SF		18.00	0	543,500	0.22	7,639	ROOF	69.12	528,000	1,071,500

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	H&V		EST	1	LT	65200	26080	65,200	26,100	1217.33	1,400	HVAC	81.24	113,700	205,000
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH						103,900	2,674,000					2,803,700	5,581,600
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	604	TN		2,900.00	0	1,751,100	24.00	16,666	STST	105.71	1,761,800	3,512,900
	SIDING FOR BOTTOM ENCLOSURE		EST	28,152	SF		12.00	0	337,800	0.11	3,561	SDNG	93.41	332,700	670,500
	ROOFING FOR BOTTOM ENCLOSURE		EST	30,192	SF		18.00	0	543,500	0.22	7,639	ROOF	69.12	528,000	1,071,500
	H&V		EST	1	LT	103900	41560	103,900	41,600	1940.00	2,231	HVAC	81.24	181,200	326,700
2.5	PIPING & SUPPORTS - MECHANICAL							125,200	174,500					385,900	685,600
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED	EST	300	LF		23.0	0	6,900	1.48	511	SPNG	94.41	48,200	55,100
	LARGE BORE PIPING	6" SS, SCH 40 WELDED	EST	400	LF		111.00	0	44,400	2.02	929	SPNG	94.41	87,700	132,100
	LARGE BORE PIPING	18" CS, STD WELDED	EST	400	LF		234.10	0	93,600	2.34	1,076	SPNG	94.41	101,600	195,200
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	150	LF		22.20	0	3,300	1.26	217	SPNG	94.41	20,500	23,800
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	100	LF		48.80	0	4,900	1.44	166	SPNG	94.41	15,600	20,500
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	300	LF		33.70	0	10,100	1.32	455	SPNG	94.41	43,000	53,100
	VALVE	18" GATE, 150 #, CS, WELDED	EST	4	EA	17,500		70,000	0	28.30	130	SPNG	94.41	12,300	82,300
	VALVE	6" GATE, 150 #, SS, WELDED	EST	6	EA	4,700		28,200	0	12.96	89	SPNG	94.41	8,400	36,600
	VALVE	4" GATE, 150 #, CS, WELDED	EST	5	EA	2,500		12,500	0	7.70	44	SPNG	94.41	4,200	16,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	10	EA	1,450		14,500	0	5.64	65	SPNG	94.41	6,100	20,600
	PIPE SUPPORTS		EST	150	EA		75.00	0	11,300	2.50	431	MECH	88.89	38,300	49,600
2.6	DUCTWORK							0	6,175,000					14,153,600	20,328,600
	NID MODULE INLET	INCLUDES INTERNAL BRACING AND TURNING VANES	EST	1,900	TN		3,250.00	0	6,175,000	60.00	131,100	FLDU	107.96	14,153,600	20,328,600
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	950	TN		2,900.00	0	2,755,000	24.00	26,220	STST	105.71	2,771,700	5,526,700
2.8	DUCTWORK INSULATION & LAGGING		EST	170,000	SF		12.00	0	2,040,000	0.25	48,875	DINS	81.75	3,995,500	6,035,500
2.9	NID MODULE- FOUNDATIONS							0	1,203,400					1,856,600	3,060,000
	EXCAVATION / BACKFILL		EST	5,000	CY			0	0	0.15	863	EXFD	90.00	77,600	77,600
	REINFORCING		EST	475	TN		1,150.00	0	546,300	20.00	10,925	REIN	78.27	855,100	1,401,400
	FORMWORK		EST	3,450	SF		2.50	0	8,600	0.14	555	FORM	99.43	55,200	63,800
	CONCRETE		EST	5,500	CY		105.00	0	577,500	1.50	9,488	CONP	79.64	755,600	1,333,100
	MUD MAT		EST	390	CY		105.00	0	41,000	1.50	673	CONP	79.64	53,600	94,600
	EMBEDDED STEEL		EST	12,000	LB		2.50	0	30,000	0.06	828	CARP	71.88	59,500	89,500
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY							0	1,332,000					3,486,100	4,818,100
	SUPPORT STEEL	MATERIAL INCLUDED WITH OEM EQUIPMENT	EST	800	TN			0	0	24.00	22,080	STST	105.71	2,334,100	2,334,100
	ACCESS GALLERY		EST	29,600	SF		45.00	0	1,332,000	0.40	13,616	GALL	84.61	1,152,000	2,484,000
2.11	GROUNDING							0	16,000		0			46,100	62,100
	GROUND ROD	3/4" - 20' LONG	EST	16	EA		150	0	2,400	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,650	FT		7.65	0	12,600	0.12	228	WIRE	98.84	22,500	35,100
	CADWELD		EST	64	EA		15	0	1,000	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
2.12	LIGHTING/ TRANSFORMERS & PANELS							156,000	150,000		0			159,100	465,100
	LIGHT FIXTURES		EST	200	EA		750	0	150,000	4.00	920	WIRE	98.84	90,900	240,900
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	6	EA	10000		60,000	0	40.00	276	WIRE	98.84	27,300	87,300
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	6	EA	7500		45,000	0	32.00	221	WIRE	98.84	21,800	66,800
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	6	EA	5000		30,000	0	16.00	110	WIRE	98.84	10,900	40,900
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	6	EA	3500		21,000	0	12.00	83	WIRE	98.84	8,200	29,200
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0													

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							69,848,100	18,056,900		986,431			90,522,300	178,427,300
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE			9	MN	75000		675,000		720.00	7,452	MECH	88.89	662400	1,337,400
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						85,777		83.48	7,161,000	7,161,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						107,966			7,573,946	7,573,946
	PER DIEM	NONE		0.00	HR						1,187,625			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%				90,285					452,612	542,896
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				902,845						902,845
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			3,492,405							3,492,405
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				902,845					4,526,115	5,428,960
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				2,708,535					13,578,345	16,286,880
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							4,167,400	4,604,500					33,954,400	42,726,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES						74,015,500	22,661,400					124,476,700	221,153,600
3.0	NEW STACK														
4.0	LIME HANDLING SYSTEM														
4.1	LIME STORAGE SILO							12,790,000	0					0	12,790,000
	SILO	CONCRETE SILO 100' DIA X 133' H - 15624 TONS - SUBCONTRACT COST INCLUDES LABOR	EST	2	EA	6,250,000.00		12,500,000	0	0.00	0	CONP	79.64	0	12,500,000
	ELEVATOR	MAINTENANCE ELEVATOR COMMON FOR BOTH SILOS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	290,000.00		290,000	0	0.00	0	MECH	88.89	0	290,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTER, TWO FILTER SEPARATORS	EST	1	LT	1,100,000		1,100,000	0	5800.00	6,670	MECH	88.89	592,900	1,692,900
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	4,100,000		4,100,000	0	21800.00	25,070	MECH	88.89	2,228,500	6,328,500
4.4	PIPING - MECHANICAL							88,700	130,300					342,600	561,600
	LARGE BORE PIPING	14" CS, SCH 40 WELDED - ON PIPE RACK	EST	500	LF		163.1	0	81,600	1.67	960	SPNG	94.41	90,700	172,300
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	1,200	LF		14.1	0	16,900	0.83	1,145	SPNG	94.41	108,100	125,000
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700
	VALVE	2" GLOBE, 150# SS, WELDED	EST	6	EA	1,450		8,700	0	5.64	39	SPNG	94.41	3,700	12,400

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400
	VALVE	14" BFLY 150# CS, FLANGED	EST	4	EA	3,000		12,000	0	16.60	76	SPNG	94.41	7,200	19,200
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	1,000	CY			0	0	0.20	230	EXFD	90.00	20,700	20,700
	BEDDING	FOR UNDERGROUND PIPING	EST	133	CY		35.0	0	4,700	0.25	38	EXFD	90.00	3,500	8,200
	PIPE SUPPORTS		EST	238	EA		50.00	0	11,900	1.50	410	MECH	88.89	36,400	48,300
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	EST	55	TN		2,900.00	0	159,500	24.00	1,518	STST	105.71	160,500	320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	EST	650	TN		2,900.00	0	1,885,000	24.00	17,940	STST	105.71	1,896,400	3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING						0	42,700					79,300	122,000
	EXCAVATION / BACKFILL		EST	500	CY			0	0	0.15	86	EXFD	90.00	7,800	7,800
	REINFORCING		EST	15	TN		1,150.00	0	17,300	20.00	345	REIN	78.27	27,000	44,300
	FORMWORK		EST	750	SF		2.50	0	1,900	0.14	121	FORM	99.43	12,000	13,900
	CONCRETE		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	1,000	LB		2.50	0	2,500	0.06	69	CARP	71.88	5,000	7,500
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS							0	69,600					130,200	199,800
	EXCAVATION / BACKFILL		EST	800	CY			0	0	0.15	138	EXFD	90.00	12,400	12,400
	REINFORCING		EST	25	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200
	CONCRETE		EST	300	CY		105.00	0	31,500	1.50	518	CONP	79.64	41,200	72,700
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H						75,000	335,000					24,400	434,400
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	3,000	SF		105	0	315,000	0.00	0	STST	105.71	0	315,000
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	40T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	75000	20000	75,000	20,000	350.00	300	HVAC	81.24	24,400	119,400
4.10	CONCRETE PIT FOR THE ELEVATOR		EST	10	CY		230.00	0	2,300	7.50	86	CONP	79.64	6,900	9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS						0	847,500					1,365,900	2,213,400
	EXCAVATION / BACKFILL		EST	5,500	CY			0	0	0.15	949	EXFD	90.00	85,400	85,400
	REINFORCING		EST	350.0	TN		1,150.00	0	402,500	20.00	8,050	REIN	78.27	630,100	1,032,600
	FORMWORK		EST	4,000	SF		2.50	0	10,000	0.14	644	FORM	99.43	64,000	74,000
	CONCRETE		EST	3,700	CY		105.00	0	388,500	1.50	6,383	CONP	79.64	508,300	896,800
	MUD MAT		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500
	EMBEDDED STEEL		EST	10,206	LB		2.50	0	25,500	0.06	704	CARP	71.88	50,600	76,100
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS							0	14,200					26,200	40,400
	EXCAVATION / BACKFILL		EST	110	CY			0	0	0.15	19	EXFD	90.00	1,700	1,700
	REINFORCING		EST	4.8	TN		1,150.00	0	5,500	20.00	110	REIN	78.27	8,600	14,100
	FORMWORK		EST	320	SF		2.50	0	800	0.14	52	FORM	99.43	5,100	5,900
	CONCRETE		EST	60	CY		105.00	0	6,300	1.50	104	CONP	79.64	8,200	14,500

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	MUD MAT		EST	8	CY		105.00	0	800	1.50	14	CONP	79.64	1,100	1,900
	EMBEDDED STEEL		EST	300	LB		2.50	0	800	0.06	21	CARP	71.88	1,500	2,300
4.13	PIPE RACK - FOUNDATIONS							0	239,600					519,100	758,700
	EXCAVATION / BACKFILL		EST	3,200	CY			0	0	0.15	552	EXFD	90.00	49,700	49,700
	REINFORCING		EST	90.0	TN		1,150.00	0	103,500	20.00	2,070	REIN	78.27	162,000	265,500
	FORMWORK		EST	9,500	SF		2.50	0	23,800	0.14	1,530	FORM	99.43	152,100	175,900
	CONCRETE		EST	950	CY		105.00	0	99,800	1.50	1,639	CONP	79.64	130,500	230,300
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	EST	5	EA	39200		196,000	0	230.00	1,323	EHEA	79.16	104,700	300,700
4.16	CABLE BUS DUCT							134,700	10,800					200,200	345,700
	480V CABLE BUS	BUS DUCT ONLY	EST	150	FT	898		134,700	0	10.30	1,777	WIRE	98.84	175,600	310,300
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400
4.17	MCC							61,800	0					3,600	65,400
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400
4.18	MIMIC PANELS		EST	1	EA	17500		17,500	0	12.00	14	WIRE	98.84	1,400	18,900
4.19	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700
	DC PANEL BOARD		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	UPS PANEL BOARDS		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000
	VRLA BATTERIES		EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700
4.20	GROUNDING							13,300	0					41,300	54,600
	GROUND ROD	3/4" - 20' LONG	EST	16	EA	150		2,400	0	4.00	74	WIRE	98.84	7,300	9,700
	500 MCM	BARE COPPER WIRE	EST	1,300	FT	7.65		9,900	0	0.12	179	WIRE	98.84	17,700	27,600
	CADWELD		EST	64	EA	15		1,000	0	2.00	147	WIRE	98.84	14,500	15,500
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	16.00	18	WIRE	98.84	1,800	1,800
4.21	LIGHTING/ TRANSFORMERS & PANELS							52,000	135,000					104,500	291,500
	LIGHT FIXTURES		EST	180	EA		750	0	135,000	4.00	828	WIRE	98.84	81,800	216,800
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	10000		20,000	0	40.00	92	WIRE	98.84	9,100	29,100
	37.7KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	2	EA	7500		15,000	0	32.00	74	WIRE	98.84	7,300	22,300
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	2	EA	5000		10,000	0	16.00	37	WIRE	98.84	3,600	13,600
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	2	EA	3500		7,000	0	12.00	28	WIRE	98.84	2,700	9,700
4.22	RACEWAY, CABLE TRAY, & CONDUIT							0	296,400					1,429,900	1,726,300
	12" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,050	LF		18.25	0	19,200	1.10	1,328	WIRE	98.84	131,300	150,500
	18" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	600	LF		21.50	0	12,900	1.45	1,001	WIRE	98.84	98,900	111,800
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	1,700	LF		27.10	0	46,100	1.75	3,421	WIRE	98.84	338,200	384,300
	36" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	500	LF		30.30	0	15,200	1.95	1,121	WIRE	98.84	110,800	126,000
	5" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	750	LF		61.00	0	45,800	1.13	972	WIRE	98.84	96,100	141,900

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	EST	600	SF		500.00	0	300,000	0.00	0	STST	105.71	0	300,000
6.16	MCC	480V MCC PER LINE UP	EST	4	EA	30000		120,000	0	16.00	74	WIRE	98.84	7,300	127,300
6.17	EMERGENBCY POWER SYSTEM							185,500	0					40,000	225,500
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100
	SATELLITE UPS		EST	2	EA	41200		82,400	0	16.00	37	WIRE	98.84	3,600	86,000
	VRLA BATTERIES		EST	2	LT	36050		72,100	0	120.00	276	WIRE	98.84	27,300	99,400
6.18	LIGHTING/ TRANSFORMERS & PANELS							18,500	75,000					53,200	146,700
	LIGHT FIXTURES		EST	100	EA		750	0	75,000	4.00	460	WIRE	98.84	45,500	120,500
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900
6.19	RACEWAY, CABLE TRAY, & CONDUIT							0	32,800					177,400	210,200
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	350	LF		27.10	0	9,500	1.75	704	WIRE	98.84	69600	79,100
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	350	LF		31.00	0	10,900	0.81	325	WIRE	98.84	32100	43,000
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,300	LF		4.44	0	5,800	0.24	357	WIRE	98.84	35300	41,100
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,500	LF		1.46	0	6,600	0.08	409	WIRE	98.84	40400	47,000
6.20	GROUNDING							0	4,500					10,900	15,400
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA		150	0	600	4.00	18	WIRE	98.84	1,800	2,400
	500 MCM	BARE COPPER WIRE	EST	500	FT		7.65	0	3,800	0.12	69	WIRE	98.84	6,800	10,600
	CADWELD		EST	8	EA		15	0	100	2.00	18	WIRE	98.84	1,800	1,900
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION							0	63,300					143,000	206,300
	3/C # 500KCMIL- 600V		EST	1,400	LF		26.12	0	36,600	0.69	1,111	WIRE	98.84	109,800	146,400
	#4/0 - #12 AWG-600V		EST	3,700	LF		7.22	0	26,700	0.08	336	WIRE	98.84	33,200	59,900
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,500	LF		3.20	0	20,800	0.08	591	WIRE	98.84	58,400	79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	EST	30	LF		205.00	0	6,200	4.05	140	ECND	75.97	10600	16,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							8,645,800	1,718,900		57,094			5,059,900	15,424,600
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS														
	ADDITIONAL CRANE ALLOWANCE							0						0	0
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS										
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						4,965		83.48	414,000	414,000
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						6,206			435,350	435,350
	PER DIEM	NONE		0.00	HR						68,265			0	0
	CONSUMABLES - % of ACCT NO. 90			0.5	%			8,595						25,300	33,894
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%			85,945							85,945

				AEP										Estimate No.:	30725B
				BIG SANDY UNIT 2										Project No.:	12721-000
				FGD PROJECT - NID EST (ESP)-4A - 7.5 LB/MM BTU										Date:	9/10/2010
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO
		Cost Type:												Reviewer:	JMK
		Est.=Estimated												Approver:	PEF
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY			
		Q=Vendor Quote								Labor Productivity =		1.15			
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			432,290							432,290
	SALES TAX - NOT INCLUDED														0
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				85,945					252,995	338,940
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT EXPENSE - % of ACCT NO. 90			15	%				257,835					758,985	1,016,820
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							432,300	438,300					1,886,600	2,757,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS						9,078,100	2,157,200					6,946,500	18,181,800
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID													0
8.0	ACTIVATED CARBON INJECTION SYSTEM														0
9.0	COMPRESSED AIR SYSTEM														
10.0	SERVICE WATER SYSTEM														
11.0	POTABLE WATER SYSTEM														
12.0	FGD SUBSTATION														
13.0	FGD DCS SYSTEM														0
14.0	CEM SYSTEM														0
15.0	TRUCK & RAIL INFRASTRUCTURE														0
16.0	SITE IMPROVEMENTS - CIVIL WORK														
17.0	BOP ITEMS														0
17.1	PIPE INSULATION	AVERAGE 6" PIPE SIZE	EST	3,400	LF		10	0	34,000	0.39	1,525	PINS	69.50	106,000	140,000
17.2	HEAT TRACING							0	175,600					248,500	424,100
	CABLE	AVERAGE 6" PIPE SIZE	EST	3,000	LF		10.35	0	31,100	0.05	173	WIRE	98.84	17,000	48,100
	POWER CONNECTOR AND OTHER ACCESSORIES INCLUDING THERMOSTATS FOR HEAT TRACING (BY ZONES)		EST	55	EA		450	0	24,500	8.00	502	WIRE	98.84	49,600	74,100
	HEAT TRACING BALANCE OF PLANT INCL PANELS, POWER WIRING AND CONDUITS		EST	4	LT		30000	0	120,000	400.00	1,840	WIRE	98.84	181,900	301,900
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)							0	183,000					702,200	885,200
	TOUCH UP PAINT FOR SHOP PAINTED STEEL		EST	33,313	SF		3	0	99,900	0.15	5,746	PNTR	66.72	383,400	483,300
	TOUCH UP PAINT FOR EQUIPMENT		EST	12,000	SF		3	0	36,000	0.15	2,070	PNTR	66.72	138,100	174,100
	PAINTING CS PIPE ONLY	AVERAGE 6" PIPE SIZE, ALLOWANCE FOR 10,000 LF PIPE	EST	15,700	SF		3	0	47,100	0.15	2,708	PNTR	66.72	180,700	227,800
17.4	HOISTS & TROLLEYS							150,000	175,000					204,400	529,400
	MISC HOISTS & TROLLEYS	IN BUILDINGS FOR EQUIPMENT MAINTENANCE AND FOR ID FANS	EST	10	EA	15000	17500	150,000	175,000	200.00	2,300	MECH	88.89	204,400	529,400
17.5	MISC AUX STEEL FOR PIPE SUPPORTS	FIELD FABRICATED	EST	35	TN		3500	0	122,500	120.00	4,830	STST	105.71	510,600	633,100
17.6	MISC PIPE SUPPORT FOUNDATIONS							0	10,500					19,600	30,100
	EXCAVATION / BACKFILL		EST	65	CY			0	0	0.15	11	EXFD	90.00	1,000	1,000
	REINFORCING		EST	5.0	TN		1,150.00	0	5,800	20.00	115	REIN	78.27	9,000	14,800



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-13
NID Detailed Capital Cost Estimate No. 30729 Est-4B ESP not in Service
(7.5 lb SO₂/MMbtu)

				AEP											Estimate No.:	30729B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
1.0	ID FANS																	
2.0	NID MODULES																	
2.1	MECHANICAL EQUIPMENT	A 14-MODULE NID SYSTEM (160' X 185') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS / COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	EST	1	LT	67,447,500		67,447,500	0	509600.00	673,946	MECH	88.89	59,907,100	127,354,600			
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	EST	103,040	SF	30		3,091,200	0	0.00	0	DINS	81.75	0	3,091,200			
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 29600 SF						65,500	1,544,800					2,059,900	3,670,200			
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	234	TN		2,900.00	0	677,700	24.00	6,450	STST	105.71	681,800	1,359,500			
	SIDING FOR PENTHOUSE		EST	9,902	SF		12.00	0	118,800	0.11	1,253	SDNG	93.41	117,000	235,800			
	CONCRETE FLOOR FOR PENTHOUSE		EST	765	CY		230.00	0	176,000	7.50	6,598	SDNG	93.41	616,300	792,300			
	ROOFING FOR PENTHOUSE		EST	30,340	SF		18.00	0	546,100	0.22	7,676	ROOF	69.12	530,600	1,076,700			
	H&V		EST	1	LT	65500	26200	65,500	26,200	1222.67	1,406	HVAC	81.24	114,200	205,900			
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH						104,400	2,687,100					2,817,400	5,608,900			
	SUPPORT STEEL AND PURLINS	THREE COAT PAINT	EST	607	TN		2,900.00	0	1,759,700	24.00	16,748	STST	105.71	1,770,400	3,530,100			
	SIDING FOR BOTTOM ENCLOSURE		EST	28,290	SF		12.00	0	339,500	0.11	3,579	SDNG	93.41	334,300	673,800			
	ROOFING FOR BOTTOM ENCLOSURE		EST	30,340	SF		18.00	0	546,100	0.22	7,676	ROOF	69.12	530,600	1,076,700			
	H&V		EST	1	LT	104400	41760	104,400	41,800	1949.33	2,242	HVAC	81.24	182,100	328,300			
2.5	PIPING & SUPPORTS - MECHANICAL							125,200	174,500					385,900	685,600			
	LARGE BORE PIPING	4" CS, SCHEDULE 40, WELDED	EST	300	LF		23.0	0	6,900	1.48	511	SPNG	94.41	48,200	55,100			
	LARGE BORE PIPING	6" SS, SCH 40 WELDED	EST	400	LF		111.00	0	44,400	2.02	929	SPNG	94.41	87,700	132,100			
	LARGE BORE PIPING	18" CS, STD WELDED	EST	400	LF		234.10	0	93,600	2.34	1,076	SPNG	94.41	101,600	195,200			
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	150	LF		22.20	0	3,300	1.26	217	SPNG	94.41	20,500	23,800			
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	100	LF		48.80	0	4,900	1.44	166	SPNG	94.41	15,600	20,500			
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	300	LF		33.70	0	10,100	1.32	455	SPNG	94.41	43,000	53,100			
	VALVE	18" GATE, 150 #, CS, WELDED	EST	4	EA	17,500		70,000	0	28.30	130	SPNG	94.41	12,300	82,300			
	VALVE	6" GATE, 150 #, SS, WELDED	EST	6	EA	4,700		28,200	0	12.96	89	SPNG	94.41	8,400	36,600			
	VALVE	4" GATE, 150 #, CS, WELDED	EST	5	EA	2,500		12,500	0	7.70	44	SPNG	94.41	4,200	16,700			
	VALVE	2" GLOBE, 150# SS, WELDED	EST	10	EA	1,450		14,500	0	5.64	65	SPNG	94.41	6,100	20,600			
	PIPE SUPPORTS		EST	150	EA		75.00	0	11,300	2.50	431	MECH	88.89	38,300	49,600			
2.6	DUCTWORK							0	4,797,000					10,995,100	15,792,100			
	NID MODULE INLET	INCLUDES INTERNAL BRACING AND TURNING VANES	EST	1,476	TN		3,250.00	0	4,797,000	60.00	101,844	FLDU	107.96	10,995,100	15,792,100			
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	EST	738	TN		2,900.00	0	2,140,200	24.00	20,369	STST	105.71	2,153,200	4,293,400			
2.8	DUCTWORK INSULATION & LAGGING		EST	136,000	SF		12.00	0	1,632,000	0.25	39,100	DINS	81.75	3,196,400	4,828,400			
2.9	NID MODULE- FOUNDATIONS							0	1,203,400					1,856,600	3,060,000			
	EXCAVATION / BACKFILL		EST	5,000	CY			0	0	0.15	863	EXFD	90.00	77,600	77,600			
	REINFORCING		EST	475	TN		1,150.00	0	546,300	20.00	10,925	REIN	78.27	855,100	1,401,400			
	FORMWORK		EST	3,450	SF		2.50	0	8,600	0.14	555	FORM	99.43	55,200	63,800			
	CONCRETE		EST	5,500	CY		105.00	0	577,500	1.50	9,488	CONP	79.64	755,600	1,333,100			
	MUD MAT		EST	390	CY		105.00	0	41,000	1.50	673	CONP	79.64	53,600	94,600			

				AEP											Estimate No.:	30729B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY						
		Q=Vendor Quote								Labor Productivity =		1.15						
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
	ELEVATOR	MAINTENANCE ELEVATOR COMMON FOR BOTH SILOS - SUBCONTRACT COST INCLUDES LABOR	EST	1	EA	290,000.00		290,000	0	0.00	0	MECH	88.89	0	290,000			
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	1,100,000		1,100,000	0	5800.00	6,670	MECH	88.89	592,900	1,692,900			
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	EST	1	LT	4,100,000		4,100,000	0	21800.00	25,070	MECH	88.89	2,228,500	6,328,500			
4.4	PIPING - MECHANICAL							88,700	130,300					342,600	561,600			
	LARGE BORE PIPING	14" CS, SCH 40 WELDED - ON PIPE RACK	EST	500	LF		163.1	0	81,600	1.67	960	SPNG	94.41	90,700	172,300			
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	1,200	LF		14.1	0	16,900	0.83	1,145	SPNG	94.41	108,100	125,000			
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	200	LF		41.7	0	8,300	1.61	370	SPNG	94.41	35,000	43,300			
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900			
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200			
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700			
	VALVE	2" GLOBE, 150# SS, WELDED	EST	6	EA	1,450		8,700	0	5.64	39	SPNG	94.41	3,700	12,400			
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400			
	VALVE	14" BFLY 150# CS, FLANGED	EST	4	EA	3,000		12,000	0	16.60	76	SPNG	94.41	7,200	19,200			
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	1,000	CY			0	0	0.20	230	EXFD	90.00	20,700	20,700			
	BEDDING	FOR UNDERGROUND PIPING	EST	133	CY		35.0	0	4,700	0.25	38	EXFD	90.00	3,500	8,200			
	PIPE SUPPORTS		EST	238	EA		50.00	0	11,900	1.50	410	MECH	88.89	36,400	48,300			
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	EST	55	TN		2,900.00	0	159,500	24.00	1,518	STST	105.71	160,500	320,000			
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	EST	650	TN		2,900.00	0	1,885,000	24.00	17,940	STST	105.71	1,896,400	3,781,400			
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING						0	42,700					79,300	122,000			
	EXCAVATION / BACKFILL		EST	500	CY			0	0	0.15	86	EXFD	90.00	7,800	7,800			
	REINFORCING		EST	15	TN		1,150.00	0	17,300	20.00	345	REIN	78.27	27,000	44,300			
	FORMWORK		EST	750	SF		2.50	0	1,900	0.14	121	FORM	99.43	12,000	13,900			
	CONCRETE		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500			
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	1,000	LB		2.50	0	2,500	0.06	69	CARP	71.88	5,000	7,500			
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS							0	69,600					130,200	199,800			
	EXCAVATION / BACKFILL		EST	800	CY			0	0	0.15	138	EXFD	90.00	12,400	12,400			
	REINFORCING		EST	25	TN		1,150.00	0	28,800	20.00	575	REIN	78.27	45,000	73,800			
	FORMWORK		EST	1,200	SF		2.50	0	3,000	0.14	193	FORM	99.43	19,200	22,200			
	CONCRETE		EST	300	CY		105.00	0	31,500	1.50	518	CONP	79.64	41,200	72,700			
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	2,500	LB		2.50	0	6,300	0.06	173	CARP	71.88	12,400	18,700			
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H						75,000	335,000					24,400	434,400			

				AEP										Estimate No.:	30729B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	3,000	SF		105	0	315,000	0.00	0	STST	105.71	0	315,000		
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	40T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	75000	20000	75,000	20,000	350.00	300	HVAC	81.24	24,400	119,400		
4.10	CONCRETE PIT FOR THE ELEVATOR		EST	10	CY		230.00	0	2,300	7.50	86	CONP	79.64	6,900	9,200		
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS						0	847,500					1,365,900	2,213,400		
	EXCAVATION / BACKFILL		EST	5,500	CY			0	0	0.15	949	EXFD	90.00	85,400	85,400		
	REINFORCING		EST	350.0	TN		1,150.00	0	402,500	20.00	8,050	REIN	78.27	630,100	1,032,600		
	FORMWORK		EST	4,000	SF		2.50	0	10,000	0.14	644	FORM	99.43	64,000	74,000		
	CONCRETE		EST	3,700	CY		105.00	0	388,500	1.50	6,383	CONP	79.64	508,300	896,800		
	MUD MAT		EST	200	CY		105.00	0	21,000	1.50	345	CONP	79.64	27,500	48,500		
	EMBEDDED STEEL		EST	10,206	LB		2.50	0	25,500	0.06	704	CARP	71.88	50,600	76,100		
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS							0	14,200					26,200	40,400		
	EXCAVATION / BACKFILL		EST	110	CY			0	0	0.15	19	EXFD	90.00	1,700	1,700		
	REINFORCING		EST	4.8	TN		1,150.00	0	5,500	20.00	110	REIN	78.27	8,600	14,100		
	FORMWORK		EST	320	SF		2.50	0	800	0.14	52	FORM	99.43	5,100	5,900		
	CONCRETE		EST	60	CY		105.00	0	6,300	1.50	104	CONP	79.64	8,200	14,500		
	MUD MAT		EST	8	CY		105.00	0	800	1.50	14	CONP	79.64	1,100	1,900		
	EMBEDDED STEEL		EST	300	LB		2.50	0	800	0.06	21	CARP	71.88	1,500	2,300		
4.13	PIPE RACK - FOUNDATIONS							0	239,600					519,100	758,700		
	EXCAVATION / BACKFILL		EST	3,200	CY			0	0	0.15	552	EXFD	90.00	49,700	49,700		
	REINFORCING		EST	90.0	TN		1,150.00	0	103,500	20.00	2,070	REIN	78.27	162,000	265,500		
	FORMWORK		EST	9,500	SF		2.50	0	23,800	0.14	1,530	FORM	99.43	152,100	175,900		
	CONCRETE		EST	950	CY		105.00	0	99,800	1.50	1,639	CONP	79.64	130,500	230,300		
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0		
	EMBEDDED STEEL		EST	5,000	LB		2.50	0	12,500	0.06	345	CARP	71.88	24,800	37,300		
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	EST	2	EA	85000		170,000	0	300.00	690	EHEA	79.16	54,600	224,600		
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	EST	5	EA	39200		196,000	0	230.00	1,323	EHEA	79.16	104,700	300,700		
4.16	CABLE BUS DUCT							134,700	10,800					200,200	345,700		
	480V CABLE BUS	BUST DUCT ONLY	EST	150	FT	898		134,700	0	10.30	1,777	WIRE	98.84	175,600	310,300		
	CABLE BUS TERMINATION	750MCM- 480V TERMINATIONS	EST	4	EA		2,700.00	0	10,800	54.00	248	WIRE	98.84	24,600	35,400		
4.17	MCC							61,800	0					3,600	65,400		
	480V MCC	PER LINE UP	EST	2	EA	30900		61,800	0	16.00	37	WIRE	98.84	3,600	65,400		
4.18	MIMIC PANELS		EST	1	EA	17500		17,500	0	12.00	14	WIRE	98.84	1,400	18,900		
4.19	EMERGENCY POWER SYSTEM							108,300	0					24,400	132,700		
	DC PANEL BOARD		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000		
	UPS PANEL BOARDS		EST	1	EA	15450		15,500	0	40.00	46	WIRE	98.84	4,500	20,000		
	SATELLITE UPS		EST	1	EA	41200		41,200	0	16.00	18	WIRE	98.84	1,800	43,000		
	VRLA BATTERIES		EST	1	LT	36050		36,100	0	120.00	138	WIRE	98.84	13,600	49,700		

				AEP										Estimate No.:	30729B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip.Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>		
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																
	ADDITIONAL CRANE ALLOWANCE								0					0	0		
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0		
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS												
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						9,472		83.48	791,000	791,000		
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						11,840			830,565	830,565		
	PER DIEM	NONE		0.00	HR						130,236			0	0		
	CONSUMABLES - % of ACCT NO. 90			0.5	%				22,276					50,290	72,566		
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				222,760						222,760		
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			944,865							944,865		
	SALES TAX - NOT INCLUDED														0		
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				222,760					502,900	725,660		
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				668,280					1,508,700	2,176,980		
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							944,900	1,136,100					3,683,500	5,764,400		
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM						19,842,200	5,591,300					13,741,500	39,174,900		
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID													0		
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS														0		
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	EST	1	LT	3,045,000		3,045,000	0	16590.00	19,079	MECH	88.89	1,695,900	4,740,900		
6.2	ECONOMIZER ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES JET PUMPS AND PIPING / SUPPORTS TO THE BOTTOM ASH POND	EST	1	LT	400,000		400,000	0	2900.00	3,335	MECH	88.89	296,400	696,400		
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.		2	EA	14,000		28,000	0	60.00	138	MECH	88.89	12,300	40,300		
6.4	AGITATOR FOR SUMP PUMPS	5 HP		1	EA	12,000		12,000	0	45.00	52	MECH	88.89	4,600	16,600		
6.5	PIPING - MECHANICAL		EST	1	LT			142,800	131,000					408,700	682,500		
	LARGE BORE PIPING	4" SS, SCHEDULE 40, WELDED - ON PIPE RACK	EST	300	LF		45.1	0	13,500	0.87	300	SPNG	94.41	28,300	41,800		
	LARGE BORE PIPING	6" CS, SCH 40 WELDED - ON PIPE RACK	EST	200	LF		32.2	0	6,400	0.88	202	SPNG	94.41	19,100	25,500		
	LARGE BORE PIPING	6" CS, SCH 40 WELDED	EST	100	LF		41.7	0	4,200	1.61	185	SPNG	94.41	17,500	21,700		
	LARGE BORE PIPING	8" HDPE (UNDERGROUND)	EST	400	LF		14.1	0	5,600	0.83	382	SPNG	94.41	36,000	41,600		
	LARGE BORE PIPING	10" CS, SCH 40 WELDED	EST	300	LF		110.3	0	33,100	2.40	828	SPNG	94.41	78,200	111,300		
	LARGE BORE PIPING	20" HDPE (UNDERGROUND)	EST	600	LF		72.8	0	43,700	1.45	1,001	SPNG	94.41	94,500	138,200		
	SMALL BORE PIPING	2" CS, SCH 80 WELDED	EST	50	LF		22.20	0	1,100	1.26	72	SPNG	94.41	6,800	7,900		
	SMALL BORE PIPING	2" SS, SCH 80 WELDED	EST	50	LF		48.80	0	2,400	1.44	83	SPNG	94.41	7,800	10,200		
	SMALL BORE PIPING	ALLOWANCE FOR MISC SIZE <2" SS, SCH 80 WELDED	EST	100	LF		33.70	0	3,400	1.32	152	SPNG	94.41	14,300	17,700		
	VALVE	2" GLOBE, 150# SS, WELDED	EST	15	EA	1,450		21,800	0	5.64	97	SPNG	94.41	9,200	31,000		

				AEP											Estimate No.:	30729B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
	VALVE	4" GATE, 150 #, CS, WELDED	EST	10	EA	2,500		25,000	0	7.70	89	SPNG	94.41	8,400	33,400			
	VALVE	6" AIR OPERATED, 150 #, CS, FLANGED	EST	2	EA	14,000		28,000	0	17.30	40	SPNG	94.41	3,800	31,800			
	VALVE	8" AIR OPERATED, 150 #, CS, FLANGED	EST	4	EA	17,000		68,000	0	19.30	89	SPNG	94.41	8,400	76,400			
	EXCAVATION / BACKFILL	FOR UNDERGROUND PIPING	EST	2,000	CY			0	0	0.20	460	EXFD	90.00	41,400	41,400			
	BEDDING	FOR UNDERGROUND PIPING	EST	267	CY		35.0	0	9,300	0.25	77	EXFD	90.00	6,900	16,200			
	PIPE SUPPORTS	AVERAGE COST FOR MISC PIPE SIZES	EST	110	EA		75.00	0	8,300	2.50	316	MECH	88.89	28,100	36,400			
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 65' DIA X 107' H - 4496 TONS -SUBCONTRACT COST INCLUDES LABOR	EST	2	EA	2,023,000		4,046,000	0	0.00	0	CONP	79.64	0	4,046,000			
6.7	RECYCLE SILO	NOT REQUIRED FOR NID																
6.8	FLY ASH SILO	NOT REQUIRED - ECONOMIZER FLY ASH SLUICD TO BOTTOM ASH POND						0	0					0	0			
	SILO BIN		EST	0	EA	50,000		0	0	450.00	0	TANK	89.16	0	0			
	SUPPORT STEEL FOR SILO		EST	0	TN		2,900.00	0	0	24.00	0	STST	105.71	0	0			
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS	TOTAL FOR TWO SILOS						0	377,100					651,400	1,028,500			
	EXCAVATION / BACKFILL		EST	4,000	CY			0	0	0.15	690	EXFD	90.00	62,100	62,100			
	REINFORCING		EST	150.0	TN		1,150.00	0	172,500	20.00	3,450	REIN	78.27	270,000	442,500			
	FORMWORK		EST	3,000	SF		2.50	0	7,500	0.14	483	FORM	99.43	48,000	55,500			
	CONCRETE		EST	1,596	CY		105.00	0	167,600	1.50	2,753	CONP	79.64	219,300	386,900			
	MUD MAT		EST	90	CY		105.00	0	9,500	1.50	155	CONP	79.64	12,400	21,900			
	EMBEDDED STEEL		EST	7,980	LB		2.50	0	20,000	0.06	551	CARP	71.88	39,600	59,600			
6.10	FLY ASH SILO - FOUNDATIONS	NOT REQUIRED						0	0					0	0			
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0			
	REINFORCING		EST	0.0	TN		1,150.00	0	0	20.00	0	REIN	78.27	0	0			
	FORMWORK		EST	0	SF		2.50	0	0	0.14	0	FORM	99.43	0	0			
	CONCRETE		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	MUD MAT		EST	0	CY		105.00	0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	0	LB		2.50	0	0	0.06	0	CARP	71.88	0	0			
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS							0	97,600					161,900	259,500			
	EXCAVATION / BACKFILL		EST	470	CY			0	0	0.15	81	EXFD	90.00	7,300	7,300			
	REINFORCING		EST	38	TN		1,150.00	0	43,700	20.00	874	REIN	78.27	68,400	112,100			
	FORMWORK		EST	960	SF		2.50	0	2,400	0.14	155	FORM	99.43	15,400	17,800			
	CONCRETE		EST	400	CY		105.00	0	42,000	1.50	690	CONP	79.64	55,000	97,000			
	MUD MAT		EST	43	CY		105.00	0	4,500	1.50	74	CONP	79.64	5,900	10,400			
	EMBEDDED STEEL		EST	2,000	LB		2.50	0	5,000	0.06	138	CARP	71.88	9,900	14,900			
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H						40,000	241,500					26,200	307,700			
	PRE-ENGINEERED BUILDING INCLUDING H&V AND LIGHTING	SUBCONTRACT PRICE, INCLUDES LABOR	EST	2,700	SF		85	0	229,500	0.00	0	STST	105.71	0	229,500			
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS	20T PACKAGED UNIT FOR ELECTRICAL EQUIPMENT ROOM. INCLUDES ALLOWANCE FOR CONCRETE PAD AND ELECTRICAL WORK	EST	1	LT	40000	12000	40,000	12,000	280.00	322	HVAC	81.24	26,200	78,200			

				AEP											Estimate No.:	30729B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS	NOT REQUIRED						0	0					0	0			
	EXCAVATION / BACKFILL		EST	0	CY			0	0	0.15	0	EXFD	90.00	0	0			
	REINFORCING		EST	0	TN	1,150.00		0	0	20.00	0	REIN	78.27	0	0			
	FORMWORK		EST	0	SF	2.50		0	0	0.14	0	FORM	99.43	0	0			
	CONCRETE		EST	0	CY	105.00		0	0	1.50	0	CONP	79.64	0	0			
	MUD MAT		EST	0	CY	105.00		0	0	1.50	0	CONP	79.64	0	0			
	EMBEDDED STEEL		EST	0	LB	2.50		0	0	0.06	0	CARP	71.88	0	0			
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	NOT REQUIRED						0	0					0	0			
	PREENGINEERED BUILDING INCLUDING H&V AND LIGHTING		EST	0	SF	95		0	0	0.00	0	STST	105.71	0	0			
	ADDITIONAL HVAC UNIT FOR ELECTRICAL ROOM & CONTROLS		EST	0	LT	75000	20000	0	0	350.00	0	HVAC	81.24	0	0			
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	EST	600	SF		500.00	0	300,000	0.00	0	STST	105.71	0	300,000			
6.16	MCC	480V MCC PER LINE UP	EST	4	EA	30000		120,000	0	16.00	74	WIRE	98.84	7,300	127,300			
6.17	EMERGENBCY POWER SYSTEM							185,500	0					40,000	225,500			
	UPS PANEL BOARDS		EST	2	EA	15500		31,000	0	40.00	92	WIRE	98.84	9,100	40,100			
	SATELLITE UPS		EST	2	EA	41200		82,400	0	16.00	37	WIRE	98.84	3,600	86,000			
	VRLA BATTERIES		EST	2	LT	36050		72,100	0	120.00	276	WIRE	98.84	27,300	99,400			
6.18	LIGHTING/ TRANSFORMERS & PANELS							18,500	75,000					53,200	146,700			
	LIGHT FIXTURES		EST	100	EA		750	0	75,000	4.00	460	WIRE	98.84	45,500	120,500			
	45KVA, 480V, 3 PHASE	LOW VOLTAGE XFMR	EST	1	EA	10000		10,000	0	40.00	46	WIRE	98.84	4,500	14,500			
	200A, 480-277V, 3 PHASE- RECEPTACLE PANEL	INCLUDING BREAKERS	EST	1	EA	5000		5,000	0	16.00	18	WIRE	98.84	1,800	6,800			
	200A, 277V-120V, 3 PHASE- LIGHTING PANELS	INCLUDING BREAKERS	EST	1	EA	3500		3,500	0	12.00	14	WIRE	98.84	1,400	4,900			
6.19	RACEWAY, CABLE TRAY, & CONDUIT							0	32,800					177,400	210,200			
	24" X 6" AL CABLE TRAY	INCLUDING SUPPORT & FITTINGS	EST	350	LF		27.10	0	9,500	1.75	704	WIRE	98.84	69600	79,100			
	4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	350	LF		31.00	0	10,900	0.81	325	WIRE	98.84	32100	43,000			
	1" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	1,300	LF		4.44	0	5,800	0.24	357	WIRE	98.84	35300	41,100			
	3/4" RGS CONDUIT	INCLUDING SUPPORT & FITTINGS	EST	4,500	LF		1.46	0	6,600	0.08	409	WIRE	98.84	40400	47,000			
6.20	GROUNDING							0	4,500					10,900	15,400			
	GROUND ROD	3/4" - 20' LONG EACH	EST	4	EA		150	0	600	4.00	18	WIRE	98.84	1,800	2,400			
	500 MCM	BARE COPPER WIRE	EST	500	FT		7.65	0	3,800	0.12	69	WIRE	98.84	6,800	10,600			
	CADWELD		EST	8	EA		15	0	100	2.00	18	WIRE	98.84	1,800	1,900			
	GROUNDING TEST	TEST & DOCUMENTATION	EST	1	LT			0	0	4.00	5	WIRE	98.84	500	500			
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	EST	3,600	LF		2.63	0	9,500	0.12	484	WIRE	98.84	47,900	57,400			
6.22	LOW VOLTAGE POWER CABLE & TERMINATION							0	63,300					143,000	206,300			
	3/C # 500KCMIL- 600V		EST	1,400	LF		26.12	0	36,600	0.69	1,111	WIRE	98.84	109,800	146,400			
	#4/0 - #12 AWG-600V		EST	3,700	LF		7.22	0	26,700	0.08	336	WIRE	98.84	33,200	59,900			
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	EST	6,500	LF		3.20	0	20,800	0.08	591	WIRE	98.84	58,400	79,200			

				AEP										Estimate No.:	30729B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost		
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	EST	30	LF		205.00	0	6,200	4.05	140	ECND	75.97	10600	16,800		
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							8,037,800	1,359,300		42,975			3,806,100	13,203,200		
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																
	ADDITIONAL CRANE ALLOWANCE							0						0	0		
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0		
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS												
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						3,737		83.48	312,000	312,000		
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						4,671			327,693	327,693		
	PER DIEM	NONE		0.00	HR						51,384			0	0		
	CONSUMABLES - % of ACCT NO. 90			0.5	%				6,797					19,031	25,827		
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				67,965						67,965		
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			401,890							401,890		
	SALES TAX - NOT INCLUDED														0		
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				67,965					190,305	258,270		
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				203,895					570,915	774,810		
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							401,900	346,600					1,419,900	2,168,500		
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS						8,439,700	1,705,900					5,226,000	15,371,700		
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID													0		
8.0	ACTIVATED CARBON INJECTION SYSTEM														0		
9.0	COMPRESSED AIR SYSTEM																
10.0	SERVICE WATER SYSTEM																
11.0	POTABLE WATER SYSTEM																
12.0	FGD SUBSTATION																
13.0	FGD DCS SYSTEM														0		
14.0	CEM SYSTEM														0		
15.0	TRUCK & RAIL INFRASTRUCTURE														0		
16.0	SITE IMPROVEMENTS - CIVIL WORK																
17.0	BOP ITEMS														0		
17.1	PIPE INSULATION	AVERAGE 6" PIPE SIZE	EST	3,400	LF		10	0	34,000	0.39	1,525	PINS	69.50	106,000	140,000		
17.2	HEAT TRACING							0	175,600					248,500	424,100		
	CABLE	AVERAGE 6" PIPE SIZE	EST	3,000	LF		10.35	0	31,100	0.05	173	WIRE	98.84	17,000	48,100		
	POWER CONNECTOR AND OTHER ACCESSORIES INCLUDING THERMOSTATS FOR HEAT TRACING (BY ZONES)		EST	55	EA		450	0	24,500	8.00	502	WIRE	98.84	49,600	74,100		
	HEAT TRACING BALANCE OF PLANT INCL PANELS, POWER WIRING AND CONDUITS		EST	4	LT		30000	0	120,000	400.00	1,840	WIRE	98.84	181,900	301,900		

				AEP											Estimate No.:	30729B		
				BIG SANDY UNIT 2											Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU											Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE											Preparer:	MNO		
		Cost Type:												Reviewer:	JMK			
		Est=Estimated												Approver:	PEF			
		Allow.=Allowance								Wage Rates Based on:			BIG SANDY					
		Q=Vendor Quote								Labor Productivity =			1.15					
Account No.	Item Description	Scope Definition	Cost Type	Quantity	Unit of Measure	Unit Equip.Cost	Unit Material Cost	Total Equipment Cost	Total Material Cost	Unit Man-hours (Base)	Total Man-hours (w/ productivity)	Crew Code	Crew Wage Rate	Total Construction & Erection Cost	Total Projected Cost			
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)							0	177,400					751,500	928,900			
	TOUCH UP PAINT FOR SHOP PAINTED STEEL		EST	31,442	SF		3	0	94,300	0.15	5,424	PNTR	73.66	399,500	493,800			
	TOUCH UP PAINT FOR EQUIPMENT		EST	12,000	SF		3	0	36,000	0.15	2,070	PNTR	73.66	152,500	188,500			
	PAINTING CS PIPE ONLY	AVERAGE 6" PIPE SIZE, ALLOWANCE FOR 10,000 LF PIPE	EST	15,700	SF		3	0	47,100	0.15	2,708	PNTR	73.66	199,500	246,600			
17.4	HOISTS & TROLLEYS							150,000	175,000					204,400	529,400			
	MISC HOISTS & TROLLEYS	IN BUILDINGS FOR EQUIPMENT MAINTENANCE AND FOR ID FANS	EST	10	EA	15000	17500	150,000	175,000	200.00	2,300	MECH	88.89	204,400	529,400			
17.5	MISC AUX STEEL FOR PIPE SUPPORTS	FIELD FABRICATED	EST	35	TN		3500	0	122,500	120.00	4,830	STST	105.71	510,600	633,100			
17.6	MISC PIPE SUPPORT FOUNDATIONS							0	10,500					19,600	30,100			
	EXCAVATION / BACKFILL		EST	65	CY			0	0	0.15	11	EXFD	90.00	1,000	1,000			
	REINFORCING		EST	5.0	TN		1,150.00	0	5,800	20.00	115	REIN	78.27	9,000	14,800			
	FORMWORK		EST	260	SF		2.50	0	700	0.14	42	FORM	99.43	4,200	4,900			
	CONCRETE		EST	25	CY		105.00	0	2,600	1.50	43	CONP	79.64	3,400	6,000			
	MUD MAT		EST	10	CY		105.00	0	1,100	1.50	17	CONP	79.64	1,400	2,500			
	EMBEDDED STEEL		EST	125	LB		2.50	0	300	0.06	9	CARP	71.88	600	900			
17.7	EYE WASH STATIONS	WITH 50 KW HEATERS	EST	5	EA	6000	1000	30,000	5,000	60.00	345	MECH	88.89	30,700	65,700			
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS	STAND PIPE FOR BUILDINGS	EST	10	EA		30000	0	300,000	240.00	2,760	MECH	88.89	245,300	545,300			
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS							180,000	1,000,000		24,713			2,116,600	3,296,600			
	OTHER DIRECT & CONSTRUCTION INDIRECT COSTS																	
	ADDITIONAL CRANE ALLOWANCE								0					0	0			
	MOBILIZATION / DEMOBILIZATION - INCLUDED IN WAGE RATES ABOVE														0			
	COST DUE TO OVERTIME WORKING 5 X10 HOUR DAYS			1	LS													
	COST DUE TO OVERTIME INEFFICIENCY - SPECIFY % INEFFICIENCY			8.00	%						2,149		83.48	179,000	179,000			
	COST DUE TO OVERTIME PAY @1.5 TIMES OVERTIME PAY RATE - SPECIFY % ADDITIONAL HOURS PAID ON ACTUAL HOURS WORKED			10.00	%						2,686			188,442	188,442			
	PER DIEM	NONE		0.00	HR						29,548			0	0			
	CONSUMABLES - % of ACCT NO. 90			0.5	%				5,000					10,583	15,583			
	FREIGHT ON MATERIAL - % of ACCT NO. 90			5.0	%				50,000						50,000			
	FREIGHT ON EQUIPMENT - % of ACCT NO. 90			5.0	%			9,000							9,000			
	SALES TAX - NOT INCLUDED														0			
	SCAFFOLDING - % OF ACCT NO. 90			5.0	%				50,000					105,830	155,830			
	CONTRACTOR'S GENERAL AND ADMINISTRATION & PROFIT - % of ACCT NO. 90			15	%				150,000					317,490	467,490			
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS							9,000	255,000					801,345	1,065,345			
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS						189,000	1,255,000					2,917,900	4,361,900			
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE														0			

				AEP										Estimate No.:	30729B		
				BIG SANDY UNIT 2										Project No.:	12721-000		
				FGD PROJECT - NID EST (N/ESP) - 4B - 7.5 LB/MM BTU										Date:	9/10/2010		
				ORDER OF MAGNITUDE COST ESTIMATE										Preparer:	MNO		
		Cost Type:												Reviewer:	JMK		
		Est=Estimated												Approver:	PEF		
		Allow.=Allowance								Wage Rates Based on:		BIG SANDY					
		Q=Vendor Quote								Labor Productivity =		1.15					
<u>Account No.</u>	<u>Item Description</u>	<u>Scope Definition</u>	<u>Cost Type</u>	<u>Quantity</u>	<u>Unit of Measure</u>	<u>Unit Equip.Cost</u>	<u>Unit Material Cost</u>	<u>Total Equipment Cost</u>	<u>Total Material Cost</u>	<u>Unit Man-hours (Base)</u>	<u>Total Man-hours (w/ productivity)</u>	<u>Crew Code</u>	<u>Crew Wage Rate</u>	<u>Total Construction & Erection Cost</u>	<u>Total Projected Cost</u>		
	ESCALATION														39,992,700		
	EQUIPMENT	4.0%/yr		4.0	%			13,411,000							13,411,000		
	MATERIAL	2.0%/yr		2.0	%				4,056,100						4,056,100		
	LABOR	2.5%/yr		2.5	%									18,463,600	18,463,600		
	INDIRECTS	2.5%/yr		2.5	%									4,062,000	4,062,000		
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP													-		
	TOTAL PROJECT COST														560,242,100		
	REFERENCE COSTS:																
A	ESP DEMOLITION	ALLOWANCE FOR 1000T STRUCTURE	ALLOW	1,000	TN			0	0	6.00	6,900	WRKG	120.63	832,300	832,300		
B	REMOVE BOOSTER AIR FANS		ALLOW	2	EA			0	0	400.00	920	WRKG	120.63	111,000	111,000		



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-14
NID Summary Capital Cost Estimate No. 30723 Base Est-1A ESP in Service
(3.0 lb SO₂/MMbtu)

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS					
1.1	ID FANS - OEM EQUIPMENT	1,795,000 ACFM WITH 14,600 HP MOTORS (\$625,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	\$ 6,288,000	\$ -	\$ 1,594,700	\$ 7,882,700
1.2	PIPING & SUPPORTS - MECHANICAL		\$ 21,800	\$ 28,700	\$ 120,500	\$ 171,000
1.3	DAMPERS		\$ 553,500	\$ -	\$ 263,200	\$ 816,700
1.4	EXPANSION JOINTS		\$ -	\$ 131,100	\$ 116,500	\$ 247,600
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	\$ -	\$ 2,600,000	\$ 5,959,400	\$ 8,559,400
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 1,160,000	\$ 1,167,000	\$ 2,327,000
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	\$ -	\$ 200,000	\$ 258,500	\$ 458,500
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	\$ -	\$ 864,000	\$ 1,692,200	\$ 2,556,200
1.9	DUCT SUPPORT STEEL - FOUNDATIONS		\$ -	\$ 295,500	\$ 532,700	\$ 828,200
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT		\$ -	\$ 106,000	\$ 185,600	\$ 291,600
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS		\$ -	\$ 273,800	\$ 433,700	\$ 707,500
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	\$ -	\$ 3,937,500	\$ -	\$ 3,937,500
1.13	TRANSFORMERS		\$ 770,000	\$ -	\$ 145,600	\$ 915,600
1.14	SWITCHGEAR		\$ 1,082,000	\$ -	\$ 569,000	\$ 1,651,000
1.15	CABLE BUS & TERMINATIONS		\$ 756,300	\$ 35,800	\$ 1,316,200	\$ 2,108,300
1.16	MCC		\$ 120,000	\$ -	\$ 7,200	\$ 127,200
1.17	MIMIC PANELS		\$ 17,500	\$ -	\$ 4,500	\$ 22,000
1.18	EMERGENCY POWER SYSTEM		\$ 285,500	\$ -	\$ 38,900	\$ 324,400
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	\$ -	\$ 186,300	\$ 283,200	\$ 469,500
1.20	MEDIUM VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 91,600	\$ 393,700	\$ 485,300
1.21	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 543,000	\$ 794,800	\$ 1,337,800
1.22	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 345,000	\$ 2,818,200	\$ 3,163,200
1.23	GROUNDING		\$ 11,100	\$ -	\$ 37,200	\$ 48,300
1.24	LIGHTING/ TRANSFORMERS & PANELS		\$ 26,000	\$ 30,000	\$ 29,500	\$ 85,500
1.25	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 1,569,000	\$ 7,502,000	\$ 9,071,000
1.26	DUCT BANK		\$ -	\$ 40,800	\$ 280,000	\$ 320,800
1.27	FOUNDATION FOR TRANSFORMERS		\$ -	\$ 64,600	\$ 168,200	\$ 232,800
1.28	FIREWALL FOR TRANSFORMERS		\$ -	\$ 3,200	\$ 8,300	\$ 11,500
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 9,931,700	\$ 12,505,900	\$ 26,720,500	\$ 49,158,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 496,600	\$ 3,189,000	\$ 8,429,900	\$ 12,115,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ID FANS	\$ 10,428,300	\$ 15,694,900	\$ 35,150,400	\$ 61,273,600

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
2.0	NID MODULES					
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J- DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS/COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	\$ 49,311,000	\$ -	\$ 41,911,600	\$ 91,222,600
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	\$ 2,419,200	\$ -	\$ -	\$ 2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF	\$ 58,100	\$ 1,316,900	\$ 1,747,600	\$ 3,122,600
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH	\$ 92,200	\$ 2,428,900	\$ 2,544,900	\$ 5,066,000
2.5	PIPING & SUPPORTS - MECHANICAL		\$ 125,200	\$ 174,500	\$ 385,900	\$ 685,600
2.6	DUCTWORK		\$ -	\$ 6,175,000	\$ 14,153,600	\$ 20,328,600
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 2,755,000	\$ 2,771,700	\$ 5,526,700
2.8	DUCTWORK INSULATION & LAGGING		\$ -	\$ 2,040,000	\$ 3,995,500	\$ 6,035,500
2.9	NID MODULE- FOUNDATIONS		\$ -	\$ 1,087,000	\$ 1,682,500	\$ 2,769,500
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY		\$ -	\$ 1,152,000	\$ 2,863,700	\$ 4,015,700
2.11	GROUNDING		\$ -	\$ 16,000	\$ 46,100	\$ 62,100
2.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 156,000	\$ 150,000	\$ 159,100	\$ 465,100
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 52,161,700	\$ 17,295,300	\$ 72,262,200	\$ 141,719,200
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 3,283,100	\$ 4,410,300	\$ 27,160,100	\$ 34,853,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES	\$ 55,444,800	\$ 21,705,600	\$ 99,422,300	\$ 176,572,700
3.0	NEW STACK					
3.1	CONCRETE STACK (DRY)	PROVIDED BY AEP	\$ -	\$ -	\$ -	\$ 17,600,000
4.0	LIME HANDLING SYSTEM					
4.1	LIME STORAGE SILO		\$ 6,190,000	\$ -	\$ -	\$ 6,190,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 700,000	\$ -	\$ 449,800	\$ 1,149,800
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 1,100,000	\$ -	\$ 654,200	\$ 1,754,200
4.4	PIPING - MECHANICAL		\$ 88,700	\$ 130,300	\$ 342,600	\$ 561,600
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	\$ -	\$ 159,500	\$ 160,500	\$ 320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	\$ -	\$ 1,885,000	\$ 1,896,400	\$ 3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING	\$ -	\$ 42,700	\$ 79,300	\$ 122,000
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 69,600	\$ 130,200	\$ 199,800
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H	\$ 75,000	\$ 335,000	\$ 24,400	\$ 434,400
4.10	CONCRETE PIT FOR THE ELEVATOR		\$ -	\$ 2,300	\$ 6,900	\$ 9,200

Sargent & Lundy, LLC	AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU COST ESTIMATE SUMMARY	Estimate No.: 30723B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS	\$ -	\$ 368,100	\$ 613,200	\$ 981,300
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS		\$ -	\$ 14,200	\$ 26,200	\$ 40,400
4.13	PIPE RACK - FOUNDATIONS		\$ -	\$ 239,600	\$ 519,100	\$ 758,700
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	\$ 170,000	\$ -	\$ 54,600	\$ 224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	\$ 196,000	\$ -	\$ 104,700	\$ 300,700
4.16	CABLE BUS DUCT		\$ 134,700	\$ 10,800	\$ 200,200	\$ 345,700
4.17	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
4.18	MIMIC PANELS		\$ 17,500	\$ -	\$ 1,400	\$ 18,900
4.19	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
4.20	GROUNDING		\$ 13,300	\$ -	\$ 41,300	\$ 54,600
4.21	LIGHTING/ TRANSFORMERS & PANELS		\$ 52,000	\$ 135,000	\$ 104,500	\$ 291,500
4.22	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 296,400	\$ 1,429,900	\$ 1,726,300
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	\$ -	\$ 23,400	\$ 87,800	\$ 111,200
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
4.25	LOW VOLTAGE POWER CABLE & TERMINATION	0.00	\$ -	\$ 132,200	\$ 260,800	\$ 393,000
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 57,600	\$ 161,600	\$ 219,200
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	\$ -	\$ 61,100	\$ 152,100	\$ 213,200
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	\$ -	\$ 3,500	\$ 10,300	\$ 13,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 8,907,300	\$ 3,975,800	\$ 7,587,900	\$ 20,471,000
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 445,400	\$ 1,013,800	\$ 2,748,700	\$ 4,207,900
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM	\$ 9,352,700	\$ 4,989,600	\$ 10,336,600	\$ 24,678,900
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID				
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS					
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 2,386,000	\$ -	\$ 1,451,600	\$ 3,837,600
6.2	FLY ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, TWO PRESSURE EXHAUSTERS, TRANSFER STATION, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 2,285,000	\$ -	\$ 1,431,100	\$ 3,716,100
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.	\$ 28,000	\$ -	\$ 12,300	\$ 40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP	\$ 12,000	\$ -	\$ 4,600	\$ 16,600
6.5	PIPING - MECHANICAL		\$ 142,800	\$ 131,000	\$ 408,700	\$ 682,500
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 60' DIA X 92' H - 3225 TONS - SUBCONTRACT COST INCLUDES LABOR	\$ 1,452,000	\$ -	\$ -	\$ 1,452,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID	\$ -	\$ -	\$ -	\$ -
6.8	FLY ASH SILO	STEEL -STORAGE SILO, 16' DIA X 18' H, 48TONS	\$ 50,000	\$ 26,100	\$ 72,400	\$ 148,500
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS		\$ -	\$ 162,400	\$ 273,700	\$ 436,100

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.10	FLY ASH SILO - FOUNDATIONS		\$ -	\$ 13,900	\$ 29,400	\$ 43,300
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS		\$ -	\$ 97,600	\$ 161,900	\$ 259,500
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H	\$ 40,000	\$ 241,500	\$ 26,200	\$ 307,700
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 82,800	\$ 141,100	\$ 223,900
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	110' L X 30' W X 25' H	\$ 75,000	\$ 276,500	\$ 24,400	\$ 375,900
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	\$ -	\$ 300,000	\$ -	\$ 300,000
6.16	MCC	480V MCC PER LINE UP	\$ 120,000	\$ -	\$ 7,300	\$ 127,300
6.17	EMERGENBCY POWER SYSTEM		\$ 185,500	\$ -	\$ 40,000	\$ 225,500
6.18	LIGHTING/ TRANSFORMERS & PANELS		\$ 18,500	\$ 75,000	\$ 53,200	\$ 146,700
6.19	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 32,800	\$ 177,400	\$ 210,200
6.20	GROUNDING	0.00	\$ -	\$ 4,500	\$ 10,900	\$ 15,400
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION	0.00	\$ -	\$ 63,300	\$ 143,000	\$ 206,300
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 20,800	\$ 58,400	\$ 79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	\$ -	\$ 6,200	\$ 10,600	\$ 16,800
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 6,794,800	\$ 1,543,900	\$ 4,586,100	\$ 12,924,800
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 339,700	\$ 393,700	\$ 1,706,700	\$ 2,440,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS	\$ 7,134,500	\$ 1,937,600	\$ 6,292,800	\$ 15,365,000
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID				
8.0	ACTIVATED CARBON INJECTION SYSTEM					
8.1	ACI MECHANICAL EQUIPMENT:		\$ 2,805,900	\$ -	\$ 888,300	\$ 3,694,200
8.2	PIPING - MECHANICAL		\$ 29,800	\$ 149,800	\$ 377,100	\$ 556,700
8.3	ACI SYSTEM - FOUNDATIONS		\$ -	\$ 41,500	\$ 79,200	\$ 120,700
8.4	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
8.5	GROUNDING		\$ 5,500	\$ -	\$ 18,600	\$ 24,100
8.6	LIGHTING / TRANSFORMERS & PANELS		\$ 26,000	\$ 15,000	\$ 20,400	\$ 61,400
8.7	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 84,600	\$ 276,700	\$ 361,300
8.8	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 16,000	\$ 62,900	\$ 78,900
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 2,929,000	\$ 306,900	\$ 1,726,800	\$ 4,962,700
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 146,500	\$ 78,300	\$ 634,600	\$ 859,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ACTIVATED CARBON INJECTION SYSTEM	\$ 3,075,500	\$ 385,200	\$ 2,361,400	\$ 5,822,000
9.0	COMPRESSED AIR SYSTEM					
9.1	AIR COMPRESSOR & AUXILIARIES		\$ 848,000	\$ -	\$ 184,600	\$ 1,032,600
9.2	PIPING - MECHANICAL		\$ 320,600	\$ 344,800	\$ 875,600	\$ 1,541,000
9.3	AIR COMPRESSOR BUILDING - FOUNDATIONS		\$ -	\$ 249,800	\$ 395,800	\$ 645,600
9.4	AIR COMPRESSOR BUILDING	120' L X 60' W X 20' H	\$ -	\$ 612,000	\$ -	\$ 612,000
9.5	LIGHTING/ TRANSFORMERS & PANELS		\$ 11,000	\$ 10,500	\$ 11,400	\$ 32,900
9.6	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
9.7	GROUNDING		\$ 4,500	\$ -	\$ 10,900	\$ 15,400
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 1,184,100	\$ 1,217,100	\$ 1,478,300	\$ 3,879,500
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 59,200	\$ 310,400	\$ 549,500	\$ 919,100
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	COMPRESSED AIR SYSTEM	\$ 1,243,300	\$ 1,527,500	\$ 2,027,800	\$ 4,798,600

Sargent & Lundy, LLC	AEP	Estimate No.:	30723B
	BIG SANDY UNIT 2	Project No.:	12721-000
	FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU	Date:	9/10/2010
	COST ESTIMATE SUMMARY	Preparer:	MNO
		Reviewer:	JMK
		Approver:	PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
10.0	SERVICE WATER SYSTEM					
10.1	PUMPS		\$ 186,000	\$ -	\$ 90,000	\$ 276,000
10.2	PIPING - MECHANICAL		\$ 298,400	\$ 342,800	\$ 688,300	\$ 1,329,500
10.3	PIPING - FIRE PROTECTION SYSTEM		\$ 181,200	\$ 284,600	\$ 673,300	\$ 1,139,100
10.4	TANKS		\$ -	\$ 234,000	\$ -	\$ 234,000
10.5	SERVICE WATER TANK & PUMP - FOUNDATIONS		\$ -	\$ 41,100	\$ 73,300	\$ 114,400
10.6	MAKE UP WATER TANK & PUMP - FOUNDATION		\$ -	\$ 27,300	\$ 48,800	\$ 76,100
10.7	ELECTRICAL	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 665,600	\$ 929,800	\$ 1,573,700	\$ 3,169,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 33,300	\$ 237,100	\$ 575,300	\$ 845,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	SERVICE WATER SYSTEM	\$ 698,900	\$ 1,166,900	\$ 2,149,000	\$ 4,014,700
11.0	POTABLE WATER SYSTEM					
11.1	PUMPS		\$ 30,000	\$ -	\$ 18,400	\$ 48,400
11.2	PIPING - MECHANICAL		\$ 99,500	\$ 195,600	\$ 457,000	\$ 752,100
11.3	TANKS		\$ -	\$ 8,500	\$ -	\$ 8,500
11.4	POTABLE WATER TANK & PUMP - FOUNDATIONS		\$ -	\$ 5,200	\$ 8,800	\$ 14,000
11.5	ELECTRICAL	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 129,500	\$ 195,600	\$ 475,400	\$ 800,500
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 6,500	\$ 49,900	\$ 173,300	\$ 229,700
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	POTABLE WATER SYSTEM	\$ 136,000	\$ 245,500	\$ 648,700	\$ 1,030,200
12.0	FGD SUBSTATION					
12.1	TRANSFORMERS		\$ 1,560,500	\$ -	\$ 273,100	\$ 1,833,600
12.2	TRANSFORMER PDC	15W X 45' X 10'H. SUBCONTRACT PRICE INCLUDES LABOR	\$ 202,500	\$ -	\$ -	\$ 202,500
12.3	TRANSFORMER PDC - FOUNDATION		\$ -	\$ 73,200	\$ 131,700	\$ 204,900
12.4	138KV MAIN FEEDER & TERMINATIONS		\$ 264,000	\$ -	\$ 254,000	\$ 518,000
12.5	SWITCHGEAR		\$ 914,200	\$ -	\$ 121,600	\$ 1,035,800
12.6	MCC	480V MCC, PER LINE UP	\$ 60,000	\$ -	\$ 3,600	\$ 63,600
12.7	CABLE BUS		\$ 181,100	\$ 18,000	\$ 290,200	\$ 489,300
12.8	PANELS - RELAY		\$ 100,000	\$ -	\$ 9,100	\$ 109,100
12.9	MIMIC PANELS		\$ 17,500	\$ -	\$ 4,500	\$ 22,000
12.10	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
12.11	GROUNDING		\$ 23,300	\$ -	\$ 59,100	\$ 82,400
12.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 26,000	\$ 30,000	\$ 29,500	\$ 85,500
12.13	OUTDOOR LIGHTING	NEW AUX YARD LIGHTING - ALLOWANCE	\$ 25,000	\$ -	\$ 56,800	\$ 81,800
12.14	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 372,900	\$ 1,787,900	\$ 2,160,800
12.15	DUCT BANK		\$ -	\$ 26,200	\$ 54,300	\$ 80,500
12.16	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 500KCMIL- 15KV	\$ -	\$ 16,700	\$ 47,100	\$ 63,800
12.17	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 96,600	\$ 147,700	\$ 244,300
12.18	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 21,800	\$ 61,100	\$ 82,900
12.19	FOUNDATION FOR AUX TRANSFORMER		\$ -	\$ 70,200	\$ 183,600	\$ 253,800
12.20	FIREWALL FOR TRANSFORMERS		\$ -	\$ 4,300	\$ 7,600	\$ 11,900
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 3,482,400	\$ 729,900	\$ 3,546,900	\$ 7,759,200
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 174,100	\$ 186,100	\$ 1,282,979	\$ 1,643,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	FGD SUBSTATION	\$ 3,656,500	\$ 916,000	\$ 4,829,900	\$ 9,402,400
13.0	FGD DCS SYSTEM					
13.1	DCS	3200 I/O POINTS	\$ 2,400,000	\$ -	\$ 813,600	\$ 3,213,600

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
13.2	DCS - VENDOR FIELD SUPPORT	200 MAN DAYS @ \$1500/DAY - SHOWN AS SUBCONTRACT COST	\$ 300,000	\$ -	\$ -	\$ 300,000
13.3	LOCALLY MOUNTED INSTRUMENTS		\$ -	\$ 650,400	\$ 852,900	\$ 1,503,300
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 2,700,000	\$ 650,400	\$ 1,666,500	\$ 5,016,900
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 135,000	\$ 165,900	\$ 622,300	\$ 923,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	FGD DCS SYSTEM	\$ 2,835,000	\$ 816,300	\$ 2,288,800	\$ 5,940,100
14.0	CEM SYSTEM					
14.1	CEM SYSTEM	PROVIDED BY AEP	\$ 1,260,000	\$ 540,000	\$ 310,000	\$ 2,110,000
15.0	TRUCK & RAIL INFRASTRUCTURE					
15.1	EXISTING RAILROAD IMPROVEMENTS	FOR FULL RAILCAR STORAGE TRACK IMPROVEMENTS - 3250 LF	\$ -	\$ 660,200	\$ 689,200	\$ 1,349,400
15.2	EXISTING RAILROAD IMPROVEMENTS	FOR LOOP TRACK UPGRADE - 5000 LF	\$ -	\$ 1,008,800	\$ 1,055,600	\$ 2,064,400
15.3	NEW RAILROAD TRACK	INCLUDES, 132LB RAIL, 7" TIMBERS, TIE PLATES, SPIKES, BOLTS, 12" SUB BALLAST, 12" BALLAST, 12 OZ/SY GEOTEXTILE MEMBRANE, 12" SUBGRADE PREP	\$ -	\$ 252,000	\$ 213,100	\$ 465,100
15.4	FIELD FABRICATED TURNOUTS	#8 TURNOUT	\$ -	\$ 90,000	\$ 54,800	\$ 144,800
15.5	RAIL SCALE	SUBCONTRACT COST, INCLUDES FOUNDATIONS	\$ 212,500	\$ -	\$ -	\$ 212,500
15.6	NEW CONCRETE ENCASEMENT	OVER AND AROUND DUCT BANK CONNECTING THE PLANT TO SWITCHYARD. THIS IS UNDER THE NEW TRACK WORK EXTENSION	\$ -	\$ 33,200	\$ 67,700	\$ 100,900
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 212,500	\$ 2,044,200	\$ 2,080,400	\$ 4,337,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 10,600	\$ 521,300	\$ 777,500	\$ 1,309,400
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	TRUCK & RAIL INFRASTRUCTURE	\$ 223,100	\$ 2,565,500	\$ 2,857,900	\$ 5,646,500
16.0	SITE IMPROVEMENTS - CIVIL WORK					
16.1	SITE GRADING		\$ -	\$ -	\$ 555,200	\$ 555,200
16.2	ROADS & SURFACING		\$ -	\$ 1,204,900	\$ 1,667,500	\$ 2,872,400
16.3	NEW CONCRETE ENCASEMENT	16' X 4' X 40' - FOR EXISTING ASH PIPE HAUL ROAD CROSSING	\$ -	\$ 36,500	\$ 66,500	\$ 103,000
16.4	TRUCK SCALE & CONCRETE APPROACH		\$ 170,000	\$ 27,300	\$ 92,000	\$ 289,300
16.5	PROCESS WATER STORAGE BASIN		\$ 60,000	\$ 81,600	\$ 240,300	\$ 381,900
16.6	PROCESS WATER STORAGE BASIN PUMP STRUCTURE - CONCRETE		\$ -	\$ 47,000	\$ 105,400	\$ 152,400
16.7	STORM WATER DRAINAGE TRENCH	2' W X 3' DEEP CAST-IN-PLACE CONCRETE TRENCH W/REINFORCING & HS-20 RATED GRATE COVERS	\$ -	\$ 526,500	\$ 535,800	\$ 1,062,300
16.8	STORM WATER RUNOFF POND		\$ -	\$ 15,000	\$ 122,600	\$ 137,600
16.9	STORM WATER RUNOFF POND PUMP STRUCTURE - CONCRETE		\$ 90,000	\$ 42,300	\$ 182,200	\$ 314,500
16.10	OILY WATER SEWER		\$ 4,500	\$ 112,600	\$ 236,000	\$ 353,100
16.11	OIL SEPARATOR	500 GPM W/ INTEGRAL LIFT STATION	\$ 100,000	\$ -	\$ 116,100	\$ 216,100

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
16.12	SANITARY SEWER		\$ -	\$ 22,200	\$ 96,900	\$ 119,100
16.13	SANITARY LIFT STATION	PACKAGED TYPE COMPLETE WITH PUMPS, 100,000 GPD	\$ 150,000	\$ -	\$ 49,200	\$ 199,200
16.14	EROSION & SEDIMENT CONTROL		\$ -	\$ 12,400	\$ 20,400	\$ 32,800
16.15	CONSTRUCTION LAYDOWN AREA	ALLOWANCE FOR 10 ACRES, DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED	\$ -	\$ 700,000	\$ 828,000	\$ 1,528,000
16.16	CRAFT PARKING	DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED. ALLOWANCE FOR 20,000 SY INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	\$ -	\$ 180,000	\$ 414,200	\$ 594,200
16.17	CONTRACTOR OFFICES (AREA)	DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED. ALLOWANCE FOR 5,000 SY AREA (TRAILERS BY CONTRACTORS) INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	\$ -	\$ 45,000	\$ 103,600	\$ 148,600
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 574,500	\$ 3,053,300	\$ 5,431,900	\$ 9,059,700
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 28,700	\$ 778,600	\$ 1,954,200	\$ 2,761,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	SITE IMPROVEMENTS - CIVIL WORK	\$ 603,200	\$ 3,831,900	\$ 7,386,100	\$ 11,821,300
17.0	BOP ITEMS					
17.1	PIPE INSULATION	AVERAGE 6" PIPE SIZE	\$ -	\$ 34,000	\$ 106,000	\$ 140,000
17.2	HEAT TRACING		\$ -	\$ 175,600	\$ 248,500	\$ 424,100
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)		\$ -	\$ 176,700	\$ 677,700	\$ 854,400
17.4	HOISTS & TROLLEYS		\$ 150,000	\$ 175,000	\$ 204,400	\$ 529,400
17.5	MISC AUX STEEL FOR PIPE SUPPORTS	FIELD FABRICATED	\$ -	\$ 122,500	\$ 510,600	\$ 633,100
17.6	MISC PIPE SUPPORT FOUNDATIONS		\$ -	\$ 10,500	\$ 19,600	\$ 30,100
17.7	EYE WASH STATIONS	WITH 50 KW HEATERS	\$ 30,000	\$ 5,000	\$ 30,700	\$ 65,700
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS	STAND PIPE FOR BUILDINGS	\$ -	\$ 300,000	\$ 245,300	\$ 545,300
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 180,000	\$ 999,300	\$ 2,042,800	\$ 3,222,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 9,000	\$ 254,822	\$ 785,878	\$ 1,049,700
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS	\$ 189,000	\$ 1,254,100	\$ 2,828,700	\$ 4,271,800
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE					
18.1	RELOCATE HYDROGEN STORAGE TANK		\$ -	\$ 15,600	\$ 86,800	\$ 102,400
18.2	NEW HYDROGEN LINE TO PLANT		\$ -	\$ 62,100	\$ 150,600	\$ 212,700
18.3	RELOCATE MISC. UNDERGROUND UTILITIES	ALLOWANCE	\$ -	\$ 125,000	\$ 170,500	\$ 295,500
18.4	OUTAGE TIE-IN DUCTWORK	ALLOWANCE FOR 85 TON DUCTWORK	\$ -	\$ 276,300	\$ 738,700	\$ 1,015,000
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ -	\$ 479,000	\$ 1,146,600	\$ 1,625,600

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (ESP)-1A - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30723B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ -	\$ 122,100	\$ 401,400	\$ 523,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE	\$ -	\$ 601,100	\$ 1,548,000	\$ 2,149,200
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT					
19.1	ARSENIC, ASBESTOS , LEAD ABATEMENT	ALLOWANCE PROVIDED BY AEP	\$ -	\$ -	\$ -	\$ 750,000
99.0	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 91,113,100	\$ 46,466,400	\$ 132,636,000	\$ 288,565,500
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 5,167,700	\$ 11,711,200	\$ 47,802,600	\$ 64,681,500
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST		\$ 96,280,800	\$ 58,177,600	\$ 180,438,600	\$ 353,247,000
	OVERALL PROJECT INDIRECT COSTS					
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES					\$ 25,000,000
	CONSTRUCTION MANAGEMENT					\$ 10,597,400
	S-U / COMMISSIONING					\$ 3,532,500
	CRAFT START-UP SUPPORT					\$ 1,562,800
	INITIAL FILLS					\$ 1,059,700
	OPERATOR & TRAINING MANUALS					\$ 300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)					\$ 400,000
	OWNERS COST	BY AEP				\$ -
	TOTAL PROJECT DIRECT AND INDIRECT COSTS					\$ 395,699,400
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT					\$ 1,251,700
	SPARE PARTS FOR THE OEM EQUIPMENT	0.80				\$ 776,054
	SPARE PARTS FOR THE BOP EQUIPMENT	0.50				\$ 475,646
	CONTINGENCY	14.8				\$ 58,551,800
	ESCALATION					\$ 34,343,200
	EQUIPMENT					\$ 10,047,800
	MATERIAL					\$ 4,175,300
	LABOR					\$ 16,288,000
	INDIRECTS					\$ 3,832,100
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP				
	TOTAL PROJECT COST					\$ 489,846,100
	REFERENCE COSTS:					
A	ESP DEMOLITION					\$ 832,300
B	REMOVE BOOSTER AIR FANS					\$ 111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-15
NID Summary Capital Cost Estimate No. 30727 Base Est-1B ESP not in Service
(3.0 lb SO₂/MMbtu)

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS					
1.1	ID FANS - OEM EQUIPMENT	1,875,000 ACFM WITH 19,500 HP MOTORS (\$750,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	\$ 6,920,000	\$ -	\$ 1,674,400	\$ 8,594,400
1.2	PIPING & SUPPORTS - MECHANICAL		\$ 21,800	\$ 28,700	\$ 120,500	\$ 171,000
1.3	DAMPERS		\$ 553,500	\$ -	\$ 263,200	\$ 816,700
1.4	EXPANSION JOINTS		\$ -	\$ 131,100	\$ 116,500	\$ 247,600
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	\$ -	\$ 2,600,000	\$ 5,959,400	\$ 8,559,400
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 1,160,000	\$ 1,167,000	\$ 2,327,000
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	\$ -	\$ 200,000	\$ 258,500	\$ 458,500

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	\$ -	\$ 864,000	\$ 1,692,200	\$ 2,556,200
1.9	DUCT SUPPORT STEEL - FOUNDATIONS		\$ -	\$ 295,500	\$ 532,700	\$ 828,200
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT		\$ -	\$ 106,000	\$ 185,600	\$ 291,600
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS		\$ -	\$ 273,800	\$ 433,700	\$ 707,500
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	\$ -	\$ 3,937,500	\$ -	\$ 3,937,500
1.13	TRANSFORMERS		\$ 770,000	\$ -	\$ 145,600	\$ 915,600
1.14	SWITCHGEAR		\$ 1,082,000	\$ -	\$ 569,000	\$ 1,651,000
1.15	CABLE BUS & TERMINATIONS		\$ 756,300	\$ 35,800	\$ 1,316,200	\$ 2,108,300
1.16	MCC		\$ 120,000	\$ -	\$ 7,200	\$ 127,200
1.17	MIMIC PANELS		\$ 17,500	\$ -	\$ 4,500	\$ 22,000
1.18	EMERGENCY POWER SYSTEM		\$ 285,500	\$ -	\$ 38,900	\$ 324,400
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	\$ -	\$ 186,300	\$ 283,200	\$ 469,500
1.20	MEDIUM VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 91,600	\$ 393,700	\$ 485,300
1.21	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 543,000	\$ 794,800	\$ 1,337,800
1.22	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 345,000	\$ 2,818,200	\$ 3,163,200
1.23	GROUNDING		\$ 11,100	\$ -	\$ 37,200	\$ 48,300
1.24	LIGHTING/ TRANSFORMERS & PANELS		\$ 26,000	\$ 30,000	\$ 29,500	\$ 85,500
1.25	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 1,569,000	\$ 7,502,000	\$ 9,071,000
1.26	DUCT BANK		\$ -	\$ 40,800	\$ 280,000	\$ 320,800
1.27	FOUNDATION FOR TRANSFORMERS		\$ -	\$ 64,600	\$ 168,200	\$ 232,800
1.28	FIREWALL FOR TRANSFORMERS		\$ -	\$ 3,200	\$ 8,300	\$ 11,500

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 10,563,700	\$ 12,505,900	\$ 26,800,200	\$ 49,869,800
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 528,200	\$ 3,189,000	\$ 9,621,100	\$ 13,338,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ID FANS	\$ 11,091,900	\$ 15,694,900	\$ 36,421,300	\$ 63,208,100
2.0	NID MODULES					
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS / COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	\$ 50,231,000	\$ -	\$ 42,381,900	\$ 92,612,900
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	\$ 2,419,200	\$ -	\$ -	\$ 2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF	\$ 58,100	\$ 1,316,900	\$ 1,747,600	\$ 3,122,600
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH	\$ 92,200	\$ 2,428,900	\$ 2,544,900	\$ 5,066,000
2.5	PIPING & SUPPORTS - MECHANICAL		\$ 125,200	\$ 174,500	\$ 385,900	\$ 685,600
2.6	DUCTWORK		\$ -	\$ 4,797,000	\$ 10,995,100	\$ 15,792,100
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 2,140,200	\$ 2,153,200	\$ 4,293,400

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
2.8	DUCTWORK INSULATION & LAGGING		\$ -	\$ 1,632,000	\$ 3,196,400	\$ 4,828,400
2.9	NID MODULE- FOUNDATIONS		\$ -	\$ 1,087,000	\$ 1,682,500	\$ 2,769,500
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY		\$ -	\$ 1,152,000	\$ 2,863,700	\$ 4,015,700
2.11	GROUNDING		\$ -	\$ 16,000	\$ 46,100	\$ 62,100
2.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 156,000	\$ 150,000	\$ 159,100	\$ 465,100
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 53,081,700	\$ 14,894,500	\$ 68,156,400	\$ 136,132,600
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 3,329,100	\$ 3,798,100	\$ 25,728,500	\$ 32,855,700
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES	\$ 56,410,800	\$ 18,692,600	\$ 93,884,900	\$ 168,988,300
3.0	NEW STACK					
3.1	CONCRETE STACK (DRY)	PROVIDED BY AEP	\$ -	\$ -	\$ -	\$ 17,600,000
4.0	LIME HANDLING SYSTEM					
4.1	LIME STORAGE SILO		\$ 5,992,400	\$ -	\$ -	\$ 5,992,400
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTER, TWO FILTER SEPARATORS	\$ 700,000	\$ -	\$ 449,800	\$ 1,149,800
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 1,100,000	\$ -	\$ 654,200	\$ 1,754,200
4.4	PIPING - MECHANICAL		\$ 88,700	\$ 130,300	\$ 342,600	\$ 561,600
4.5	LIME STORAGE SILO ACCESS STAIR TOWER		\$ -	\$ 159,500	\$ 160,500	\$ 320,000

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	\$ -	\$ 1,885,000	\$ 1,896,400	\$ 3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING	\$ -	\$ 42,700	\$ 79,300	\$ 122,000
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 69,600	\$ 130,200	\$ 199,800
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H	\$ 75,000	\$ 335,000	\$ 24,400	\$ 434,400
4.10	CONCRETE PIT FOR THE ELEVATOR		\$ -	\$ 2,300	\$ 6,900	\$ 9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS	\$ -	\$ 368,100	\$ 613,200	\$ 981,300
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS		\$ -	\$ 14,200	\$ 26,200	\$ 40,400
4.13	PIPE RACK - FOUNDATIONS		\$ -	\$ 239,600	\$ 519,100	\$ 758,700
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	\$ 170,000	\$ -	\$ 54,600	\$ 224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	\$ 196,000	\$ -	\$ 104,700	\$ 300,700
4.16	CABLE BUS DUCT		\$ 134,700	\$ 10,800	\$ 200,200	\$ 345,700
4.17	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
4.18	MIMIC PANELS		\$ 17,500	\$ -	\$ 1,400	\$ 18,900
4.19	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
4.20	GROUNDING		\$ 13,300	\$ -	\$ 41,300	\$ 54,600
4.21	LIGHTING/ TRANSFORMERS & PANELS		\$ 52,000	\$ 135,000	\$ 104,500	\$ 291,500
4.22	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 296,400	\$ 1,429,900	\$ 1,726,300
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	\$ -	\$ 23,400	\$ 87,800	\$ 111,200
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
4.25	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 132,200	\$ 260,800	\$ 393,000
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 57,600	\$ 161,600	\$ 219,200

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	\$ -	\$ 61,100	\$ 152,100	\$ 213,200
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	\$ -	\$ 3,500	\$ 10,300	\$ 13,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 8,709,700	\$ 3,975,800	\$ 7,587,900	\$ 20,273,400
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 435,500	\$ 1,013,800	\$ 2,748,700	\$ 4,198,100
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM	\$ 9,145,200	\$ 4,989,600	\$ 10,336,600	\$ 24,471,500
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID				
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS					
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 2,822,000	\$ -	\$ 1,609,000	\$ 4,431,000
6.2	ECONOMIZER ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES JET PUMPS AND PIPING / SUPPORTS TO THE BOTTOM ASH POND	\$ 400,000	\$ -	\$ 296,400	\$ 696,400
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.	\$ 28,000	\$ -	\$ 12,300	\$ 40,300

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.4	AGITATOR FOR SUMP PUMPS	5 HP	\$ 12,000	\$ -	\$ 4,600	\$ 16,600
6.5	PIPING - MECHANICAL		\$ 142,800	\$ 131,000	\$ 408,700	\$ 682,500
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 60' DIA X 143' H - 5400 TONS - SUBCONTRACT COST INCLUDES LABOR	\$ 2,430,000	\$ -	\$ -	\$ 2,430,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID	\$ -	\$ -	\$ -	\$ -
6.8	FLY ASH SILO	NOT REQUIRED - ECONOMIZER FLY ASH SLUICED TO BOTTOM ASH POND	\$ -	\$ -	\$ -	\$ -
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS		\$ -	\$ 162,400	\$ 273,700	\$ 436,100
6.10	FLY ASH SILO - FOUNDATIONS	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS		\$ -	\$ 97,600	\$ 161,900	\$ 259,500
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H	\$ 40,000	\$ 241,500	\$ 26,200	\$ 307,700
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	\$ -	\$ 300,000	\$ -	\$ 300,000
6.16	MCC	480V MCC PER LINE UP	\$ 120,000	\$ -	\$ 7,300	\$ 127,300
6.17	EMERGENCY POWER SYSTEM		\$ 185,500	\$ -	\$ 40,000	\$ 225,500
6.18	LIGHTING/ TRANSFORMERS & PANELS		\$ 18,500	\$ 75,000	\$ 53,200	\$ 146,700
6.19	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 32,800	\$ 177,400	\$ 210,200
6.20	GROUNDING		\$ -	\$ 4,500	\$ 10,900	\$ 15,400
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 63,300	\$ 143,000	\$ 206,300
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 20,800	\$ 58,400	\$ 79,200

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	\$ -	\$ 6,200	\$ 10,600	\$ 16,800
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 6,198,800	\$ 1,144,600	\$ 3,341,500	\$ 10,684,900
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 309,900	\$ 291,900	\$ 1,240,600	\$ 1,842,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS	\$ 6,508,700	\$ 1,436,500	\$ 4,582,100	\$ 12,527,400
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID				
8.0	ACTIVATED CARBON INJECTION SYSTEM					
8.1	ACI MECHANICAL EQUIPMENT:		\$ 2,805,900	\$ -	\$ 888,300	\$ 3,694,200
8.2	PIPING - MECHANICAL		\$ 29,800	\$ 149,800	\$ 377,100	\$ 556,700
8.3	ACI SYSTEM - FOUNDATIONS		\$ -	\$ 41,500	\$ 79,200	\$ 120,700
8.4	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
8.5	GROUNDING		\$ 5,500	\$ -	\$ 18,600	\$ 24,100
8.6	LIGHTING / TRANSFORMERS & PANELS		\$ 26,000	\$ 15,000	\$ 20,400	\$ 61,400
8.7	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 84,600	\$ 276,700	\$ 361,300
8.8	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 16,000	\$ 62,900	\$ 78,900
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 2,929,000	\$ 306,900	\$ 1,726,800	\$ 4,962,700
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 146,500	\$ 78,300	\$ 634,600	\$ 859,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ACTIVATED CARBON INJECTION SYSTEM	\$ 3,075,500	\$ 385,200	\$ 2,361,400	\$ 5,822,000
9.0	COMPRESSED AIR SYSTEM					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
9.1	AIR COMPRESSOR & AUXILIARIES		\$ 848,000	\$ -	\$ 184,600	\$ 1,032,600
9.2	PIPING - MECHANICAL		\$ 320,600	\$ 344,800	\$ 875,600	\$ 1,541,000
9.3	AIR COMPRESSOR BUILDING - FOUNDATIONS		\$ -	\$ 249,800	\$ 395,800	\$ 645,600
9.4	AIR COMPRESSOR BUILDING	120' L X 60' W X 20' H	\$ -	\$ 612,000	\$ -	\$ 612,000
9.5	LIGHTING/ TRANSFORMERS & PANELS		\$ 11,000	\$ 10,500	\$ 11,400	\$ 32,900
9.6	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
9.7	GROUNDING		\$ 4,500	\$ -	\$ 10,900	\$ 15,400
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 1,184,100	\$ 1,217,100	\$ 1,478,300	\$ 3,879,500
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 59,200	\$ 310,400	\$ 549,500	\$ 919,100
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	COMPRESSED AIR SYSTEM	\$ 1,243,300	\$ 1,527,500	\$ 2,027,800	\$ 4,798,600
10.0	SERVICE WATER SYSTEM					
10.1	PUMPS		\$ 186,000	\$ -	\$ 90,000	\$ 276,000
10.2	PIPING - MECHANICAL		\$ 298,400	\$ 342,800	\$ 688,300	\$ 1,329,500
10.3	PIPING - FIRE PROTECTION SYSTEM		\$ 181,200	\$ 284,600	\$ 673,300	\$ 1,139,100
10.4	TANKS		\$ -	\$ 234,000	\$ -	\$ 234,000
10.5	SERVICE WATER TANK & PUMP - FOUNDATIONS		\$ -	\$ 41,100	\$ 73,300	\$ 114,400
10.6	MAKE UP WATER TANK & PUMP - FOUNDATION		\$ -	\$ 27,300	\$ 48,800	\$ 76,100
10.7	ELECTRICAL	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 665,600	\$ 929,800	\$ 1,573,700	\$ 3,169,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 33,300	\$ 237,100	\$ 575,300	\$ 845,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	SERVICE WATER SYSTEM	\$ 698,900	\$ 1,166,900	\$ 2,149,000	\$ 4,014,700
11.0	POTABLE WATER SYSTEM					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
11.1	PUMPS		\$ 30,000	\$ -	\$ 18,400	\$ 48,400
11.2	PIPING - MECHANICAL		\$ 99,500	\$ 181,900	\$ 448,200	\$ 729,600
11.3	TANKS		\$ -	\$ 8,500	\$ -	\$ 8,500
11.4	POTABLE WATER TANK & PUMP - FOUNDATIONS		\$ -	\$ 5,200	\$ 8,800	\$ 14,000
11.5	ELECTRICAL	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 129,500	\$ 195,600	\$ 475,400	\$ 800,500
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 6,500	\$ 49,900	\$ 173,300	\$ 229,700
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	POTABLE WATER SYSTEM	\$ 136,000	\$ 245,500	\$ 648,700	\$ 1,030,200
12.0	FGD SUBSTATION					
12.1	TRANSFORMERS		\$ 1,560,500	\$ -	\$ 273,100	\$ 1,833,600
12.2	TRANSFORMER PDC	15W X 45' X 10'H. SUBCONTRACT PRICE INCLUDES LABOR	\$ 202,500	\$ -	\$ -	\$ 202,500
12.3	TRANSFORMER PDC - FOUNDATION		\$ -	\$ 73,200	\$ 131,700	\$ 204,900
12.4	138KV MAIN FEEDER & TERMINATIONS		\$ 264,000	\$ -	\$ 254,000	\$ 518,000
12.5	SWITCHGEAR		\$ 914,200	\$ -	\$ 121,600	\$ 1,035,800
12.6	MCC	480V MCC, PER LINE UP	\$ 60,000	\$ -	\$ 3,600	\$ 63,600
12.7	CABLE BUS		\$ 181,100	\$ 18,000	\$ 290,200	\$ 489,300
12.8	PANELS - RELAY		\$ 100,000	\$ -	\$ 9,100	\$ 109,100
12.9	MIMIC PANELS		\$ 17,500	\$ -	\$ 4,500	\$ 22,000
12.10	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
12.11	GROUNDING		\$ 23,300	\$ -	\$ 59,100	\$ 82,400
12.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 26,000	\$ 30,000	\$ 29,500	\$ 85,500
12.13	OUTDOOR LIGHTING	NEW AUX YARD LIGHTING ALLOWANCE	\$ 25,000	\$ -	\$ 56,800	\$ 81,800
12.14	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 372,900	\$ 1,787,900	\$ 2,160,800
12.15	DUCT BANK		\$ -	\$ 26,200	\$ 54,300	\$ 80,500
12.16	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 500KCMIL- 15KV	\$ -	\$ 16,700	\$ 47,100	\$ 63,800

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
12.17	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 96,600	\$ 147,700	\$ 244,300
12.18	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 21,800	\$ 61,100	\$ 82,900
12.19	FOUNDATION FOR AUX TRANSFORMER		\$ -	\$ 70,200	\$ 183,600	\$ 253,800
12.20	FIREWALL FOR TRANSFORMERS		\$ -	\$ 4,300	\$ 7,600	\$ 11,900
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 3,482,400	\$ 729,900	\$ 3,546,900	\$ 7,759,200
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 174,100	\$ 186,100	\$ 1,282,979	\$ 1,643,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	FGD SUBSTATION	\$ 3,656,500	\$ 916,000	\$ 4,829,900	\$ 9,402,400
13.0	FGD DCS SYSTEM					
13.1	DCS	3200 I/O POINTS	\$ 2,400,000	\$ -	\$ 813,600	\$ 3,213,600
13.2	DCS - VENDOR FIELD SUPPORT	200 MAN DAYS @ \$1500/DAY - SHOWN AS SUBCONTRACT COST	\$ 300,000	\$ -	\$ -	\$ 300,000
13.3	LOCALLY MOUNTED INSTRUMENTS		\$ -	\$ 650,400	\$ 852,900	\$ 1,503,300
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 2,700,000	\$ 650,400	\$ 1,666,500	\$ 5,016,900
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 135,000	\$ 165,900	\$ 622,300	\$ 923,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	FGD DCS SYSTEM	\$ 2,835,000	\$ 816,300	\$ 2,288,800	\$ 5,940,100
14.0	CEM SYSTEM					
14.1	CEM SYSTEM	PROVIDED BY AEP	\$ 1,260,000	\$ 540,000	\$ 310,000	\$ 2,110,000
15.0	TRUCK & RAIL INFRASTRUCTURE					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
15.1	EXISTING RAILROAD IMPROVEMENTS	FOR FULL RAILCAR STORAGE TRACK IMPROVEMENTS - 3250 LF	\$ -	\$ 660,200	\$ 689,200	\$ 1,349,400
15.2	EXISTING RAILROAD IMPROVEMENTS	FOR LOOP TRACK UPGRADE - 5000 LF	\$ -	\$ 1,008,800	\$ 1,055,600	\$ 2,064,400
15.3	NEW RAILROAD TRACK	INCLUDES, 132LB RAIL, 7" TIMBERS, TIE PLATES, SPIKES, BOLTS, 12" SUB BALLAST, 12" BALLAST, 12 OZ/SY GEOTEXTILE MEMBRANE, 12" SUBGRADE PREP	\$ -	\$ 252,000	\$ 213,100	\$ 465,100
15.4	FIELD FABRICATED TURNOUTS	#8 TURNOUT	\$ -	\$ 90,000	\$ 54,800	\$ 144,800
15.5	RAIL SCALE	SUBCONTRACT COST, INCLUDES FOUNDATIONS	\$ 212,500	\$ -	\$ -	\$ 212,500
15.6	NEW CONCRETE ENCASEMENT	OVER AND AROUND DUCT BANK CONNECTING THE PLANT TO SWITCHYARD. THIS IS UNDER THE NEW TRACK WORK EXTENSION	\$ -	\$ 33,200	\$ 67,700	\$ 100,900
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 212,500	\$ 2,044,200	\$ 2,080,400	\$ 4,337,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 10,600	\$ 521,300	\$ 777,500	\$ 1,309,400
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	TRUCK & RAIL INFRASTRUCTURE	\$ 223,100	\$ 2,565,500	\$ 2,857,900	\$ 5,646,500
16.0	SITE IMPROVEMENTS - CIVIL WORK					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
16.1	SITE GRADING		\$ -	\$ -	\$ 555,200	\$ 555,200
16.2	ROADS & SURFACING		\$ -	\$ 1,204,900	\$ 1,667,500	\$ 2,872,400
16.3	NEW CONCRETE ENCASEMENT	16' X 4' X 40' - FOR EXISTING ASH PIPE HAUL ROAD CROSSING	\$ -	\$ 36,500	\$ 66,500	\$ 103,000
16.4	TRUCK SCALE & CONCRETE APPROACH		\$ 170,000	\$ 27,300	\$ 92,000	\$ 289,300
16.5	PROCESS WATER STORAGE BASIN		\$ 60,000	\$ 81,600	\$ 240,300	\$ 381,900
16.6	PROCESS WATER STORAGE BASIN PUMP STRUCTURE - CONCRETE		\$ -	\$ 47,000	\$ 105,400	\$ 152,400
16.7	STORM WATER DRAINAGE TRENCH	2' W X 3' DEEP CAST-IN-PLACE CONCRETE TRENCH W/REINFORCING & HS-20 RATED GRATE COVERS	\$ -	\$ 526,500	\$ 535,800	\$ 1,062,300
16.8	STORM WATER RUNOFF POND		\$ -	\$ 15,000	\$ 122,600	\$ 137,600
16.9	STORM WATER RUNOFF POND PUMP STRUCTURE - CONCRETE		\$ 90,000	\$ 42,300	\$ 182,200	\$ 314,500
16.10	OILY WATER SEWER		\$ 4,500	\$ 112,600	\$ 236,000	\$ 353,100
16.11	OIL SEPARATOR	500 GPM W/ INTEGRAL LIFT STATION	\$ 100,000	\$ -	\$ 116,100	\$ 216,100
16.12	SANITARY SEWER		\$ -	\$ 22,200	\$ 96,900	\$ 119,100
16.13	SANITARY LIFT STATION	PACKAGED TYPE COMPLETE WITH PUMPS, 100,000 GPD	\$ 150,000	\$ -	\$ 49,200	\$ 199,200
16.14	EROSION & SEDIMENT CONTROL		\$ -	\$ 12,400	\$ 20,400	\$ 32,800
16.15	CONSTRUCTION LAYDOWN AREA	ALLOWANCE FOR 10 ACRES, DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED	\$ -	\$ 700,000	\$ 828,000	\$ 1,528,000

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
16.16	CRAFT PARKING	DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED. ALLOWANCE FOR 20,000 SY INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	\$ -	\$ 180,000	\$ 414,200	\$ 594,200
16.17	CONTRACTOR OFFICES (AREA)	DOES NOT INCLUDE LAND ACQUISITION, IF REQUIRED. ALLOWANCE FOR 5,000 SY AREA (TRAILERS BY CONTRACTORS) INCLUDES: 6" BASE COURSE 10 OZ/SY GEOTEXTILE 12" SUBGRADE PREP	\$ -	\$ 45,000	\$ 103,600	\$ 148,600
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 574,500	\$ 3,053,300	\$ 5,431,900	\$ 9,059,700
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 28,700	\$ 778,600	\$ 1,954,200	\$ 2,761,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	SITE IMPROVEMENTS - CIVIL WORK	\$ 603,200	\$ 3,831,900	\$ 7,386,100	\$ 11,821,300
17.0	BOP ITEMS					
17.1	PIPE INSULATION		\$ -	\$ 34,000	\$ 106,000	\$ 140,000
17.2	HEAT TRACING		\$ -	\$ 175,600	\$ 248,500	\$ 424,100
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)		\$ -	\$ 170,900	\$ 655,800	\$ 826,700
17.4	HOISTS & TROLLEYS		\$ 150,000	\$ 175,000	\$ 204,400	\$ 529,400
17.5	MISC AUX STEEL FOR PIPE SUPPORTS		\$ -	\$ 122,500	\$ 510,600	\$ 633,100

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
17.6	MISC PIPE SUPPORT FOUNDATIONS		\$ -	\$ 10,500	\$ 19,600	\$ 30,100
17.7	EYE WASH STATIONS		\$ 30,000	\$ 5,000	\$ 30,700	\$ 65,700
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS		\$ -	\$ 300,000	\$ 245,300	\$ 545,300
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 180,000	\$ 993,500	\$ 2,020,900	\$ 3,194,400
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 9,000	\$ 253,343	\$ 776,879	\$ 1,039,221
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS	\$ 189,000	\$ 1,246,800	\$ 2,797,800	\$ 4,233,600
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE					
18.1	RELOCATE HYDROGEN STORAGE TANK		\$ -	\$ 15,600	\$ 86,800	\$ 102,400
18.2	NEW HYDROGEN LINE TO PLANT		\$ -	\$ 62,100	\$ 150,600	\$ 212,700
18.3	RELOCATE MISC. UNDERGROUND UTILITIES	ALLOWANCE	\$ -	\$ 125,000	\$ 170,500	\$ 295,500
18.4	OUTAGE TIE-IN DUCTWORK	ALLOWANCE FOR 85 TON DUCTWORK	\$ -	\$ 276,300	\$ 738,700	\$ 1,015,000
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ -	\$ 479,000	\$ 1,146,600	\$ 1,625,600
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ -	\$ 122,100	\$ 401,400	\$ 523,600
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE	\$ -	\$ 601,100	\$ 1,548,000	\$ 2,149,200
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30727B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
19.1	ARSENIC, ASBESTOS , LEAD ABATEMENT	ALLOWANCE PROVIDED BY AEP	\$ -	\$ -	\$ -	\$ 750,000
99.0	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 91,871,500	\$ 43,660,500	\$ 127,343,400	\$ 281,225,400
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 5,205,600	\$ 10,995,700	\$ 47,087,000	\$ 63,288,300
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST		\$ 97,077,100	\$ 54,656,200	\$ 174,430,400	\$ 344,513,700
	OVERALL PROJECT INDIRECT COSTS					
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES					\$ 25,000,000
	CONSTRUCTION MANAGEMENT					\$ 10,335,400
	S-U / COMMISSIONING					\$ 3,445,100
	CRAFT START-UP SUPPORT					\$ 1,500,500
	INITIAL FILLS					\$ 1,033,500
	OPERATOR & TRAINING MANUALS					\$ 300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)					\$ 400,000
	OWNERS COST	BY AEP				\$ -
	TOTAL PROJECT DIRECT AND INDIRECT COSTS					\$ 386,528,200
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT					\$ 1,262,000
	SPARE PARTS FOR THE OEM EQUIPMENT	0.80				\$ 782,440
	SPARE PARTS FOR THE BOP EQUIPMENT	0.50				\$ 479,560
	CONTINGENCY	14.6				\$ 56,485,500
	ESCALATION					\$ 33,591,600

Sargent & Lundy, LLC

AEP

Estimate No.: 30727B

BIG SANDY UNIT 2

Project No.: 12721-000

FGD PROJECT - NID BASE EST (N/ESP)-1B - 3.0 LB/MM BTU

Date: 9/10/2010

COST ESTIMATE SUMMARY

Preparer: MNO

Reviewer: JMK

Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	EQUIPMENT					\$ 10,130,900
	MATERIAL					\$ 3,922,500
	LABOR					\$ 15,745,600
	INDIRECTS					\$ 3,792,600
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP				
	TOTAL PROJECT COST					\$ 477,867,300
	REFERENCE COSTS:					
A	ESP DEMOLITION					\$ 832,300
B	REMOVE BOOSTER AIR FANS					\$ 111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-16
NID Summary Capital Cost Estimate No. 30722 Est-2A ESP in Service
(1.7 lb SO₂/MMbtu)

Sargent &	AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE COST ESTIMATE	Estimate No.: 30722B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS					
1.1	ID FANS - OEM EQUIPMENT	1,795,000 ACFM WITH 14,600 HP MOTORS (\$625,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	\$ 6,288,000	\$ -	\$ 1,594,700	\$ 7,882,700
1.2	PIPING & SUPPORTS - MECHANICAL		\$ 21,800	\$ 28,700	\$ 120,500	\$ 171,000
1.3	DAMPERS		\$ 553,500	\$ -	\$ 263,200	\$ 816,700
1.4	EXPANSION JOINTS		\$ -	\$ 131,100	\$ 116,500	\$ 247,600
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	\$ -	\$ 2,600,000	\$ 5,959,400	\$ 8,559,400
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 1,160,000	\$ 1,167,000	\$ 2,327,000
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	\$ -	\$ 200,000	\$ 258,500	\$ 458,500
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	\$ -	\$ 864,000	\$ 1,692,200	\$ 2,556,200
1.9	DUCT SUPPORT STEEL - FOUNDATIONS		\$ -	\$ 295,500	\$ 532,700	\$ 828,200

Sargent &	AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE COST ESTIMATE	Estimate No.: 30722B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT		\$ -	\$ 106,000	\$ 185,600	\$ 291,600
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS		\$ -	\$ 273,800	\$ 433,700	\$ 707,500
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	\$ -	\$ 3,937,500	\$ -	\$ 3,937,500
1.13	TRANSFORMERS		\$ 770,000	\$ -	\$ 145,600	\$ 915,600
1.14	SWITCHGEAR		\$ 1,082,000	\$ -	\$ 569,000	\$ 1,651,000
1.15	CABLE BUS & TERMINATIONS		\$ 756,300	\$ 35,800	\$ 1,316,200	\$ 2,108,300
1.16	MCC		\$ 120,000	\$ -	\$ 7,200	\$ 127,200
1.17	MIMIC PANELS		\$ 17,500	\$ -	\$ 4,500	\$ 22,000
1.18	EMERGENCY POWER SYSTEM		\$ 285,500	\$ -	\$ 38,900	\$ 324,400
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	\$ -	\$ 186,300	\$ 283,200	\$ 469,500
1.20	MEDIUM VOLTAGE POWER CABLE & TERMINATION	0.00	\$ -	\$ 91,600	\$ 393,700	\$ 485,300
1.21	LOW VOLTAGE POWER CABLE & TERMINATION	0.00	\$ -	\$ 543,000	\$ 794,800	\$ 1,337,800
1.22	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 345,000	\$ 2,818,200	\$ 3,163,200
1.23	GROUNDING		\$ 11,100	\$ -	\$ 37,200	\$ 48,300
1.24	LIGHTING/ TRANSFORMERS & PANELS		\$ 26,000	\$ 30,000	\$ 29,500	\$ 85,500
1.25	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 1,569,000	\$ 7,502,000	\$ 9,071,000
1.26	DUCT BANK		\$ -	\$ 40,800	\$ 280,000	\$ 320,800
1.27	FOUNDATION FOR TRANSFORMERS		\$ -	\$ 64,600	\$ 168,200	\$ 232,800
1.28	FIREWALL FOR TRANSFORMERS		\$ -	\$ 3,200	\$ 8,300	\$ 11,500
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 9,931,700	\$ 12,505,900	\$ 26,720,500	\$ 49,158,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 496,600	\$ 3,189,000	\$ 9,590,900	\$ 13,276,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ID FANS	\$ 10,428,300	\$ 15,694,900	\$ 36,311,400	\$ 62,434,600
2.0	NID MODULES					
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM	\$ 48,579,000	\$ -	\$ 41,533,400	\$ 90,112,400

Sargent &	AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE COST ESTIMATE	Estimate No.: 30722B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST	\$ 2,419,200	\$ -	\$ -	\$ 2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF	\$ 58,100	\$ 1,316,900	\$ 1,747,600	\$ 3,122,600
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH	\$ 92,200	\$ 2,428,900	\$ 2,544,900	\$ 5,066,000
2.5	PIPING & SUPPORTS - MECHANICAL		\$ 125,200	\$ 174,500	\$ 385,900	\$ 685,600
2.6	DUCTWORK		\$ -	\$ 6,175,000	\$ 14,153,600	\$ 20,328,600
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 2,755,000	\$ 2,771,700	\$ 5,526,700
2.8	DUCTWORK INSULATION & LAGGING		\$ -	\$ 2,040,000	\$ 3,995,500	\$ 6,035,500
2.9	NID MODULE- FOUNDATIONS		\$ -	\$ 1,087,000	\$ 1,682,500	\$ 2,769,500
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY		\$ -	\$ 1,152,000	\$ 2,863,700	\$ 4,015,700
2.11	GROUNDING		\$ -	\$ 16,000	\$ 46,100	\$ 62,100
2.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 156,000	\$ 150,000	\$ 159,100	\$ 465,100
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 51,429,700	\$ 17,295,300	\$ 71,884,000	\$ 140,609,000
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 3,246,500	\$ 4,410,300	\$ 27,019,200	\$ 34,675,900
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES	\$ 54,676,200	\$ 21,705,600	\$ 98,903,200	\$ 175,284,900
3.0	NEW STACK					
4.0	LIME HANDLING SYSTEM					
4.1	LIME STORAGE SILO		\$ 3,240,000	\$ -	\$ -	\$ 3,240,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTER, TWO FILTER SEPARATORS	\$ 350,000	\$ -	\$ 296,400	\$ 646,400

Sargent &	AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE COST ESTIMATE	Estimate No.: 30722B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 1,100,000	\$ -	\$ 654,200	\$ 1,754,200
4.4	PIPING - MECHANICAL		\$ 88,700	\$ 130,300	\$ 342,600	\$ 561,600
4.5	LIME STORAGE SILO ACCESS STAIR TOWER		\$ -	\$ 159,500	\$ 160,500	\$ 320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	\$ -	\$ 1,885,000	\$ 1,896,400	\$ 3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING	\$ -	\$ 42,700	\$ 79,300	\$ 122,000
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 69,600	\$ 130,200	\$ 199,800
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H	\$ 75,000	\$ 335,000	\$ 24,400	\$ 434,400
4.10	CONCRETE PIT FOR THE ELEVATOR		\$ -	\$ 2,300	\$ 6,900	\$ 9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS	\$ -	\$ 224,100	\$ 369,800	\$ 593,900
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS		\$ -	\$ 14,200	\$ 26,200	\$ 40,400
4.13	PIPE RACK - FOUNDATIONS		\$ -	\$ 239,600	\$ 519,100	\$ 758,700
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V,3PHASE, 3 WINDING XFMR	\$ 170,000	\$ -	\$ 54,600	\$ 224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	\$ 196,000	\$ -	\$ 104,700	\$ 300,700
4.16	CABLE BUS DUCT		\$ 134,700	\$ 10,800	\$ 200,200	\$ 345,700
4.17	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
4.18	MIMIC PANELS		\$ 17,500	\$ -	\$ 1,400	\$ 18,900
4.19	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
4.20	GROUNDING		\$ 13,300	\$ -	\$ 41,300	\$ 54,600
4.21	LIGHTING/ TRANSFORMERS & PANELS		\$ 52,000	\$ 135,000	\$ 104,500	\$ 291,500
4.22	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 296,400	\$ 1,429,900	\$ 1,726,300
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	\$ -	\$ 23,400	\$ 87,800	\$ 111,200

Sargent &	AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE COST ESTIMATE	Estimate No.: 30722B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
4.25	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 132,200	\$ 260,800	\$ 393,000
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 57,600	\$ 161,600	\$ 219,200
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	\$ -	\$ 61,100	\$ 152,100	\$ 213,200
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	\$ -	\$ 3,500	\$ 10,300	\$ 13,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 5,607,300	\$ 3,831,800	\$ 7,191,100	\$ 16,630,200
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 280,400	\$ 977,100	\$ 2,597,300	\$ 3,854,800
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM	\$ 5,887,700	\$ 4,808,900	\$ 9,788,400	\$ 20,485,000
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID				
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS					
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 1,767,000	\$ -	\$ 1,075,400	\$ 2,842,400
6.2	FLY ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, TWO PRESSURE EXHAUSTERS, TRANSFER STATION, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 2,285,000	\$ -	\$ 1,431,100	\$ 3,716,100

Sargent &	AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE COST ESTIMATE	Estimate No.: 30722B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.	\$ 28,000	\$ -	\$ 12,300	\$ 40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP	\$ 12,000	\$ -	\$ 4,600	\$ 16,600
6.5	PIPING - MECHANICAL		\$ 142,800	\$ 131,000	\$ 408,700	\$ 682,500
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 55' DIA X 61' H - 1670 TONS - SUBCONTRACT COST INCLUDES LABOR	\$ 795,000	\$ -	\$ -	\$ 795,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID	\$ -	\$ -	\$ -	\$ -
6.8	FLY ASH SILO	STEEL -STORAGE SILO, 12' DIA X 13' H, 25TONS	\$ 35,000	\$ 20,300	\$ 66,500	\$ 121,800
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS		\$ -	\$ 132,300	\$ 227,000	\$ 359,300
6.10	FLY ASH SILO - FOUNDATIONS		\$ -	\$ 9,500	\$ 21,100	\$ 30,600
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS		\$ -	\$ 97,600	\$ 161,900	\$ 259,500
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H	\$ 40,000	\$ 241,500	\$ 26,200	\$ 307,700
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 82,800	\$ 141,100	\$ 223,900
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	110' L X 30' W X 25' H	\$ 75,000	\$ 276,500	\$ 24,400	\$ 375,900
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	\$ -	\$ 300,000	\$ -	\$ 300,000
6.16	MCC	480V MCC PER LINE UP	\$ 120,000	\$ -	\$ 7,300	\$ 127,300
6.17	EMERGENBCY POWER SYSTEM		\$ 185,500	\$ -	\$ 40,000	\$ 225,500
6.18	LIGHTING/ TRANSFORMERS & PANELS		\$ 18,500	\$ 75,000	\$ 53,200	\$ 146,700
6.19	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 32,800	\$ 177,400	\$ 210,200
6.20	GROUNDING		\$ -	\$ 4,500	\$ 10,900	\$ 15,400
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 63,300	\$ 143,000	\$ 206,300
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 20,800	\$ 58,400	\$ 79,200

Sargent &	AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE COST ESTIMATE	Estimate No.: 30722B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	\$ -	\$ 6,200	\$ 10,600	\$ 16,800
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 5,503,800	\$ 1,503,600	\$ 4,149,000	\$ 11,156,400
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 275,200	\$ 383,400	\$ 1,543,200	\$ 2,201,800
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS	\$ 5,779,000	\$ 1,887,000	\$ 5,692,200	\$ 13,358,200
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID				
8.0	ACTIVATED CARBON INJECTION SYSTEM					
9.0	COMPRESSED AIR SYSTEM					
10.0	SERVICE WATER SYSTEM					
11.0	POTABLE WATER SYSTEM					
12.0	FGD SUBSTATION					
13.0	FGD DCS SYSTEM					
14.0	CEM SYSTEM					
15.0	TRUCK & RAIL INFRASTRUCTURE					
16.0	SITE IMPROVEMENTS - CIVIL WORK					
17.0	BOP ITEMS					

Sargent &	AEP	Estimate No.:	30722B
	BIG SANDY UNIT 2	Project No.:	12721-000
	FGD PROJECT - NID BASE	Date:	9/10/2010
	COST ESTIMATE	Preparer:	MNO
		Reviewer:	JMK
		Approver:	PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE					
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT					
99.0	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 85,790,100	\$ 46,282,100	\$ 131,423,900	\$ 281,846,100
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 4,901,500	\$ 11,664,200	\$ 48,507,600	\$ 65,073,300
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST		\$ 90,691,600	\$ 57,946,300	\$ 179,931,500	\$ 346,919,400
	OVERALL PROJECT INDIRECT COSTS					
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES					\$ 25,000,000
	CONSTRUCTION MANAGEMENT					\$ 10,407,600
	S-U / COMMISSIONING					\$ 3,469,200
	CRAFT START-UP SUPPORT					\$ 1,548,600
	INITIAL FILLS					\$ 1,040,800
	OPERATOR & TRAINING MANUALS					\$ 300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)					\$ 400,000
	OWNERS COST	BY AEP				\$ -
	TOTAL PROJECT DIRECT AND INDIRECT COSTS					\$ 389,085,600
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT					\$ 1,179,000
	SPARE PARTS FOR THE OEM EQUIPMENT	0.80				\$ 730,980
	SPARE PARTS FOR THE BOP EQUIPMENT	0.50				\$ 448,020

Sargent &		AEP BIG SANDY UNIT 2 FGD PROJECT - NID BASE COST ESTIMATE			Estimate No.: 30722B Project No.: 12721-000 Date: 9/10/2010 Preparer: MNO Reviewer: JMK Approver: PEF	
Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	CONTINGENCY	14.8				\$ 57,861,200
	ESCALATION					\$ 33,671,700
	EQUIPMENT					\$ 9,464,500
	MATERIAL					\$ 4,158,700
	LABOR					\$ 16,242,200
	INDIRECTS					\$ 3,806,300
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP				
	TOTAL PROJECT COST					\$ 481,797,500
	REFERENCE COSTS:					
A	ESP DEMOLITION					\$ 832,300
B	REMOVE BOOSTER AIR FANS					\$ 111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-17
NID Summary Capital Cost Estimate No. 30726 Est-2B ESP not in Service
(1.7 lb SO₂/MMbtu)

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30726B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS					
2.0	NID MODULES					
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS / COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	\$ 49,600,000	\$ -	\$ 42,054,700	\$ 91,654,700
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	\$ 2,419,200	\$ -	\$ -	\$ 2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF	\$ 58,100	\$ 1,316,900	\$ 1,747,600	\$ 3,122,600
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH	\$ 92,200	\$ 2,428,900	\$ 2,544,900	\$ 5,066,000
2.5	PIPING & SUPPORTS - MECHANICAL		\$ 125,200	\$ 174,500	\$ 385,900	\$ 685,600
2.6	DUCTWORK		\$ -	\$ 4,797,000	\$ 10,995,100	\$ 15,792,100
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 2,140,200	\$ 2,153,200	\$ 4,293,400
2.8	DUCTWORK INSULATION & LAGGING		\$ -	\$ 1,632,000	\$ 3,196,400	\$ 4,828,400
2.9	NID MODULE- FOUNDATIONS		\$ -	\$ 1,087,000	\$ 1,682,500	\$ 2,769,500
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY		\$ -	\$ 1,152,000	\$ 2,863,700	\$ 4,015,700
2.11	GROUNDING		\$ -	\$ 16,000	\$ 46,100	\$ 62,100
2.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 156,000	\$ 150,000	\$ 159,100	\$ 465,100
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30726B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 52,450,700	\$ 14,894,500	\$ 67,829,200	\$ 135,174,400
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 3,297,500	\$ 3,798,100	\$ 25,607,400	\$ 32,703,000
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES	\$ 55,748,200	\$ 18,692,600	\$ 93,436,600	\$ 167,877,400
3.0	NEW STACK					
4.0	LIME HANDLING SYSTEM					
4.1	LIME STORAGE SILO		\$ 3,112,400	\$ -	\$ -	\$ 3,112,400
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 350,000	\$ -	\$ 296,400	\$ 646,400
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 1,100,000	\$ -	\$ 654,200	\$ 1,754,200
4.4	PIPING - MECHANICAL		\$ 88,700	\$ 130,300	\$ 342,600	\$ 561,600
4.5	LIME STORAGE SILO ACCESS STAIR TOWER		\$ -	\$ 159,500	\$ 160,500	\$ 320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	\$ -	\$ 1,885,000	\$ 1,896,400	\$ 3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING	\$ -	\$ 42,700	\$ 79,300	\$ 122,000
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 69,600	\$ 130,200	\$ 199,800
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H	\$ 75,000	\$ 335,000	\$ 24,400	\$ 434,400
4.10	CONCRETE PIT FOR THE ELEVATOR		\$ -	\$ 2,300	\$ 6,900	\$ 9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS	\$ -	\$ 224,100	\$ 369,800	\$ 593,900

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30726B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS		\$ -	\$ 14,200	\$ 26,200	\$ 40,400
4.13	PIPE RACK - FOUNDATIONS		\$ -	\$ 239,600	\$ 519,100	\$ 758,700
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V, 3PHASE, 3 WINDING XFMR	\$ 170,000	\$ -	\$ 54,600	\$ 224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	\$ 196,000	\$ -	\$ 104,700	\$ 300,700
4.16	CABLE BUS DUCT		\$ 134,700	\$ 10,800	\$ 200,200	\$ 345,700
4.17	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
4.18	MIMIC PANELS		\$ 17,500	\$ -	\$ 1,400	\$ 18,900
4.19	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
4.20	GROUNDING		\$ 13,300	\$ -	\$ 41,300	\$ 54,600
4.21	LIGHTING/ TRANSFORMERS & PANELS		\$ 52,000	\$ 135,000	\$ 104,500	\$ 291,500
4.22	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 296,400	\$ 1,429,900	\$ 1,726,300
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	\$ -	\$ 23,400	\$ 87,800	\$ 111,200
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
4.25	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 132,200	\$ 260,800	\$ 393,000
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 57,600	\$ 161,600	\$ 219,200
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	\$ -	\$ 61,100	\$ 152,100	\$ 213,200
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	\$ -	\$ 3,500	\$ 10,300	\$ 13,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 5,479,700	\$ 3,831,800	\$ 7,191,100	\$ 16,502,600
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 274,000	\$ 977,100	\$ 2,597,300	\$ 3,848,400
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM	\$ 5,753,700	\$ 4,808,900	\$ 9,788,400	\$ 20,351,000
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID				

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30726B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS					
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 2,386,000	\$ -	\$ 1,451,600	\$ 3,837,600
6.2	ECONOMIZER ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES JET PUMPS AND PIPING / SUPPORTS TO THE BOTTOM ASH POND	\$ 400,000	\$ -	\$ 296,400	\$ 696,400
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.	\$ 28,000	\$ -	\$ 12,300	\$ 40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP	\$ 12,000	\$ -	\$ 4,600	\$ 16,600
6.5	PIPING - MECHANICAL		\$ 142,800	\$ 131,000	\$ 408,700	\$ 682,500
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 55' DIA X 129' H - 4075 TONS - SUBCONTRACT COST INCLUDES LABOR	\$ 1,834,000	\$ -	\$ -	\$ 1,834,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID	\$ -	\$ -	\$ -	\$ -
6.8	FLY ASH SILO	NOT REQUIRED - ECONOMIZER FLY ASH SLUICED TO BOTTOM ASH POND	\$ -	\$ -	\$ -	\$ -
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS		\$ -	\$ 132,300	\$ 227,000	\$ 359,300
6.10	FLY ASH SILO - FOUNDATIONS	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS		\$ -	\$ 97,600	\$ 161,900	\$ 259,500
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H	\$ 40,000	\$ 241,500	\$ 26,200	\$ 307,700

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30726B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	\$ -	\$ 300,000	\$ -	\$ 300,000
6.16	MCC	480V MCC PER LINE UP	\$ 120,000	\$ -	\$ 7,300	\$ 127,300
6.17	EMERGENBCY POWER SYSTEM		\$ 185,500	\$ -	\$ 40,000	\$ 225,500
6.18	LIGHTING/ TRANSFORMERS & PANELS		\$ 18,500	\$ 75,000	\$ 53,200	\$ 146,700
6.19	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 32,800	\$ 177,400	\$ 210,200
6.20	GROUNDING		\$ -	\$ 4,500	\$ 10,900	\$ 15,400
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 63,300	\$ 143,000	\$ 206,300
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 20,800	\$ 58,400	\$ 79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	\$ -	\$ 6,200	\$ 10,600	\$ 16,800
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 5,166,800	\$ 1,114,500	\$ 3,137,400	\$ 9,418,700
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 258,300	\$ 284,200	\$ 1,163,800	\$ 1,706,400
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS	\$ 5,425,100	\$ 1,398,700	\$ 4,301,200	\$ 11,125,100
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID				
8.0	ACTIVATED CARBON INJECTION SYSTEM					
9.0	COMPRESSED AIR SYSTEM					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30726B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
10.0	SERVICE WATER SYSTEM					
11.0	POTABLE WATER SYSTEM					
12.0	FGD SUBSTATION					
13.0	FGD DCS SYSTEM					
14.0	CEM SYSTEM					
15.0	TRUCK & RAIL INFRASTRUCTURE					
16.0	SITE IMPROVEMENTS - CIVIL WORK					
17.0	BOP ITEMS					
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE					
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT					
99.0	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 86,978,500	\$ 43,486,400	\$ 126,415,300	\$ 275,230,200
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 4,960,900	\$ 10,951,300	\$ 46,737,600	\$ 62,649,900
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST		\$ 91,939,400	\$ 54,437,700	\$ 173,152,900	\$ 337,880,100
	OVERALL PROJECT INDIRECT COSTS					
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES					\$ 25,000,000
	CONSTRUCTION MANAGEMENT					\$ 10,113,900

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-2B - 1.7 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30726B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	S-U / COMMISSIONING					\$ 3,371,300
	CRAFT START-UP SUPPORT					\$ 1,489,500
	INITIAL FILLS					\$ 1,011,400
	OPERATOR & TRAINING MANUALS					\$ 300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)					\$ 400,000
	OWNERS COST	BY AEP				\$ -
	TOTAL PROJECT DIRECT AND INDIRECT COSTS					\$ 378,816,200
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT					\$ 1,195,200
	SPARE PARTS FOR THE OEM EQUIPMENT	0.80				\$ 741,024
	SPARE PARTS FOR THE BOP EQUIPMENT	0.50				\$ 454,176
	CONTINGENCY	14.8				\$ 56,146,800
	ESCALATION					\$ 32,894,800
	EQUIPMENT					\$ 9,594,700
	MATERIAL					\$ 3,906,900
	LABOR					\$ 15,630,300
	INDIRECTS					\$ 3,762,900
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP				
	TOTAL PROJECT COST					\$ 469,053,000
	REFERENCE COSTS:					
A	ESP DEMOLITION					\$ 832,300
B	REMOVE BOOSTER AIR FANS					\$ 111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-18
NID Summary Capital Cost Estimate No. 30724 Est-3A ESP in Service
(4.5 lb SO₂/MMbtu)

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS					
1.1	ID FANS - OEM EQUIPMENT	1,795,000 ACFM WITH 14,600 HP MOTORS (\$625,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	\$ 6,288,000	\$ -	\$ 1,594,700	\$ 7,882,700
1.2	PIPING & SUPPORTS - MECHANICAL		\$ 21,800	\$ 28,700	\$ 120,500	\$ 171,000
1.3	DAMPERS		\$ 553,500	\$ -	\$ 263,200	\$ 816,700
1.4	EXPANSION JOINTS		\$ -	\$ 131,100	\$ 116,500	\$ 247,600
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	\$ -	\$ 2,600,000	\$ 5,959,400	\$ 8,559,400
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 1,160,000	\$ 1,167,000	\$ 2,327,000
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	\$ -	\$ 200,000	\$ 258,500	\$ 458,500
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	\$ -	\$ 864,000	\$ 1,692,200	\$ 2,556,200
1.9	DUCT SUPPORT STEEL - FOUNDATIONS		\$ -	\$ 295,500	\$ 532,700	\$ 828,200

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT		\$ -	\$ 106,000	\$ 185,600	\$ 291,600
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS		\$ -	\$ 273,800	\$ 433,700	\$ 707,500
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	\$ -	\$ 3,937,500	\$ -	\$ 3,937,500
1.13	TRANSFORMERS		\$ 770,000	\$ -	\$ 145,600	\$ 915,600
1.14	SWITCHGEAR		\$ 1,082,000	\$ -	\$ 569,000	\$ 1,651,000
1.15	CABLE BUS & TERMINATIONS		\$ 756,300	\$ 35,800	\$ 1,316,200	\$ 2,108,300
1.16	MCC		\$ 120,000	\$ -	\$ 7,200	\$ 127,200
1.17	MIMIC PANELS		\$ 17,500	\$ -	\$ 4,500	\$ 22,000
1.18	EMERGENCY POWER SYSTEM		\$ 285,500	\$ -	\$ 38,900	\$ 324,400
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	\$ -	\$ 186,300	\$ 283,200	\$ 469,500
1.20	MEDIUM VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 91,600	\$ 393,700	\$ 485,300
1.21	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 543,000	\$ 794,800	\$ 1,337,800
1.22	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 345,000	\$ 2,818,200	\$ 3,163,200
1.23	GROUNDING		\$ 11,100	\$ -	\$ 37,200	\$ 48,300
1.24	LIGHTING/ TRANSFORMERS & PANELS		\$ 26,000	\$ 30,000	\$ 29,500	\$ 85,500
1.25	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 1,569,000	\$ 7,502,000	\$ 9,071,000
1.26	DUCT BANK		\$ -	\$ 40,800	\$ 280,000	\$ 320,800
1.27	FOUNDATION FOR TRANSFORMERS		\$ -	\$ 64,600	\$ 167,000	\$ 231,600
1.28	FIREWALL FOR TRANSFORMERS		\$ -	\$ 3,200	\$ 8,200	\$ 11,400
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 9,931,700	\$ 12,505,900	\$ 26,719,200	\$ 49,156,800
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 496,600	\$ 3,189,000	\$ 9,590,600	\$ 13,276,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ID FANS	\$ 10,428,300	\$ 15,694,900	\$ 36,309,800	\$ 62,433,000
2.0	NID MODULES					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS/COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	\$ 53,053,000	\$ -	\$ 43,792,000	\$ 96,845,000
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	\$ 2,419,200	\$ -	\$ -	\$ 2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF	\$ 58,100	\$ 1,316,900	\$ 1,747,600	\$ 3,122,600
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH	\$ 92,200	\$ 2,359,600	\$ 2,474,700	\$ 4,926,500
2.5	PIPING & SUPPORTS - MECHANICAL		\$ 125,200	\$ 174,500	\$ 385,900	\$ 685,600
2.6	DUCTWORK		\$ -	\$ 6,175,000	\$ 14,153,600	\$ 20,328,600
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 2,755,000	\$ 2,711,400	\$ 5,466,400
2.8	DUCTWORK INSULATION & LAGGING		\$ -	\$ 2,040,000	\$ 3,995,500	\$ 6,035,500
2.9	NID MODULE- FOUNDATIONS		\$ -	\$ 1,109,900	\$ 1,712,800	\$ 2,822,700
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY		\$ -	\$ 1,152,000	\$ 2,863,700	\$ 4,015,700
2.11	GROUNDING		\$ -	\$ 16,000	\$ 46,100	\$ 62,100
2.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 156,000	\$ 150,000	\$ 159,100	\$ 465,100
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 55,903,700	\$ 17,248,900	\$ 74,042,400	\$ 147,195,000

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 3,470,200	\$ 4,398,500	\$ 27,836,800	\$ 35,705,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES	\$ 59,373,900	\$ 21,647,400	\$ 101,879,200	\$ 182,900,500
3.0	NEW STACK					
4.0	LIME HANDLING SYSTEM					
4.1	LIME STORAGE SILO		\$ 8,952,000	\$ -	\$ -	\$ 8,952,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTER, TWO FILTER SEPARATORS	\$ 1,100,000	\$ -	\$ 592,900	\$ 1,692,900
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 2,866,000	\$ -	\$ 1,564,000	\$ 4,430,000
4.4	PIPING - MECHANICAL		\$ 88,700	\$ 130,300	\$ 342,600	\$ 561,600
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	\$ -	\$ 159,500	\$ 160,500	\$ 320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	\$ -	\$ 1,885,000	\$ 1,896,400	\$ 3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING	\$ -	\$ 42,700	\$ 79,300	\$ 122,000
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 69,600	\$ 130,200	\$ 199,800
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H	\$ 75,000	\$ 335,000	\$ 24,400	\$ 434,400
4.10	CONCRETE PIT FOR THE ELEVATOR		0.00	2300.00	6900.00	9200.00

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS	\$ -	\$ 560,700	\$ 917,900	\$ 1,478,600
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS		\$ -	\$ 14,200	\$ 26,200	\$ 40,400
4.13	PIPE RACK - FOUNDATIONS		\$ -	\$ 239,600	\$ 519,100	\$ 758,700
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V, 3PHASE, 3 WINDING XFMR	\$ 170,000	\$ -	\$ 54,600	\$ 224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	\$ 196,000	\$ -	\$ 104,700	\$ 300,700
4.16	CABLE BUS DUCT		\$ 134,700	\$ 10,800	\$ 200,200	\$ 345,700
4.17	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
4.18	MIMIC PANELS		\$ 17,500	\$ -	\$ 1,400	\$ 18,900
4.19	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
4.20	GROUNDING		\$ 13,300	\$ -	\$ 41,300	\$ 54,600
4.21	LIGHTING/ TRANSFORMERS & PANELS		\$ 52,000	\$ 135,000	\$ 104,500	\$ 291,500
4.22	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 296,400	\$ 1,429,900	\$ 1,726,300
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	\$ -	\$ 23,400	\$ 87,800	\$ 111,200
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
4.25	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 132,200	\$ 260,800	\$ 393,000
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 57,600	\$ 161,600	\$ 219,200
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	\$ -	\$ 61,100	\$ 152,100	\$ 213,200
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	\$ -	\$ 3,500	\$ 10,200	\$ 13,700
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 13,835,300	\$ 4,168,400	\$ 8,945,400	\$ 26,949,100

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 691,800	\$ 1,062,900	\$ 3,260,600	\$ 5,015,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM	\$ 14,527,100	\$ 5,231,300	\$ 12,206,000	\$ 31,964,400
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID				
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS					
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT		\$ 2,386,000	\$ -	\$ 1,451,600	\$ 3,837,600
6.2	FLY ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, TWO PRESSURE EXHAUSTERS, TRANSFER STATION, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 2,285,000	\$ -	\$ 1,431,100	\$ 3,716,100
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.	\$ 28,000	\$ -	\$ 12,300	\$ 40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP	\$ 12,000	\$ -	\$ 4,600	\$ 16,600
6.5	PIPING - MECHANICAL		\$ 142,800	\$ 131,000	\$ 408,700	\$ 682,500
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 65' DIA X 110' H - 4644 TONS - SUBCONTRACT COST INCLUDES LABOR	\$ 2,090,000	\$ -	\$ -	\$ 2,090,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID	\$ -	\$ -	\$ -	\$ -
6.8	FLY ASH SILO	STEEL -STORAGE SILO, 18' DIA X 19' H, 69 TONS	\$ 55,000	\$ 29,000	\$ 80,500	\$ 164,500
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS		\$ -	\$ 188,700	\$ 317,300	\$ 506,000
6.10	FLY ASH SILO - FOUNDATIONS		\$ -	\$ 16,200	\$ 34,100	\$ 50,300

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS		\$ -	\$ 97,600	\$ 161,900	\$ 259,500
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H	\$ 40,000	\$ 241,500	\$ 25,600	\$ 307,100
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 82,800	\$ 139,700	\$ 222,500
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	110' L X 30' W X 25' H	\$ 75,000	\$ 276,500	\$ 23,800	\$ 375,300
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	\$ -	\$ 300,000	\$ -	\$ 300,000
6.16	MCC	480V MCC PER LINE UP	\$ 120,000	\$ -	\$ 7,300	\$ 127,300
6.17	EMERGENBCY POWER SYSTEM		\$ 185,500	\$ -	\$ 40,000	\$ 225,500
6.18	LIGHTING/ TRANSFORMERS & PANELS		\$ 18,500	\$ 75,000	\$ 53,200	\$ 146,700
6.19	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 32,800	\$ 177,400	\$ 210,200
6.20	GROUNDING		\$ -	\$ 4,500	\$ 10,900	\$ 15,400
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 63,300	\$ 143,000	\$ 206,300
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 20,800	\$ 58,400	\$ 79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	\$ -	\$ 6,200	\$ 10,600	\$ 16,800
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 7,437,800	\$ 1,575,400	\$ 4,639,900	\$ 13,653,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 371,900	\$ 401,700	\$ 1,728,000	\$ 2,501,700
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS	\$ 7,809,700	\$ 1,977,100	\$ 6,367,900	\$ 16,154,800
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID				
8.0	ACTIVATED CARBON INJECTION SYSTEM					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
9.0	COMPRESSED AIR SYSTEM					
10.0	SERVICE WATER SYSTEM					
11.0	POTABLE WATER SYSTEM					
12.0	FGD SUBSTATION					
13.0	FGD DCS SYSTEM					
14.0	CEM SYSTEM					
15.0	TRUCK & RAIL INFRASTRUCTURE					
16.0	SITE IMPROVEMENTS - CIVIL WORK					
17.0	BOP ITEMS					
17.1	PIPE INSULATION	AVERAGE 6" PIPE SIZE	\$ -	\$ 34,000	\$ 106,000	\$ 140,000
17.2	HEAT TRACING		\$ -	\$ 175,600	\$ 248,500	\$ 424,100
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)		\$ -	\$ 175,900	\$ 674,900	\$ 850,800
17.4	HOISTS & TROLLEYS		\$ 150,000	\$ 175,000	\$ 204,400	\$ 529,400
17.5	MISC AUX STEEL FOR PIPE SUPPORTS	FIELD FABRICATED	\$ -	\$ 122,500	\$ 499,500	\$ 622,000
17.6	MISC PIPE SUPPORT FOUNDATIONS		\$ -	\$ 10,500	\$ 19,500	\$ 30,000
17.7	EYE WASH STATIONS	WITH 50 KW HEATERS	\$ 30,000	\$ 5,000	\$ 30,700	\$ 65,700
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS	STAND PIPE FOR BUILDINGS	\$ -	\$ 300,000	\$ 245,300	\$ 545,300
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 180,000	\$ 998,500	\$ 2,028,800	\$ 3,207,300
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 9,000	\$ 254,618	\$ 782,686	\$ 1,046,304

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS	\$ 189,000	\$ 1,253,100	\$ 2,811,500	\$ 4,253,600
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE					
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT					
99.0	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 100,426,100	\$ 46,643,300	\$ 135,807,800	\$ 301,227,200
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 5,633,300	\$ 11,756,300	\$ 50,169,000	\$ 67,558,600
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST		\$ 106,059,400	\$ 58,399,600	\$ 185,976,800	\$ 368,785,800
	OVERALL PROJECT INDIRECT COSTS					
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES					\$ 25,000,000
	CONSTRUCTION MANAGEMENT					\$ 11,041,100
	S-U / COMMISSIONING					\$ 3,680,400
	CRAFT START-UP SUPPORT					\$ 1,600,200
	INITIAL FILLS					\$ 1,104,100
	OPERATOR & TRAINING MANUALS					\$ 300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)					\$ 400,000
	OWNERS COST	BY AEP				\$ -
	TOTAL PROJECT DIRECT AND INDIRECT COSTS					\$ 411,161,600
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT					\$ 1,378,800
	SPARE PARTS FOR THE OEM EQUIPMENT	0.80				\$ 854,856

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP)-3A - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30724B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	SPARE PARTS FOR THE BOP EQUIPMENT	0.50				\$ 523,944
	CONTINGENCY	14.7				\$ 60,595,200
	ESCALATION					\$ 35,940,300
	EQUIPMENT					\$ 11,068,300
	MATERIAL					\$ 4,191,200
	LABOR					\$ 16,787,900
	INDIRECTS					\$ 3,892,900
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP				
	TOTAL PROJECT COST					\$ 509,075,900
	REFERENCE COSTS:					
A	ESP DEMOLITION					\$ 832,300
B	REMOVE BOOSTER AIR FANS					\$ 111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-19
NID Summary Capital Cost Estimate No. 30728 Est-3B ESP not in Service
(4.5 lb SO₂/MMbtu)

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30728B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS					
2.0	NID MODULES					
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS / COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	\$ 53,973,000	\$ -	\$ 44,242,300	\$ 98,215,300
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	\$ 2,419,200	\$ -	\$ -	\$ 2,419,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 25600 SF	\$ 58,100	\$ 1,316,900	\$ 1,747,600	\$ 3,122,600
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH	\$ 92,200	\$ 2,428,900	\$ 2,544,900	\$ 5,066,000
2.5	PIPING & SUPPORTS - MECHANICAL		\$ 125,200	\$ 174,500	\$ 385,900	\$ 685,600
2.6	DUCTWORK		\$ -	\$ 4,797,000	\$ 10,995,100	\$ 15,792,100
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 2,140,200	\$ 2,153,200	\$ 4,293,400
2.8	DUCTWORK INSULATION & LAGGING		\$ -	\$ 1,632,000	\$ 3,196,400	\$ 4,828,400
2.9	NID MODULE- FOUNDATIONS		\$ -	\$ 1,087,000	\$ 1,682,500	\$ 2,769,500
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY		\$ -	\$ 1,152,000	\$ 2,863,700	\$ 4,015,700
2.11	GROUNDING		\$ -	\$ 16,000	\$ 46,100	\$ 62,100
2.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 156,000	\$ 150,000	\$ 159,100	\$ 465,100

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30728B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 56,823,700	\$ 14,894,500	\$ 70,016,800	\$ 141,735,000
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 3,516,200	\$ 3,798,100	\$ 26,421,500	\$ 33,735,800
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES	\$ 60,339,900	\$ 18,692,600	\$ 96,438,300	\$ 175,470,800
3.0	NEW STACK	PROVIDED BY AEP	\$ -	\$ -	\$ -	\$ -
4.0	LIME HANDLING SYSTEM					
4.1	LIME STORAGE SILO		\$ 8,698,000	\$ -	\$ -	\$ 8,698,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 1,100,000	\$ -	\$ 592,900	\$ 1,692,900
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 2,866,000	\$ -	\$ 1,564,000	\$ 4,430,000
4.4	PIPING - MECHANICAL		\$ 88,700	\$ 130,300	\$ 342,600	\$ 561,600
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	\$ -	\$ 159,500	\$ 160,500	\$ 320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	\$ -	\$ 1,885,000	\$ 1,896,400	\$ 3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING	\$ -	\$ 42,700	\$ 79,300	\$ 122,000
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 69,600	\$ 130,200	\$ 199,800
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H	\$ 75,000	\$ 335,000	\$ 24,400	\$ 434,400

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30728B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.10	CONCRETE PIT FOR THE ELEVATOR		\$ -	\$ 2,300	\$ 6,900	\$ 9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS	\$ -	\$ 560,700	\$ 917,900	\$ 1,478,600
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS		\$ -	\$ 14,200	\$ 26,200	\$ 40,400
4.13	PIPE RACK - FOUNDATIONS		\$ -	\$ 239,600	\$ 519,100	\$ 758,700
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V, 3PHASE, 3 WINDING XFMR	\$ 170,000	\$ -	\$ 54,600	\$ 224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	\$ 196,000	\$ -	\$ 104,700	\$ 300,700
4.16	CABLE BUS DUCT		\$ 134,700	\$ 10,800	\$ 200,200	\$ 345,700
4.17	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
4.18	MIMIC PANELS		\$ 17,500	\$ -	\$ 1,400	\$ 18,900
4.19	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
4.20	GROUNDING		\$ 13,300	\$ -	\$ 41,300	\$ 54,600
4.21	LIGHTING/ TRANSFORMERS & PANELS		\$ 52,000	\$ 135,000	\$ 104,500	\$ 291,500
4.22	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 296,400	\$ 1,429,900	\$ 1,726,300
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	\$ -	\$ 23,400	\$ 87,800	\$ 111,200
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
4.25	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 132,200	\$ 260,800	\$ 393,000
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 57,600	\$ 161,600	\$ 219,200
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	\$ -	\$ 61,100	\$ 152,100	\$ 213,200
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	\$ -	\$ 3,500	\$ 10,300	\$ 13,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 13,581,300	\$ 4,168,400	\$ 8,945,500	\$ 26,695,200
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 679,100	\$ 1,062,900	\$ 3,260,600	\$ 5,002,600

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30728B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM	\$ 14,260,400	\$ 5,231,300	\$ 12,206,100	\$ 31,697,800
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID				
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS					
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT		\$ 2,900,000	\$ -	\$ 1,615,100	\$ 4,515,100
6.2	ECONOMIZER ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES JET PUMPS AND PIPING / SUPPORTS TO THE BOTTOM ASH POND	\$ 400,000	\$ -	\$ 296,400	\$ 696,400
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.	\$ 28,000	\$ -	\$ 12,300	\$ 40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP	\$ 12,000	\$ -	\$ 4,600	\$ 16,600
6.5	PIPING - MECHANICAL		\$ 142,800	\$ 131,000	\$ 408,700	\$ 682,500
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 65' DIA X 151' H - 6652 TONS - SUBCONTRACT COST INCLUDES LABOR	\$ 2,994,000	\$ -	\$ -	\$ 2,994,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID	\$ -	\$ -	\$ -	\$ -
6.8	FLY ASH SILO	NOT REQUIRED - ECONOMIZER FLY ASH SLUICED TO BOTTOM ASH POND	\$ -	\$ -	\$ -	\$ -
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS		\$ -	\$ 188,700	\$ 317,300	\$ 506,000
6.10	FLY ASH SILO - FOUNDATIONS	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS		\$ -	\$ 97,600	\$ 161,900	\$ 259,500
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H	\$ 40,000	\$ 241,500	\$ 26,200	\$ 307,700

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30728B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	\$ -	\$ 300,000	\$ -	\$ 300,000
6.16	MCC	480V MCC PER LINE UP	\$ 120,000	\$ -	\$ 7,300	\$ 127,300
6.17	EMERGENBCY POWER SYSTEM		\$ 185,500	\$ -	\$ 40,000	\$ 225,500
6.18	LIGHTING/ TRANSFORMERS & PANELS		\$ 18,500	\$ 75,000	\$ 53,200	\$ 146,700
6.19	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 32,800	\$ 177,400	\$ 210,200
6.20	GROUNDING		\$ -	\$ 4,500	\$ 10,900	\$ 15,400
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 63,300	\$ 143,000	\$ 206,300
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 20,800	\$ 58,400	\$ 79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	\$ -	\$ 6,200	\$ 10,600	\$ 16,800
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 6,840,800	\$ 1,170,900	\$ 3,391,200	\$ 11,402,900
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 342,000	\$ 298,600	\$ 1,259,500	\$ 1,900,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS	\$ 7,182,800	\$ 1,469,500	\$ 4,650,700	\$ 13,303,100
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID				
8.0	ACTIVATED CARBON INJECTION SYSTEM					
9.0	COMPRESSED AIR SYSTEM					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30728B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
10.0	SERVICE WATER SYSTEM					
11.0	POTABLE WATER SYSTEM					
12.0	FGD SUBSTATION					
13.0	FGD DCS SYSTEM					
14.0	CEM SYSTEM					
15.0	TRUCK & RAIL INFRASTRUCTURE					
16.0	SITE IMPROVEMENTS - CIVIL WORK					
17.0	BOP ITEMS					
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE					
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT					
99.0	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 101,127,100	\$ 43,879,400	\$ 130,611,100	\$ 293,967,600
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 5,668,400	\$ 11,051,500	\$ 48,310,800	\$ 65,030,700
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST		\$ 106,795,500	\$ 54,930,900	\$ 178,921,900	\$ 358,998,300
	OVERALL PROJECT INDIRECT COSTS					
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES					\$ 25,000,000
	CONSTRUCTION MANAGEMENT					\$ 10,769,900

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-3B - 4.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30728B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	S-U / COMMISSIONING					\$ 3,590,000
	CRAFT START-UP SUPPORT					\$ 1,539,000
	INITIAL FILLS					\$ 1,077,000
	OPERATOR & TRAINING MANUALS					\$ 300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)					\$ 400,000
	OWNERS COST	BY AEP				\$ -
	TOTAL PROJECT DIRECT AND INDIRECT COSTS					\$ 401,674,200
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT					\$ 1,388,300
	SPARE PARTS FOR THE OEM EQUIPMENT	0.80				\$ 860,746
	SPARE PARTS FOR THE BOP EQUIPMENT	0.50				\$ 527,554
	CONTINGENCY	14.5				\$ 58,316,600
	ESCALATION					\$ 35,090,700
	EQUIPMENT					\$ 11,145,100
	MATERIAL					\$ 3,942,300
	LABOR					\$ 16,151,000
	INDIRECTS					\$ 3,852,300
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP				
	TOTAL PROJECT COST					\$ 496,469,800
	REFERENCE COSTS:					
A	ESP DEMOLITION					\$ 832,300
B	REMOVE BOOSTER AIR FANS					\$ 111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-20
NID Summary Capital Cost Estimate No. 30725 Est-4A ESP in Service
(7.5 lb SO₂/MMbtu)

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS					
1.1	ID FANS - OEM EQUIPMENT	1,795,000 ACFM WITH 14,600 HP MOTORS (\$625,000 EACH). INCLUDES HYDRAULIC OIL UNITS, SEAL AIR FAN SKIDS, VIBRATION MONITORING EQUIPMENT, FAN STALL EQUIPMENT, FIELD SERVICE REP FOR 140 DAYS	\$ 6,288,000	\$ -	\$ 1,594,700	\$ 7,882,700
1.2	PIPING & SUPPORTS - MECHANICAL		\$ 21,800	\$ 28,700	\$ 120,500	\$ 171,000
1.3	DAMPERS		\$ 553,500	\$ -	\$ 263,200	\$ 816,700
1.4	EXPANSION JOINTS		\$ -	\$ 131,100	\$ 116,500	\$ 247,600
1.5	DUCTWORK	NID MODULE OUTLET TO ID FANS AND FROM ID FANS TO STACK - INCLUDES INTERNAL BRACING AND TURNING VANES	\$ -	\$ 2,600,000	\$ 5,959,400	\$ 8,559,400
1.6	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 1,160,000	\$ 1,167,000	\$ 2,327,000
1.7	ID FAN INSULATION & LAGGING	TOTAL FOR TWO FANS. PRICING REFLECTS ACOUSTICAL INSULATION	\$ -	\$ 200,000	\$ 258,500	\$ 458,500
1.8	DUCTWORK INSULATION & LAGGING	INCLUDES INSULATION FOR SPRAY DRYER OUTLET DUCT TO NID MODULES SUPPLIED WITH THE OEM EQUIPMENT	\$ -	\$ 864,000	\$ 1,692,200	\$ 2,556,200
1.9	DUCT SUPPORT STEEL - FOUNDATIONS		\$ -	\$ 295,500	\$ 532,700	\$ 828,200

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.10	ID FAN FOUNDATIONS INCLUDING ID FAN AUX EQUIPMENT		\$ -	\$ 106,000	\$ 185,600	\$ 291,600
1.11	NID CONTROL & SWITCHGEAR BUILDING - FOUNDATIONS		\$ -	\$ 273,800	\$ 433,700	\$ 707,500
1.12	NID CONTROL & SWITCHGEAR BUILDING	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, FINISHES AND SANITARY FACILITIES	\$ -	\$ 3,937,500	\$ -	\$ 3,937,500
1.13	TRANSFORMERS		\$ 770,000	\$ -	\$ 145,600	\$ 915,600
1.14	SWITCHGEAR		\$ 1,082,000	\$ -	\$ 569,000	\$ 1,651,000
1.15	CABLE BUS & TERMINATIONS		\$ 756,300	\$ 35,800	\$ 1,316,200	\$ 2,108,300
1.16	MCC		\$ 120,000	\$ -	\$ 7,200	\$ 127,200
1.17	MIMIC PANELS		\$ 17,500	\$ -	\$ 4,500	\$ 22,000
1.18	EMERGENCY POWER SYSTEM		\$ 285,500	\$ -	\$ 38,900	\$ 324,400
1.19	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C 750KCMIL- 13.8KV	\$ -	\$ 186,300	\$ 283,200	\$ 469,500
1.20	MEDIUM VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 91,600	\$ 393,700	\$ 485,300
1.21	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 543,000	\$ 794,800	\$ 1,337,800
1.22	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 345,000	\$ 2,818,200	\$ 3,163,200
1.23	GROUNDING		\$ 11,100	\$ -	\$ 37,200	\$ 48,300
1.24	LIGHTING/ TRANSFORMERS & PANELS		\$ 26,000	\$ 30,000	\$ 29,500	\$ 85,500
1.25	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 1,569,000	\$ 7,502,000	\$ 9,071,000
1.26	DUCT BANK		\$ -	\$ 40,800	\$ 280,000	\$ 320,800
1.27	FOUNDATION FOR TRANSFORMERS		\$ -	\$ 64,600	\$ 168,200	\$ 232,800
1.28	FIREWALL FOR TRANSFORMERS		\$ -	\$ 3,200	\$ 8,300	\$ 11,500
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 9,931,700	\$ 12,505,900	\$ 26,720,500	\$ 49,158,100
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 496,600	\$ 3,189,000	\$ 9,590,900	\$ 13,276,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	ID FANS	\$ 10,428,300	\$ 15,694,900	\$ 36,311,400	\$ 62,434,600
2.0	NID MODULES					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
2.1	MECHANICAL EQUIPMENT	A 12-MODULE NID SYSTEM (160' X 160') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS/COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	\$ 66,387,200	\$ -	\$ 58,815,100	\$ 125,202,300
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	\$ 3,010,600	\$ -	\$ -	\$ 3,010,600
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 29600 SF	\$ 65,200	\$ 1,537,000	\$ 2,048,900	\$ 3,651,100
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH	\$ 103,900	\$ 2,674,000	\$ 2,803,700	\$ 5,581,600
2.5	PIPING & SUPPORTS - MECHANICAL		\$ 125,200	\$ 174,500	\$ 385,900	\$ 685,600
2.6	DUCTWORK		\$ -	\$ 6,175,000	\$ 14,153,600	\$ 20,328,600
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 2,755,000	\$ 2,771,700	\$ 5,526,700
2.8	DUCTWORK INSULATION & LAGGING		\$ -	\$ 2,040,000	\$ 3,995,500	\$ 6,035,500
2.9	NID MODULE- FOUNDATIONS		\$ -	\$ 1,203,400	\$ 1,856,600	\$ 3,060,000
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY		\$ -	\$ 1,332,000	\$ 3,486,100	\$ 4,818,100
2.11	GROUNDING		\$ -	\$ 16,000	\$ 46,100	\$ 62,100
2.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 156,000	\$ 150,000	\$ 159,100	\$ 465,100
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 69,848,100	\$ 18,056,900	\$ 90,522,300	\$ 178,427,300

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 4,167,400	\$ 4,604,500	\$ 33,954,400	\$ 42,726,300
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES	\$ 74,015,500	\$ 22,661,400	\$ 124,476,700	\$ 221,153,600
3.0	NEW STACK					
4.0	LIME HANDLING SYSTEM					
4.1	LIME STORAGE SILO		\$ 12,790,000	\$ -	\$ -	\$ 12,790,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTER, TWO FILTER SEPARATORS	\$ 1,100,000	\$ -	\$ 592,900	\$ 1,692,900
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 4,100,000	\$ -	\$ 2,228,500	\$ 6,328,500
4.4	PIPING - MECHANICAL		\$ 88,700	\$ 130,300	\$ 342,600	\$ 561,600
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	\$ -	\$ 159,500	\$ 160,500	\$ 320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	\$ -	\$ 1,885,000	\$ 1,896,400	\$ 3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING	\$ -	\$ 42,700	\$ 79,300	\$ 122,000
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 69,600	\$ 130,200	\$ 199,800
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H	\$ 75,000	\$ 335,000	\$ 24,400	\$ 434,400
4.10	CONCRETE PIT FOR THE ELEVATOR		\$ -	\$ 2,300	\$ 6,900	\$ 9,200

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS	\$ -	\$ 847,500	\$ 1,365,900	\$ 2,213,400
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS		\$ -	\$ 14,200	\$ 26,200	\$ 40,400
4.13	PIPE RACK - FOUNDATIONS		\$ -	\$ 239,600	\$ 519,100	\$ 758,700
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V, 3PHASE, 3 WINDING XFMR	\$ 170,000	\$ -	\$ 54,600	\$ 224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	\$ 196,000	\$ -	\$ 104,700	\$ 300,700
4.16	CABLE BUS DUCT		\$ 134,700	\$ 10,800	\$ 200,200	\$ 345,700
4.17	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
4.18	MIMIC PANELS		\$ 17,500	\$ -	\$ 1,400	\$ 18,900
4.19	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
4.20	GROUNDING		\$ 13,300	\$ -	\$ 41,300	\$ 54,600
4.21	LIGHTING/ TRANSFORMERS & PANELS		\$ 52,000	\$ 135,000	\$ 104,500	\$ 291,500
4.22	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 296,400	\$ 1,429,900	\$ 1,726,300
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	\$ -	\$ 23,400	\$ 87,800	\$ 111,200
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
4.25	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 132,200	\$ 260,800	\$ 393,000
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 57,600	\$ 161,600	\$ 219,200
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	\$ -	\$ 61,100	\$ 152,100	\$ 213,200
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	\$ -	\$ 3,500	\$ 10,300	\$ 13,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 18,907,300	\$ 4,455,200	\$ 10,058,000	\$ 33,420,500
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 945,400	\$ 1,136,100	\$ 3,683,500	\$ 5,764,900

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM	\$ 19,852,700	\$ 5,591,300	\$ 13,741,500	\$ 39,185,400
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID				
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS					
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 2,900,000	\$ -	\$ 1,615,100	\$ 4,515,100
6.2	FLY ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, TWO PRESSURE EXHAUSTERS, TRANSFER STATION, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 2,285,000	\$ -	\$ 1,431,100	\$ 3,716,100
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.	\$ 28,000	\$ -	\$ 12,300	\$ 40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP	\$ 12,000	\$ -	\$ 4,600	\$ 16,600
6.5	PIPING - MECHANICAL		\$ 142,800	\$ 131,000	\$ 408,700	\$ 682,500
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 60' DIA X 88' H - 3071 TONS - SUBCONTRACT COST INCLUDES LABOR	\$ 2,764,000	\$ -	\$ -	\$ 2,764,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID	\$ -	\$ -	\$ -	\$ -
6.8	FLY ASH SILO	STEEL -STORAGE SILO, 20' DIA X 21' H, 100 TONS	\$ 75,000	\$ 43,500	\$ 115,600	\$ 234,100
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS	TOTAL FOR TWO SILOS	\$ -	\$ 314,000	\$ 529,800	\$ 843,800

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.10	FLY ASH SILO - FOUNDATIONS		\$ -	\$ 19,900	\$ 40,400	\$ 60,300
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS		\$ -	\$ 97,600	\$ 161,900	\$ 259,500
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H	\$ 40,000	\$ 241,500	\$ 26,200	\$ 307,700
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 82,800	\$ 141,100	\$ 223,900
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	110' L X 30' W X 25' H	\$ 75,000	\$ 276,500	\$ 24,400	\$ 375,900
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	\$ -	\$ 300,000	\$ -	\$ 300,000
6.16	MCC	480V MCC PER LINE UP	\$ 120,000	\$ -	\$ 7,300	\$ 127,300
6.17	EMERGENBCY POWER SYSTEM		\$ 185,500	\$ -	\$ 40,000	\$ 225,500
6.18	LIGHTING/ TRANSFORMERS & PANELS		\$ 18,500	\$ 75,000	\$ 53,200	\$ 146,700
6.19	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 32,800	\$ 177,400	\$ 210,200
6.20	GROUNDING		\$ -	\$ 4,500	\$ 10,900	\$ 15,400
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 63,300	\$ 143,000	\$ 206,300
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 20,800	\$ 58,400	\$ 79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	\$ -	\$ 6,200	\$ 10,600	\$ 16,800
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 8,645,800	\$ 1,718,900	\$ 5,059,900	\$ 15,424,600
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 432,300	\$ 438,300	\$ 1,886,600	\$ 2,757,200
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS	\$ 9,078,100	\$ 2,157,200	\$ 6,946,500	\$ 18,181,800
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID				
8.0	ACTIVATED CARBON INJECTION SYSTEM					

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
9.0	COMPRESSED AIR SYSTEM					
10.0	SERVICE WATER SYSTEM					
11.0	POTABLE WATER SYSTEM					
12.0	FGD SUBSTATION					
13.0	FGD DCS SYSTEM					
14.0	CEM SYSTEM					
15.0	TRUCK & RAIL INFRASTRUCTURE					
16.0	SITE IMPROVEMENTS - CIVIL WORK					
17.0	BOP ITEMS					
17.1	PIPE INSULATION	AVERAGE 6" PIPE SIZE	\$ -	\$ 34,000	\$ 106,000	\$ 140,000
17.2	HEAT TRACING		\$ -	\$ 175,600	\$ 248,500	\$ 424,100
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)		\$ -	\$ 183,000	\$ 702,200	\$ 885,200
17.4	HOISTS & TROLLEYS		\$ 150,000	\$ 175,000	\$ 204,400	\$ 529,400
17.5	MISC AUX STEEL FOR PIPE SUPPORTS	FIELD FABRICATED	\$ -	\$ 122,500	\$ 510,600	\$ 633,100
17.6	MISC PIPE SUPPORT FOUNDATIONS		\$ -	\$ 10,500	\$ 19,600	\$ 30,100
17.7	EYE WASH STATIONS	WITH 50 KW HEATERS	\$ 30,000	\$ 5,000	\$ 30,700	\$ 65,700
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS	STAND PIPE FOR BUILDINGS	\$ -	\$ 300,000	\$ 245,300	\$ 545,300
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 180,000	\$ 1,005,600	\$ 2,067,300	\$ 3,252,900
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 9,000	\$ 256,428	\$ 796,699	\$ 1,062,127
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS	\$ 189,000	\$ 1,262,000	\$ 2,864,000	\$ 4,315,000

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE					
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT					
99.0	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 120,650,500	\$ 47,888,700	\$ 153,864,100	\$ 340,753,300
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 6,644,500	\$ 12,073,900	\$ 56,883,200	\$ 75,601,600
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST		\$ 127,295,000	\$ 59,962,600	\$ 210,747,300	\$ 416,354,900
	OVERALL PROJECT INDIRECT COSTS					
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES					\$ 25,000,000
	CONSTRUCTION MANAGEMENT					\$ 12,490,600
	S-U / COMMISSIONING					\$ 4,163,500
	CRAFT START-UP SUPPORT					\$ 1,813,000
	INITIAL FILLS					\$ 1,249,100
	OPERATOR & TRAINING MANUALS					\$ 300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)					\$ 400,000
	OWNERS COST	BY AEP				\$ -
	TOTAL PROJECT DIRECT AND INDIRECT COSTS					\$ 461,771,100
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT					\$ 1,654,800
	SPARE PARTS FOR THE OEM EQUIPMENT	0.80				\$ 1,025,976
	SPARE PARTS FOR THE BOP EQUIPMENT	0.50				\$ 628,824

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (ESP) - 4A - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30725B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	CONTINGENCY	14.6				\$ 67,660,600
	ESCALATION					\$ 40,711,400
	EQUIPMENT					\$ 13,284,400
	MATERIAL					\$ 4,303,400
	LABOR					\$ 19,023,900
	INDIRECTS					\$ 4,099,700
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP				
	TOTAL PROJECT COST					\$ 571,797,900
	REFERENCE COSTS:					
A	ESP DEMOLITION					\$ 832,300
B	REMOVE BOOSTER AIR FANS					\$ 111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-21
NID Summary Capital Cost Estimate No. 30729 Est-4B ESP not in Service
(7.5 lb SO₂/MMbtu)

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-4B - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30729B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
1.0	ID FANS					
2.0	NID MODULES					
2.1	MECHANICAL EQUIPMENT	A 14-MODULE NID SYSTEM (160' X 185') INCLUDING LIME DAY SILOS, HYDRATORS, MIXERS, J-DUCTS, FABRIC FILTER MODULES, ALL INTERNAL ELEMENTS (BAGS, CAGES, ASH HOPPERS, 2 BROKEN BAG DETECTORS / COMPARTMENT), ASH RECYCLE SYSTEM, VACUUM PIPING, AND ALL INTERNAL PIPING & DUCTWORK FOR THE VARIOUS MODULES.	\$ 67,447,500	\$ -	\$ 59,907,100	\$ 127,354,600
2.2	INSULATION FOR NID MODULES	SUBCONTRACT COST INCLUDES LABOR	\$ 3,091,200	\$ -	\$ -	\$ 3,091,200
2.3	PENTHOUSE FOR NID MODULES	14 FT HIGH, 29600 SF	\$ 65,500	\$ 1,544,800	\$ 2,059,900	\$ 3,670,200
2.4	BOTTOM ENCLOSURE FOR NID MODULES	40 FT HIGH	\$ 104,400	\$ 2,687,100	\$ 2,817,400	\$ 5,608,900
2.5	PIPING & SUPPORTS - MECHANICAL		\$ 125,200	\$ 174,500	\$ 385,900	\$ 685,600
2.6	DUCTWORK		\$ -	\$ 4,797,000	\$ 10,995,100	\$ 15,792,100
2.7	DUCT SUPPORT STEEL	THREE COAT SHOP PAINT	\$ -	\$ 2,140,200	\$ 2,153,200	\$ 4,293,400
2.8	DUCTWORK INSULATION & LAGGING		\$ -	\$ 1,632,000	\$ 3,196,400	\$ 4,828,400
2.9	NID MODULE- FOUNDATIONS		\$ -	\$ 1,203,400	\$ 1,856,600	\$ 3,060,000
2.10	NID MODULE - SUPPORT STEEL AND ACCESS GALLERY		\$ -	\$ 1,332,000	\$ 3,486,100	\$ 4,818,100
2.11	GROUNDING		\$ -	\$ 16,000	\$ 46,100	\$ 62,100
2.12	LIGHTING/ TRANSFORMERS & PANELS		\$ 156,000	\$ 150,000	\$ 159,100	\$ 465,100

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-4B - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30729B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
2.13	RACEWAY, CABLE TRAY, & CONDUIT	INCLUDED IN ID FANS, 1.0	\$ -	\$ -	\$ -	\$ -
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 70,989,800	\$ 15,677,000	\$ 87,062,900	\$ 173,729,700
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 4,224,500	\$ 3,997,600	\$ 32,763,700	\$ 40,985,900
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	NID MODULES	\$ 75,214,300	\$ 19,674,600	\$ 119,826,600	\$ 214,715,600
3.0	NEW STACK					
4.0	LIME HANDLING SYSTEM					
4.1	LIME STORAGE SILO		\$ 12,780,000	\$ -	\$ -	\$ 12,780,000
4.2	LIME UNLOADING SYSTEM	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 1,100,000	\$ -	\$ 592,900	\$ 1,692,900
4.3	LIME TRANSPORT SYSTEM TO DAY BINS	INCLUDE PNEUMATIC HANDLING SYSTEM, THREE VACUUM EXHAUSTERS, TWO FILTER SEPARATORS	\$ 4,100,000	\$ -	\$ 2,228,500	\$ 6,328,500
4.4	PIPING - MECHANICAL		\$ 88,700	\$ 130,300	\$ 342,600	\$ 561,600
4.5	LIME STORAGE SILO ACCESS STAIR TOWER	INCLUDES CATWALK TO THE SECOND SILO - THREE COAT SHOP PAINT	\$ -	\$ 159,500	\$ 160,500	\$ 320,000
4.6	PIPE RACK FOR LIME HANDLING, WASTE HANDLING AND MISC MECHANICAL PIPING	THREE COAT SHOP PAINT	\$ -	\$ 1,885,000	\$ 1,896,400	\$ 3,781,400
4.7	RAIL CAR UNLOADING AREA - FOUNDATIONS	20' X 120' - NO SIDING	\$ -	\$ 42,700	\$ 79,300	\$ 122,000
4.8	LIME UNLOADING BLOWER / ELECTRICAL BUILDING - FOUNDATIONS		\$ -	\$ 69,600	\$ 130,200	\$ 199,800
4.9	LIME UNLOADING BLOWER / ELECTRICAL BUILDING	100' L X 30' W X 30' H	\$ 75,000	\$ 335,000	\$ 24,400	\$ 434,400

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-4B - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30729B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
4.10	CONCRETE PIT FOR THE ELEVATOR		\$ -	\$ 2,300	\$ 6,900	\$ 9,200
4.11	LIME STORAGE SILO - FOUNDATIONS	INCLUDES FOUNDATIONS FOR LIME TRANSPORT SYSTEM PRESSURE BLOWERS	\$ -	\$ 847,500	\$ 1,365,900	\$ 2,213,400
4.12	LIME STORAGE SILO ACCESS STAIR TOWER - FOUNDATIONS		\$ -	\$ 14,200	\$ 26,200	\$ 40,400
4.13	PIPE RACK - FOUNDATIONS		\$ -	\$ 239,600	\$ 519,100	\$ 758,700
4.14	TRANSFORMERS	SUS TRANSFORMERS: 33F, 33G, 13.8KV-480V, 3PHASE, 3 WINDING XFMR	\$ 170,000	\$ -	\$ 54,600	\$ 224,600
4.15	SWITCHGEAR	480V LOW VOLTAGE (33F/G), SWITCHGEAR	\$ 196,000	\$ -	\$ 104,700	\$ 300,700
4.16	CABLE BUS DUCT		\$ 134,700	\$ 10,800	\$ 200,200	\$ 345,700
4.17	MCC		\$ 61,800	\$ -	\$ 3,600	\$ 65,400
4.18	MIMIC PANELS		\$ 17,500	\$ -	\$ 1,400	\$ 18,900
4.19	EMERGENCY POWER SYSTEM		\$ 108,300	\$ -	\$ 24,400	\$ 132,700
4.20	GROUNDING		\$ 13,300	\$ -	\$ 41,300	\$ 54,600
4.21	LIGHTING/ TRANSFORMERS & PANELS		\$ 52,000	\$ 135,000	\$ 104,500	\$ 291,500
4.22	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 296,400	\$ 1,429,900	\$ 1,726,300
4.23	HIGH VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-15KV	\$ -	\$ 23,400	\$ 87,800	\$ 111,200
4.24	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
4.25	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 132,200	\$ 260,800	\$ 393,000
4.26	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 57,600	\$ 161,600	\$ 219,200
4.27	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS, 2.38' H X 3.79' W	\$ -	\$ 61,100	\$ 152,100	\$ 213,200
4.28	FOUNDATIONS FOR TRANSFORMERS	FOR XFMR 33F, 33G, INCLUDES MUD MAT	\$ -	\$ 3,500	\$ 10,300	\$ 13,800
90.00	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 18,897,300	\$ 4,455,200	\$ 10,058,000	\$ 33,410,500

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-4B - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30729B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 944,900	\$ 1,136,100	\$ 3,683,500	\$ 5,764,400
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	LIME HANDLING SYSTEM	\$ 19,842,200	\$ 5,591,300	\$ 13,741,500	\$ 39,174,900
5.0	LIME SLAKER BUILDING	NOT REQUIRED FOR NID				
6.0	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS					
6.1	BYPRODUCT WASTE HANDLING - MECHANICAL EQUIPMENT	INCLUDES PNEUMATIC HANDLING SYSTEM, THREE PRESSURE BLOWERS, ONE BIN VENT FILTER, ASH UNLOADING SYSTEM	\$ 3,045,000	\$ -	\$ 1,695,900	\$ 4,740,900
6.2	ECONOMIZER ASH HANDLING - MECHANICAL EQUIPMENT	INCLUDES JET PUMPS AND PIPING / SUPPORTS TO THE BOTTOM ASH POND	\$ 400,000	\$ -	\$ 296,400	\$ 696,400
6.3	BUILDING SUMP PUMPS	FOR BUILDINGS - DUPLEX. INCLUDES CHECK & ISOLATION VALVES.	\$ 28,000	\$ -	\$ 12,300	\$ 40,300
6.4	AGITATOR FOR SUMP PUMPS	5 HP	\$ 12,000	\$ -	\$ 4,600	\$ 16,600
6.5	PIPING - MECHANICAL		\$ 142,800	\$ 131,000	\$ 408,700	\$ 682,500
6.6	BYPRODUCT WASTE SILO	CONCRETE SILO 65' DIA X 107' H - 4496 TONS - SUBCONTRACT COST INCLUDES LABOR	\$ 4,046,000	\$ -	\$ -	\$ 4,046,000
6.7	RECYCLE SILO	NOT REQUIRED FOR NID	\$ -	\$ -	\$ -	\$ -

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-4B - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30729B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
6.8	FLY ASH SILO	NOT REQUIRED - ECONOMIZER FLY ASH SLUICD TO BOTTOM ASH POND	\$ -	\$ -	\$ -	\$ -
6.9	BYPRODUCT WASTE STORAGE SILO - FOUNDATIONS	TOTAL FOR TWO SILOS	\$ -	\$ 377,100	\$ 651,400	\$ 1,028,500
6.10	FLY ASH SILO - FOUNDATIONS	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.11	BYPRODUCT TRANSPORT BLOWER BUILDING - FOUNDATIONS		\$ -	\$ 97,600	\$ 161,900	\$ 259,500
6.12	BYPRODUCT TRANSPORT BLOWER BUILDING	90' L X 30' W X 20' H	\$ 40,000	\$ 241,500	\$ 26,200	\$ 307,700
6.13	FLY ASH BLOWER AND ELECTRICAL BUILDING - FOUNDATIONS	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.14	FLY ASH BLOWER AND ELECTRICAL BUILDING	NOT REQUIRED	\$ -	\$ -	\$ -	\$ -
6.15	LOAD OUT AREA PDC	SUBCONTRACT PRICE INCLUDES LABOR. COMPLETE WITH HVAC, & FINISHES.	\$ -	\$ 300,000	\$ -	\$ 300,000
6.16	MCC	480V MCC PER LINE UP	\$ 120,000	\$ -	\$ 7,300	\$ 127,300
6.17	EMERGENBCY POWER SYSTEM		\$ 185,500	\$ -	\$ 40,000	\$ 225,500
6.18	LIGHTING/ TRANSFORMERS & PANELS		\$ 18,500	\$ 75,000	\$ 53,200	\$ 146,700
6.19	RACEWAY, CABLE TRAY, & CONDUIT		\$ -	\$ 32,800	\$ 177,400	\$ 210,200
6.20	GROUNDING		\$ -	\$ 4,500	\$ 10,900	\$ 15,400
6.21	MEDIUM VOLTAGE POWER CABLE & TERMINATION	1/C # 2/0-5KV	\$ -	\$ 9,500	\$ 47,900	\$ 57,400
6.22	LOW VOLTAGE POWER CABLE & TERMINATION		\$ -	\$ 63,300	\$ 143,000	\$ 206,300
6.23	CONTROL & INSTRUMENT CABLE	#14, #16 & PR # 20 & SHLD WIRE	\$ -	\$ 20,800	\$ 58,400	\$ 79,200
6.24	DUCT BANK	DUCT BANK WITH 4-5" & 4-3" CONDUITS	\$ -	\$ 6,200	\$ 10,600	\$ 16,800
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 8,037,800	\$ 1,359,300	\$ 3,806,100	\$ 13,203,200
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 401,900	\$ 346,600	\$ 1,419,900	\$ 2,168,500
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BYPRODUCT WASTE & FLY ASH HANDLING SYSTEMS	\$ 8,439,700	\$ 1,705,900	\$ 5,226,000	\$ 15,371,700

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-4B - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30729B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
7.0	ABSORBER ISLAND	NOT REQUIRED FOR NID				
8.0	ACTIVATED CARBON INJECTION SYSTEM					
9.0	COMPRESSED AIR SYSTEM					
10.0	SERVICE WATER SYSTEM					
11.0	POTABLE WATER SYSTEM					
12.0	FGD SUBSTATION					
13.0	FGD DCS SYSTEM					
14.0	CEM SYSTEM					
15.0	TRUCK & RAIL INFRASTRUCTURE					
16.0	SITE IMPROVEMENTS - CIVIL WORK					
17.0	BOP ITEMS					
17.1	PIPE INSULATION	AVERAGE 6" PIPE SIZE	\$ -	\$ 34,000	\$ 106,000	\$ 140,000
17.2	HEAT TRACING		\$ -	\$ 175,600	\$ 248,500	\$ 424,100
17.3	TOUCH UP PAINT (INCLUDES PAINTING CS PIPE)		\$ -	\$ 177,400	\$ 751,500	\$ 928,900
17.4	HOISTS & TROLLEYS		\$ 150,000	\$ 175,000	\$ 204,400	\$ 529,400
17.5	MISC AUX STEEL FOR PIPE SUPPORTS	FIELD FABRICATED	\$ -	\$ 122,500	\$ 510,600	\$ 633,100
17.6	MISC PIPE SUPPORT FOUNDATIONS		\$ -	\$ 10,500	\$ 19,600	\$ 30,100
17.7	EYE WASH STATIONS	WITH 50 KW HEATERS	\$ 30,000	\$ 5,000	\$ 30,700	\$ 65,700
17.8	FIRE PROTECTION FOR MISC BUILDINGS & AREAS	STAND PIPE FOR BUILDINGS	\$ -	\$ 300,000	\$ 245,300	\$ 545,300
90.0	SUBTOTAL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 180,000	\$ 1,000,000	\$ 2,116,600	\$ 3,296,600

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-4B - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30729B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	SUBTOTAL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 9,000	\$ 255,000	\$ 801,345	\$ 1,065,345
	TOTAL DIRECT & CONSTRUCTION INDIRECT COST	BOP ITEMS	\$ 189,000	\$ 1,255,000	\$ 2,917,900	\$ 4,361,900
18.0	CAPITAL REPLACEMENTS - REMOVAL AND RELOCATION OF EXISTING EQUIPMENT AND INFRASTRUCTURE					
19.0	ARSENIC, ASBESTOS , LEAD ABATEMENT					
99.0	OVERALL - EQUIPMENT, MATERIAL AND LABOR COSTS		\$ 121,806,200	\$ 45,143,600	\$ 149,280,300	\$ 334,580,100
	OVERALL - OTHER DIRECT & CONSTRUCTION INDIRECT COSTS		\$ 6,702,300	\$ 11,373,900	\$ 55,260,700	\$ 73,336,900
	OVERALL TOTAL DIRECT & CONSTRUCTION INDIRECT COST		\$ 128,508,500	\$ 56,517,500	\$ 204,541,000	\$ 407,917,000
	OVERALL PROJECT INDIRECT COSTS					
	ENGINEERING, PROCUREMENT, & PROJECT SERVICES					\$ 25,000,000
	CONSTRUCTION MANAGEMENT					\$ 12,237,500
	S-U / COMMISSIONING					\$ 4,079,200
	CRAFT START-UP SUPPORT					\$ 1,759,000
	INITIAL FILLS					\$ 1,223,800
	OPERATOR & TRAINING MANUALS					\$ 300,000
	SUBCONTRACTORS (NOISE & DUCTWORK CONSULTANT, GEOTECHNICAL INVESTIGATION)					\$ 400,000
	OWNERS COST	BY AEP				\$ -
	TOTAL PROJECT DIRECT AND INDIRECT COSTS					\$ 452,916,500

Sargent & Lundy, LLC

AEP
BIG SANDY UNIT 2
FGD PROJECT - NID EST (N/ESP)-4B - 7.5 LB/MM BTU
COST ESTIMATE SUMMARY

Estimate No.: 30729B
Project No.: 12721-000
Date: 9/10/2010
Preparer: MNO
Reviewer: JMK
Approver: PEF

Account No.	Item Description	Scope Definition	Total Equipment Cost	Total Material Cost	Total Construction & Erection Cost	Total Projected Cost
	SPARE PARTS FOR THE OEM & THE BOP EQUIPMENT					\$ 1,670,600
	SPARE PARTS FOR THE OEM EQUIPMENT	0.80				\$ 1,035,772
	SPARE PARTS FOR THE BOP EQUIPMENT	0.50				\$ 634,828
	CONTINGENCY	14.4				\$ 65,662,300
	ESCALATION					\$ 39,992,700
	EQUIPMENT					\$ 13,411,000
	MATERIAL					\$ 4,056,100
	LABOR					\$ 18,463,600
	INDIRECTS					\$ 4,062,000
	INTEREST DURING CONSTRUCTION (AFUDC)	BY AEP				
	TOTAL PROJECT COST					\$ 560,242,100
	REFERENCE COSTS:					
A	ESP DEMOLITION					\$ 832,300
B	REMOVE BOOSTER AIR FANS					\$ 111,000



Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010

ATTACHMENT 5-22
O&M Costs – Fixed and Variable (NID)



AEP

Order-of-Magnitude EPC Cost Estimate – Attachment 5-22
Big Sandy Station – Unit 2

Project No. 12721-000
September 10, 2010

NID O&M Costs – Revision B

GENERAL

All O&M costs are presented in constant 2010 dollars.

VARIABLE O&M COSTS

The variable O&M costs include:

- Reagent and Disposal
- NID byproduct and dry fly ash removed from the ESP includes 30 wt% dust control water for weight of solids transported to the landfill
- Makeup water for the process only. The water consumption includes: hydrator water, temperature control water, and dust control water only.
- Activated carbon injection rate is based on 2 lb/MMacfm into the NID system.
- Bag replacement every 3 years
- Cage replacement every 9 years
- Auxiliary Power (displayed as MW consumed)
- The draft power accounts for the NID system loss, new ductwork, and all other losses associated with the balance draft conversion (furnace to stack). In the cases where the ESP is left in service, the additional ESP pressure loss is included in the draft power estimate. For the cases with a booster fan, the booster fan power is added to the new ID fan power to fully account for the system requirement. This will provide a consistent basis for comparison of the various technologies. The operating power is 20% less than the test block power used for cost estimating purposes.
- A second value for the draft power is provided that shows the estimated requirement for the FGD system only (J-duct through baghouse). The FGD draft power is part of the overall draft power.
- No forced outages are anticipated due to equipment redundancy designed into the system.

AEP

Order-of-Magnitude EPC Cost Estimate – Attachment 5-22
Big Sandy Station – Unit 2

Project No. 12721-000
September 10, 2010

NID O&M Costs – Revision B**FIXED O&M COSTS**

The fixed O&M costs include:

- Operating Labor

The FGD system will require additional staff to operate the equipment. The minimum additional staff used in the estimate was based on:

Operation	Staff
Absorber Island Operation	2 person per shift for 5 shifts (10 operators total)
Total	10 operations staff

Depending on the workload of the balance of the plant operations staff, additional FGD operating labor may be required. Other areas to consider are:

Operation	Staff
Reagent Unloading	2 additional people if the coal handling staff cannot handle the additional duties.
Hydrator/Mixer Operations	5 additional operations staff
Byproduct Loadout	2 additional operators
System Engineer	1 additional position
Total	10 additional operations staff

For FGD technology comparison purposes, the minimum operations staff required was used in the evaluation. Additional staff could be included; however, the difference in staff between the various technologies would be the same.

- Maintenance Labor
Including: maintenance mechanics, I&C technicians, maintenance planner, supervision, and overhead.
- Maintenance Materials
Including: all preventative and corrective maintenance materials for the hydrators, mixers, module dampers, blowers/compressors, fans, etc...

AEP

Order-of-Magnitude EPC Cost Estimate – Attachment 5-22
Big Sandy Station – Unit 2

Project No. 12721-000
September 10, 2010

NID O&M Costs – Revision B**ECONOMIC BASIS**

Table 1 shows the data used to generate the costs associated with the retrofit options.

Table 1. Economic Parameters

Unit Capacity Factor (%) ^{Note 1}	85
Operating Labor Rate (\$/hr) ^{Note 2}	50.00
Lime (\$/ton) ^{Note 5}	139 (Delivered by Rail Costs)
Activated Carbon (\$/ton) ^{Note 4}	1440 (Delivered  ts)
By-Product Disposal (\$/ton) ^{Note 3}	8
Makeup Water (\$/1000 gallons)	1.00
Fabric Filter Bag Costs (\$/bag) ^{Note 4}	80
Fabric Filter Cage Costs (\$/cage) ^{Note 4}	30

Notes:

- 1) Per Order of Magnitude/Relative Capital Installed Cost Estimate Specification (BS2-FGDSCE-052010) Revision 1 dated June 21, 2010 provided by AEP.
- 2) The labor rate is a total pay and benefits rate.
- 3) Disposal cost for by-product (FGD and/or fly ash), trucking to landfill on private haul road.
- 4) Cost was provided by AEP in comments to Revision A.
- 5) Provided by AEP on the teleconference on 27-July-2010.

AEP

Order-of-Magnitude EPC Cost Estimate – Attachment 5-22
Big Sandy Station – Unit 2

Project No. 12721-000
September 10, 2010

NID O&M Costs – Revision B

Table 2. O&M Costs for NID Systems without the ESP (2010 dollars)

Fuel	1.7 w/o ESP	3.0 w/o ESP	4.5 w/o ESP	7.5 w/o ESP
Fixed O&M (\$/year)				
Operating Labor	1,040,000	1,040,000	1,040,000	1,040,000
Maintenance Material	2,284,000	2,350,000	2,416,000	2,548,000
Maintenance Labor	1,522,000	1,566,000	1,610,000	1,698,000
Total Fixed O&M (\$/year)	4,846,000	4,956,000	5,066,000	5,286,000
Variable O&M (\$/year)				
Reagent Cost	10,189,000	20,462,000	30,160,000	44,782,000
Activated Carbon	2,344,000	2,319,000	2,315,000	2,293,000
FGD Byproduct Disposal Cost	4,393,000	5,860,000	7,246,000	9,806,000
Makeup Water Cost	523,000	533,000	550,000	572,000
Wastewater Treatment Chemicals	NA	NA	NA	NA
Bags and Cages Replacement	690,000	690,000	690,000	690,000
Total Variable O&M excluding Auxiliary Power (\$/year)	18,139,000	29,864,000	40,961,000	58,143,000
Auxiliary Power at Full Load (MW)				
Overall Draft (Furnace to Stack)	23	23	23	23
FGD Draft Only	10	10	10	10
FGD Equipment Load	4	5	6	6
Existing ESP	0	0	0	0
WESP	NA	NA	NA	NA
Total Auxiliary Power at Full Load (MW)	27	28	29	29

Note: NA = Not Applicable

AEP

Order-of-Magnitude EPC Cost Estimate – Attachment 5-22
Big Sandy Station – Unit 2

Project No. 12721-000
September 10, 2010

NID O&M Costs – Revision B

Table 3. O&M Costs for NID Systems with the ESP (2010 dollars)


Fuel	1.7 w/ ESP	3.0 w/ ESP	4.5 w/ ESP	7.5 w/ ESP
Fixed O&M (\$/year)				
Operating Labor	1,040,000	1,040,000	1,040,000	1,040,000
Maintenance Material	2,284,000	2,350,000	2,416,000	2,548,000
Maintenance Labor	1,522,000	1,566,000	1,610,000	1,698,000
Total Fixed O&M (\$/year)	4,846,000	4,956,000	5,066,000	5,286,000
Variable O&M (\$/year)				
Reagent Cost	10,189,000	20,462,000	30,160,000	44,782,000
Activated Carbon	2,267,000	2,243,000	2,239,000	2,218,000
FGD Byproduct Disposal Cost	1,902,000	3,668,000	5,290,000	7,806,000
Makeup Water Cost	517,000	530,000	547,000	570,000
Wastewater Treatment Chemicals	NA	NA	NA	NA
Bags and Cages Replacement	690,000	690,000	690,000	690,000
Total Variable O&M excluding Auxiliary Power (\$/year)	15,565,000	27,593,000	38,926,000	56,066,000
Auxiliary Power at Full Load (MW)				
Overall Draft (Furnace to Stack)	27	27	27	27
FGD Draft Only	10	10	10	10
FGD Equipment Load	4	5	6	6
Existing ESP	4	4	4	4
WESP	NA	NA	NA	NA
Total Auxiliary Power at Full Load (MW)	35	36	37	37


Note: NA = Not Applicable





Big Sandy Unit 2
Kentucky Power Company
American Electric Power Service Corporation
Order-of-Magnitude FGD Cost Estimate
WFGD, DFGD, IAQCS & NID Technologies
September 10, 2010


ATTACHMENT 5-23
Project Schedule (NID – ESP Out of Service)

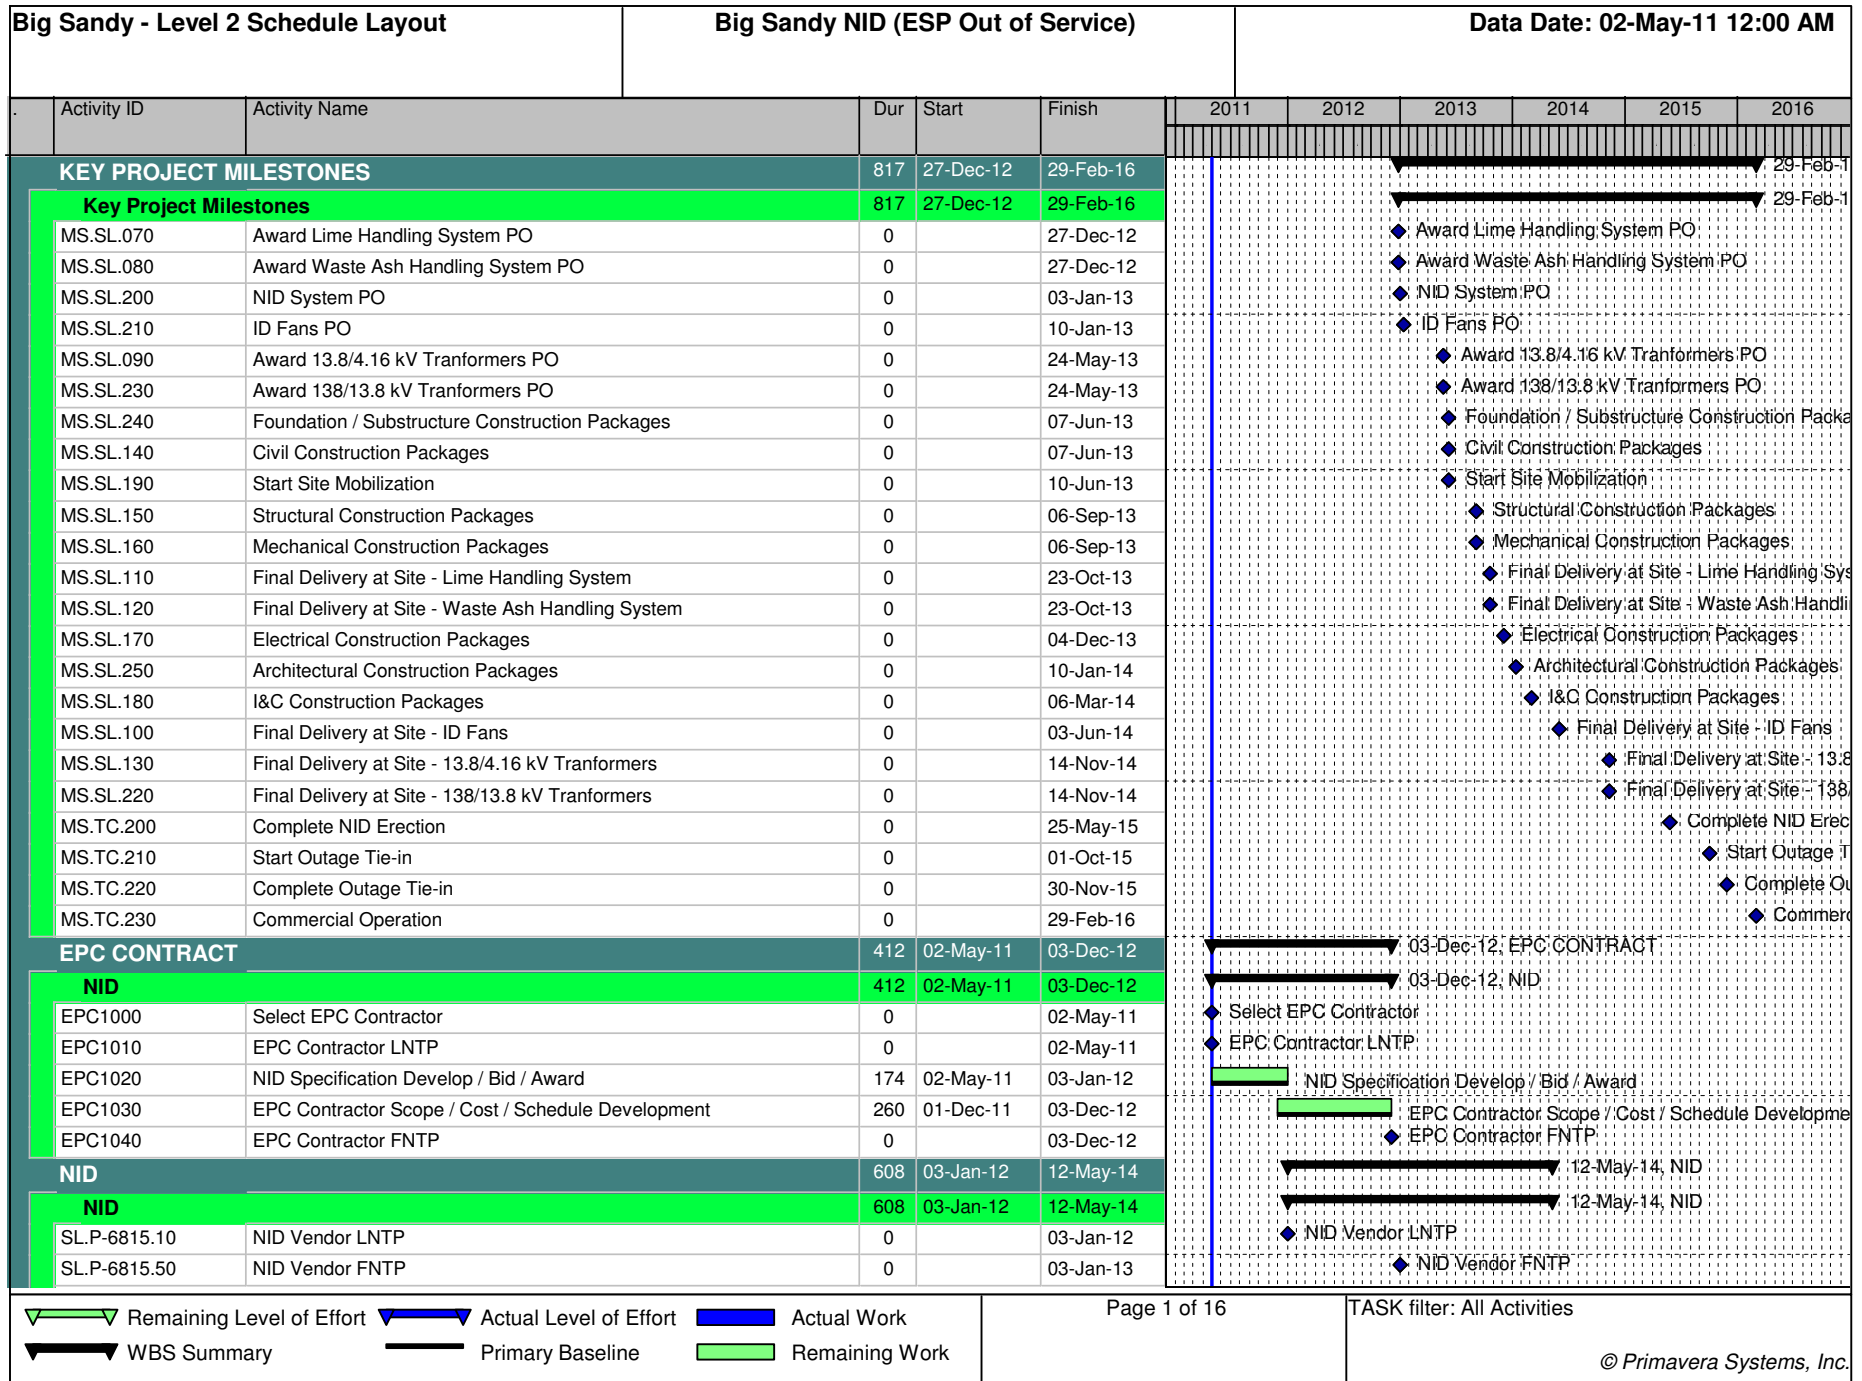


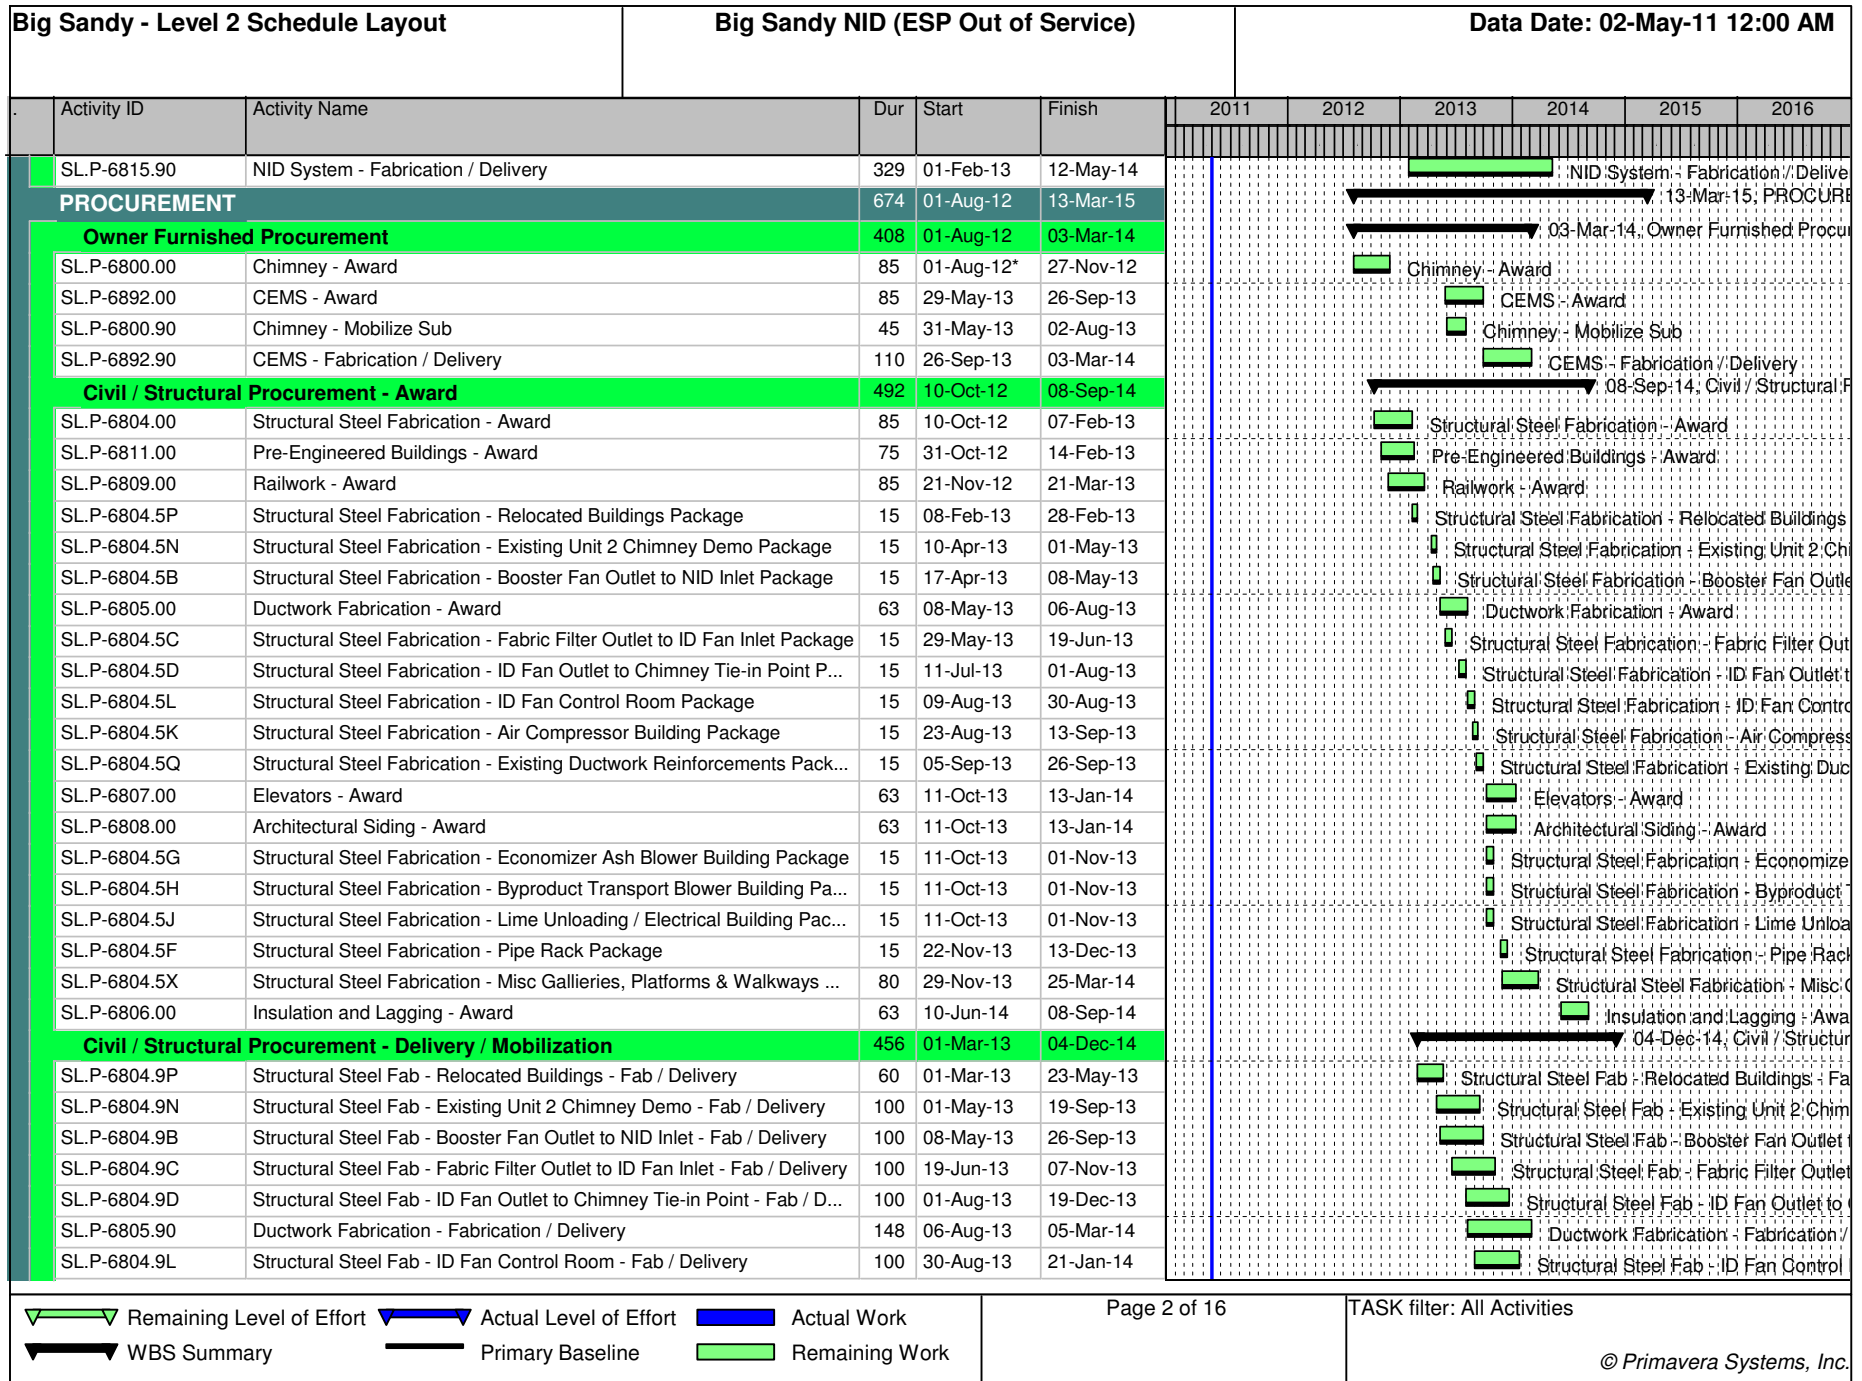


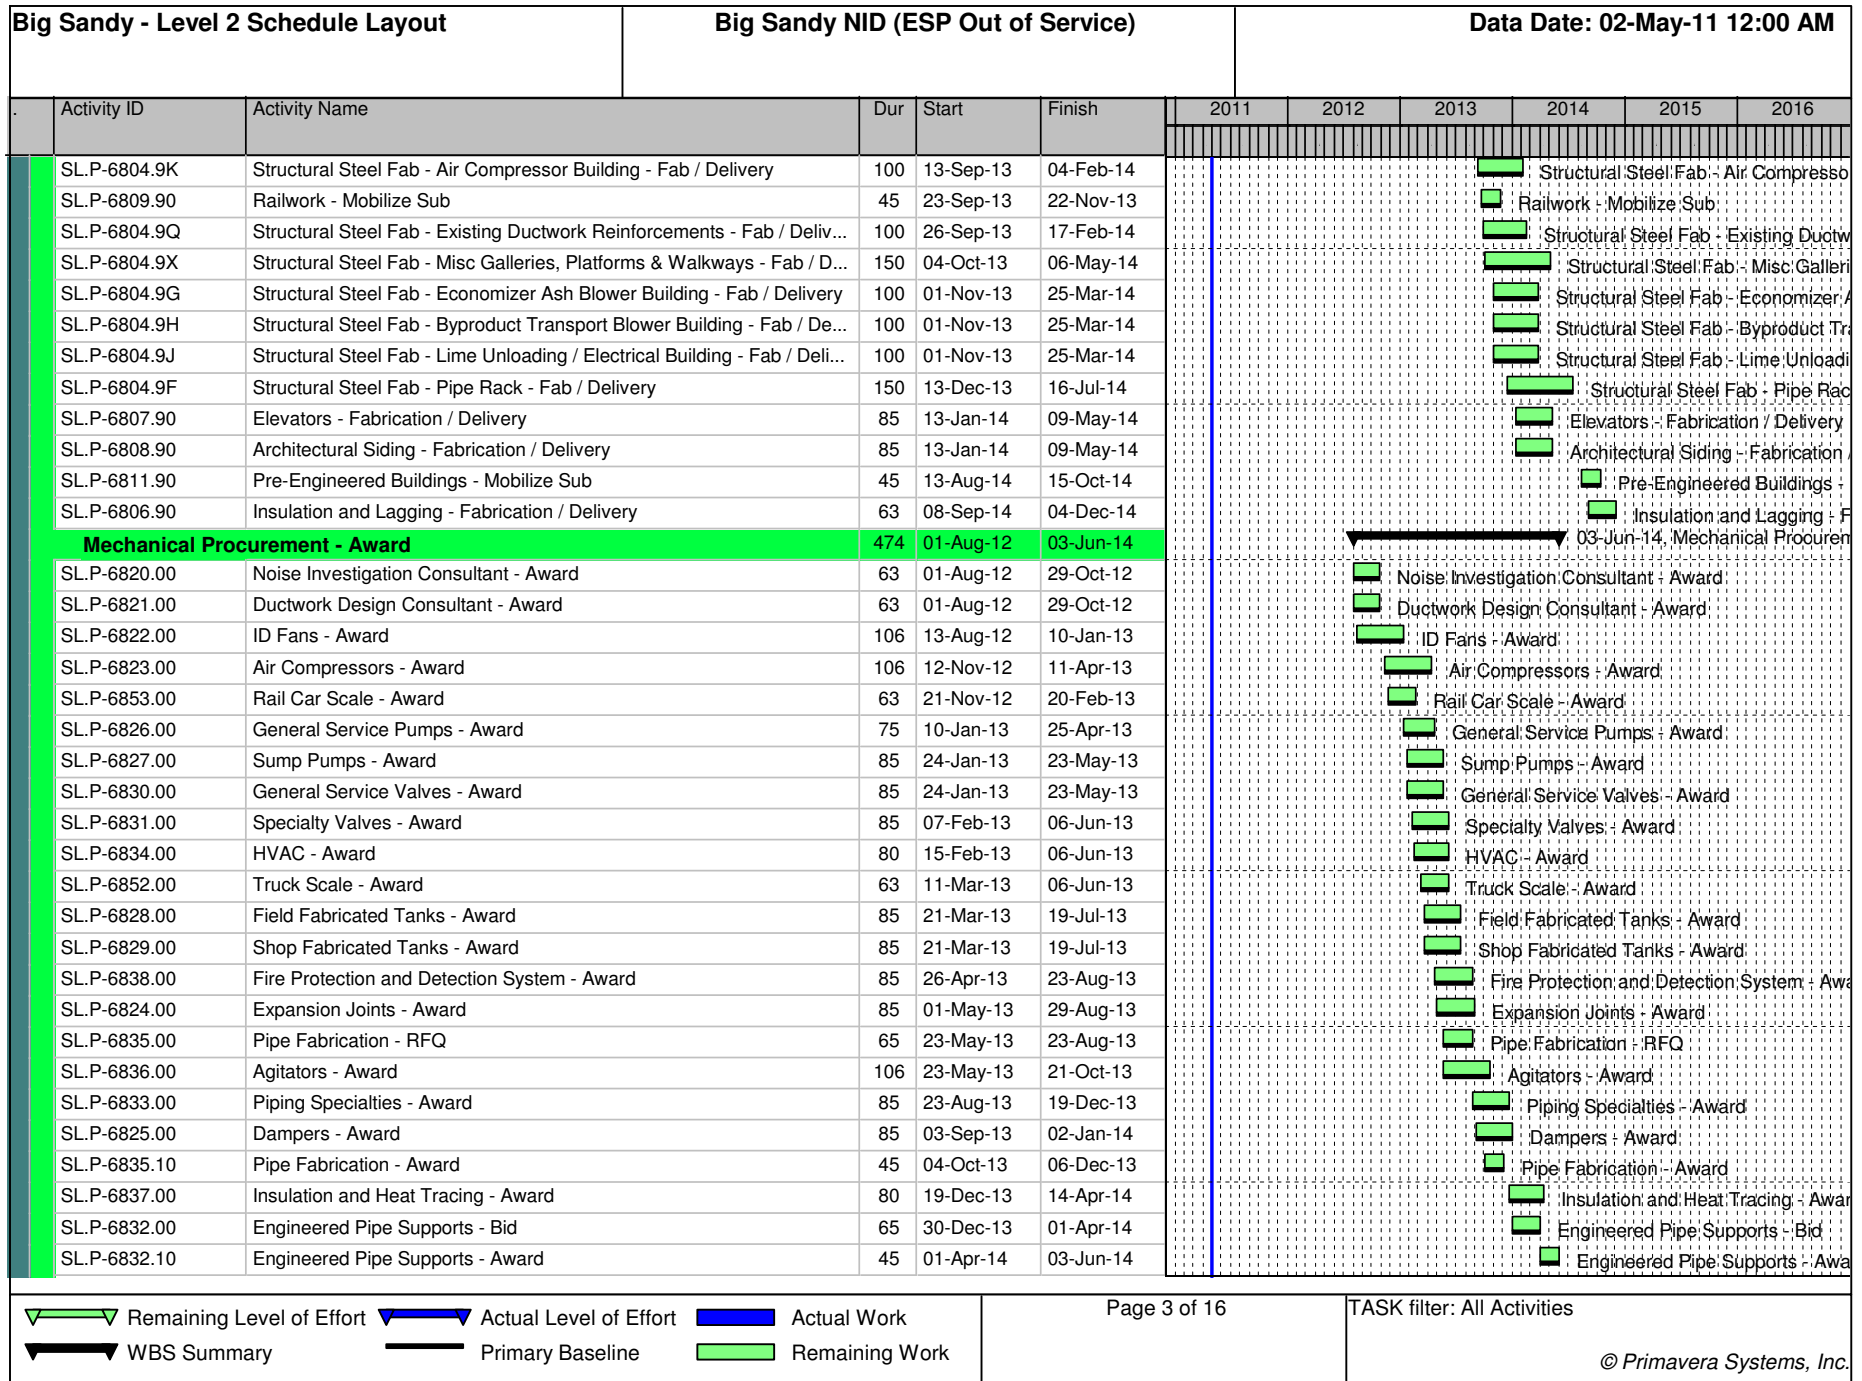


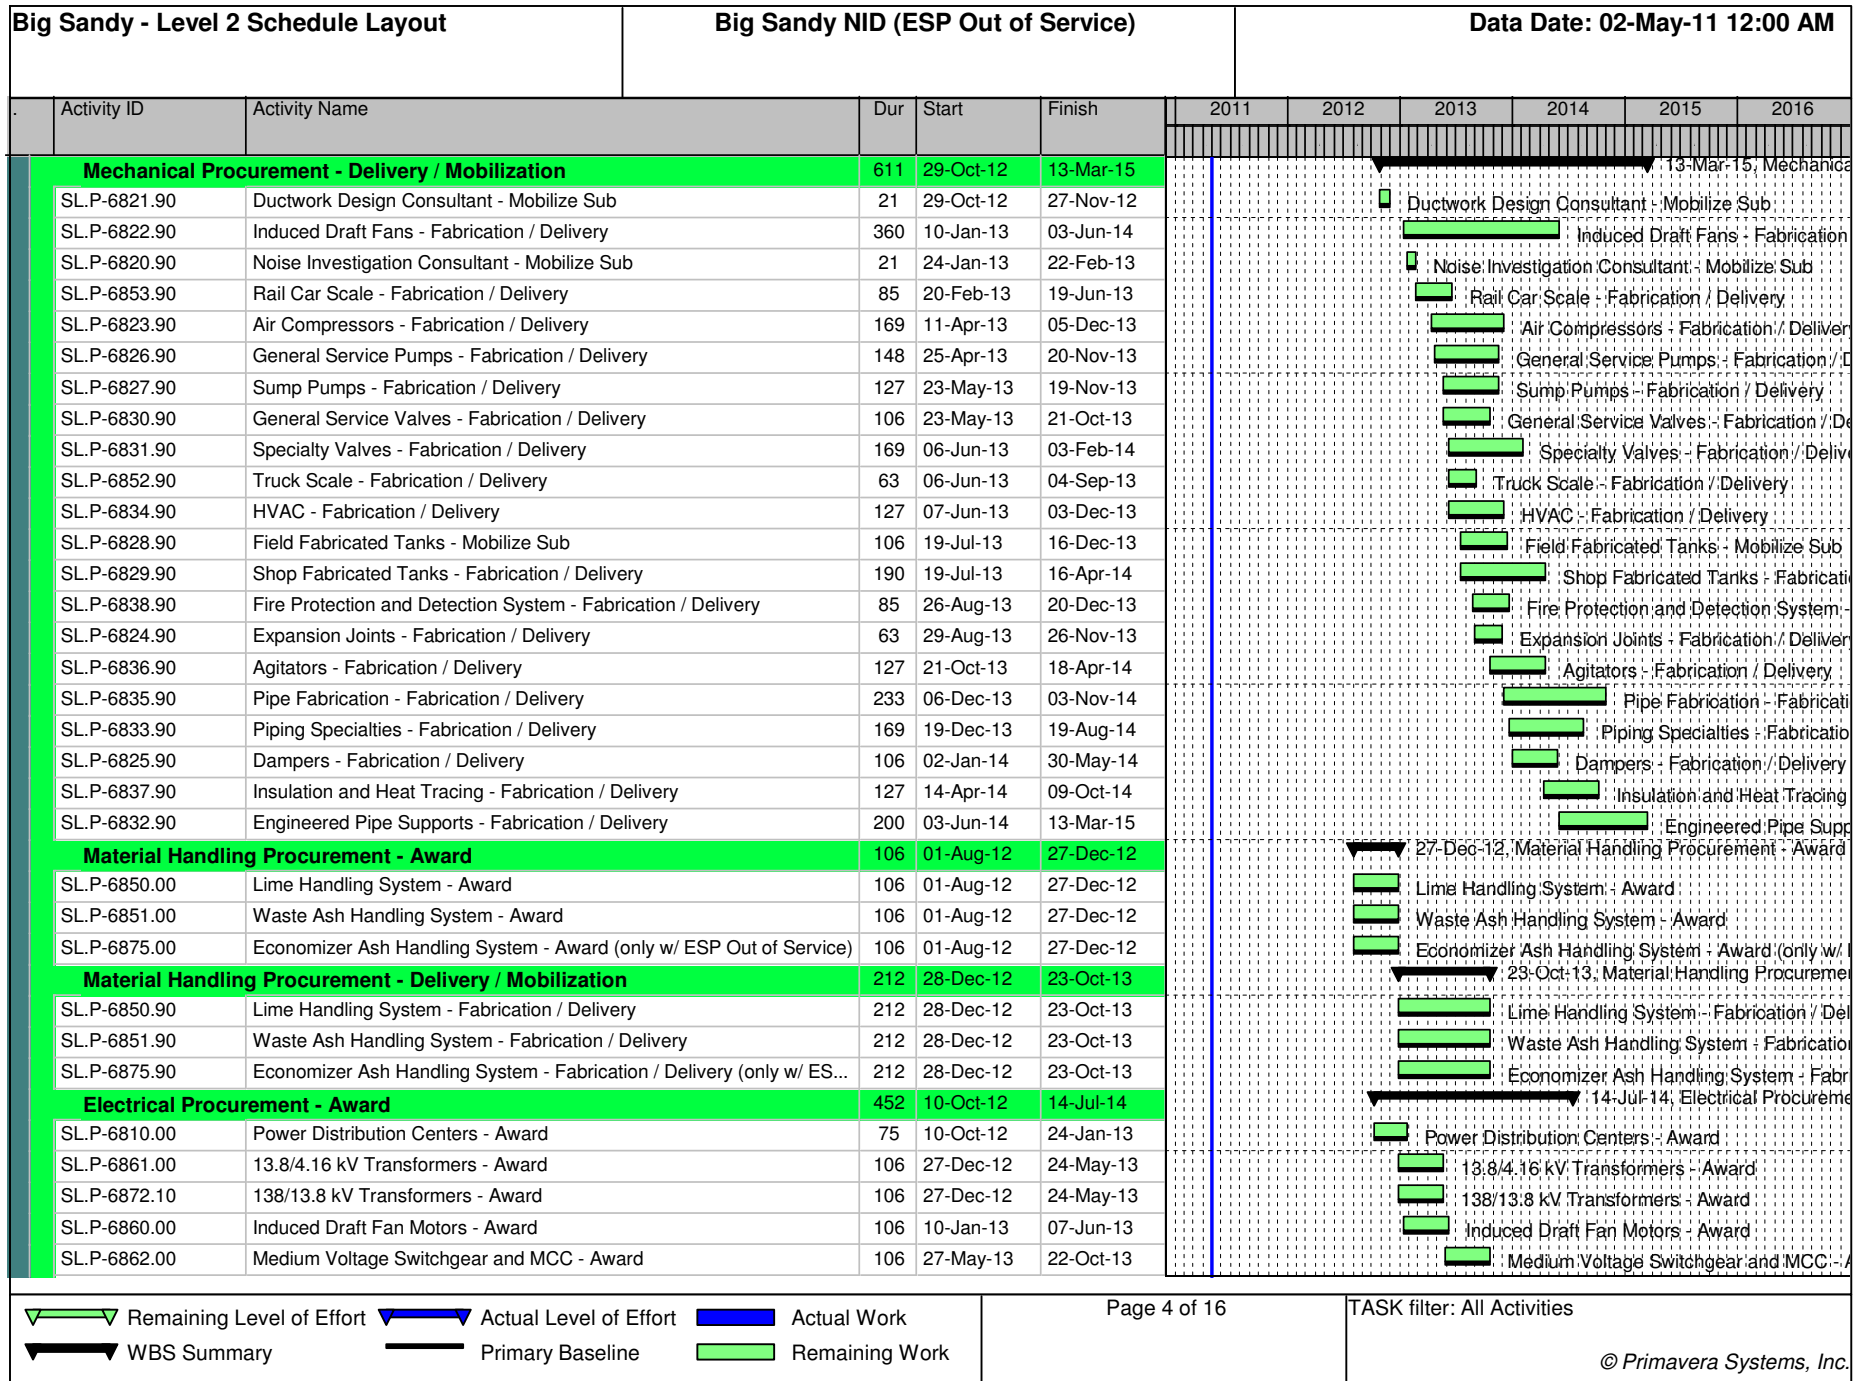

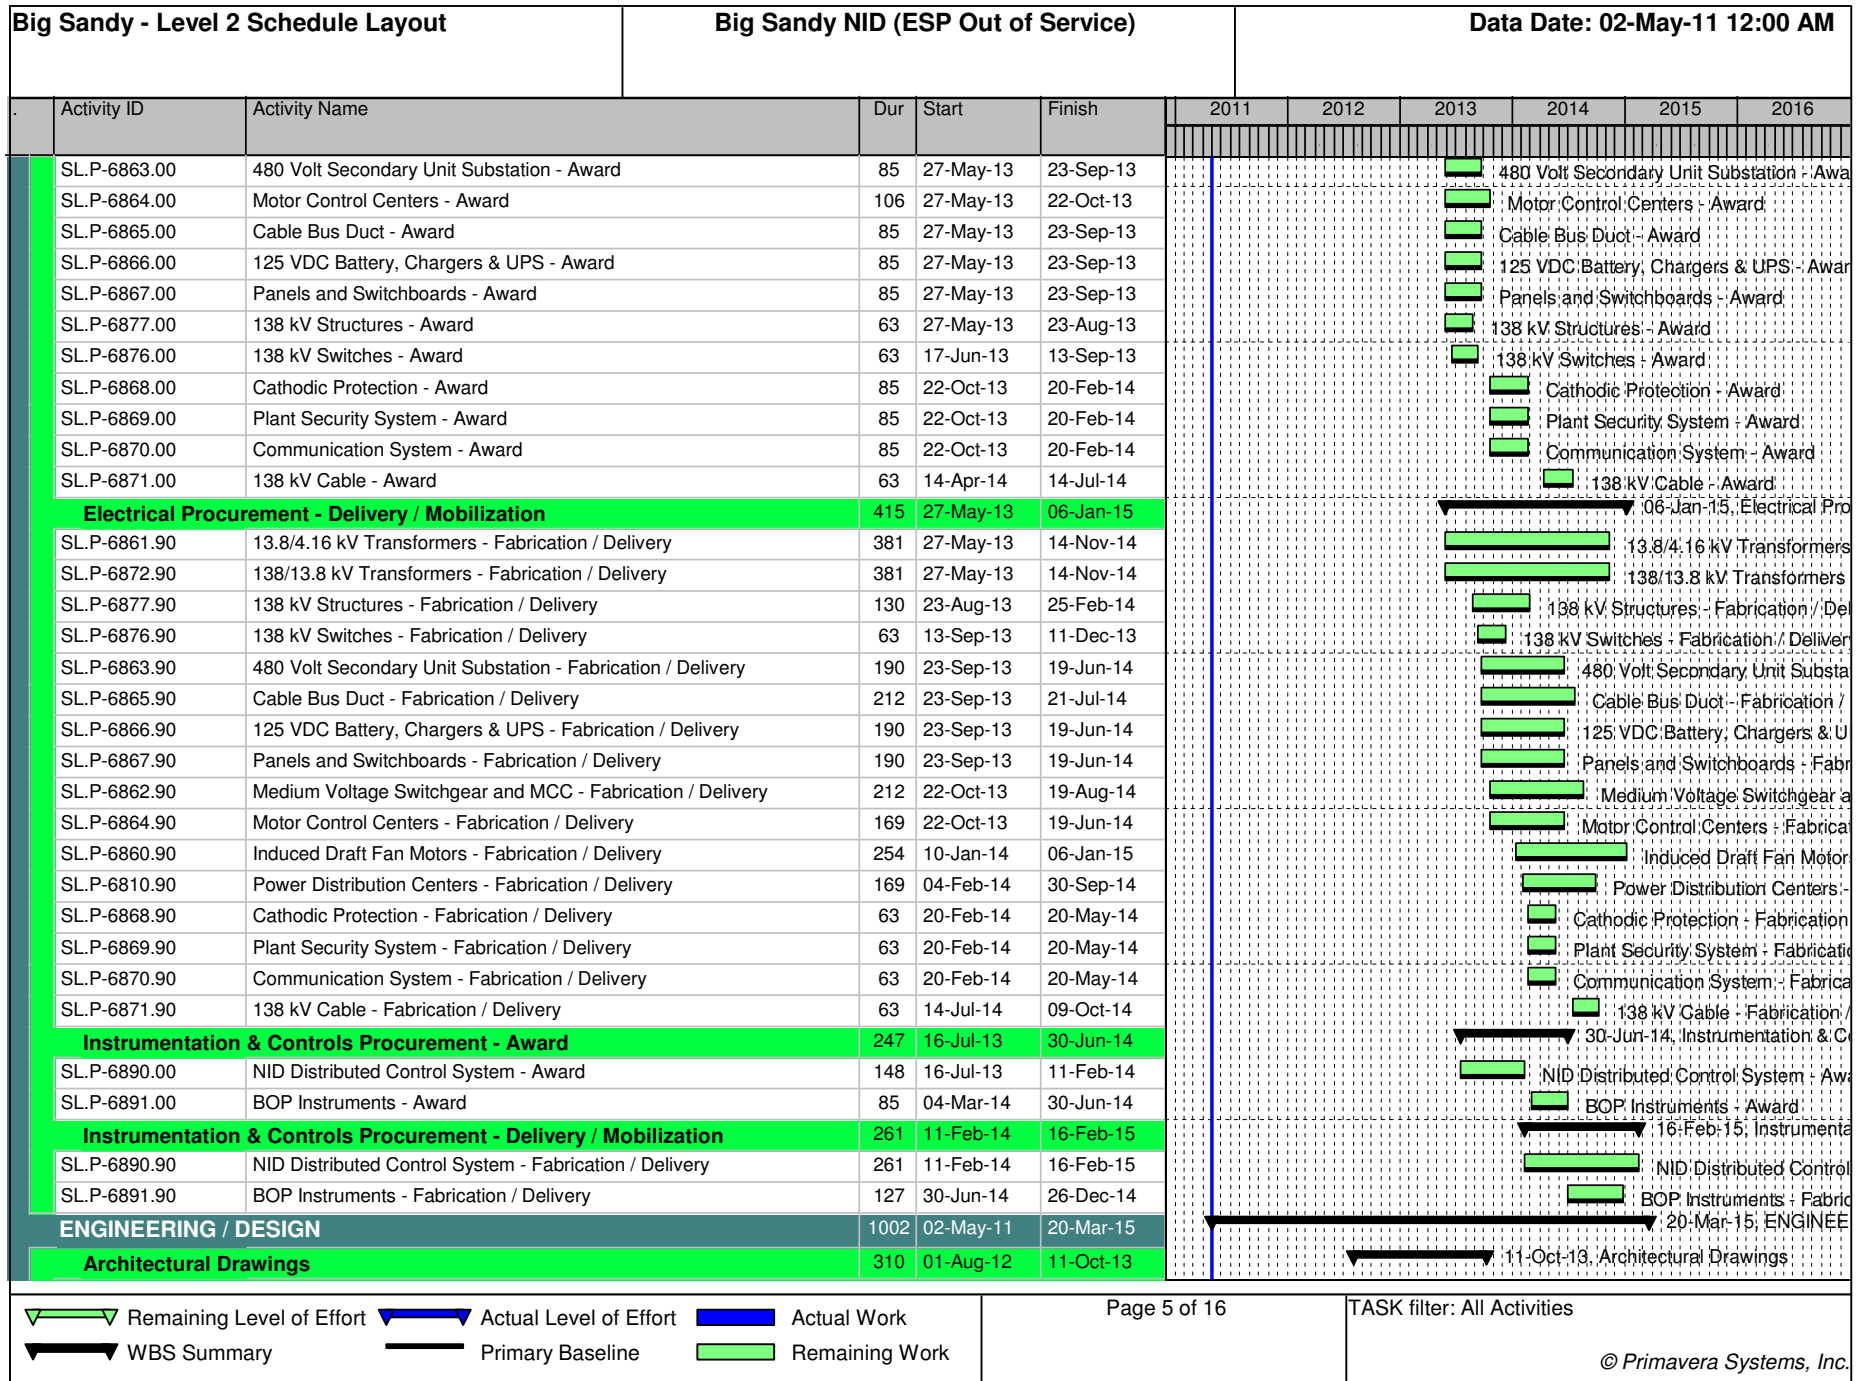

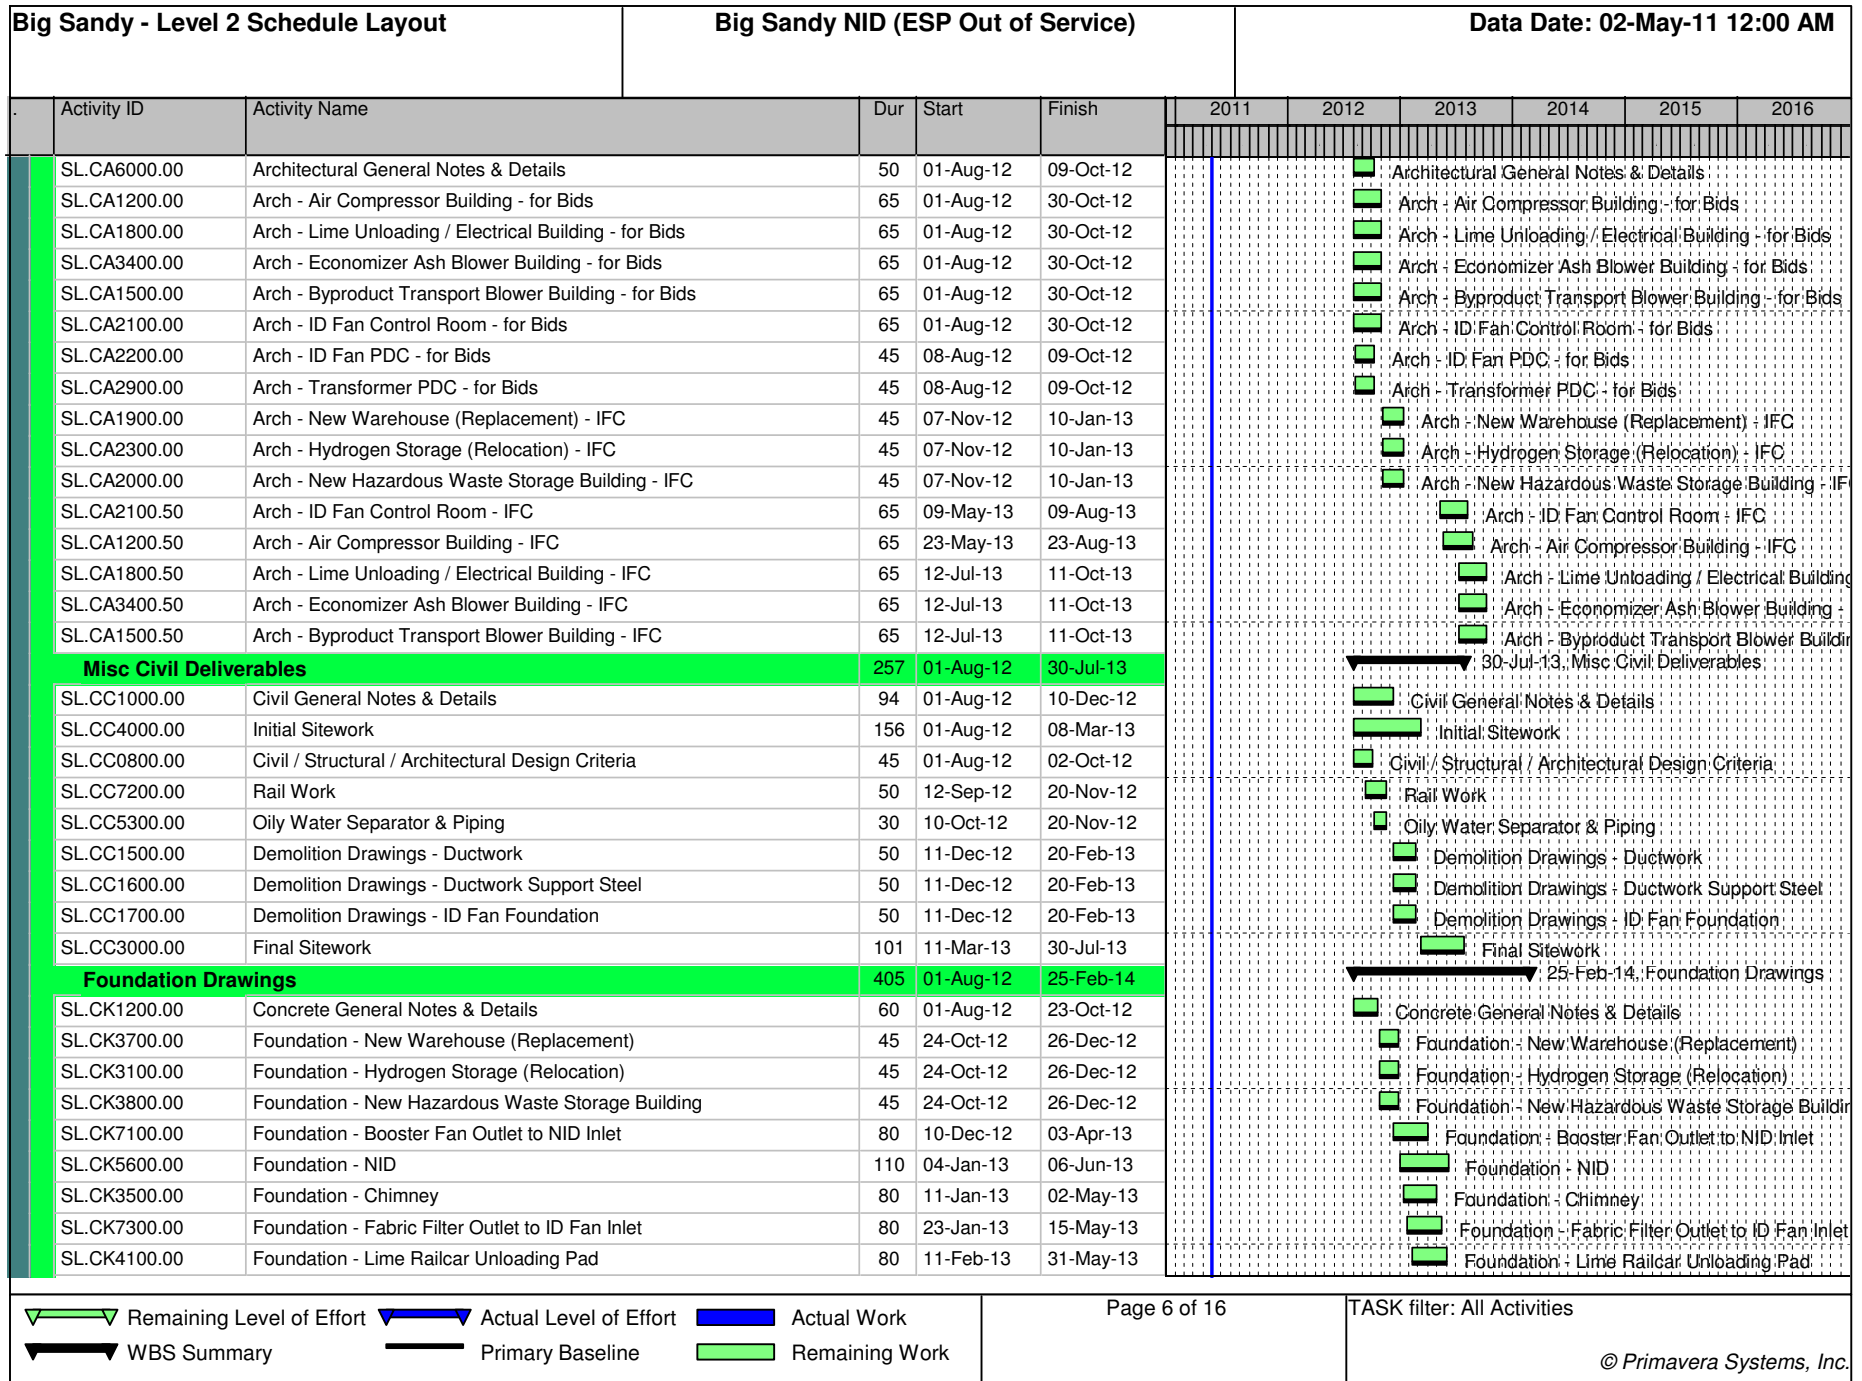


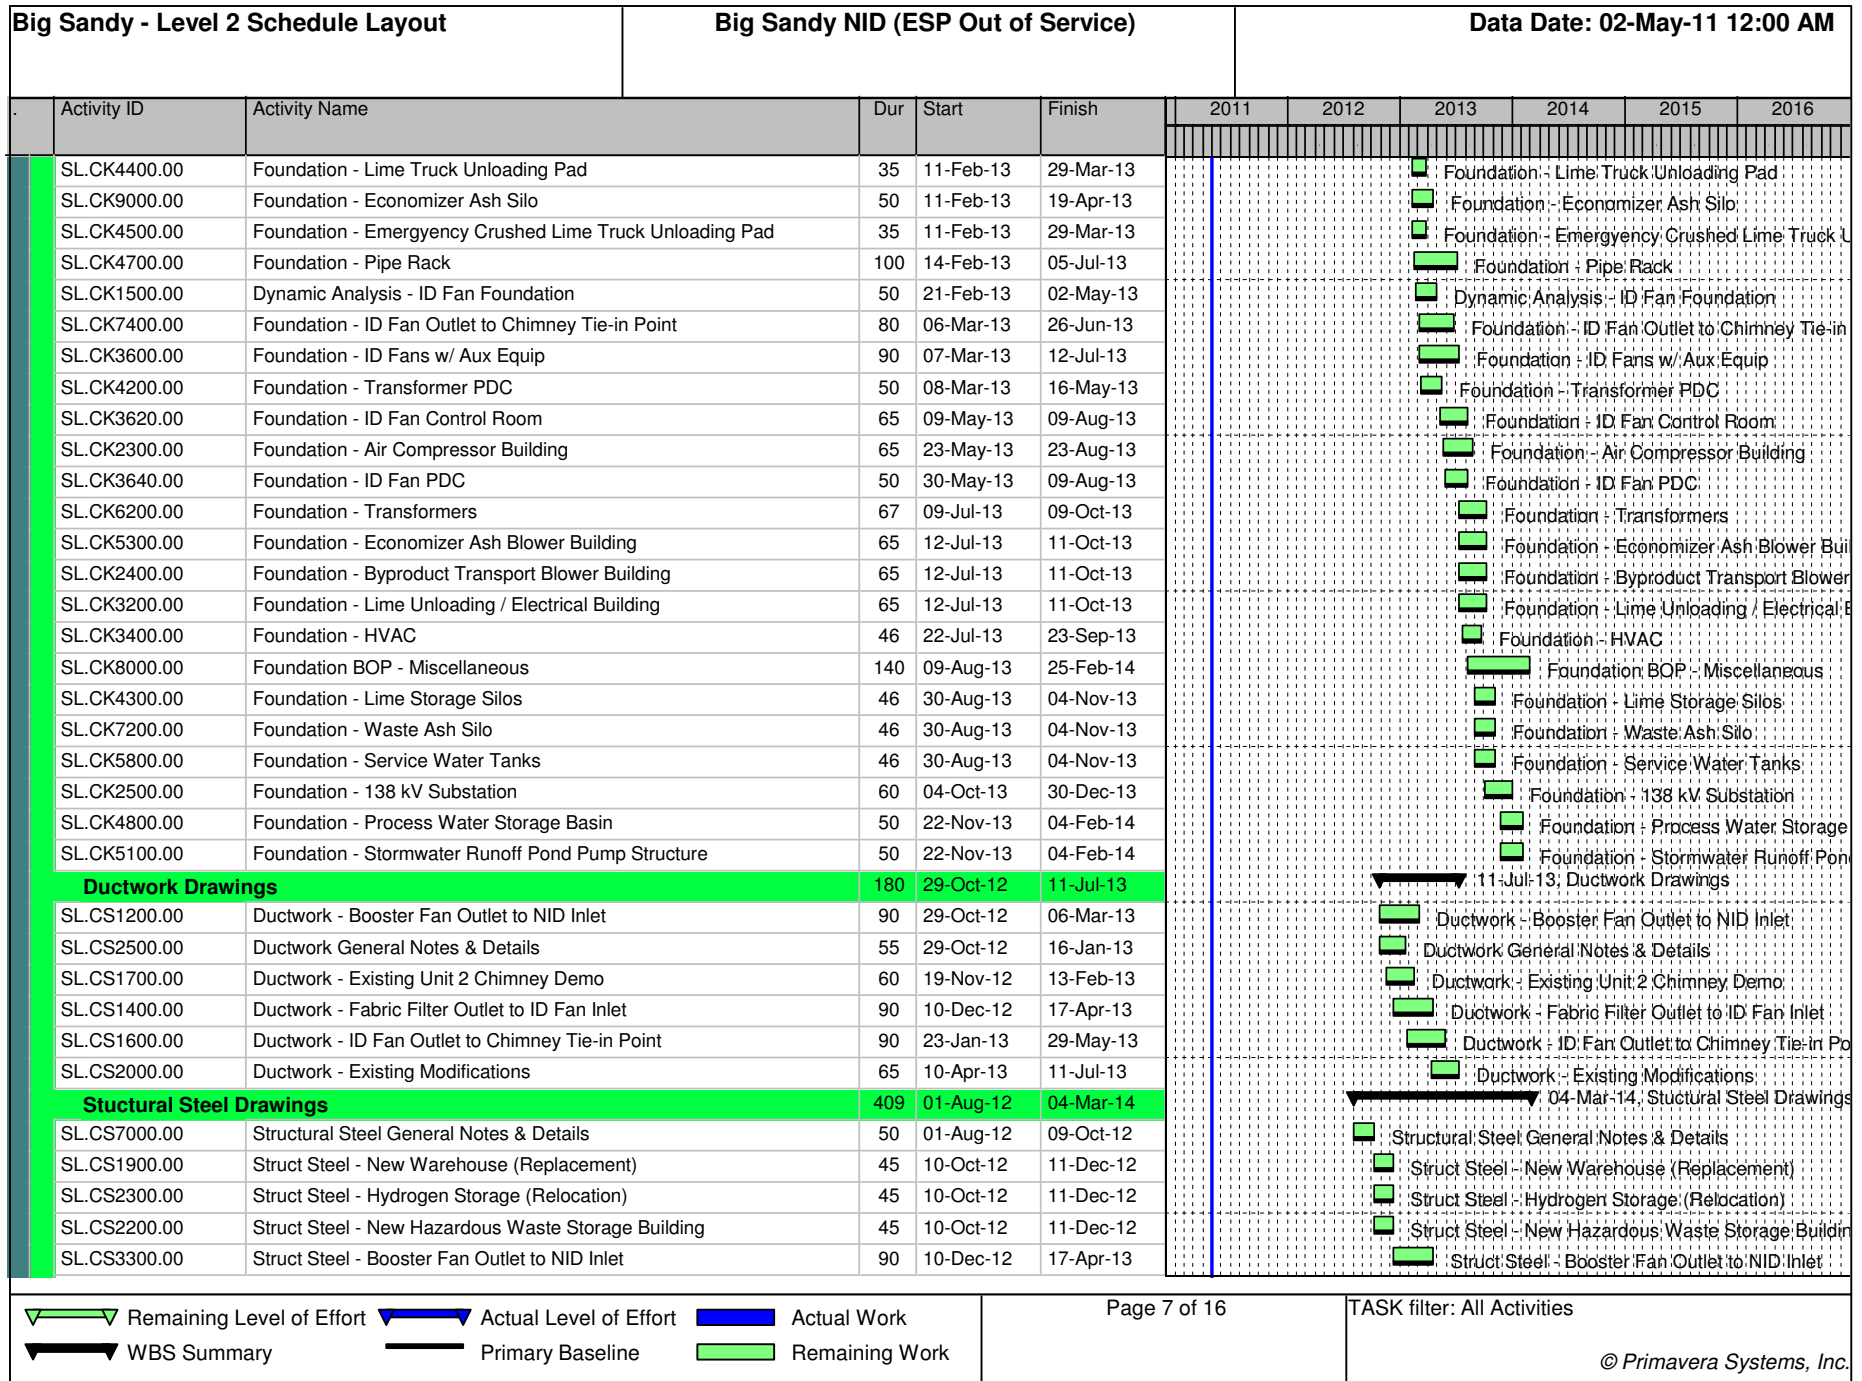


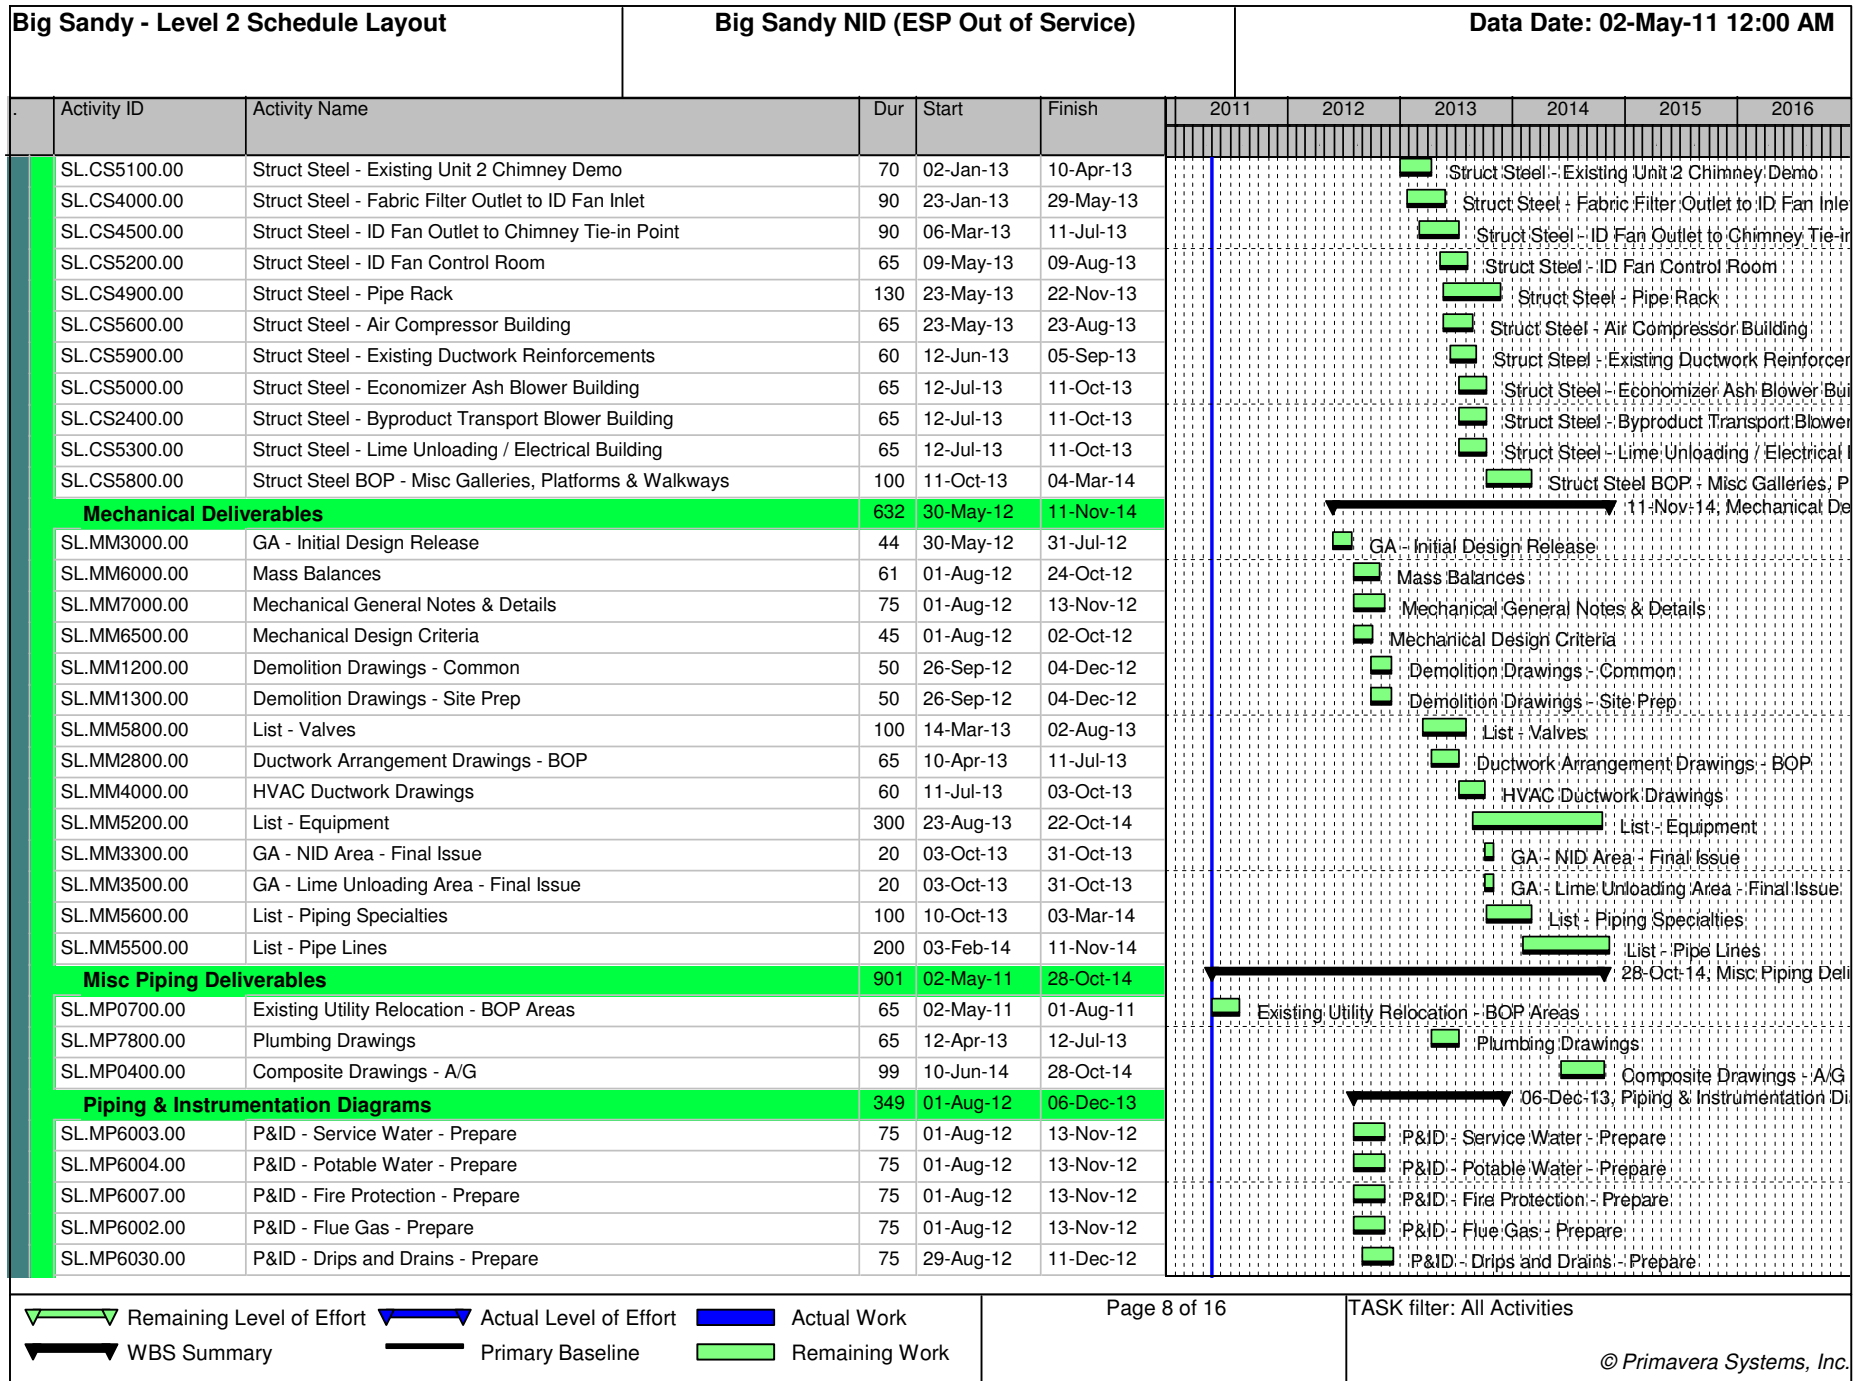

Big Sandy - Level 2 Schedule Layout			Big Sandy NID (ESP Out of Service)			Data Date: 02-May-11 12:00 AM											
Activity ID	Activity Name	Dur	Start	Finish	2011	2012	2013	2014	2015	2016							
SL.MP6005.00	P&ID - Instrument Air - Prepare	75	26-Sep-12	10-Jan-13													
SL.MP6006.00	P&ID - Plant Air - Prepare	75	26-Sep-12	10-Jan-13													
SL.MP6020.00	P&ID - NID Economizer Ash Recycle - Prepare	50	24-Oct-12	03-Jan-13													
SL.MP6021.00	P&ID - Lime Handling - Prepare	50	24-Oct-12	03-Jan-13													
SL.MP6003.50	P&ID - Service Water - IFC	25	21-Jun-13	26-Jul-13													
SL.MP6002.50	P&ID - Flue Gas - IFC	25	21-Jun-13	26-Jul-13													
SL.MP6004.50	P&ID - Potable Water - IFC	25	06-Sep-13	11-Oct-13													
SL.MP6007.50	P&ID - Fire Protection - IFC	25	06-Sep-13	11-Oct-13													
SL.MP6030.50	P&ID - Drips and Drains - IFC	25	18-Oct-13	22-Nov-13													
SL.MP6005.50	P&ID - Instrument Air - IFC	25	01-Nov-13	06-Dec-13													
SL.MP6006.50	P&ID - Plant Air - IFC	25	01-Nov-13	06-Dec-13													
System Descriptions		65	12-Dec-12	14-Mar-13													
SL.MP9003.00	System Descriptions - Service Water - Preliminary	45	12-Dec-12	14-Feb-13													
SL.MP9004.00	System Descriptions - Potable Water - Preliminary	45	12-Dec-12	14-Feb-13													
SL.MP9007.00	System Descriptions - Fire Protection - Preliminary	45	12-Dec-12	14-Feb-13													
SL.MP9030.00	System Descriptions - Drips and Drains - Preliminary	45	12-Dec-12	14-Feb-13													
SL.MP9002.00	System Descriptions - Flue Gas - Preliminary	45	12-Dec-12	14-Feb-13													
SL.MP9020.00	System Descriptions - NID Economizer Ash Recycle - Preliminary	45	04-Jan-13	07-Mar-13													
SL.MP9021.00	System Descriptions - Lime Handling - Preliminary	45	04-Jan-13	07-Mar-13													
SL.MP9005.00	System Descriptions - Instrument Air - Preliminary	45	11-Jan-13	14-Mar-13													
SL.MP9006.00	System Descriptions - Plant Air - Preliminary	45	11-Jan-13	14-Mar-13													
Isometric Drawings		274	14-Nov-12	06-Dec-13													
SL.MP1003.00	Isometric - Service Water (U/G & A/G)	180	14-Nov-12	26-Jul-13													
SL.MP1004.00	Isometric - Potable Water (U/G & A/G)	180	31-Jan-13	11-Oct-13													
SL.MP1007.00	Isometric - Fire Protection (U/G & A/G)	180	31-Jan-13	11-Oct-13													
SL.MP1020.00	Isometric - NID Economizer Ash Recycle (U/G & A/G)	65	07-Mar-13	06-Jun-13													
SL.MP1030.00	Isometric - Drips and Drains (U/G & A/G)	180	14-Mar-13	22-Nov-13													
SL.MP1005.00	Isometric - Instrument Air (A/G Only)	140	23-May-13	06-Dec-13													
SL.MP1006.00	Isometric - Plant Air (A/G Only)	140	23-May-13	06-Dec-13													
SL.MP1021.00	Isometric - Lime Handling (A/G Only)	90	27-Jun-13	01-Nov-13													
Piping Analysis		184	24-May-13	11-Feb-14													
SL.MP7003.00	Piping Analysis - Service Water	90	24-May-13	27-Sep-13													
SL.MP7004.00	Piping Analysis - Potable Water	90	09-Aug-13	13-Dec-13													
SL.MP7007.00	Piping Analysis - Fire Protection	90	09-Aug-13	13-Dec-13													
SL.MP7020.00	Piping Analysis - NID Economizer Ash Recycle	65	13-Sep-13	13-Dec-13													
SL.MP7030.00	Piping Analysis - Drips and Drains	90	20-Sep-13	28-Jan-14													

Remaining Level of Effort
 Actual Level of Effort
 Actual Work
 WBS Summary
 Primary Baseline
 Remaining Work

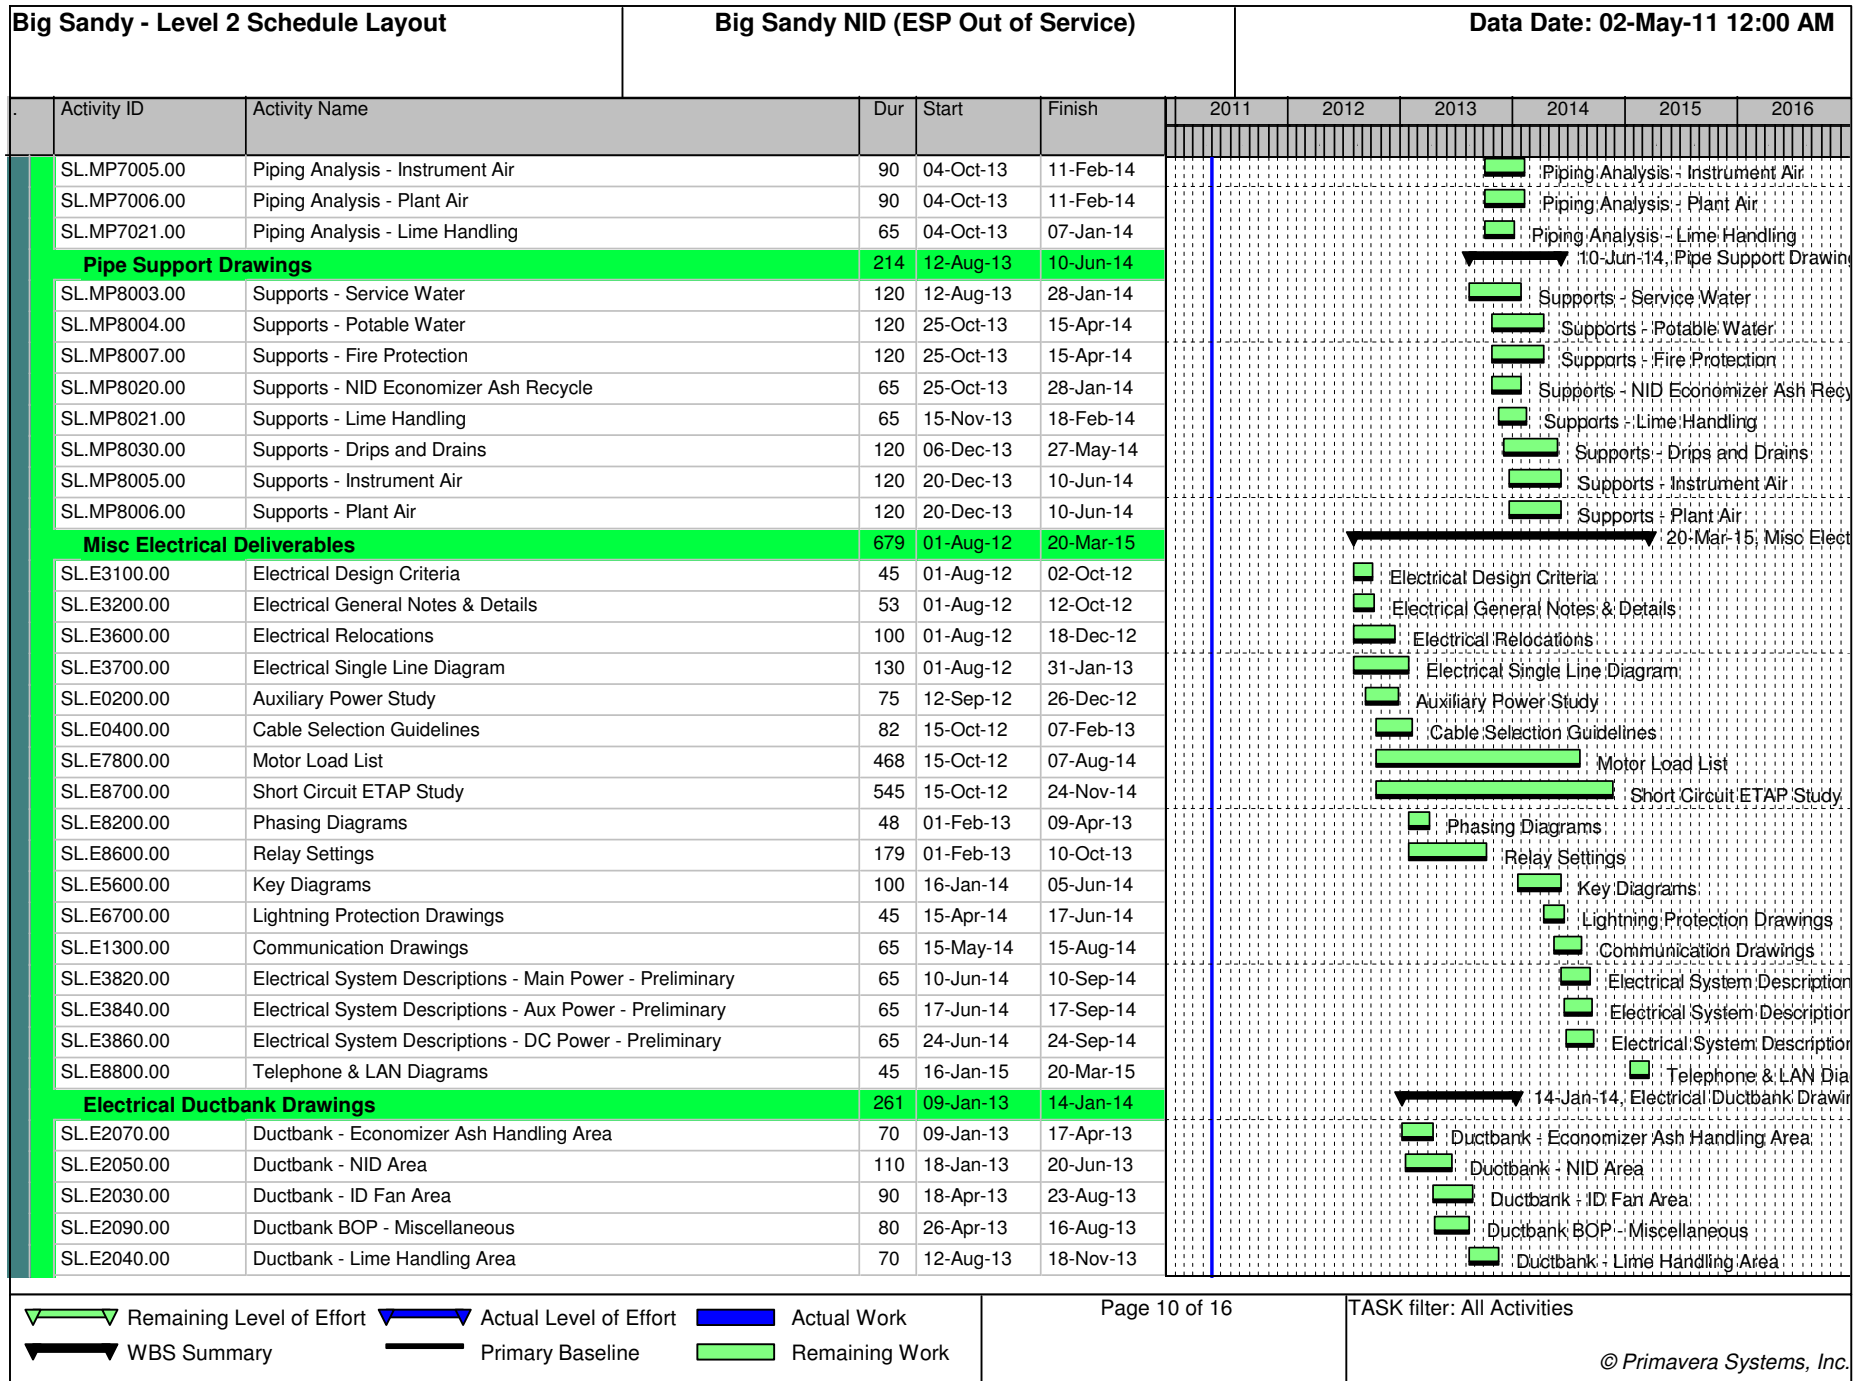

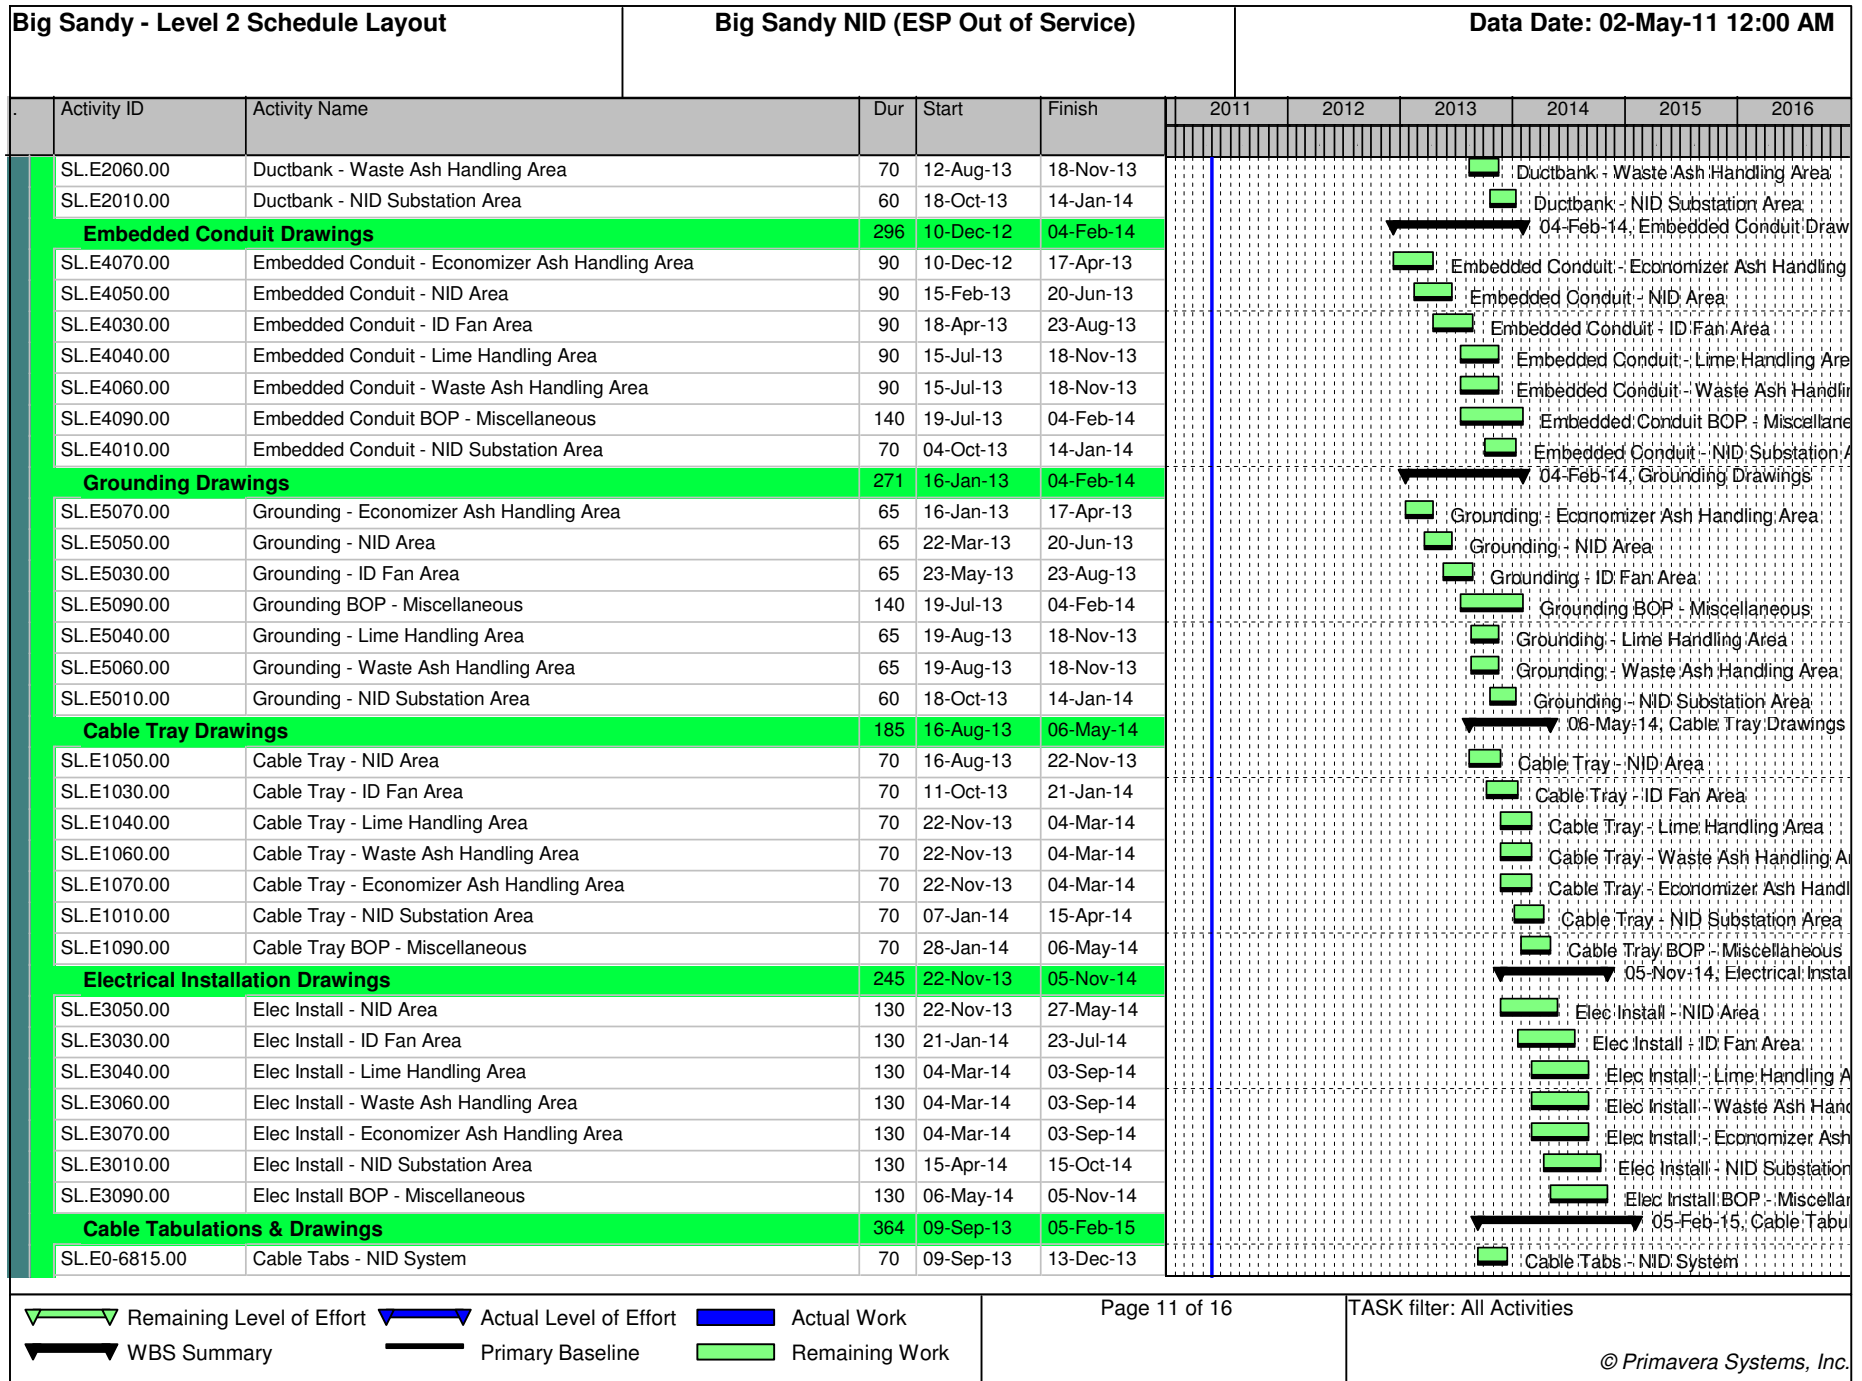

Big Sandy - Level 2 Schedule Layout			Big Sandy NID (ESP Out of Service)			Data Date: 02-May-11 12:00 AM											
Activity ID	Activity Name	Dur	Start	Finish	2011	2012	2013	2014	2015	2016							
SL.E0-6822.00	Cable Tabs - Induced Draft Fans	70	07-Oct-13	14-Jan-14													
SL.E0-6860.00	Cable Tabs - Induced Draft Fan Motors	55	04-Nov-13	21-Jan-14													
SL.E0-6850.00	Cable Tabs - Lime Handling System	65	08-Jan-14	08-Apr-14													
SL.E0-6851.00	Cable Tabs - Waste Ash Handling System	65	08-Jan-14	08-Apr-14													
SL.E0-6875.00	Cable Tabs - Economizer Ash Handling System	65	08-Jan-14	08-Apr-14													
SL.E0-6861.00	Cable Tabs - 13.8/4.16 kV Transformers	70	05-Mar-14	10-Jun-14													
SL.E0-6872.00	Cable Tabs - 138/13.8 kV Transformers	70	05-Mar-14	10-Jun-14													
SL.E0-6863.00	Cable Tabs - 480 Volt Secondary Unit Substation	50	19-Mar-14	27-May-14													
SL.E0-6862.00	Cable Tabs - Medium Voltage Switchgear and MCC	50	09-Apr-14	17-Jun-14													
SL.E0-6864.00	Cable Tabs - Motor Control Centers	50	09-Apr-14	17-Jun-14													
SL.E0-6866.00	Cable Tabs - 125 VDC Battery, Chargers & UPS	50	16-Apr-14	24-Jun-14													
SL.E0-6867.00	Cable Tabs - Panels and Switchboards	50	30-Apr-14	09-Jul-14													
SL.E0-6876.00	Cable Tabs - 138 kV Switches	50	30-Apr-14	09-Jul-14													
SL.E0-6811.00	Cable Tabs - Pre-Engineered Buildings	70	07-May-14	13-Aug-14													
SL.E0-6823.00	Cable Tabs - Air Compressors	40	07-May-14	01-Jul-14													
SL.E0-6810.00	Cable Tabs - Power Distribution Centers	70	07-May-14	13-Aug-14													
SL.E0-6825.00	Cable Tabs - Dampers	40	14-May-14	09-Jul-14													
SL.E0-6836.00	Cable Tabs - Agitators	40	28-May-14	23-Jul-14													
SL.E0-6852.00	Cable Tabs - Truck Scale	40	28-May-14	23-Jul-14													
SL.E0-6853.00	Cable Tabs - Rail Car Scale	40	28-May-14	23-Jul-14													
SL.E0-6838.00	Cable Tabs - Fire Protection and Detection System	60	04-Jun-14	27-Aug-14													
SL.E0-6890.00	Cable Tabs - NID Distributed Control System	70	10-Jun-14	17-Sep-14													
SL.E0-6826.00	Cable Tabs - General Service Pumps	40	11-Jun-14	06-Aug-14													
SL.E0-6827.00	Cable Tabs - Sump Pumps	40	11-Jun-14	06-Aug-14													
SL.E0-6834.00	Cable Tabs - HVAC	40	18-Jun-14	13-Aug-14													
SL.E0-6830.00	Cable Tabs - General Service Valves	40	25-Jun-14	20-Aug-14													
SL.E0-6831.00	Cable Tabs - Specialty Valves	40	25-Jun-14	20-Aug-14													
SL.E0-6807.00	Cable Tabs - Elevators	40	10-Jul-14	03-Sep-14													
SL.E0-6868.00	Cable Tabs - Cathodic Protection	50	17-Jul-14	24-Sep-14													
SL.E0-6869.00	Cable Tabs - Plant Security System	50	24-Jul-14	01-Oct-14													
SL.E0-6870.00	Cable Tabs - Communication System	50	24-Jul-14	01-Oct-14													
SL.E0-6999.00	Cable Tabs BOP - Miscellaneous	75	07-Aug-14	19-Nov-14													
SL.E0-6837.00	Cable Tabs - Insulation and Heat Tracing	80	12-Aug-14	02-Dec-14													
SL.E0-6891.00	Cable Tabs - BOP Instruments	70	28-Oct-14	05-Feb-15													
Lighting Diagrams		165	27-May-14	16-Jan-15													
SL.E6050.00	Lighting - NID Area	45	27-May-14	30-Jul-14													

Remaining Level of Effort
 Actual Level of Effort
 Actual Work
 WBS Summary
 Primary Baseline
 Remaining Work

