

P. S. C. Ky. No. 4

Cancels P. S. C. Ky. No. 3

FARMERS RURAL ELECTRIC COOPERATIVE CORPORATION

OF

Glasgow, Kentucky

Rates, Rules and Regulations for Furnishing

ELECTRICITY

AT

Barren County, Kentucky

Hart County, Kentucky

Metcalf County, Kentucky

Portion of LaRue, Grayson, Green, Edmonson and Adair Counties, Kentucky

**Filed with PUBLIC SERVICE COMMISSION OF
KENTUCKY**

ISSUED December 30, 19 70

EFFECTIVE January 1, 19 71

CHECKED
PUBLIC SERVICE COMMISSION
JAN 28 1971 ISSUED BY
by 952
ENGINEERING DIVISION

FARMERS R. E. C. C.
(Name of Utility)

BY J. B. Galloway
J. B. Galloway, Manager

FOR All Counties Served

P.S.C. Ky. No. 4

Original Sheet No. 7

Cancelling P.S.C. Ky. No. 3

2nd Revised Sheet No. 9 & 10

Farmers Rural Electric Coop. Corp.

RULES AND REGULATIONS

1. **SCOPE** - This Schedule of Rules and Regulations is a part of all contracts for receiving electric service from the Cooperative and applies to all service received from the Cooperative whether the service received is based upon a contract, agreement, signed application, or otherwise. No employee or individual director of the Cooperative is permitted to make an exception to rates or Rules and Regulations. Rates and rules of service may be obtained from the Cooperative's office.
2. **REVISIONS** - These Rules and Regulations may be revised, amended, supplemented or otherwise changed from time to time without notice. Such changes, when effective, shall have the same force and effect as the present Rules and Regulations. The members shall be informed of any changes as soon as possible, after adoption by the Board of Directors, through the Cooperative's monthly newsletter.
3. **CONSUMER'S RESPONSIBILITY FOR COOPERATIVE'S PROPERTY** - All meters, service connections, and other equipment furnished by the Cooperative shall be, and remain, the property of the Cooperative. The member shall exercise proper care to protect the property of the Cooperative on its premises and, in the event of loss or damage to the Cooperative's property arising from neglect of member to care for same, the cost of necessary repairs or replacements shall be paid by the member.
4. **CONTINUITY OF SERVICE** - The Cooperative shall use reasonable diligence to provide a constant and uninterrupted supply of electric power and energy. However, if such supply should fail or be interrupted or become defective through act of God, or public enemy, or by accidents, strikes, labor troubles, or by action of the elements, or inability to secure rights-of-way or other permits needed, or for any other cause beyond the reasonable control of the Cooperative, the Cooperative shall not be liable therefor.
5. **RELOCATION OF LINES BY REQUEST OF MEMBERS** - The Cooperative's established lines shall not be relocated unless the expense for moving and relocating is paid by the member, except in instances where it would be to the advantage of the Cooperative to make such relocation.
6. **APPLICATION FOR SERVICE** - Each prospective member desiring electric service shall be required to sign the Cooperative's "Application for Membership and Electric Service," before service is supplied by the Cooperative and provide the Cooperative with necessary easements or right-of-way permits.
7. **MEMBERSHIP FEE** - The membership fee as set forth in the By-Laws shall be ten dollars (\$10.00), upon the payment of which a member shall be eligible for one service connection. An additional fee of ten dollars (\$10.00) shall be charged for each additional service. The membership fee shall be refunded, if all bills are paid, or shall be applied against any unpaid bills of the member at the time service is discontinued, which will automatically terminate the membership. Service covered by each meter shall be billed separately.


DATE OF ISSUE December 30, 1970
Month Day Year

DATE EFFECTIVE January 1, 1971
Month Day Year

ISSUED BY J. B. Gallaway
Name of Officer

Manager
Title

Glasgow, Kentucky
Address

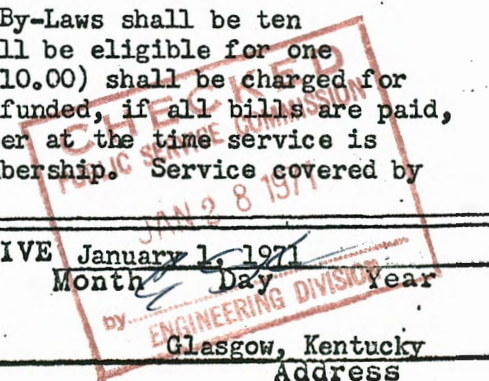

FOR All Counties Served

P.S.C. Ky. No. 4

Original Sheet No. 8

Cancelling P.S.C. Ky. No. 3

2nd Revised Sheet No. 10 & 11

Farmers Rural Electric Coop. Corp.

RULES AND REGULATIONS

- 8. RIGHT OF ACCESS - The Cooperative's employees shall have access to member's premises at all reasonable times for the purpose of reading meter, testing, repairing, removing, or exchanging any and all equipment belonging to the Cooperative.
- 9. MEMBER'S DISCONTINUANCE OF SERVICE - Any member desiring service discontinued or changed from one location to another shall give the Cooperative three (3) days notice in person or in writing, provided such notice does not violate contractual obligations.
- 10. SERVICE CHARGES - No charge will be made for the initial installation of service, or for a service replacing one which has been destroyed by fire. However, a service charge of \$3.00 will be made to a new occupant for the reconnecting or transferring of such service. Service charge will be due and payable at time of connection or transfer or upon notice of said charge. Also, service calls made by the Cooperative pertaining to the consumer's premises shall be charged for at the rate of \$3.00 per call. No service calls shall be made and no service shall be connected or reconnected after working hours unless there exists circumstances that will justify the additional expense. (I)
- 11. TEMPORARY SERVICE - Temporary service may be supplied to circuses, carnivals, fairs, and services of a transient nature in accordance with the existing rate schedules of the Cooperative except that the consumer shall pay, in addition to the regular rates, the total cost of connecting and disconnecting service less the value of materials returned to stock. An advance deposit may be required of the full amount of the estimated bill for service, including the cost of connection and disconnection.
- 12. SERVICE TO CONSUMERS WHICH MAY BE OF SHORT DURATION - In cases of service to power the pumping of oil wells, the operation of oil fields, and any and all other types of consumer services which may be of short duration, the Cooperative must and shall protect its investments on same in the following manner:

The consumer, at the time application is made for such service, shall pay a deposit to the Cooperative, in each instance, an amount equal to the cost of construction and retirement, covering both material and labor involved, less salvage value on all material returned into stock. This deposit may be refunded at the rate of twenty percent (20%) of the consumer's monthly power bills thereafter. (C)


In case of a transfer of the lease or ownership on an oil well, or other property, the parties involved may make the necessary arrangements regarding the transfer of the deposit and settlement of same.
- 13. METER TESTS - All meters shall be checked for accuracy before installation. The Cooperative shall, at its own expense, make periodic tests and inspections of its meters in order to maintain a high standard of accuracy and to conform with the regulations of the Public Service Commission.

DATE OF ISSUE December 30, 1970
Month Day Year

DATE EFFECTIVE January 1, 1971
Month Day Year

ISSUED BY J. B. Gallaway Manager
Name of Officer Title

Glasgow, Kentucky
Address

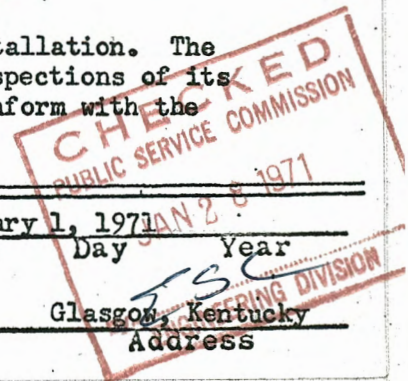

FOR All Counties Served

P.S.C. Ky. No. 4

Original Sheet No. 9

Cancelling P.S.C. Ky. No. 3

2nd Revised Sheet No. 11 & 12

Farmers Rural Electric Coop. Corp.

RULES AND REGULATIONS

The Cooperative shall make additional tests of meters at the request of the member upon advance payment of a fee of three dollars (\$3.00). When the test, made at the member's request, shows the meter to be accurate within 2% slow or fast, no billing adjustment shall be made and the fee paid shall be forfeited to cover cost of the test. (I)

When test shows the meter to be in excess of 2% fast or slow, an adjustment shall be made to the member's bill by recalculating the monthly bills for a period equal to one-half (1/2) of the time lapsed since the past previous test, which in no case shall exceed twelve (12) months and the cost of testing shall be borne by the Cooperative and the three dollars (\$3.00) paid by the member shall be refunded. (C)

14. FAILURE OF METER TO REGISTER - In the event a member's meter shall fail to register, the member shall be billed from the date of such failure at the average consumption of the member based on the three (3) month period immediately preceding the failure.

15. DISCONTINUANCE OF SERVICE BY COOPERATIVE - The Cooperative may refuse to connect or may discontinue service to a member for the violation of any of its rules and regulations. The Cooperative may discontinue service to a member for theft of current or for the appearance of current-theft devices found on the premises of the member. The discontinuance of service by the Cooperative for any cause stated in this rule does not release the member from his obligation for all bills due.


16. POINT OF DELIVERY - The point of delivery is the point designated by the Cooperative on member's premises where current is to be metered. All wiring and equipment beyond this point of delivery shall be supplied and maintained by the member. The member shall, however, notify the Cooperative of any proposed changes in his equipment or wiring which will materially increase or decrease his load so the Cooperative may check its equipment for adequacy to accommodate the consumer's requirement.

17. CONSUMER'S WIRING - All wiring of the member must conform to Cooperative's requirements and accepted modern standards. The member agrees to wire his premises in accordance with specifications at least equal to those prescribed by the National Electrical Code. The Cooperative, however, assumes no responsibility in respect to the type, standard of construction, protective equipment or the condition of the member's property, and will not be liable for any loss or injury to persons or property occurring on the premises or property of the member.

The member agrees to operate and maintain its facilities so as not to interfere with the service of the Cooperative to its other members. The member will have complete responsibility for all construction, operation, and maintenance beyond the meter and will save the Cooperative harmless against liability for injury or damages resulting in any manner from construction, location, operation, or maintenance of the member's facilities.

DATE OF ISSUE December 30, 1970 DATE EFFECTIVE January 1, 1971
Month Day Year Month Day Year

ISSUED BY J. B. Galloway Manager Glasgow, Kentucky
Name of Officer Title Address

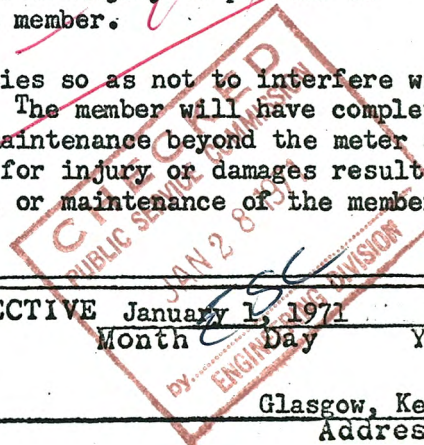

FOR All Counties Served

P.S.C. Ky. No. 4

Original Sheet No. 10

Cancelling P.S.C. Ky. No. 3

2nd Revised Sheet No. 12 & 13

Farmers Rural Electric Coop. Corp.

RULES AND REGULATIONS

18. INSPECTION - All consumer's wiring must be inspected and approved before permanent connection for electric service is made by the Cooperative except where temporary service is desired during the construction of any permanent building. Fee for such inspection is payable at the Cooperative office.

19. METER READING - Each member receiving service shall supply the Cooperative with monthly readings on such date as designated by the Cooperative. Upon failure by the member to supply the Cooperative with three consecutive meter readings the Cooperative shall then read the meter and charge the member three dollars (\$3.00) for the extra service rendered. In the event an error in meter reading is made or member fails to return meter reading, the member shall pay an amount approximately equal to his average bill. (I)

20. CHARGE FOR SEASONAL, MOBILE HOMES, PUMPS, AND OTHER SERVICES - Consumers requiring service only during certain seasons, not exceeding 9 months per year, may guarantee a minimum annual payment of 12 times the minimum monthly charge determined in accordance with the rate applicable. In this case there shall be no minimum monthly charge. Payment of minimum annual charge shall entitle the consumer to the use of the corresponding number of kilowatt-hours in accordance with the rate applicable. (C)

Charge shall be computed each month.... (D)

Consumers requiring service to mobile homes, trailers, pumps, barns, or services with low usage shall be required to deposit with the Cooperative an amount to cover the cost of labor and overhead for constructing electric facilities as follows: Service and/or meter pole and each span of primary excluding the first. The deposit shall be paid prior to the construction of electric facilities. Such deposit shall be returned to the consumer in the form of a credit on the amount paid annually for electric service in the amount of twenty (20) per cent of the total annual billing. (N)


21. CONSUMER BILLING AND COLLECTING POLICY - Bills are to be mailed on or before the first day of each month covering service rendered during the month ending at the first of the preceeding month.

Electric energy bills are due and payable from first through fifteenth of each month afterwhich the gross amount will be 10% higher on the first \$25.00 of the current monthly bill. Failure to receive bill shall not release the obligation to pay.

Delinquent letters are to be sent out on or about the 19th of each month. Field collection date for delinquent accounts shall be on or about the 25th of each month.

DATE OF ISSUE December 30, 1970 DATE EFFECTIVE January 1, 1971
Month Day Year Month Day Year

ISSUED BY J. B. Callaway Manager Glasgow, Kentucky
Name of Officer Title Address

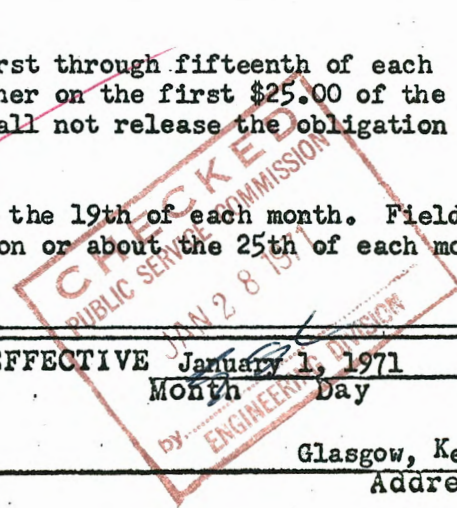

FOR All Counties Served

P.S.C. Ky. No. 4

Original Sheet No. 11

Cancelling P.S.C. Ky. No. 3

2nd Revised Sheet No. 13

Farmers Rural Electric Coop. Corp.

RULES AND REGULATIONS

A \$3.00 fee is to be collected on first call and on all subsequent calls for purposes of collecting delinquent accounts during regular working hours. The Cooperative reserves the right to require additional payment for trips made other than during regular working hours. (I)

No consumer is to be reconnected at any location without first having paid all previous indebtedness to Cooperative.

A service charge of \$3.00 shall be applied to each reconnect, regardless of whether a trip is required, and on service calls for trouble on consumer's side of meter. (I)

Invoice statement to be issued on or about 19th of following month covering each delinquent account.

Periodically all unpaid invoice statements are to be turned over to an attorney or competent collecting agency for further proceedings, provided such amount exceeds the membership fee.


When checks are returned from bank marked "Insufficient Funds" the drawer of said check is to be notified by letter and his service placed on the cut-off list along with other delinquent accounts and handled in the same manner as outlined above.

All consumers are to be members of the Cooperative. Cases of failure to pay membership fee shall be treated in the same manner as outlined above on delinquent accounts.

When a member-consumer is delinquent, the Cooperative may require an advance deposit of an amount equal to the estimated electric bills for two months. In certain cases of temporary service, and/or questionable cases, an advance deposit for two months estimated consumption may be charged at the time of initial service connect. Such advance payments may be refunded or consumed in electric energy used after 24 months of prompt payment.

22. GENERAL - Should a consumer require service other than covered in our rate schedules and as stated in these rules and regulations, the Cooperative reserves the right to require payment from the consumer for the initial cost of such installation. (N)

Handwritten signature in red ink

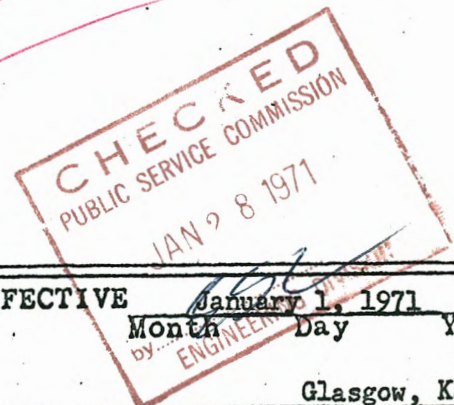

DATE OF ISSUE December 30, 1970
Month Day Year

DATE EFFECTIVE January 1, 1971
Month Day Year

ISSUED BY J. B. Holloway Manager
Name of Officer Title

Glasgow, Kentucky
Address

Form for filing Rate Schedules

For All Counties Served
Community, Town or City

P.S.C. NO. 4

Original SHEET NO. 1

Farmers Rural Electric Coop. Corp.
Name of Issuing Corporation

CANCELLING P.S.C. NO. 3

2nd Revised SHEET NO. 1

CLASSIFICATION OF SERVICE

SCHEDULE R - RESIDENTIAL AND FARM SERVICE RATE PER UNIT

APPLICABLE: In all territory served by the seller.

AVAILABILITY

Available to residents for all uses in the home and on the farm and for other consumers using single-phase service below 50 KW for ordinary merchandising establishments, repair shops, garages and service stations, schools, churches and community buildings, all subject to the established rules and regulations of the seller. Three-phase service may be provided to consumers located within 1,000 feet of existing three-phase line.

(C)

TYPE OF SERVICE

Single-phase, or three-phase where available, 60 cycles, at available secondary voltages.

(C)

RATES PER MONTH

First	50 KWH	@	6.0¢	per KWH	
Next	50 KWH	@	4.0¢	per KWH	
Next	100 KWH	@	2.0¢	per KWH	(I)
Next	300 KWH	@	1.5¢	per KWH	
Remaining	KWH	@	1.2¢	per KWH	

MINIMUM CHARGES


The minimum monthly charge to consumers billed under the above rate shall be \$3.00. Payment of the minimum charge shall entitle the consumer to the use of the number of kilowatt hours corresponding to the minimum charge in accordance with the foregoing rate. The minimum monthly charge for three-phase service shall be \$.75 per KVA of installed transformer capacity.

(C)

DATE OF ISSUE December 30, 1970 DATE EFFECTIVE January 1, 1971 Billing

ISSUED BY B. Galloway TITLE Manager
Name of Officer

Issued by authority of an Order of the Public Service Commission of Ky. in Case No. 5407 dated December 30, 1970

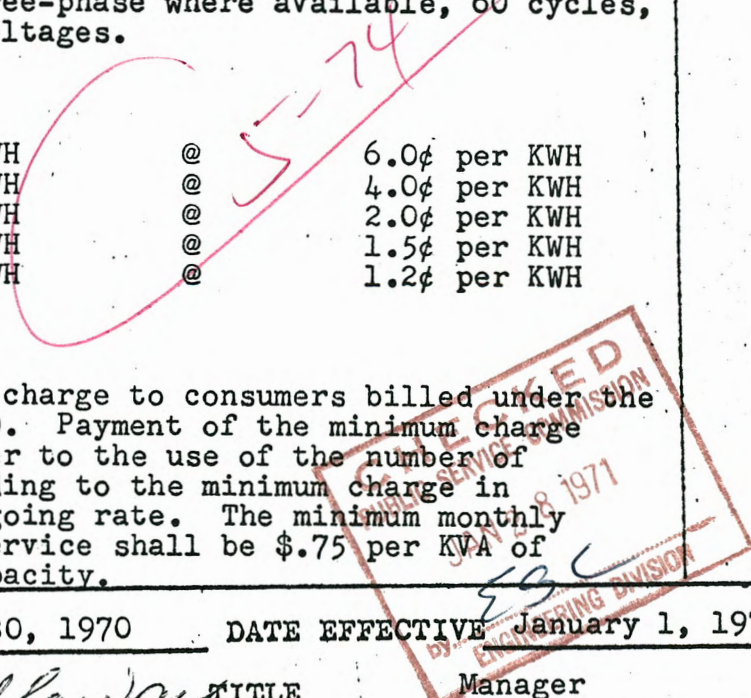

Form for filing Rate Schedules

For All Counties Served
Community, Town or City

P.S.C. NO. 4

Original SHEET NO. 2

Farmers Rural Electric Coop. Corp.
Name of Issuing Corporation

CANCELLING P.S.C. NO. 3

2nd Revised SHEET NO. 2

CLASSIFICATION OF SERVICE

SCHEDULE R - RESIDENTIAL AND FARM SERVICE


RATE
PER UNIT

TERMS OF PAYMENT

The above rates are net, the gross rates are 10% higher on the first \$25.00. If the current monthly bill is not paid by the 15th of the month following the meter reading date, the gross rates shall then apply. No delayed payment charge shall be applicable to schools, churches and community buildings.

(C)

05-74

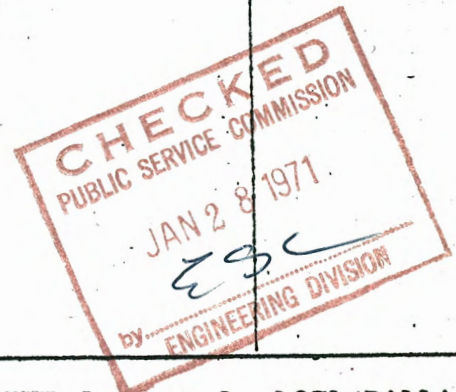

DATE OF ISSUE December 30, 1970 DATE EFFECTIVE January 1, 1971 Billing

ISSUED BY [Signature] TITLE Manager
Name of Officer

Issued by authority of an Order of the Public Service Commission of Ky. in
Case No. 5407 dated December 30, 1970.

Form for filing Rate Schedules

For All Counties Served
Community, Town or City

P.S.C. NO. 4

Original SHEET NO. 3

Farmers Rural Electric Coop. Corp.
Name of Issuing Corporation

CANCELLING P.S.C. NO. 3

2nd Revised SHEET NO. 3 & 6

CLASSIFICATION OF SERVICE

SCHEDULE C - COMMERCIAL & INDUSTRIAL SERVICE	RATE PER UNIT
<u>APPLICABLE:</u> In all territory served by the seller.	
<u>AVAILABILITY:</u> Available to consumers for commercial and industrial loads for all uses including lighting, heating and power, including oil well services, all subject to the established rules and regulations of the seller.	
<u>TYPE OF SERVICE:</u> Single-phase, or three-phase where available, 60 cycles at available voltages.	
<u>RATES PER MONTH</u>	
1. For all consumers whose kilowatt demand is less than 50 KW.	
Kilowatt Demand Charge: None	
First 50 KWH @	6.0¢ per KWH
Next 50 KWH @	4.0¢ per KWH
Next 400 KWH @	2.0¢ per KWH
Remaining KWH @	1.5¢ per KWH
2. For all consumers whose kilowatt demand exceeds 50 KW.	
Kilowatt Demand Charge: Per KW	\$1.25
<u>Energy Charge:</u>	
First 10,000 KWH @	1.1¢ per KWH
Next 20,000 KWH @	1.0¢ per KWH
Next 30,000 KWH @	0.9¢ per KWH
Next 140,000 KWH @	0.8¢ per KWH
Next 400,000 KWH @	0.7¢ per KWH
Remaining KWH @	0.6¢ per KWH

CHECKED
 PUBLIC SERVICE COMMISSION
 JAN 28 1971
 ENGINEERING DIVISION

DATE OF ISSUE December 30, 1970 DATE EFFECTIVE January 1, 1971 Billing

ISSUED BY J. J. Callaway TITLE Manager
Name of Officer

Issued by authority of an Order of the Public Service Commission of Ky. in Case No. 5407 dated December 30, 1970.

Form for filing Rate Schedules

For All Counties Served
Community, Town or City

P.S.C. NO. 4

Original SHEET NO. 4

Farmers Rural Electric Coop. Corp.
Name of Issuing Corporation

CANCELLING P.S.C. NO. 3

2nd Revised SHEET NO. 3,4,6, &7

CLASSIFICATION OF SERVICE

SCHEDULE C - COMMERCIAL & INDUSTRIAL SERVICE

RATE
PER UNIT

DETERMINATION OF BILLING DEMAND:

The billing demand shall be the maximum kilowatt demand established by the consumer for any period of fifteen consecutive minutes during the month for which the bill is rendered, as indicated or recorded by a demand meter and adjusted for power factor as provided below.

POWER FACTOR ADJUSTMENT:


The consumer agrees to maintain unity power factor as nearly as practicable. Power factor may be measured at any time. Should such measurements indicate that the power factor at the time of maximum demand is less than 85%, the demand for billing purposes shall be the demand as indicated or recorded by the demand meter multiplied by 85% and divided by the per cent power factor.

(C)

MINIMUM MONTHLY CHARGE:

The minimum monthly charge under the above rate shall be \$3.00 for single-phase service. The minimum monthly charge for three-phase service shall be 75¢ per KVA of installed transformer capacity or the minimum monthly charge stated in the service contract. Where it is necessary to extend or re-enforce existing distribution facilities, the minimum monthly charge may be increased to assure adequate compensation for the added facilities. Where the minimum charge is increased in accordance with the terms of this section, additional energy shall be included in accordance with the foregoing rate schedule.

(C)

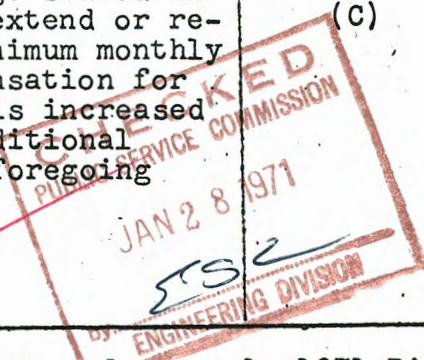

DATE OF ISSUE December 30, 1970 DATE EFFECTIVE January 1, 1971 Billing

ISSUED BY [Signature] TITLE Manager
Name of Officer

Issued by authority of an Order of the Public Service Commission of Ky. in Case No. 5407 dated December 30, 1970.

Form for filing Rate Schedules

For All Counties Served
Community, Town or City

P.S.C. NO. 4

Original SHEET NO. 5

Farmers Rural Electric Coop. Corp.
Name of Issuing Corporation

CANCELLING P.S.C. NO. 3

2nd Revised SHEET NO. 4, 5, & 7

CLASSIFICATION OF SERVICE

SCHEDULE C - COMMERCIAL & INDUSTRIAL SERVICE	RATE PER UNIT
<p><u>SERVICE AT PRIMARY VOLTAGE:</u></p> <p>If service is furnished at primary distribution voltage, a discount of 10% shall apply to both energy and demand charges. However, service may be metered at secondary voltage and adjusted to primary metering by adding the estimated transformer losses to the metered kilowatt hours.</p>	(T)
<p><u>FUEL ADJUSTMENT:</u></p> <p>In case the rate under which Seller purchases power at wholesale is adjusted in accordance with a fuel cost adjustment provision in seller's wholesale power contract, the foregoing energy charges under Part 2 above shall be adjusted each month by the same amount per KWH as the fuel cost adjustment per KWH in seller's wholesale power bill for the next preceding month.</p>	(N)
<p><u>TERMS OF PAYMENT:</u></p> <p>The above rates are net, the gross rates are 10% higher on the first \$25.00. If the current monthly bill is not paid by the 15th of the month following the meter reading date, the gross rates shall then apply. No delayed payment charges shall be applicable to schools, churches, and community buildings.</p>	

5-74

CHECKED
PUBLIC SERVICE COMMISSION
JAN 28 1971
ENGINEERING DIVISION

DATE OF ISSUE December 30, 1970 DATE EFFECTIVE January 1, 1971 Billing

ISSUED BY *J.B. Ballouway* TITLE Manager

Issued by authority of an Order of the Public Service Commission of Ky. in Case No. 5407 dated December 30, 1970.

Form for filing Rate Schedules

For All Counties Served
Community, Town or City

P.S.C. NO. 4

Original SHEET NO. 6

Farmers Rural Electric Coop. Corp.
Name of Issuing Corporation

CANCELLING P.S.C. NO. 1

1st. Revised SHEET NO. 16

CLASSIFICATION OF SERVICE

SCHEDULE OL - OUTDOOR LIGHTING SERVICE

RATE
PER UNIT

APPLICABLE: In all territory served by the seller.

AVAILABILITY:

Available to individuals, towns, villages and others for controlled single or multiple outdoor lighting from dusk to dawn.

(C)

Service under this schedule is for a term of not less than one year and is subject to the rules and regulations of the seller.

(C)

RATE PER FIXTURE:

<u>Type of Fixture</u>	<u>Lamp Size</u>	<u>Monthly Charge</u>
Incandescent	Up to 200 Watts	\$ 2.00
Incandescent	200 to 350 Watts	2.50
Mercury	100 to 200 Watts	3.00
Mercury	200 to 450 Watts	5.00
Mercury	450 to 1200 Watts	8.00

(C & I)

CONDITIONS OF SERVICE:

1. Outdoor lighting equipment including lamps, fixtures, and other necessary facilities, including electric energy, will be furnished by the Cooperative. Above service is limited to one wood pole per fixture.

(C)


2. Lamp replacements will be furnished and made by the Cooperative except in cases of vandalism or willful destruction.

(C)

3. Should the service required be other than by the above standard provisions, the Cooperative reserves the right to require payment from the consumer for the initial cost of such installation.

(C)

C 5-74

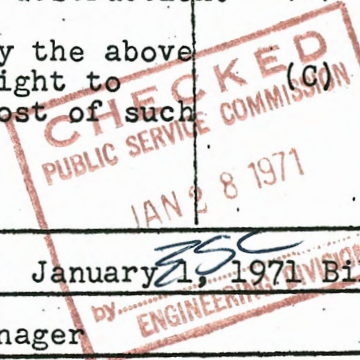

DATE OF ISSUE December 30, 1970 DATE EFFECTIVE January 1, 1971 Billing

ISSUED BY [Signature] TITLE Manager

Issued by authority of an Order of the Public Service Commission of Ky. in Case No. 5407 dated December 30, 1970.

FOR Entire Area Served

P.S.C. Ky. No. 1

Original Sheet No. 1

Cancelling P.S.C. Ky. No. _____

_____ Sheet No. _____

Farmers Rural Electric Coop. Corp.

RULES AND REGULATIONS

The Cooperative will install underground distribution lines to a residential subdivision under the following conditions:

1. The subdivision being developed must consist of a tract of land which is divided into ten (10) or more lots for the construction of new residential buildings or the land on which is constructed two (2) or more new multiple occupancy buildings (refer to PSC Electric Rules, Appendix A for definitions of terms).
2. Developer or owner of subdivision may be required to advance to the Cooperative an amount equal to an "estimated average cost differential," if any, between the average or representative cost of underground distribution systems in residential subdivisions and of equivalent overhead distribution systems within the utility service areas. If the amount deposited exceeds the normal charge for underground extensions, the amount in excess shall be refunded upon completion of the subdivision.
3. The Cooperative will construct underground distribution facilities in the subdivision adequate to render single phase 120/240 Volt service.
4. Three phase primary mains or feeders required within a subdivision to supply local distribution or to serve individual three phase loads may be overhead unless underground is required by governmental authorities or chosen by applicant, in either of which case the differential cost of underground shall be born by the applicant.
5. Developer or successor in title shall grant a right-of-way satisfactory to the Cooperative for the installation, operation and maintenance of its underground facilities.
6. If developer provides the secondary service lines to the residence from service pedestal located on easement, the Cooperative shall credit the applicant fifty dollars (\$50.00) or the equivalent cost of an overhead service line to the applicant's meter base, whichever is greater. Service lines to house (provided by developer) shall be installed and ready for inspection at the same time as the residence. Trench is to be left open until inspection has been made. If the Cooperative provides secondary service lines, applicant shall pay the "estimated average cost differential" between overhead and underground service.

08-24

CHECKED
 PUBLIC SERVICE COMMISSION
 JUN 13 1973
 BY *JRR*
 ENGINEERING DIVISION

DATE OF ISSUE May 29 1973 DATE EFFECTIVE June 7 1973
 Month Day Year Month Day Year

ISSUED BY J. B. Galloway Manager 504 S. Broadway, Glasgow, Ky.
 Name of Officer Title Address

FOR Entire Area Served

P.S.C. Ky. No. 1

Original Sheet No. 2

Cancelling P.S.C. Ky. No. _____

Sheet No. _____

Farmers Rural Electric Coop. Corp.

RULES AND REGULATIONS

- 7. For all developments that do not meet the conditions set forth in paragraph 1 above, underground distribution will be installed provided an advance to the Cooperative is made in an amount equal to the difference between the Cooperative's estimated cost of underground facilities and overhead facilities, which it would otherwise provide.
- 8. The developer or owner of subdivision may be required to perform all necessary trenching and backfilling in accordance with the Cooperative's specifications. The Cooperative shall then credit the developer's or owner's cost in an amount equal to the Cooperative's normal cost for trenching and backfilling.
- 9. See Exhibit A, "Average Underground Cost Differentials," dated May 22, 1973 which is filed as an addendum to this regulation. This exhibit may be revised because of change in cost differentials.

[Handwritten signature]

CHECKED
 PUBLIC SERVICE COMMISSION
 JUN 13 1973
 by *[Signature]*
 ENGINEERING DIVISION

DATE OF ISSUE May 29 1973 DATE EFFECTIVE June 7 1973
 Month Day Year Month Day Year

ISSUED BY B. Galloway B. Galloway, Manager 504 South Broadway
 Name of Officer Title Address

FARMERS RURAL ELECTRIC COOPERATIVE CORPORATION

Glasgow, Kentucky

EXHIBIT A

AVERAGE UNDERGROUND COST DIFFERENTIALS

(Filed in compliance with Appendix to the Order of the Public Service Commission in Administrative Case No. 146, dated February 2, 1973.)

Cost of Underground single-phase per foot \$ 1.20

Cost of Overhead single-phase per foot 0.60

Cost Difference per foot \$ 0.60


Cost of Underground three-phase per foot \$ 3.00

Cost of Overhead three-phase per foot 1.20

Cost Difference per foot \$ 1.80

Costs do not include transformers, miscellaneous units nor trenching and backfilling.

When rock is encountered, the actual cost of rock removal and hauling from site will be added to the above.

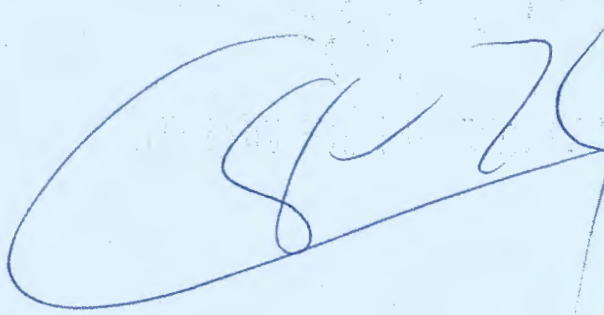

May 22, 1973

