PSC KY NO.____1__ **Bluegrass Water Utility Operating Company, LLC** 3rd Revised Cover Sheet SEWER SERVICE in entire service area CANCELLING PSC KY NO.____ _Cover Sheet BLUEGRASS WATER UTILITY OPERATING COMPANY, LLC 1630 Des Peres Rd, Suite 140 St. Louis, MO 63131 http://www.centralstateswaterresources.com/communities/bluegrass/ RATES – CHARGES – RULES - REGULATIONS FOR FURNISHING **SEWER SERVICES** ΙN **KENTUCKY COUNTIES OF** Bullitt, Campbell, Franklin, Garrard, Graves, Hardin, Jessamine, Madison, Marshall, McCracken, Oldham, Scott, and Shelby FILED WITH THE PUBLIC SERVICE COMMISSION

OF KENTUCKY

DATE OF ISSUE: April 8, 2022
DATE EFFECTIVE: March 31, 2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2021-00265 DATED February 24, 2022

PSC KY NO	1		
6th Revised	_SHEET NO	1	
CANCELLING 1	PSC KY NO	11	
5th Revised	SHEET NO	1	

Bluegrass Water Utility Operating Company, LLC

SEWER SERVICE in entire service area

Tariff Contents	
TITLE SHEET NUMBER	
TITLE SHEET NOWIDER	_
Touiss Contants	
Tariff Contents 1–1.1	
Territory Served	
Rates and Charges	(T)
Residential (RS) and Commercial Flat Rate (CF) Service monthly rates1.3	
RS and CF service non-recurring charges	
(reserved for future use)2–3.1	
Delaplain Commercial Service Area monthly rates & non-recurring charges3.2	
Magruder Village monthly rates & nonrecurring charges	(T)
Yung Farm Estates monthly rates & nonrecurring charges	(T)
(reserved for future use)4-10.5	(T)
Rules and Regulations	
Residential Rules and Regulations	
Definitions 11–12	
Substances not to be discharged into sewers	
Grease, Oil and Sand Traps	
Service Pipe Connections	
Protection by Consumers	
Notice of Trouble	
Maintenance	(T)
Connections	(T)
Line Relocation	
Easements	
Discontinuance of Service	
Billing, Collection and Penalties	
Deposits	
Liability of Company	
Approval of Rules and Regulations	

DATE OF ISSUE:	April 11, 2024
	For Service Rendered on or after
DATE EFFECTIVE:	December 1, 2023
ISSUED BY: /s/	Josiah Cox
TITLE: Bluegras	ss Water UOC, President
-	

PSC KY NO	11	
1st Revised	SHEET NO	1,1
CANCELLING	PSC KY NO	1
Original	SHEET NO	1.1

Bluegrass Water Utility Operating Company, LLC

SEWER SERVICE in entire service area

1.0	Purpose
2.0	Objectives
3.0	Policy27
	Sewer Use
5.0	User Management Requirements
5.1	Change in Discharge
5.2	Non-Compliance Notification
5.3	Termination of Service
6.0	Operating Agreements
6.1	Transferability31
	Modification31
7.0	Monitoring and Reporting
	Representative Samples
7.2	Reporting31
	Integrity of Samples
7.4	Chain of Custody
	Record Retention
7.6	Definitions
	Discharge Limitations34
	User Information Form
10.0	Form Operating Agreements
	Reporting Forms 53-59
	Self-monitoring Report Form
	Chain of Custody Form
	Wastewater contribution Monitoring Report Form
	Excess Treatment Fee 59

DATE OF ISSUE:	April 11, 2024
	_
	For Service Rendered on or after
DATE EFFECTIVE:	December 1, 2023
ISSUED BY: /s/	Josiah Cox
TITLE: Bluegras	ss Water UOC, President

		PSC KY NO.	1
		2nd Revised SHEET NO)1.2
Bluegrass Water Utility Operating Company, LLC SEWER SERVICE in entire service area		CANCELLING PSC KY NO.	1
		1st Revised SHEET NO	D. <u>1.2</u>
		ral Index ory Served	
<u>County</u>	Community		
Hardin	Airview Estates Subd	ivision	
McCracken	Arcadia Pines Subdiv	ision	
Madison	Brocklyn Subdivision	L	
McCracken	Carriage Park Subdiv	ision	
Campbell	Darlington Creek		
Scott	Delaplain service are	1*	
Jessamine	Equestrian Woods Su	bdivision	
Franklin	Fox Run Estates Sub	livision	
McCracken	Great Oaks Subdivisi	on	
Marshall	Golden Acres Subdiv	ision	
Garrard	Herrington Haven an	d Woodland Estates Subdivisions	
Bullitt	Kingswood Developr	nent	
Bullitt	Lake Columbia Estat	es	
Scott	Longview and Home	stead Subdivisions	
McCracken	Magruder Village		(N)
McCracken	Marshall Ridge Subd	ivision	
Shelby	Persimmon Ridge De	velopment	
Graves	Randview Subdivisio	n	
Oldham	River Bluff, city and	environs	
McCracken	Timberland Subdivis	on	
Bullitt	Woodland Acres Sub	division	
Campbell	Yung Farms		(N)
		ke Estates, Shuttle Run, and Riffton Me ce properties at the interchange of I-75	
DATE OF ISSUE: April 11	1, 2024		
F 0	a Dandanad Car		
DATE EFFECTIVE: Dece	e Rendered on or after mber 1, 2023		
ISSUED BY: /s/ Josiah Cox			
·			
TITLE: Bluegrass Water UC	A, I resident		

	PSC KY NO. <u>1</u> <u>1st Revised</u> SHEET NO.	
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO	
SEWER SERVICE in entire service area	Original SHEET NO.	
CLASSIFICATION OF SERVICE – Residential (R	(S)	
Applicable to all customers for residential use through gruder Village and Yung Farms (see Tariff Sheet Normonthly rate per dwelling unit, whether to a standarother multi-unit building, and regardless of whether unit through an individual water meter.	o. 1.2), Service is provided at a fla lone residence, duplex unit, or any	at (T)
<u>Single Residential</u> service is available to any dwelling ter service line and independent sewer lateral line (i connections).	-	
Multi Residential service is available to any dwellin vice line or shared sewer lateral line excluding Y-sh	_	er-
Single Residential Rate (per dwelling unit):	\$77.77 per m	onth (R)
Multi Residential Rate (per dwelling unit):	\$58.33 per m	onth (R)
CLASSIFICATION OF SERVICE – Commercial, t	flat-rate (CF)	
Applicable throughout the service area (see Tariff S lage and Yung Farms. Service is available for non-	residential use, and is provided to	a (T)
non-residential customer with an independent water lateral line. Service is provided at a flat monthly rat whether water utility service is provided to the unit		·.

For Service Rendered on or after
DATE EFFECTIVE: December 1, 2023

ISSUED BY: /s/ Josiah Cox

TITLE: Bluegrass Water UOC, President

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION
ORDER IN CASE NO. 2022-00432 DATED FEBRUARY 14, 2024

	PSC KY NO. 1	
Bluegrass Water Utility Operating Company, LLC	<u>1st Revised</u> SHEETS NO. <u>1.4</u> CANCELLING PSC KY NO.	
SEWER SERVICE in entire service area	Original SHEETS NO.	
NON-RECURRING CHARGES — RS and CF ser	vice	
Applicable in the same parts of the service area to v of Service are applicable (see Tariff Sheet Nos. 1.2		
New Tap Fee		
All Service Areas	Actual Cost	(N)
Late Payment Penalty Return Check Fee Termination/Reconnection Fees Field Collection Fee * Zero amount represents a reduction for some parts o change for the other parts.	10% \$15.00 \$0.00 \$0.00	(I) (I)
DATE OF ISSUE: April 11, 2024		
For Service Rendered on or after DATE EFFECTIVE: December 1, 2023		

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2022-00432 DATED FEBRUARY 14, 2024

TITLE: Bluegrass Water UOC, President

ISSUED BY: /s/ Josiah Cox

	PSC KY NO. 1
	1st Revised SHEETS NO. 2–3.1
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEETS NO
RESERVED FOR FUTURE USE	

DATE OF ISSUE: February 10, 2022

DATE EFFECTIVE: August 1, 2021

ISSUED BY: /s/ Josiah Cox

TITLE: Bluegrass Water UOC, President

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2020-00290 DATED August 2, 2021

	PSC KY NO	1
	1st Revised SHEETS N	O. 3.2
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO	1
SEWER SERVICE in entire service area	Original SHEETS N	IO. 3.2
CLASSIFICATION OF SERVICE: DELAPLAIN SE	RVICE AREA	
Applicable to all non-residential customers in the vicin Delaplain Road in Scott County, Kentucky, formerly spany.	•	
Non-residential service is available to properties other for any use not exclusively domestic or residential. It is service territory of Delaplain Disposal Company, inclu commercial service properties at the interchange of I-7 residential customers are subject to the Industrial/Commercial service properties at the interchange of I-7 residential customers are subject to the Industrial/Commercial Service instituted by Delaplain Disposal Commercial Service Service Properties at the interchange of I-7 residential customers are subject to the Industrial/Commercial Service Service Service Properties at the interchange of I-7 residential customers are subject to the Industrial/Commercial Service Service Service Properties at the interchange of I-7 residential Commercial Service Properties at the interchange of I-7 residential Commercial Service Properties at the interchange of I-7 residential Commercial Service Properties at the interchange of I-7 residential Commercial Service Properties at the interchange of I-7 residential Commercial Service Properties Service Prop	s available throughout the for ding in the industrial park an '5 and Delaplain Road. All no mercial User Policy (including	rmer ad on- ag ex-
RECURRING RATES		
Flat Rate per unit	\$197.43 per month	(N)
Non-residential Rate for commercial/industrial: (non-residential service is metered)	\$11.67 per 1000 gals.	(I)
Non-Recurring Charges (applicable to residential and	non-residential customers)	
Tap-On Fee	Actual Cost	(R)
Late Payment Penalty	10%	(N)
Return Check Fee	\$15.00	(N)
DATE OF ISSUE: April 11, 2024		
DATE EFFECTIVE: For Service Rendered on or after December 1, 2023		
ISSUED BY: /s/ Josiah Cox		
TITLE: Bluegrass Water UOC, President		

	PSC KY NO1
	1st Revised SHEET NO. 3.3
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO. 1
SEWER SERVICE in entire service area	Original SHEET NO. 3.3
CLASSIFICATION OF SERVICE: Residential (RS):	MACDUDED VII I ACE (N)
	1
Applicable to all customers for residential use through Sheet No. 1.2), Service is provided at a flat monthly ra stand-alone residence, duplex unit, or any other multi- whether water utility service is provided to the unit thr	nte per dwelling unit, whether to a unit building, and regardless of
<u>Single Residential</u> service is available to any dwelling ter service line and independent sewer lateral line (includent connections).	
Single Residential Rate (per dwelling unit):	\$35.00 per month
NON-RECURRING CHARGES — RS and CF service	e (N)
Applicable in the same parts of the service area to which of Service are applicable (see Tariff Sheet Nos. 1.2 and	ch the RS and CF Classifications
New Tap Fee	
All Service Areas	\$0.00
Late Payment Penalty	\$0.00
Return Check Fee	\$0.00
Termination/Reconnection Fees	\$0.00
Field Collection Fee	\$0.00

DATE OF ISSUE: April 11, 2024

For Service Rendered on or after
DATE EFFECTIVE: December 1, 2023

ISSUED BY: /s/ Josiah Cox

TITLE: Bluegrass Water UOC, President

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION
ORDER IN CASE NO. 2022-00432 DATED FEBRUARY 14, 2023

	PSC KY NO. 1
	1st Revised SHEET NO. 3.3
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO. 1
SEWER SERVICE in entire service area	Original SHEET NO. 3.3
CLASSIFICATION OF SERVICE: Residential (RS): Y	TUNG FARM ESTATES (N)
Applicable to all customers for residential use througho Sheet No. 1.2), Service is provided at a flat monthly rate stand-alone residence, duplex unit, or any other multi-use whether water utility service is provided to the unit throughout	e per dwelling unit, whether to a nit building, and regardless of
<u>Single Residential</u> service is available to any dwelling/r ter service line and independent sewer lateral line (incluconnections).	*
Single Residential Rate (per dwelling unit):	\$60.00 per month
NON-RECURRING CHARGES — RS and CF service	(N)
Applicable in the same parts of the service area to which of Service are applicable (see Tariff Sheet Nos. 1.2 and	h the RS and CF Classifications
New Tap Fee	
All Service Areas	\$0.00
Late Payment Penalty	\$0.00
Return Check Fee	\$0.00
Termination/Reconnection Fees	\$0.00
Field Collection Fee	\$0.00

DATE OF ISSUE: April 11, 2024

For Service Rendered on or after
DATE EFFECTIVE: December 1, 2023

ISSUED BY: /s/ Josiah Cox

TITLE: Bluegrass Water UOC, President

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION

	PSC KY NO	1	
	1st Revised	SHEET NO	4-10.3
Bluegrass Water Utility Operating Company, LLC	CANCELLING 1	PSC KY NO	
SEWER SERVICE in entire service area		SHEET NO	

RESERVED FOR FUTURE USE

DATE OF ISSUE: February 10, 2022

DATE EFFECTIVE: August 1, 2021

ISSUED BY: /s/ Josiah Cox

TITLE: Bluegrass Water UOC, President

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2020-00290 DATED August 2, 2021

	PSC KY NO	1		
	1st Revised	SHEET NO	10.4-10.5	
Bluegrass Water Utility Operating Company, LLC	CANCELLING	CANCELLING PSC KY NO		
SEWER SERVICE in entire service area	Original	SHEET NO	10.4-10.5	

RESERVED FOR FUTURE USE

DATE OF ISSUE:	April 11, 2024
_	For Service Rendered on or after December 1, 2023
ISSUED BY: /s/ J	osiah Cox
TITLE: Bluegrass	Water UOC, President
DV ALITHODITY OF TH	E DUDUIC SEDVICE COMMISSION

ORDER IN CASE NO. 2022-00432 DATED FEBRUARY 14, 2023

	PSC KY NO. 1
	4th Revised SHEET NO. 11
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEET NO

RULES AND REGULATIONS

This schedule of Rules and Regulations governs the furnishing of sewage service by the Bluegrass Water Utility Operating Company, LLC (hereinafter referred to as Bluegrass Water UOC) and applies to all service received from Bluegrass Water UOC. All Rules and Regulations are to be in effect so long as they are not in conflict with the rules and regulations of the Public Service Commission. Bluegrass Water UOC is further subject to all Rules and Regulations of the Public Service Commission.

The Rules and Regulations contained in this tariff apply in the service territory of Bluegrass Water UOC (see Tariff Sheet No. 1.2).

The Residential Rules and Regulations (Tariff Sheets 11-26) apply to the furnishing of sewage service by Bluegrass Water UOC (a) for residential users throughout the service territory and (b) for all other users in the service territory other than in the Delaplain service area. They also apply to the furnishing of non-residential service in the Delaplain service area to the extent not inconsistent with, or governed by, a more specific provision in the Industrial/Commercial Rules and Regulations (Tariff Sheets 27-59).

Residential Rules and Regulations

DEFINITIONS

- "Customer" shall mean any person, firm, corporation, or municipality that discharges to the Bluegrass Water UOC sewer system pursuant to these Rules and Regulations.
- "Company" shall mean Bluegrass Water UOC acting through its officers, managers, or other duly authorized employees or agents.
- "Customer's service line" is the service lateral from the main collection line to the premises served.
- "Commission" shall mean the Kentucky Public Service Commission.
- "Domestic Waste" means the waste from residential users and from the sanitary conveniences of dwellings, commercial buildings, industrial facilities, and institutions.

DATE OF ISSUE: February 10, 2022	
DATE EFFECTIVE: August 1, 2021	
ISSUED BY: /s/ Josiah Cox	
TITLE: Bluegrass Water UOC, President	
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION OR DER IN CASE NO. 2020-00290 DATED August 2, 2021	

	PSC KY NO. 1
	1st Revised SHEET NO. 12
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEET NO

"Pretreatment" means the reduction of the amounts of pollutants, the elimination of pollutants, or the alteration of the nature of pollutant properties in wastewater to a less harmful state by application of physical, chemical or biological processes or process changes prior to or in lieu of discharging or otherwise introducing such pollutants into a public sewer.

"Sanitary Sewer" means a sewer which is intended to convey only domestic waste and commercial and industrial wastes not specifically prohibited or restricted by these Regulations.

"Sewer" means a pipe or conduit for conveying wastewater.

"Shall" – is mandatory; "may" is permissive.

"Storm Sewer" means a sewer which is intended to convey only storm waters, surface runoff, street wash waters and drainage, and which is not a part of the wastewater sewer system.

"Treatment Works" means any devices and systems owned by Bluegrass Water UOC in the conveyance, storage, treatment, recycling and reclamation of sewage or liquid industrial wastes including interceptor sewers, outfall sewers, sewage collection systems, pumping, power, and other equipment and appurtenances; extensions, improvements, remodeling, additions and alterations thereof; and any works, including the land that will be an integral part of the treatment process or is used for preventing, abating, reducing, storing, treating, separating or disposing of waste, or industrial waste.

SUBSTANCES NOT TO BE DISCHARGED INTO SEWERS

No substances shall be placed into the sanitary sewer system which will create a combustible, gaseous, explosive or inflammable condition nor shall any substances or objects be placed or discharged into the system which will not dissolve and which will thus cause an obstruction and clogging within the system. No petroleum products shall be placed or discharged into the system. No substance which might be harmful to the sewage treatment process or receiving stream shall be discharged in the system.

No person shall discharge or cause to be discharged any storm water, surface water, and groundwater or roof runoff to any sewer.

The discharge of any wastewater into the sewer system by any person is unlawful except in compliance with the provisions set forth in this tariff, and any more stringent State or Federal Standards.

DATE OF ISSUE: February 10, 2022
DATE EFFECTIVE: August 1, 2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
ITTLE: Bluegrass water OOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION
ORDER IN CASE NO. <u>2020-00290</u> DATED <u>August 2, 2021</u>

	PSC KY NO	1	
	1st Revised	SHEET NO	13
Bluegrass Water Utility Operating Company, LLC	CANCELLING	PSC KY NO	
SEWER SERVICE in entire service area		SHEET NO	

GREASE OIL AND SAND TRAPS

Bluegrass Water UOC may require pretreatment for certain types of discharge that could be harmful to the collection and/or treatment system. All restaurants, food service establishments and other commercial oil and grease generators shall provide grease and/or oil interceptor (or trap) for the proper handling of liquid wastes containing floatable grease in excessive amounts, or any flammable wastes, sand, or other harmful ingredients. In the maintaining of these interceptors the owner shall be responsible for the proper removal and disposal by appropriate means of the captured material and shall maintain records with the dates and means of disposal. Interceptors or traps will not be required for private living quarters of dwelling units.

All interceptors or traps shall be of a type and capacity approved by the Kentucky Department for Natural Resources and Environmental Protection and Kentucky Department of Housing, Buildings and Construction, and shall be located so as to be readily and easily accessible for cleaning and inspection. They shall be constructed of impervious materials capable of withstanding abrupt and extreme changes in temperatures and shall be of substantial construction, gastight, watertight, and equipped with easily removable covers.

All grease, oil and sand interceptors or traps shall be maintained by the user at his expense, in continuously efficient operation at all times. Bluegrass Water UOC may require an establishment to have interceptors or traps cleaned on a regular basis. Bluegrass Water UOC may reject potentially harmful wastes or may require control over the quantities and rates of discharge.

Approval of proposed facilities or equipment by the Kentucky Department of Natural Resources and Environmental Protection and Kentucky Department of Housing, Buildings and Construction, does not in any way guarantee that these facilities or equipment will function in the manner described by their constructor or manufacturer, nor shall it relieve a person, firm or corporation of the responsibility of enlarging or otherwise modifying such facilities to accomplish the intended purpose.

SERVICE PIPE CONNECTIONS

Bluegrass Water UOC shall install and maintain that portion of the service pipe from the main to the boundary line of the easement, public road, or street, under which such main may be located. Bluegrass Water UOC is not responsible for extending a service main to serve additional properties.

No unauthorized person shall uncover, make any connections with, use, alter, or disturb any public sewer. Illegal or unauthorized connections shall be terminated immediately.

A separate and independent building sewer shall be provided for every structure.

DATE OF ISSUE: Febru	uary 10, 2022
	. 1. 2021
DATE EFFECTIVE: Au	igust 1, 2021
ISSUED BY: /s/ Josiah C	Cox
TITLE: Bluegrass Water	UOC, President
BY AUTHORITY OF THE PUBL	IC SERVICE COMMISSION
ORDER IN CASE NO. 2020-0029	00 DATED August 2 2021

	PSC KY NO	11		
	1st Revised	SHEET NO	14	
Bluegrass Water Utility Operating Company, LLC	CANCELLING	PSC KY NO		
SEWER SERVICE in entire service area		SHEET NO		

All plumbing work done in connection with Customer service line fixtures connected with Bluegrass Water UOC mains shall be submitted for the inspection by Bluegrass Water UOC before such underground work is covered up. Whenever the Bluegrass Water UOC determines that a job of plumbing is obviously defective, although not in direct violation of these Rules and Regulations, Bluegrass may insist upon its being corrected before the sewer service is accepted.

The customer shall install and maintain that portion of the service pipe from the end of the Company's portion into the premises served. That portion of the service pipe installed and maintained by the customer shall conform to all reasonable rules of Bluegrass Water UOC. It shall be constructed of materials approved by the sewage utility and installed under the inspection of Bluegrass Water UOC, including but not limited to a sewer line clean out. Prior to tapping on to the sewer system, Bluegrass Water UOC shall be notified, and the appropriate tap-on fee paid.

A sewer service pipe shall not be laid in the same trench with a water pipe.

If a governmental agency requires an inspection of the customer's plumbing, Bluegrass Water UOC shall not connect the customer's service pipe until it has received notice from the inspection agency certifying that the customer's plumbing is satisfactory.

If excavation of sewer lines owned by Bluegrass Water UOC becomes necessary, Bluegrass Water UOC will restore the effected property when soil conditions and weather are appropriate. Bluegrass Water UOC shall not be held liable for repairs or restoration associated with repairs for lateral connections on private property. This includes lateral connections under driveways and roads that require service.

PROTECTION BY CONSUMERS

The Consumer shall protect the equipment of Bluegrass Water UOC on his premises and shall not interfere with Bluegrass Water UOC's property or permit interference except by duly authorized representatives of Bluegrass Water UOC.

NOTICE OF TROUBLE

The Consumer shall give immediate notice to Bluegrass Water UOC of any irregularities, any known defects, or unsatisfactory service.

DATE OF ISSUE: February 10, 2022
DATE FEEDOCTIVE
DATE EFFECTIVE: August 1, 2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION
ORDER IN CASE NO. 2020-00290 DATED August 2, 2021

	PSC KY NO	1	
	1st Revised	SHEET NO	15
Bluegrass Water Utility Operating Company, LLC	CANCELLING	PSC KY NO	
SEWER SERVICE in entire service area		SHEET NO	

MAINTENANCE

Bluegrass Water UOC may at any time deemed necessary suspend sewer service to any consumer or consumers for the purpose of making repairs, changes, or improvements upon any part of its systems. Bluegrass Water UOC shall give reasonable notice of such suspension of service to the customer(s).

CONNECTIONS

Bluegrass Water UOC will consider a request to connect to an existing serviceable main as a normal connection. The charge, if any, for a connection qualifying under this description shall be as set forth in the NON-RECURRING CHARGES section for that part of the service area.

Reconnection: A Customer disconnected due to non-payment of tariff charges or non-compliance with tariff rules or Commission regulations, will be required to pay a reconnection fee, if any, set forth as a NON-RECURRING CHARGE in the applicable tariff sheet for the classification of service, in addition to any unpaid past-due balance before service is restored.

Field Collection Fee: This fee is assessed when Bluegrass Water UOC's representative makes a trip to the premises of a customer for the purpose of terminating service. The fee will be assessed in the amount or at the rate set forth in the applicable NON-RECURRING CHARGES tariff sheet for the classification of service, if: (a) Bluegrass Water UOC's representative actually terminates service, (b) in the course of the trip, the customer pays the delinquent bill to avoid termination; or (c) Bluegrass Water UOC's representative agrees to delay termination based on the customer's agreement to pay the delinquent bill on a specific date. This fee is assessed no more than once during a billing cycle.

Other Connections: A developer of an undeveloped area within Bluegrass Water UOC's service area shall be charged the full cost of installation.

LINE RELOCATION

When necessary to move or relocate facilities, the cost will be paid by the party or parties requesting such relocation.

EASEMENTS

The customer shall not place structures of any kind or personal property on recorded easements. Any structure or property violating this provision shall be removed at the owner's expense

DATE OF ISSUE:	February 10, 2022
DATE PERCTUE	A
DATE EFFECTIVE: _	August 1, 2021
ISSUED BY: /s/	Josiah Cox
TITLE: Bluegrass	s Water UOC, President
DV AUTHODITY OF TE	HE PUBLIC SERVICE COMMISSION
	020-00290 DATED August 2, 2021

	PSC KY NO1
	1st Revised SHEET NO. 16
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEET NO

DISCONTINUANCE OF SERVICE

Bluegrass Water UOC may refuse or terminate service for noncompliance with its tariff rules or commission regulations after having made a reasonable effort to obtain customer compliance. Said customer will be given at least ten (10) days written notice prior to termination. Bluegrass Water UOC will notify the customer in writing of the reasons for termination or refusal. The notice will be recorded along with the corrective action to be taken by the customer or Bluegrass Water UOC before service is restored or provided.

If a dangerous condition is found to exist service may be terminated without notice.

In the event that an illegal or improper connection is discovered, Bluegrass Water UOC shall take immediate steps to sever the connection in question. This includes those connections discovered during smoke testing and camera inspection of lines that are deemed illegal or improper and allow Inflow/Infiltration of water to the sewer system. A photograph of the connection and an explanation of the condition will be given by Bluegrass Water UOC either by mail or directly. Bluegrass Water UOC may terminate service for nonpayment of tariff charges after a five (5) day written notice of intent to terminate. Service will not be terminated before twenty (20) days after the mailing date of the original bill. If a medical certificate is presented service will not be terminated for thirty (30) days beyond the termination date.

When payments are delinquent Bluegrass Water UOC may file a complaint in court. Bluegrass Water UOC may request that all court costs be included in any judgment amount awarded to Bluegrass Water UOC. Bluegrass Water UOC may refer any delinquent accounts to a collection agency.

BILLING, COLLECTION AND PENALTIES

Billing for sewage service furnished by the sewer system shall be made by Bluegrass Water UOC on a monthly basis, bills are mailed the first week of each month and become due the last business day of each month. A late payment penalty will be assessed after the due date in the amount or at the rate set forth in the applicable NON-RECURRING CHARGES tariff sheet for the classification of service.

Failure to receive bill does not excuse payment.

DEPOSITS

At this time, Bluegrass Water UOC does not require a deposit for new sewer customers.

DATE OF ISSUE:	February 10, 2022
DATE EFFECTIVE:	August 1, 2021
ISSUED BY: /s/ J	
TITLE: Bluegrass	
IIILE: <u>Bluegrass</u>	water OOC, President
	E PUBLIC SERVICE COMMISSION
ORDER IN CASE NO. 20	20-00290 DATED August 2, 2021

	PSC KY NO	1	
	1st Revised S	HEET NO	17
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC	KY NO	11
SEWER SERVICE in entire service area	<u>Original</u> S	HEET NO	17

LIABILITY OF THE COMPANY

Bluegrass Water UOC shall not in any way or under any circumstances be held liable or responsible to any person or persons for any loss or damage resulting from the sewer service, due to any cause whatsoever. Bluegrass water UOC will undertake to use reasonable care and diligence in order to prevent and avoid interruptions and fluctuations in the service, but it cannot and does not guarantee that such will not occur.

Bluegrass Water UOC shall not be responsible for accidents or damages resulting from the discontinuance of service, nor by reason of the breaking of any main, sewer pipe, fixture or appliance whether owned by the Company or Customer, and no person shall be entitled to damages nor have any portion of a payment refunded for any interruption of service.

Bluegrass Water UOC shall not be considered in any manner an insurer of property or persons and it shall be free and exempt from any and all claims for damages on account of any injury to property or persons for any cause whatsoever.

APPROVAL OF RULES AND REGULATIONS

All Rules and Regulations of Bluegrass Water UOC are subject to the approval of the Public Service Commission of the Commonwealth of Kentucky.

(T)

DATE OF ISSUE: April 11, 2024				
For Service Rendered on or after				
DATE EFFECTIVE: December 1, 2023				
ISSUED BY: /s/ Josiah Cox				
TITLE: Bluegrass Water UOC, President				
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION				

	PSC KY NO	1	
	Original	SHEET NO	27
Bluegrass Water Utility Operating Company, LLC	CANCELLING	PSC KY NO	
SEWER SERVICE in entire service area		SHEET NO	

Industrial/Commercial Rules and Regulations

1.0 PURPOSE

This Policy sets forth uniform requirements for existing and future industrial/commercial Users who discharge directly or indirectly into the wastewater collection and treatment system ("System") of Bluegrass Water UOC ("Utility"), formerly that of Delaplain Disposal Company. This Policy is designed to ensure that Users take no action which would prevent the Utility from complying with the requirements of the Commonwealth of Kentucky's Division of Water of the Natural Resources and Environmental Protection Cabinet ("DOW").

2.0 OBJECTIVES

The objectives of this Policy are to: (1) prevent the introduction of pollutants or materials into the wastewater system that interfere with the System's operation, contaminate the resulting sludge, pass through the System into the receiving waters or the atmosphere, or otherwise are incompatible with the System; (2) improve the opportunity to recycle and reclaim wastewater and sludge; and (3) ensure equitable distribution of the cost of the treatment and collection system.

3.0 POLICY

All Users are subject to this Policy and shall comply with its terms and those of approved Operating Agreements ("Operating Agreements") between Users and the Utility. Where a conflict between the terms of this Policy and an Operating Agreement occurs, the terms of this Policy shall control.

Users shall arrange and shall cause to be performed any required analyses. A laboratory approved by the Utility shall perform all analyses. Users shall bear all costs associated with these analyses. The Utility may conduct sampling and analysis of a User's effluent discharges at its discretion. This Policy shall be administered and enforced for the Utility by a registered professional engineer or appropriately certified wastewater treatment plant operator experienced in wastewater and sewer regulation and management.

DATE OF ISSUE: <u>04/05/2021</u>
DATE EFFECTIVE: 05/05/2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
-
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION
ORDER IN CASE NO. 2020-00297 DATED January 14, 2021

	PSC KY NO	1	
	Original	SHEET NO	28
Bluegrass Water Utility Operating Company, LLC	CANCELLING	PSC KY NO	
SEWER SERVICE in entire service area		SHEET NO	

4.0 SEWER USE

Within 30 days from the effective date of this Policy, each existing User shall submit to the Utility a completed User Information Form. Within 30 days of the Utility's receipt of the User Information Form, the Utility and the User shall enter an Operating Agreement incorporating the requirements of this Policy. Users failing to enter such an Operating Agreement within 60 days of the Policy's effective date are subject to termination of service and disconnection from the System.

No prospective User shall connect to or use any existing connection of the system before submitting a completed User Information Form to the Utility and entering an Operating Agreement with the Utility.

The Utility may assess to any User who violates any provision of this Policy or its Agreement a charge equal to the amount of damage to the System or costs incurred by the Utility that result from the violation. Such costs may include, but are not limited to, civil or criminal penalties assessed to the Utility as a result of the User's violation and attorney's fees and other costs incurred in civil and criminal proceedings resulting from the User's violation. The Utility may, at its discretion, also terminate a User's service for violations of this Policy.

Users who discharge only domestic or "restroom waste" into the System shall complete the applicable portions of the User Information Form set forth at section 9.1 and execute the Operating Agreement set forth at Section 10.1 of this policy.

All other Users shall complete and submit the User Information Form set forth at Section 9.1 in its entirety and shall execute the Operating Agreement set forth at Section 10.2. This Operating Agreement shall be tailored to the User's discharge activity and shall enable the Utility to comply with its Kentucky Pollutant Discharge Elimination System Permit ("KPDES Permit").

No User shall place, deposit, or permit to be deposited into the System any wastewater containing or having:

- any storm water, ground water, roof run-off, subsurface drainage, or cooling water.
- a temperature higher than 104 degrees F.

ORDER IN CASE NO. 2020-00297 DATED January 14, 2021

• any gasoline, benzene, naphtha, fuel oil, or other flammable or explosive liquids, solids or gases; and in no case any pollutant with a closed cup flashpoint of less than 140

DATE OF ISSUE: <u>04/05/2021</u>
DATE EFFECTIVE: 05/05/2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
DV ALITHODITY OF THE DIDDLIC SEDVICE COMMISSION

PSC KY NO	1				
Original	SHEET NO	29			
CANCELLING :	CANCELLING PSC KY NO				
	SHEET NO				

Bluegrass Water Utility Operating Company, LLC

SEWER SERVICE in entire service area

degrees F., or which causes the System to exceed 10 percent of the lower explosive limit at any point.

- any garbage that has not been ground by suitable garbage grinders.
- any ashes, cinders, sand, mud, straw, shavings, metal, glass, rags, feathers, tar, plastic, wood, manure, or any other solids or viscous substances capable of causing obstructions or other interferences with proper operation of the System.
- toxic or poisonous substances in sufficient quantity to injure or interfere with any wastewater treatment process, to constitute hazards to humans or animals, or to create any hazard in waters which receive treated effluent from the System.
- noxious or malodorous gases or substances capable of creating a public nuisance including pollutants which result in the presence of toxic gases, vapors, or fumes.
- solids of a character or quantity that require special and unusual attention for their handling.
- any substance which may affect System effluent and cause the Utility to violate the requirements of its Permit.
- any substance which would cause the System to fail to comply with sludge use, recycling, or disposal guidelines or regulations issued pursuant to the federal laws governing air or water quality, the Toxic Substances Act, or any applicable enactment of the Commonwealth of Kentucky.
- color which is not removed in the treatment process.
- medical or infectious wastes, radioactive waste or isotopes, or any pollutant, including BOD pollutants, released at a flow rate or concentration which would interfere with operation of the System.

The Utility may, at reasonable times, inspect the interior or exterior of any building connected or to be connected to the System, inspect and copy appropriate records, and inspect and test sampling equipment. The Utility may, at any reasonable time, perform smoke test on or test the discharges of any facility connecting a building to the System.

5.0 USER MANAGEMENT REQUIREMENTS

5.1 Change in Discharge

Users shall at all times comply with Operating Agreements. No facility expansion, production increase, or process modification that will cause a new, different, or increased discharge into the System may be implemented without the Utility's prior approval and until the execution of a

DATE OF ISSUE: 04/05/2021
DATE EFFECTIVE: 05/05/2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2020-00297 DATED January 14, 2021

_1		
NO. 30		
CANCELLING PSC KY NO		
SHEET NO		

Bluegrass Water Utility Operating Company, LLC

SEWER SERVICE in entire service area

written amendment to the User's existing Operating Agreement. Requests for modification of an Operating Agreement must be submitted in writing to the Utility not less than 90 days prior to the User's proposed implementation date. No facility expansion, production increase, or process modification shall be approved that causes a discharge that would cause the Utility to violate its KPDES Permit.

5.2 Non-Compliance Notification

Upon learning that it is not complying with its Operating Agreement or that an unavoidable event will prevent its compliance with its Operating Agreement, the User shall immediately notify the Utility of:

- the nature and cause of the non-complying discharge;
- the time when the non-complying discharge began or is expected to begin and its duration; and
- the steps taken by the User to achieve compliance and prevent a recurrence of the noncomplying discharge.

If the User learns of its failure to comply as a result of sampling and analysis, it shall repeat the sampling and analysis within 24 hours of learning of its failure to comply and immediately provide to the utility the results of the second sampling and analysis.

5.3 Termination of Service

ORDER IN CASE NO. 2020-00297 DATED January 14, 2021

After a reasonable attempt to obtain compliance, the Utility may terminate service for:

- Discharges not permitted by the User's Agreement or in excess of those permitted, upon ten days written termination notice;
- Falsification of reports, upon ten days written termination notice;
- Unapproved modification of sampling equipment or methods, upon ten days written termination notice;
- (For customers discharging only domestic or "restroom waste") Refusal to allow the Utility timely access to the User's premises, upon ten days written termination notice;
- (For customers discharging wastes other than domestic or "restroom waste") Refusal to allow the Utility timely access to the User's premises, upon two days written termination notice;

•

DATE OF ISSUE: <u>04/05/2021</u>
DATE EFFECTIVE: 05/05/2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION

	PSC KY NO. 1	
Bluegrass Water Utility Operating Company, LLC SEWER SERVICE in entire service area	Original SHEET NO. 31	
	CANCELLING PSC KY NO	
	SHEET NO	
Any discharge which presents a hazard to pulment, or the System, without advance notice.	blic health and safety, the welfare of the local environ-	
6.0 OPERATING AGREEMENTS		
6.1 Transferability		
	the Utility's prior written approval. No approval will be d in writing to be bound by the terms of the transferred	
6.2 Modification		
Agreements to impose additional restrictions, conditional restrictions	n, the Utility may modify or amend existing Operating tons, prohibitions, or monitoring requirements upon Usbandition for maintaining or renewing its KPDES Permit.	
7.0 MONITORING AND REPORTING		
7.1 Representative Samples		
Samples shall be representative of the volume and na	ture of the monitored discharge.	
7.2 Reporting		
monitoring reports for the preceding month. A compl tion 11.1 of this Policy, shall be filed for each sample	hall submit to the Utility by the 15th of each month. Use leted "Self-monitoring Report Form", as set forth in Sec e taken. Users shall submit with the User monitoring re- orth in Section 11.2 of this policy, for each sample taken	
7.3 Integrity of Samples		
Samples shall be collected, handled and preserved us tection Agency ("EPA") and shall be analyzed by a U	ing methods approved by the U.S. Environmental Pro- Julity approved	
DATE OF ISSUE: 04/05/2021		
DATE EFFECTIVE: 05/05/2021		
ISSUED BY: /s/ Josiah Cox		

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. $\underline{2020\text{-}00297}$ DATED $\underline{\text{January } 14, 2021}$

TITLE: Bluegrass Water UOC, President

	PSC KY NO	1	
	Original	SHEET NO	32
Bluegrass Water Utility Operating Company, LLC	CANCELLING	PSC KY NO	
SEWER SERVICE in entire service area		SHEET NO	

laboratory according to methods contained in Title 40, Code of Federal Regulations, Part 136, or otherwise approved by the EPA ("EPA approved procedures").

7.4 Chain of Custody

Sample containers shall be labeled at the time of collection and the following information shall be affixed to the label with waterproof ink: sample number, name of collector, and the date, time, and place of collection. The User shall maintain a field log with all information required for the label and the name of the user, location of sampling point, and type of sample. A Chain-of-Custody form containing all information recorded in the field log plus the signature of all persons who have had custody of the sample and the dates of possession shall accompany each sample that is provided to the laboratory. The format of the Chain-of-Custody form is set forth at Section 11.2 of this Policy.

7.5 Record Retention

Users shall maintain records of all monitoring information, including all calibration and maintenance records and all original chart recordings for continuous monitoring instruments, and copies of all reports required by this policy, for at least three years from creation of the record.

7.6 Definitions

- Composite Sample when performed automatically by mechanical instrument shall mean a sample that is collected over time, formed either by continuous sampling or by mixing discrete samples. The sample may be either a time composite sample (composed of discrete sample aliquots collected in one container at constant time intervals providing representative samples irrespective of stream flow) of a flow proportional sample (collected either as a constant sample volume at time intervals proportional to stream flow, or collected by increasing the volume of each aliquot as the flow increases while maintaining a constant time interval between aliquots). Composite samples taken manually shall be comprised of no fewer than four samples of equal volume collected over an eight hour period at a rate proportionate to discharge flow, or a sample portion collected continuously over a 24 hour period at a rate proportional to the discharge flow. Methods for composite sampling must be approved in advance by the Utility.
- Biochemical Oxygen Demand (BOD or BOD-5) shall mean the measure of decomposable organic matter in wastewater as represented by the oxygen used over a period of five days at 20 degrees C, as determined by EPA approved procedures.

DATE OF ISSUE: 04/05/2	021	
DATE EFFECTIVE: 05/05	5/2021	
ISSUED BY: /s/ Josiah Cox	r	
TITLE: Bluegrass Water UOC, President		
BY AUTHORITY OF THE PUBLIC	SERVICE COMMISSION	
ORDER IN CASE NO. 2020-00297 I	DATED January 14, 2021	

PSC KY NO	1	
Original	SHEET NO	33
CANCELLING	PSC KY NO	
	SHEET NO	

Bluegrass Water Utility Operating Company, LLC

SEWER SERVICE in entire service area

- Total Suspended Solids (TSS) shall mean the insoluble solid matter suspended in wastewater that is separable by laboratory filtration according to EPA approved procedures.
- Oil and Grease (Total) shall mean all vegetable and animal matter, hydrocarbons, waxes, oils, gasoline, heavy fuel, or lubricating oils as determined according to EPA approved procedures.
- Daily Maximum shall mean the maximum allowable discharge of a pollutant during a calendar day. Where daily maximum limitations are expressed in units of mass, the daily discharge is the total mass discharged over the course of the day. Where daily maximum limitations are expressed in terms of concentration, the daily discharge is the arithmetic average measurement of the pollutant concentration derived from all measurements taken that day.
- Grab Sample shall mean an individual sample collected in less than 15 minutes, without regard for flow or time.
- Instantaneous Maximum Concentration shall mean the maximum concentration allowed in any single grab sample.
- Cooling Water, Uncontaminated, shall mean water used for cooling purposes only which has no direct contact with any raw material, intermediate, or final product and which does not contain a level of contaminates detectably higher than that of the intake water.
- Cooling Water, Contaminated, shall mean water used for cooling purposes only which may become contaminated either through the use of water treatment chemicals used as corrosion inhibitors or biocides, or by direct contact with process materials or wastewater.
- Monthly Average shall mean the arithmetic mean of the values for effluent samples collected during a calendar month or specified 30 day period.
- Weekly Average shall mean the arithmetic mean of the values for effluent samples collected over a period of seven consecutive days.
- Bi-Weekly shall mean once every other week.
- Bi-Monthly shall mean once every other month.
- Quarterly shall mean once every three months.
- By-Pass shall mean the intentional diversion of wastes from any portion of the treatment facility.

DATE OF ISSUE: 04/05/2021
DATE EFFECTIVE: 05/05/2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2020-00297 DATED January 14, 2021

	PSC KY NO	1	
	<u>Original</u>	SHEET NO	34
Bluegrass Water Utility Operating Company, LLC	CANCELLING	G PSC KY NO	
SEWER SERVICE in entire service area		SHEET NO	

8.0 DISCHARGE LIMITATIONS

No discharge into the Utility's system may exceed the following limits:

DISCHARGE LIMITATIONS

PARAMETER	UNIT	24 HOUR MAXIMUM CONCENTRATION (mg/L)
Flow	GPD	Report
Arsenic, total	mg/L	0.10
Cadmium, total	mg/L	0.05
Chromium, total	mg/L	1.71
Chromium, hexavalent	mg/L	0.10
Copper, total	mg/L	0.60
Cyanide, total	mg/L	0.50
Iron, total	mg/L	15.0
Lead, total	mg/L	0.20
Mercury, total	mg/L	0.0005
Nickel, total	mg/L	1.0
Silver, total	mg/L	0.10
Zinc, total	mg/L	2.0
Ammonia nitrogen	mg/L	30
Oil/Grease, total	mg/L	100
PH, S.U.	mg/L	6-10
TSS	mg/L	300
BOD-5	mg/L	300

DATE OF ISSUE: <u>04/05/2021</u>		
DATE EFFECTIVE: 05/05/2021		
ISSUED BY: /s/Josiah Cox		
TITLE: Bluegrass Water UOC, President		
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION		

ORDER IN CASE NO. <u>2020-00297</u> DATED <u>January 14, 2021</u>

	Original SHEET NO. 35
Bluegrass Water Utility Operating Company, LLC	C CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEET NO
9.0 USER INFORMATION FORM	
	Commercial User Policy, the following form must be com- rent users within 30 days of Commission approval of this spective Users.
USER I	INFORMATION FORM
NOTE: Please read all attached instructions prio 1.1 Facility Name: Operator Name: Is the operator identified the owner of the Yes () No () If no, provide the name and acother documents indicating the operator's	ne facility? address of the operator and submit a copy of the contract or
1.2 Facility Address: Street:	
Street:State:Zip: _	
1.3 Business Mailing Address: Street:	
Street:State:Zip: _	
1.4 Designated Signatory Authority of (Attach similar information for each authority of Name: Title: Address: City: Phone Number:	thorized representative)
1.5 Designated Facility Contact: Name: Title: Phone Number:	
Fax Number:	
DATE OF ISSUE: <u>04/05/2021</u>	<u> </u>
DATE EFFECTIVE: 05/05/2021	
ISSUED BY: /s/ Josiah Cox	
TITLE: Bluegrass Water UOC, President	
BY AUTHORITY OF THE PUBLIC SERVICE COMMISS ORDER IN CASE NO. <u>2020-00297</u> DATED <u>January 14, 20</u>	

PSC KY NO. 1

	PSC KY NO. 1
	Original SHEET NO. 36
Bluegrass Water Utility Operating Company, L.	-
SEWER SERVICE in entire service area	SHEET NO
SEWER SERVICE III entire service area	SHEET NO
2.0 BUSINESS ACTIVITY	
	ploy processes in any of the industrial categories or business other they generate wastewater, waste sludge, or hazardous of business activity (check all that apply).
() Aluminum Forming	() Asbestos Manufacturing
() Battery Manufacturing	() Can Making
() Coal Mining	() Coil Coating
() Copper Forming	() Electrical and Electronic Components Manufacture
() Electroplating	() Feedlots
() Fertilizer Manufacturing	() Foundries (Metal Molding ad Casting
() Glass Manufacturing	() Frain Mills
() Inorganic Chemicals	() Iron and Steel
() Leather Tanning and Finishing	() Metal Finishing
() Nonferrous Meta Forming	() Nonferrous Metals Manufacturing
() Organic Chemical Manufacture	() Paint and Ink Formulating
() Paving and Roofing Manufacture	() Pesticides Manufacturing
() Petroleum Refining	() Pharmaceutical
() Plastic, Synthetic Materials Mfgr.	() Plastics Processing Manufacturing
() Rubber	() Soap and Detergent Manufacturing
() Steam Electric	() Sugar Processing
() Textile mills	() Timber Produces
* A facility whose processes are within th Environmental Protection Agency (EPA) c	ese business areas may be a "categorical user" and subject to ategorical pretreatment standards.
2.2 Give a brief description of all operature (attach additional sheets if necessary):	rations at this facility including primary products or services
2.3 Indicate applicable Standard Industry applies, list in descending order of imported a b c d e	strial Classification (SIC) for all processes. (If more than one unce):
DATE OF ISSUE: 04/05/2021	
DATE EFFECTIVE: 05/05/2021	
ISSUED BY: /s/ Josiah Cox	
TITLE: Bluegrass Water UOC, President	<u></u>
BY AUTHORITY OF THE PUBLIC SERVICE COMM ORDER IN CASE NO. <u>2020-00297</u> DATED <u>January 14</u>	

			PSC KY NO	1	
			Original S	SHEET NO. <u>37</u>	
Bluegrass Water Utility	Operating Compan	CANCELLING PSC KY NO			
SEWER SERVICE in en	tire service area		S	SHEET NO	
2.4 Product Volum	ne:				
PRODUCT	PST CALE	NDAR YEAR	ESTIMATE THIS	CALENDAR YEAR	
(Brandname)		s Per Day		s Per Day	
(levels with other and no. u.l.)	(Daii)	Units)	(Daily Units)		
	Average	Maximum	Average	Maximum	
3.0 WATER SUP	PLY:				
3.1 Water Resour	rees: (check as m	any as are applical	(h/a)		
		iny as are applicat () Surface Wa			
() Munic	ripal Water (Spec	<i>ify city):</i>			
() Other	(Specify):				
3.2 Name on Wat	er Bill:				
Street:		City:	State:Zi	p:	
	e Account Numbe				
o.s water betvice	: Account Number	·			
DATE OF ISSUE:	04/05/2021				
DATE EFFECTIVE:					
ISSUED BY: /s/Jo					
FITLE: Bluegrass V	Vater UOC, Presiden	<u>it</u>			

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. <u>2020-00297</u> DATED <u>January 14, 2021</u>

		PSC KY NO. 1			
Dluggrass Water Hillity Operating Cor		Original SHEET NO. 38 CANCELLING PSC KY NO. SHEET NO. SHEET NO.			
Bluegrass Water Utility Operating Con SEWER SERVICE in entire service area	npany, LLC				
SEWER SERVICE III CHINC SCIVICE dica	-	SHEET NO	,		
3.4 List Average Water Use on	Premises: (New fa	cilities may estimate)			
TYPE	AVERAGE WATER U AGE (GPD)	INDICATE (E) ESTIMATED OR (M) MEASURED			
a. Contact cooling water					
b. Non-contact cooling water					
c. Boiler feed			1		
d. Process					
e. Sanitary					
f. Air pollution control			-		
g. Contained in product					
h. Plant and equipment wash- down					
i. Irrigation and lawn watering					
j. Other					
k. TOTAL OF a-j			1		
n. 10171E of u j			1		
4.0 SEWER INFORMATION:					
4.1 For an Existing Business:					
	nnected to the Delanlain i	Disposal sanitary sewer system?			
	ver account number	sisposai saintary serier system.			
		r hookup? () Yes () No			
For a New Business:					
Have you applied for a bui	lding permit if a new facil	ity will be constructed?			
() Yes () No					
Will you be connected to th	e Delaplain Disposal sew	er system?			
() Yes () No					
4.2 List size, descriptive locati (if more than four, attach a		lity sewer that connects to the sewer	system		
(ij more man jour, anach a	aamonai injormanon on t	mmer succi.j			
DATE OF ISSUE: <u>04/05/2021</u>					
DATE EFFECTIVE: 05/05/2021					
ISSUED BY: /s/ Josiah Cox					
TITLE: Bluegrass Water UOC, Pres					
BY AUTHORITY OF THE PUBLIC SERVIC					

ORDER IN CASE NO. 2020-00297 DATED January 14, 2021

						PSC KY NO.		111		
						Original	SH	EET NO	39	
Blueg	SEWER SERVICE in entire service area					CANCELLIN	G PSC k	XY NO		
SEWE							SH	EET NO		
	a.	ъ.	T	45 0		D: 1 D			El	
Sew	er Size	Descrip	tive Location	of Sewer C	onnection o	or Discharge Po	int	Average (GP)		
										-
5.0	HI A CIT	TH ATER	DISCHARC	E DIEODI	ATION					_
5.0	WASI	EWAIEK	DISCHARG.	E INFORM	AATION:					
5.1	Does (tem?	or will) th	is facility dis	scharge an	y wastewa	ter other than _.	from re	strooms to	o the sev	ver sys
		•	te the remain Section 9.)	ider of this	applicatio	on.)				
5.2	Provid	le the follo	owing inform	ation on w	astewater _.	flow rate: (Nev	v facilii	ties may e	stimate)	
			Нои	rs/Day Dis	scharge (e.	g., 8 hours/day	<i>י</i>)			
	M	T		•				T		
	IVI	1				SAT				
			Hour	s of Disch	arge (e.g.,	9 a.m. to 5 p.n	1.)			
	<i>M</i>	T	W	<i>TH</i>	F	SAT	SUN	<u> </u>		
			ow Rate (Gal verage (Gals ₎		Max	imum Daily Fl	ow Rate	e (Gals) _		
5.3	If bate	h dischar	zes occurs oi	will occur	r, indicate	· (New facilit	ies may	, estimate,)	
	Numb	er of batch	ı discharges,	per de	ay					
	Avera	ge dischar	ge per batch	, (Gal.	s)					
	Time o	Time of batch discharges,, (days of week) at (hours of day)								
						ischarge,				
DATE		E: <u>04</u>								
			05/05/2021							
		/s/ Josia			_					
TITLE	E: <u>Bl</u>	uegrass Wat	er UOC, Presid	ent						

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. <u>2020-00297</u> DATED <u>January 14, 2021</u>

				1 SHEET NO. 40		
Rluegrass	Water Utility Operating Compan	Original SHEET NO. 40 CANCELLING PSC KY NO.				
	ERVICE in entire service area		SHEET NO			
draw a dits complestreams ties may having whilding neer. Facilities and show 5.5 F type of difference to the show the sh	lagram of the flow of material letion, showing all unit process. Include the average daily volestimate). If estimates are use vastewater discharges to the slayout in Section 8. This draws that checked activities in quell skip to Section 5.6. For Non-categorical Users On ischarge (batch, continuous of	l, products, waterses. Indicate white lume and maximated for flow data, we wer. Use these wing must be certification 2.1 of Section 2.1 of Se	r, and wastewarch processes us um daily volume this must be ind numbers when fied by a Kenturon 2 are considuate wastewater displant process. I	astewater is or will be generated ter from the start of the activity to e water and which generate waste of each wastestream (new faciliticated. Number each unit process showing the unit processes in the cky Registered Professional Engineered Categorical Industrial Users charge, maximum discharge, and charde the reference number from should provide activates for each		
the proce discharge	_	s to each process.	(New facilities	should provide estimates for each		
No.	Process Description	Average Flow (GPD)	Maximum Flow (GPD)	Type of Discharge (batch, Contin., None)		
Answer q	nuestions 5.6 and 5. 7 only if y	ou are subject to	categorical pre	etreatment standards		
proposed	_	ence number fron	n the process sc	ws for each of your processes of hematic that corresponds to each		
No.	Regulated Process	Average Flow (GPD)	Maximum Flow (GPD)	Type of Discharge (batch, Contin., None)		
DATE OF	ISSUE: <u>04/05/2021</u>	_				
	FECTIVE: <u>05/05/2021</u> SY: <u>/s/ Josiah Cox</u>					
TITLE:	Bluegrass Water UOC, President	<u>t</u>				
	DRITY OF THE PUBLIC SERVICE CO CASE NO. <u>2020-00297</u> DATED <u>Janua</u>					

				PSC KY NO.	1			
					SHEET NO.	41		
Bluegr	ass Water Utility	y Operating Company,	CANCELLIN	CANCELLING PSC KY NO				
SEWE	R SERVICE in er	ntire service area		SHEET NO				
No.		Dilution	Average Flow (GPD	Maximum () Flow (GPD)	Type of Disch (batch, Contin.,	0		
5.7 ITO in	For Categori	ical Users subject to	Total Toxic (Organic (TTO) Red	quirements: Provi	ide the following		
the ap	,	l) this facility use an orical pretreatment .	, ,	0		TTO standard o		
	Has the base () Yes () No	line monitoring repo	ort (BMR) bed	en submitted whic	h contains the ITO	O information?		
		organic management se attach a copy) ()	-	P) been developed	?			
	o you have, or p ment at this fac	plan to have, automo cility?	atic sampling	equipment or con	tinuous wastewat	er flow metering		
1 1	Current:	Flow Metering	,	() Yes () No				
	DI I	Sampling Equipme						
	Planned:	Flow Metering Sampling Equipm	,	() Yes () No () Yes () No				
	please indicate uipment below	the present or future:	e location of	this equipment on	the sewer schema	atic and describe		
	water volumes	cess changes or export or characteristics? that may affect the a	Consider pro	_	-			
DATE	OF ISSUE:	04/05/2021						
		05/05/2021						
		Sosiah Cox Water UOC, President						
IIILE	. Diucgiass	maior ood, rresidelit						

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. $\underline{2020\text{-}00297}$ DATED $\underline{\text{January } 14, 2021}$

	PSC KY NO. 1
	Original SHEET NO. 42
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEET NO
() Yes () No, (skip question 5.10)	
, , , , , , , , , , , , , , , , , , , ,	ir effects on the wastewater volume and characteristics:
(Attach additional sheets if needed.)	ir effects on the wastewater volume and characteristics.
6.0 CHARACTERISTICS OF DISCHARGE	
analytical results. Do Not Leave Blanks. For a pollutant is known to be present (P), suspected the appropriate letter in the column for average or on a separate sheet, if necessary, the sample form to 40 CPR Part 136. If they do not, indicate what the leave to indicate what the sample sam	the at the end of this section to report the analysis of the all other (non-regulated) pollutants, indicate whether the to be present (S), or known not to be present (O), by placing the reported values. Indicate on either the top of each table, to location and type of analysis used. Be sure methods content what method was used. It pollutants will be present or are suspected to be present extend to be present), S (may be present), or O (will not be
. , , , , , , , , , , , , , , , , , , ,	
7.0 TREATMENT	
7.1 Is any form of wastewater treatment (see () Yes () No	e list below) practiced at this facility?
7.2 Is any form of wastewater treatment (or this facility within the next three years? () Yes () No	changes to an existing wastewater treatment planned for
7.3 Treatment devices or processes used or pas appropriate).	proposed for treating wastewater or sludge (check as many
() Air Flotation() Chemical precipitation()	Centrifuge Chlorination Filtration Grease or Oil Separation, Type: Grinder Filter
DATE OF ISSUE: 04/05/2021	
DATE EFFECTIVE: <u>05/05/2021</u>	
ISSUED BY: /s/ Josiah Cox	<u>_</u>
TITLE: Bluegrass Water UOC, President	_
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSIO ORDER IN CASE NO. <u>2020-00297</u> DATED <u>January 14, 2021</u>	

				P	SC KY NO	1			
					Original	SHEET NO.	43		
Bluegr	ass Wate	er Utility Operating Company,	C	CANCELLING PSC KY NO					
SEWER SERVICE in entire service area					SHEET NO.				
()	Grit Ri	emoval	()	Ion Exchange	,				
\tilde{O}		llization, pH correction	\tilde{O}	Ozonation Statement	,				
Ó		e Osmosis	Ó	Screen					
Ŏ	Sedime	entation	Ö	Septic Tank					
\tilde{O}	Solven	t Separation	0	Spill Protecti	on				
()	Sump		()	Biological Tr	eatment, typ	e:			
()		ater Diversion or Storage	()	Other Chemic		* *			
()	Other .	Physical Treatment, type:	()	Other, type: _					
7.4 dures		ribe the pollutant loadings, treatment facility checked o		_	pucity, phys	real size, and op	eraning proce		
<i>tions</i> . 7. 6	Descr	product disposal method, w wibe any changes in treatme discharge to the sanitary sew	ent or	· disposal meth	ods planned	l or under const	_		
7. 7		u have a treatment plant op							
(If yes	s,)	Name:							
		Title:		Phone: _					
		Full time:(spec	cific h	ours) Part time	?:	(specific hours)			
		Classification:		Certij	fication No.				
7.8		nu have a manual on the cor s () No	rect o	peration of you	ır treatment	equipment?			
DATE	OF ISSU	JE: <u>04/05/2021</u>							
DATE	EFFECT	TIVE:05/05/2021							
		/s/ Josiah Cox							
		luegrass Water UOC, President							
111111	. <u>D</u>	acgrass water COC, Freshtellt							
		7 OF THE PUBLIC SERVICE COM E NO. <u>2020-00297</u> DATED <u>January</u>							

					PSC KY	/ NO		1	
					<u>Origin</u>	nal	_SHEE	ET NO	44
Bluegrass Wate	r Utility Ope	rating Com	pany, LLC		CANCE	ELLING P	SC KY	NO	
SEWER SERVI	CE in entire s	ervice area					_SHEE	ET NO	
7. 9 Do voi	, have a w	ittan main	tenance sche	dula four	sour troat	an out ou		m+?	
•		uten main	ienance sche	auie jor y	our ireai	тені еді	игртег	ui:	
	() No	ATIONAL	CHADACTI						
3.0 FACIL	IIY OPER	AIIONAL	CHARACTE	KISTICS	:				
8.1 Shift Ii	nformation								
Work Days	Mon.	Tues.	Wed.	Thurs.	Fri.		Sat.	Si	un.
Shifts per									
work day: Empl's per	1st								
Shift									
<i>-</i>	2 nd								
CI · C	3 rd								
Shift start and end	I^{st}								
times:									
	2^{nd}								
	3 rd								
() ()	Continuoi Seasonal -	us through - Circle th	ss activity is: the year, or e months of t	the year v					
Jan. Feb.	Mar.	$Apr. \mid M$	lay June	July	Aug.	Sept. (Oct.	Nov.	Dec.
Comments:									
() Cor	itinuous thi	ough the	y discharge is vear, or nths of the ye		the busin	ness activ	vity oc	curs:	
DATE OF ISSU				_					
DATE EFFECTI	·			=					
SSUED BY:				_					
TITLE: <u>Bl</u> ı	iegrass Water	UOC, Presi	ident	_					
BY AUTHORITY									
ORDER IN CASE	NO. <u>2020-002</u>	<u>'9/</u> DATED <u>J</u>	anuary 14, 2021	_					

							PSC	KY NO		1		
							<u>Ori</u>	ginal	SHE	EET NO	45	
Bluegr	ass Water	Utility Or	erating (Company	, LLC		CAN	CELLING	G PSC K	Y NO		
SEWE	R SERVICI	E in entire	service ar	rea					SHE	EET NO		
Jan.	Feb.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.	
Com	ments:											
8.4							ntenance Own occu		er reaso	ns?		
8.5 list if	List type needed):	es and ar	nounts (1	mass or	volume	per day,) of raw i	material	s used o	or planne	ed for us	e (attach
8.6 neede	List type d). Includ	_		U		_	U		0 1	-	,	ich list if
			Ch	emical			Quant	ity	_			
gram) existin	Building nd locatio , sewer, a ng and pro ne attached	on of all and each oposed so	water m facility ampling	eters, s sewer li	torm dra ine conn	ains, nu ected to	mbered i the sew	ınit prod er systen	cesses (n. Num	from sch ber each	ematic j sewer a	nd show
9.0	SPILL F	PREVEN	TION									
9.1	Do you	have che	emical st	orage c	ontainer	, bins o	r ponds a	at your f	acility?	() Yes (() No	
DATE	OF ISSUE:	04	/05/2021			_						
DATE	EFFECTIV	Æ:	05/05/202	.1		_						
ISSUE	D BY:	/s/ Josia	h Cox			_						
TITLE	: Blue	grass Wat	er UOC, F	resident		_						
	THORITY O											

		PSC KY NO	. 1	
			SHEET NO	
Bluegrass Water Utility Operati	ng Company, LLC	CANCELLIN	NG PSC KY NO	
SEWER SERVICE in entire service	ce area		SHEET NO	
If yes, describe their location in a diagram or describe being metal containers have cathod	ow these containers' pr			
() an onsite dis	posal system			
() Sanitary sew	er system (e.g. through	a floor drain)		
() Storm drain				
() To ground				
() Other, speci				
() Not applicat	ole, no possible discharg	ge to any of the abo	ove routes	
() Yes - (Attach a cop () Not applicable domestic wastes. 9.5 Describe below any prev	since there are no fi		Ů.	
10.1 Are any waste liquids () Yes, please describe () No, Skip the remains		nd not disposed of	in the sanitary se	wer system?
Waste Generat	ed Quantity	(per year)	Disposal Meth	eod
DATE OF ISSUE: <u>04/05/2</u> 6)21			
DATE EFFECTIVE: 05/05	/2021			
ISSUED BY: /s/ Josiah Cox				
TITLE: Bluegrass Water UC				

	PSC KY NO. 1
	Original SHEET NO. 47
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEET NO
10.2 Indicate which wastes identified above are datased are disposed of on-site.	isposed of at an off-site treatment facility and which
10.3 If any of your wastes are sent to an off-site ce wastes and the facility.	entralized waste treatment facility, identify the
10.4 If an outside firm removes any of the above call waste haulers: A.	hecked wastes, state the name(s), and address(es) of B.
Permit#	Permit#
10.5 Have you ever been issued any Federal, State ()Yes ()No	e, or local environmental permits?
If Yes, please list the permit(s):	
11.0 AUTHORIZED SIGNATURES:	
11.1 Compliance Certification: A. Are all applicable Federal, State, and local on a consistent basis?	l pretreatment standards and requirements being me
()Yes ()No ()Not yet discharging	
B. If no, what additional operations and maintenance into compliance? List any additional treatment technicility into compliance.	
DATE OF ISSUE: 04/05/2021	
DATE EFFECTIVE: 05/05/2021	
ISSUED BY: /s/ Josiah Cox	
TITLE: Bluegrass Water UOC, President	
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2020-00297 DATED January 14, 2021	

	P	SC KY NO	1	
	_	Original	SHEET NO	48
Bluegrass Water Utility Operating Company, LLC	C	CANCELLING	PSC KY NO	
SEWER SERVICE in entire service area	_		SHEET NO	
Provide a schedule for bringing the facility	into compliance	e. Specify m	ajor events pla	nned along wit
reasonable completion dates. Note that if the				
user, it may establish a schedule for complian	nce different fro	m the one si	ibmitted by the f	acility.
Milestone Activity		Complet	ion Date	
I hereby swear that: (1) This documes supervision in accordance with a system desirevaluate the information submitted; (2) Base system. or those persons directly responsible to the best of my knowledge and belief. true, a information may lead to termination of sews state, and federal governments. Name(s)	gned to assure t ed on my inquiry for gathering th accurate, and co	hat qualified of the pers e information mplete; (3)	d personnel prop son or persons t on , the informat I am aware that	perly gather an who manage th ion submitted is submitting fals
Signature	Date	— Phon	e	_
Subscribed and sworn to by	Applic	ant's Repres	sentative, this _	_day of
, 20				
DATE OF ISSUE: <u>04/05/2021</u>				
DATE EFFECTIVE: 05/05/2021				
ISSUED BY: /s/ Josiah Cox				
TITLE: Bluegrass Water UOC, President				
BY AUTHORITY OF THE PUBLIC SERVICE COMMISS ORDER IN CASE NO. <u>2020-00297</u> DATED <u>January 14, 20</u>				

		PSC KY NO. 1
		Original SHEET NO. 49
	rass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWE	R SERVICE in entire service area	SHEET NO
Му со	ommission expires,	
		Notary Public
10.0	FORM OPERATING AGREEMENTS	
10.1 stroo	Operating Agreement for Users whose disci m wastes."	harge into the System is limited to domestic or "re-
	OPERATING	AGREEMENT
	USER NAME:ADDRESS:TELEPHONE NUMBER:	Delaplain Disposal Company (the Utility), and
agree "restr	In consideration of the services rendered by sions of the Utility's tariff on file with the Kentes that it will not place, deposit, or suffer to be room wastes" into the Utility's system through rents, owns, or controls.	ucky Public Service Commission and further deposited any wastes other than domestic or
its condisco	e other than domestic or "restroom wastes" in tentrol is a violation of the rules and regulations in the tweet User's sewer service and recover any dates and the User's violation, including but not limbecome liable to the Commonwealth of Kentuck	s of the Utility for which the Utility may mages from User which the Utility may incur
	This Agreement is effective as of the date of	the last signature.
Blueg	grass Water UOC	User:
DATE	OF ISSUE: <u>04/05/2021</u>	
DATE	EFFECTIVE: 05/05/2021	
ISSUE	ED BY: /s/ Josiah Cox	
TITLE	: Bluegrass Water UOC, President	
	THORITY OF THE PUBLIC SERVICE COMMISSION R IN CASE NO. <u>2020-00297</u> DATED <u>January 14, 2021</u>	

	PSC KY NO1
	Original SHEET NO. 50
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEET NO
By: E	3y:
Title:	Date:
10.2 Operating Agreements for Users who are or wastes other than domestic or "restroom wastes."	will be placing, depositing, or suffering to be deposited
OPERATINO	G AGREEMENT
USER NAME:ADDRESS: TELEPHONE NUMBER:	Delaplain Disposal Company (the Utility), and
FAX NUMBER:	
In consideration of the services rendered by the Utility's tariff on file with the Kentucky Public Se	the Utility, User agrees to be bound by the provisions of ervice Commission.
in the Utility's tariff permits the Utility to disconnect to which the Utility may incur as a result of User's viole for which Utility may become liable to the Commonw	
2. User is authorized to discharge into the Sy	siem at the jouowing atscharge point(s):
3. User shall not exceed the discharge limits s	set forth in Section 7.0 of the Industrial/Commercial User
method, at the location where the waste stream first	rs at the indicated frequency using the indicated sampling enters the Utility's System, as shown on the description form, Reports of monitoring and analysis shall be sub- he policy.
DATE OF ISSUE: <u>04/05/2021</u>	
DATE EFFECTIVE: 05/05/2021	
ISSUED BY: /s/ Josiah Cox	
TITLE: Bluegrass Water UOC, President	
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2020-00297 DATED January 14, 2021	

		PSC KY NO	1	
		Original	SHEET NO.	51
Bluegrass Water Utility Operatin	ng Company, LLC	CANCELLING	PSC KY NO.	
SEWER SERVICE in entire service				
SAMPLE TYPE: 24 Hour C	omnosit <i>e</i>			_
Flow	1	Cadn	iium, total	
Chromium, total	=-		er, total	
Iron, total	-		ury, total	
Nickel, total	- 0.1	Zinc,	•	
Barium	-		iesium	
Manganese	- C 1C .	Chlor		
Fluoride	_ Ammonia Nitrogen	Caro		
BOD-5	_	Color		
Total Suspended Solids		Total Dissolve	ed Solids	
10000 Suspenior Souns		10000 200000		
SAMPLE TYPE: Grab				
Cyanide, total	Amenable Cyanide	Sulfic	de	
Phenols	PCBs	TTO		
рН. S.U	Oil/Grease, total			
impact to the System or the edutility's tariff including but a determine the nature and imp	required of the Utility by DC es to accept such other modinate of federal law or regular edges its duty to take all reason its mot limited to additional or control of the non-complying dispact of the non-complying dispact of the mon-complying dispact.	OW as a condition fications proposition. Sonable steps to restail to compact the compact of the compact of the contract of th	on for maintained by Utility of the continuities or continuities or continuities or continuities and the continuities are continuities and the continuities and the continuities are continuities ar	ning or renewing as are required of are required of are rect any adverse greement and the y be necessary to
an effluent or discharge as a with the limitations contained	· -	e for adequate to Itility's tariff.	reatment to ac	hieve compliance
injury, or severe damage.	cy puss me system unicss n		io preveiu ios	s of tige, personal
DATE OF ISSUE: <u>04/05/20</u>	21			
DATE EFFECTIVE: 05/05/	2021			
ISSUED BY: /s/ Josiah Cox				
TITLE: Bluegrass Water UO				

	PSC KY NO	1	
	Original	SHEET NO	52
Bluegrass Water Utility Operating Company, LLC	CANCELLING	PSC KY NO	
SEWER SERVICE in entire service area		SHEET NO	

- 9. User shall maintain and operate all facilities and equipment for the treatment and control of wastewater which are installed or used to comply with the policy and this Agreement. If User's facilities or and/or equipment for the treatment of wastewater fails or suffers a reduction in capacity, or if the Utility's system fails, User shall reduce or stop its discharge into the System as necessary until its facilities or equipment or the System is repaired and capable of treating wastewater in compliance with this policy and the Utility's Kentucky Pollutant Discharge Elimination System Permit ("KP DES Permit 'J.
- 10. User shall dispose of all solids, sludges, backwash, or other pollutants removed in the course of treatment or control of wastewaters in accordance with the Clean Water Act, the Clean Air Act, the Resources Conservation and Recovery Act, and KRS Chapter 224.
- 11. User shall routinely calibrate, inspect, and maintain all equipment used for sampling and analysis of wastewater. Equipment used for sampling and analysis shall be capable of measuring flows with a maximum deviation of less than 10 percent from true discharge rates throughout the range of expected discharge volumes.
- 12. User shall include the results of all monitoring done in excess of the requirements of the policy and this Agreement in its monthly reports to the Utility.
- 13. All reports submitted to the Utility shall contain the following certification and be signed by an authorized representative of user:

I hereby swear under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted, is to the best of my knowledge and belief true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including immediate termination of service and the possibility of fines and criminal penalties for knowing violations."

This Agreement is effective as of the date of the last signature.

DATE OF ISSUE: <u>04/05/2021</u>
DATE EFFECTIVE: 05/05/2021
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION
ORDER IN CASE NO. 2020-00297 DATED January 14, 2021

	PSC KY NO1
	Original SHEET NO. 53
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO
SEWER SERVICE in entire service area	SHEET NO
CERTIFICATION:	ACCEPTANCE:
Delaplain Disposal Company	User:
By:	By:
Date:	Title: Date:
11.0 REPORTING FORMS	
	and into the asset on about the full assistant forms for more at
ing to the Utility:	ge into the system shall use the following forms for report-
11.1 Self-monitoring Report Form	
Blue	grass Water UOC
	nitoring Report Form
Date of this report:	
Company Name:	
Address:	
Company Contact:	
Telephone:	
Sampling	
Collected by:	
Collection Date:	_ Time:
Sample Point Location:	
DATE OF ISSUE: <u>04/05/2021</u>	-
DATE EFFECTIVE: 05/05/2021	
ISSUED BY: /s/ Josiah Cox	<u> </u>
TITLE: Bluegrass Water UOC, President	<u> </u>
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSI ORDER IN CASE NO. 2020-00297 DATED January 14, 202	

			_	SHEET NO. 54
luegrass Water Utility	<u>Operating Company, L</u>	<u>LC</u>	CANCELLING 1	PSC KY NO
EWER SERVICE in enti	ire service area			SHEET NO
Analys	is Performed by:			
Type o	f Sample Grab	Time C	composite He	ours
	Flow Propor	uonai Compos	iteHours	
		<u>Analysis</u>	<u>1</u>	
Parameter	Unit	Result	Limit	24 Hour Max
	Avg. GPD			
	Peak GPD			
Arsenic, Tot.	Mg/L			
Cadmium, Tot.	Mg/L			
Chromium, Tot.	Mg/L			
Chromium, Hex	Mg/L			
Copper, Tot.	Mg/L			
Cyanide, Tot.	Mg/L			
Cyanide, Amen.	Mg/L			
fron, Tot.	Mg/L			
Lead, Tot.	Mg/L			
Mercury, Tot.	Mg/L			
Nickel, Tot.	Mg/L			
Silver, Tot.	Mg/L			
Zinc, Tot.	Mg/L			
Barium	Mg/L			
Selenium	Mg/L			
Magnesium	Mg/L			
Sulfate	Mg/L			
Sulfide	Mg/L			
Chloride	Mg/L			
Fluoride	Mg/L			
Ammonia Nitrogen	Mg/L			
Phenois	Mg/L			
PCBs	Mg/L			
ГТО	Mg/L			
Boron	Mg/L			

DATE EFFECTIVE: 05/05/2021

ISSUED BY: /s/ Josiah Cox

TITLE: Bluegrass Water UOC, President

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2020-00297 DATED January 14, 2021

			PSC KY NO.	1			
					55		
Bluegrass Water Utility Operating Company, LLC SEWER SERVICE in entire service area			CANCELLING PSC KY NO				
				·			
SEWER SERVICE III chure service area				_SHEET NO.			
Parameter	Unit	Result	Limit	24 Ho	ur Max.		
PH	S.U.		-				
Oil/Grease, Tot	Mg/L						
BOD-5	Mg/L						
Tot. Susp. Solids	Mg/L						
Tot. Disol. Solids	Mg/L						
Color	ADMI						
Temperature	°F						
Tem	°F						
Arsenic	Mg/L						
Silver	Mg/L						
lations. Name			Title				
Signature			Date/Phone				
Subscribed and			, Affian	t, this	_ day of		
My commission	expires		, 20				
Note: Chain-of-Custody	y must be attached	d.					
This report shall be post period and submitted to		han the 15th da	y of each month foll	owing the c	ompleted reported		
DATE OF ISSUE: 04	4/05/2021						
DATE EFFECTIVE:							
ISSUED BY: /s/ Josia	ıh Cox						
TITLE: Bluegrass Wat	ter UOC, President						

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. $\underline{2020\text{-}00297}$ DATED $\underline{\text{January } 14, 2021}$

grass Water Utility Operating Company, LLC ER SERVICE in entire service area SHEET NO. grass Water UOC Des Peres Rd Suite 303 couis MO 63131 SHEET NO. SHEET NO.	
egrass Water UOC Des Peres Rd Suite 303 Louis MO 63131 .: Self-Monitoring	
egrass Water UOC Des Peres Rd Suite 303 Louis MO 63131 .: Self-Monitoring	
egrass Water UOC Des Peres Rd Suite 303 Louis MO 63131 L: Self-Monitoring	
Des Peres Rd Suite 303 Louis MO 63131 Les Self-Monitoring	
Special Conditions	
Chain of Custody Form BLUEGRASS WATER UOC INDUSTRIAL/COMMERCIAL USER PROGRAM	
CHAIN-OF-CUSTODY	
e of Inspection: [] Scheduled [] Unscheduled [] Demand [] Self monitoring	
pany: Sample Location:	
nit Number:	
imple Date & Station De- No. Time Scription (grab/composite) Containers Preservation Requirements Analy	
E OF ISSUE: 04/05/2021	
E EFFECTIVE:	
ED BY: /s/ Josiah Cox	
E: Bluegrass Water UOC, President	

Bluegrass Water Utility Operating Company, LLC SEWER SERVICE in entire service area	PSC KY NO. 1 Original SHEET NO. 57 CANCELLING PSC KY NO. SHEET NO. SHEET NO.
Sample Collected By (Print):	Signature:
Reviewed By (Print):	Signature:
Company Name (Print):	Date:
Reviewed By (Print):	Signature:
Company Name (Print):	Date:
Reviewed By (Print):	Signature:
11.3 Wastewater contribution Monitoring Report Form	

WASTEWATER CONTRIBUTION MONITORING REPORT FACILITY NAME

Parameter	Freq.	Type	Unit	Limit	Test Re- sult	Test Method	Violation
Arsenic	Quarterly	24 Hour Composite	Mg/l	0.10	Suit	Wicthou	
Cadmium	Quarterly	24 Hour Composite	Mg/l	0.05			
Chromium	Quarterly	24 Hour Composite	Mg/l	1.71			
Chromium, Hexavalent	Quarterly	24 Hour Composite	Mg/l	0.10			
Copper	Quarterly	24 Hour Composite	Mg/l	0.60			
Cyanide	Quarterly	Grab	Mg/l	0.50			
Iron	Quarterly	24 Hour Composite	Mg/l	15.0			

DATE OF ISSUE: <u>04/05/2021</u>	
DATE EFFECTIVE: 05/05/2021	
ISSUED BY: /s/ Josiah Cox	
TITLE: Bluegrass Water UOC, President	
•	

PSC KY NO	1		
Original	SHEET NO	58	
CANCELLING	PSC KY NO		
	SHEET NO.		

Bluegrass Water Utility Operating Company, LLC

ORDER IN CASE NO. <u>2020-00297</u> DATED <u>January 14, 2021</u>

SEWER SERVICE in entire service area


Parameter	Freq.	Type	Unit	Limit	Test Result	Test Method	Violation
Lead	Quarterly	24 Hour Composite	Mg/l	0.20			
Mercury	Quarterly	24 Hour Composite	Mg/l	0.0005			
Nickel	Quarterly	24 Hour Composite	Mg/l	1.0			
Oil/Grease	Quarterly	Grab	Mg/l	100			
Ph, S.U.	Quarterly	Grab	S.U.	6-10			
Silver	Quarterly	24 Hour Composite	Mg/l	0.10			
Zinc	Quarterly	24 Hour Composite	Mg/l				
BOD-5	Quarterly	24 Hour Composite	Mg/l	300			
TSS	Quarterly	24 Hour Composite	Mg/l	300			
Ammonia Nitrogen	Quarterly	24 Hour Composite	Mg/l	30			
Nitrogen Date:					Gra	.b/Comp	Both

Date:	By:	Grab/Comp	Both
supervision in accordate accordate the information or those persons dire knowledge and belief	ance with system designed to on submitted. Based on my inquestly responsible for gathering true, accurate, and complete	all attachments were prepared assure that qualified personne uiry of the person or persons who the information submitted it. I am aware that there are signly of fines for knowing violation	el properly gather and no manage the System, s, to the best of my gnificant penalties for
Signed:	Title:	Date:	
DATE OF IGGLE	04/05/2021		
DATE EFFECTIVE: ISSUED BY:/s/Jos	04/05/2021 05/05/2021 iah Cox ater UOC, President		
	UBLIC SERVICE COMMISSION		

	PSC KY NO. 1
	Original SHEET NO. 59
Bluegrass Water Utility Operating Comp	pany, LLC CANCELLING PSC KY NO.
SEWER SERVICE in entire service area	SHEET NO
Subscribed and sworn to by, 20	Applicant's Representative, this day of
My commission expires,	
	Notary Public
12.0 EXCESS TREATMENT F	EE
this policy must obtain the prior Uti treatment fee in addition to other sp	is for BOD, TSS, or Ammonia Nitrogen set forth in Section 7.0 of ality approval before making such discharges and shall pay an excess eccified charges. In no event shall a User's 24-Hour Maximum Daily g/L for BOD, 400 mg/I for TSS, or 100 mg/L for Ammonia Nitro-
Excess treatment fees shall be as fol	llows:
BOD	\$1.78 per pound in excess of Section 7.0 discharge limit
TSS	\$1.78 per pound in excess of Section 7.0 discharge limit
Ammonia Nitrogen	\$8.36 per pound in excess of Section 7.0 discharge limit
DATE OF ISSUE: <u>04/05/2021</u>	
DATE EFFECTIVE: 05/05/2021 ISSUED DV: /s/ Josiah Cox	
ISSUED BY: /s/ Josiah Cox TITLE: Bluegrass Water UOC, President	dent
TITLE. Diugiass water OOC, Presid	uent

	PSC KY NO. 1	
	Original SHEET NO. 60	_
Bluegrass Water Utility Operating Company, LLC	CANCELLING PSC KY NO	_
SEWER SERVICE in entire service area	SHEET NO	
DE TELEBRICATE IN CHAIR SOLVICE WICH	SHEET IVO.	-

(N)

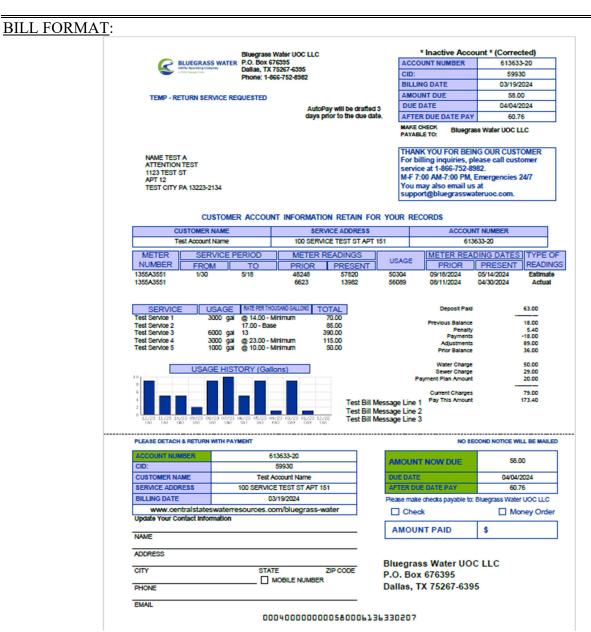

DATE OF ISSUE: April 11, 2024
For Service Rendered on or after
DATE EFFECTIVE: December 1, 2023
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION

BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION ORDER IN CASE NO. 2022-00432 DATED FEBRUARY 14, 2024

PSC KY NO	1		
Original	SHEET NO	61	
CANCELLING	FPSC KY NO		
	SHEET NO.		

Bluegrass Water Utility Operating Company, LLC

SEWER SERVICE in entire service area

(N)

Questions?

Phone: 1-866-752-8982

Email: support@bluegrasswateruoc.com

Logging into Our Portal

Through your customer portal, you may view your account history, pay your bill, sign up for AutoPay, and even go paperless. By enrolling in e-billing to receive an email notification that a new bill is available. All online payments may be subject to processing fees. Please locate your CID on the top right of your bill to log in initially.

Paying Your Bill

AutoPay Please note AutoPay drafts 3 days prior to your due date

Pay By Mail
Send check or money order together with remittance stub (bottom perforated portion of your bill) to:

Bluegrass Water UOC LLC P.O. Box 676395 Dallas, TX 75267-6395

Note: No cash, staples, or paper clips please!

Please visit cswr.authoritypay.com to log into your account

Note: You may also pay as a guest for Quick Pay

Pay By Phone

You may pay with a credit card by calling 1-866-752-8982; be sure to have your account number ready

- Pay In Person
 1. Find CheckFreePay location
 a. Under Location Search, type in your zip code in "Enter Location" box
- b. Under Ways to Pay, click "Account Number" box
 2. Bring Utility bill and Photo I.D. to payment location
- 3. For more information on how to pay in person, visit

Understanding Your Bill

Your bill contains information about your water and/or sewer charges Here's a guide:

Account Number: This number should be included in any correspondence with the utility company and added to your check or money order.

Amount Due: This is the outstanding balance charged to all customers for utility services. Previous Balance: The amount of unpaid previous charges

as of the date of the current bill.

Due Date ("Total Due By" date): The account is considered delinquent and may be subject to disconnection if outstanding amount due is not paid by the due date. A late fee on the unpaid balance is added on any unpaid delinquent balance. Please reference specific tariff online.

If you leave your residence for an extended period of time and wish to avoid discontinuance of service, you may forward your mail or sign up for automatic payment.

To see an example bill, visit www.centralstateswaterresources.com/bluegrass-water

Updating Information

ATTENTION:

DATE OF ICCITE.

To receive notifications from us, please provide and/or update your contact information online on our website.

DATE OF 1880E. <u>April 11, 2024</u>
For Service Rendered on or after
DATE EFFECTIVE: December 1, 2023
ISSUED BY: /s/ Josiah Cox
TITLE: Bluegrass Water UOC, President
BY AUTHORITY OF THE PUBLIC SERVICE COMMISSION

ORDER IN CASE NO. 2022-00432 DATED FEBRUARY 14, 2024

April 11 2024